
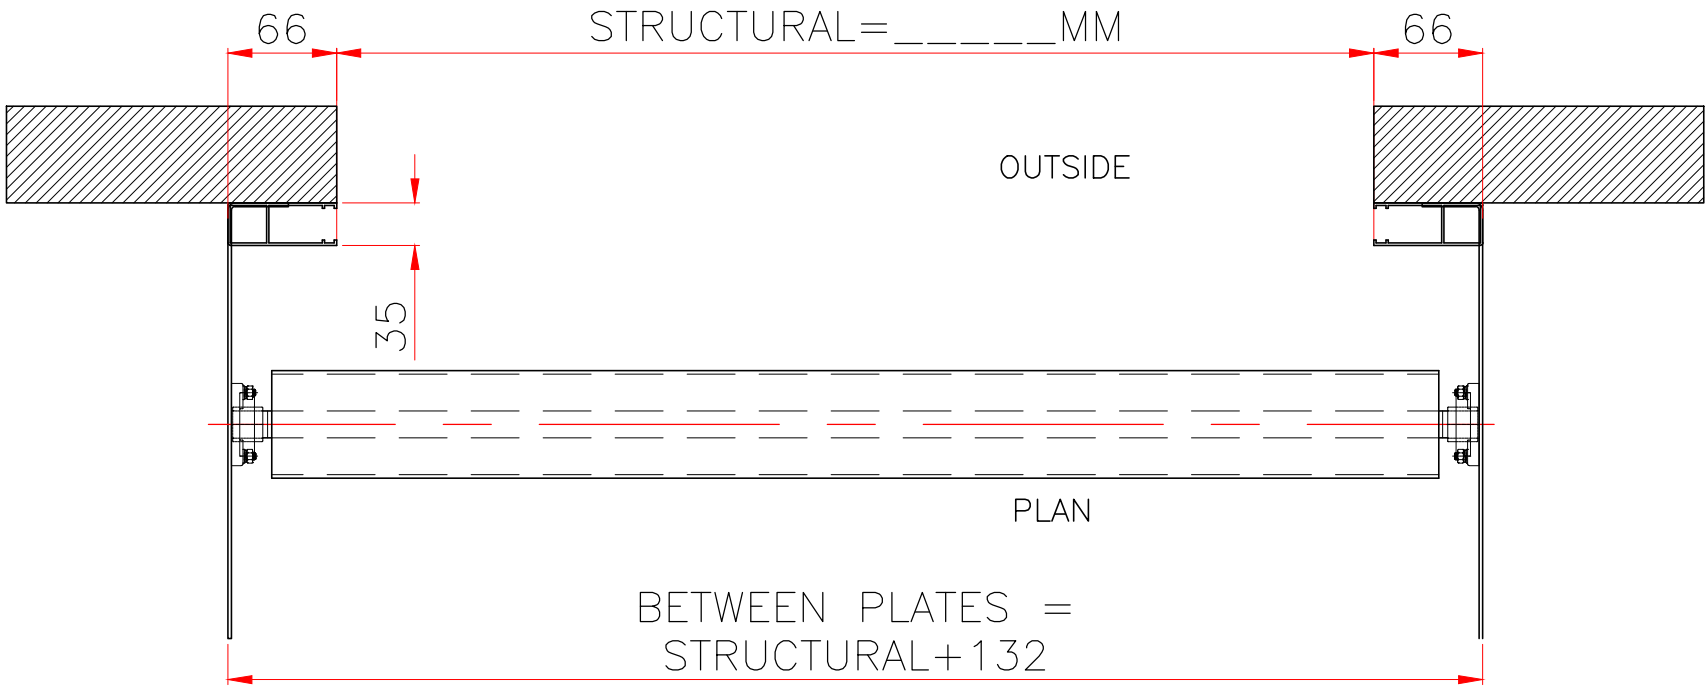


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS CSG38-44 SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
FIRE LINK	FUSIBLE		
	PANEL		
	*SPECIAL		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE (OPTION)			
PHOTOCELLS (OPTION)			
COIL CASING (OB/DBF)			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div>FORTRESS SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>			
20_CSG44_NBS_V6 2016_ REV1 _ 20.5.19			



SIZES:
SG38-44 ELECTRIC:


PUNCHED/PERFORATED;
0-3000W X 0-1200H, PLATE 165*165
0-3000W X 1200-1600H, PLATE 180*180
0-3000W X 1600-2500H, PLATE 205*205
0-3000W X 2500-4000H, PLATE 250*250

SOLID;
AS ABOVE, MAX WIDTH 4000W, MAX HEIGHT 3900H

SG38-44 MANUAL:

PUNCHED/PERFORATED;
0-3000W X 0-1400H, PLATE 165*165
0-3000W X 1400-1900H, PLATE 180*180
0-3000W X 1900-2500H, PLATE 205*205
0-3000W X 2500-2800H, PLATE 250*250

SOLID;
AS ABOVE, MAX WIDTH 4000W

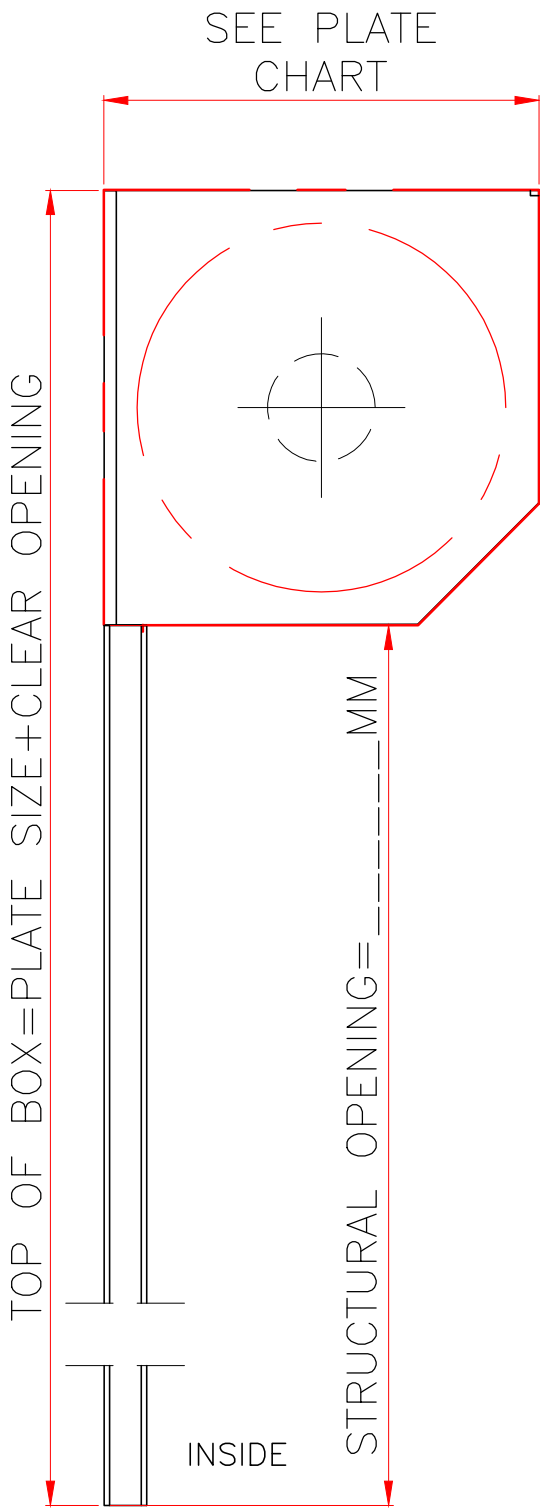

NOTE:

COIL CASINGS DO COME AS STANDARD
MANUAL VERSIONS HAVE A BASE BAR SLIDE LOCK AS STANDARD
AVAILABLE IN RAL9016 & 8019 ONLY
FOR ELECTRIC VERSIONS, MANUAL OVERRIDES DO NOT COME AS STANDARD
FOR ELECTRIC VERSIONS, SAFETY BRAKES ARE NOT INCLUDED AS STANDARD

CONTROLS:
ELECTRIC VERSIONS COME WITH A TUBE MOTOR AND SINGLE POLE ROCKER SWITCH AS STANDARD.

OPTIONAL CONTROLS INCLUDE GROUP COMMAND, KEYSWITCH, REMOTE CONTROL (P'CELLS REQUIRED FOR THIS OPTION) AND KEYPAD ENTRY.