


SALES ORDER:		DATE:	FITTING DATE:	
FORTRESS FC75 SURVEY				
CUSTOMER:				
JOB TITLE:				
SITE ADDRESS:				
DOOR REF		INTERNAL	EXTERNAL	
MEASURED BY		DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION				
FIXING TO				
KEYSWITCH DEADMAN	INSIDE			
	OUTSIDE			
PUSH BTN DEADMAN	INSIDE			
	OUTSIDE			
IMPULSE	RADAR			
	IND. LOOP			
	FOBS			
	*SPECIAL			
FIRE LINK	FUSIBLE			
SILL ANGLE	YES/NO			
	SIZE:			
FITTING ANGLES				
DETAIL OPPOSITE				
SEAV LG20/20				
SAFETY EDGE (N/A)				
PHOTOCELLS (N/A)				
COIL CASING				
FASCIA				
MOTOR HOOD				
FIRE RATING				
COLOUR/FINISH				
FLASHINGS	INSIDE			
	OUTSIDE			
OTHER ITEMS:				
<div><div><div><div></div></div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div></div>				
07_FC75_NBS_V6 2016_ REV4 _ 1.7.19				

Type: FC75 Commercial Roller Shutter

LH SIDE

RH SIDE


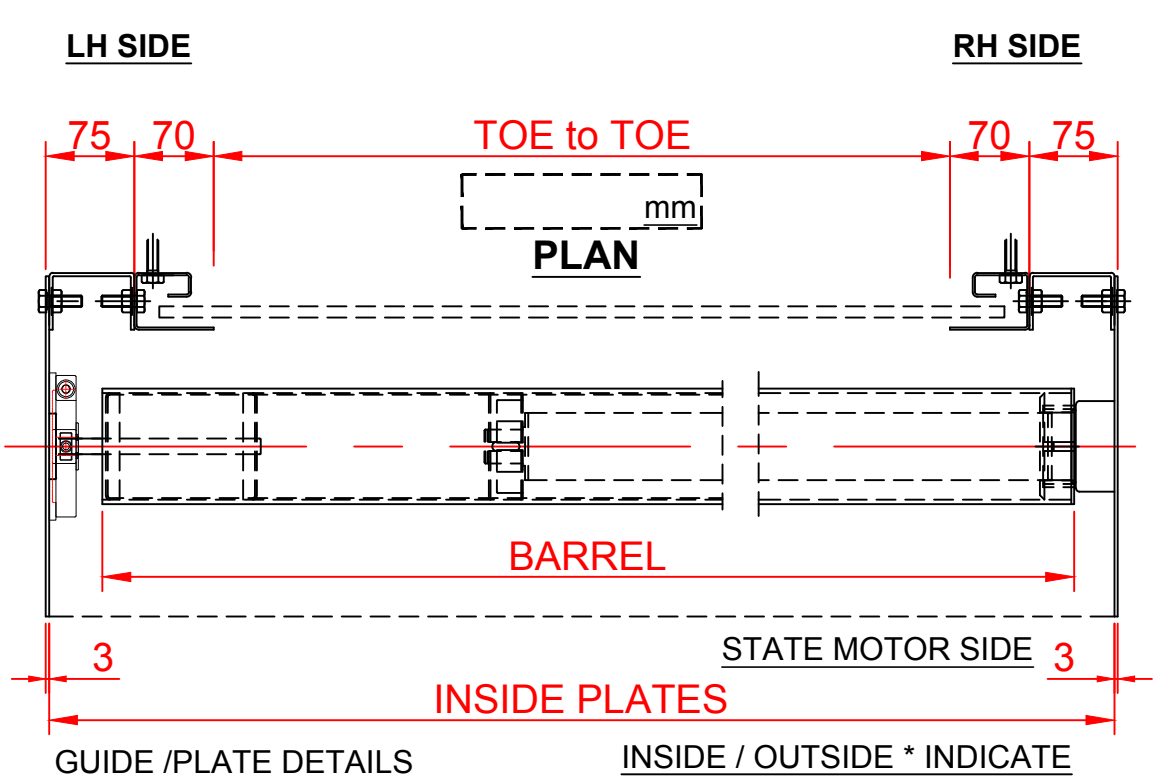


CLEAR OPENING HEIGHT 0-3000 'X'=325, 'Y'=300  
CLEAR OPENING HEIGHT 3001-5500 'X'=350, 'Y'=350

MAX SIZE 5500\*5500  
OUTSIDE THESE SIZES CONTACT D/O

FACE FIX

REVEAL FIX

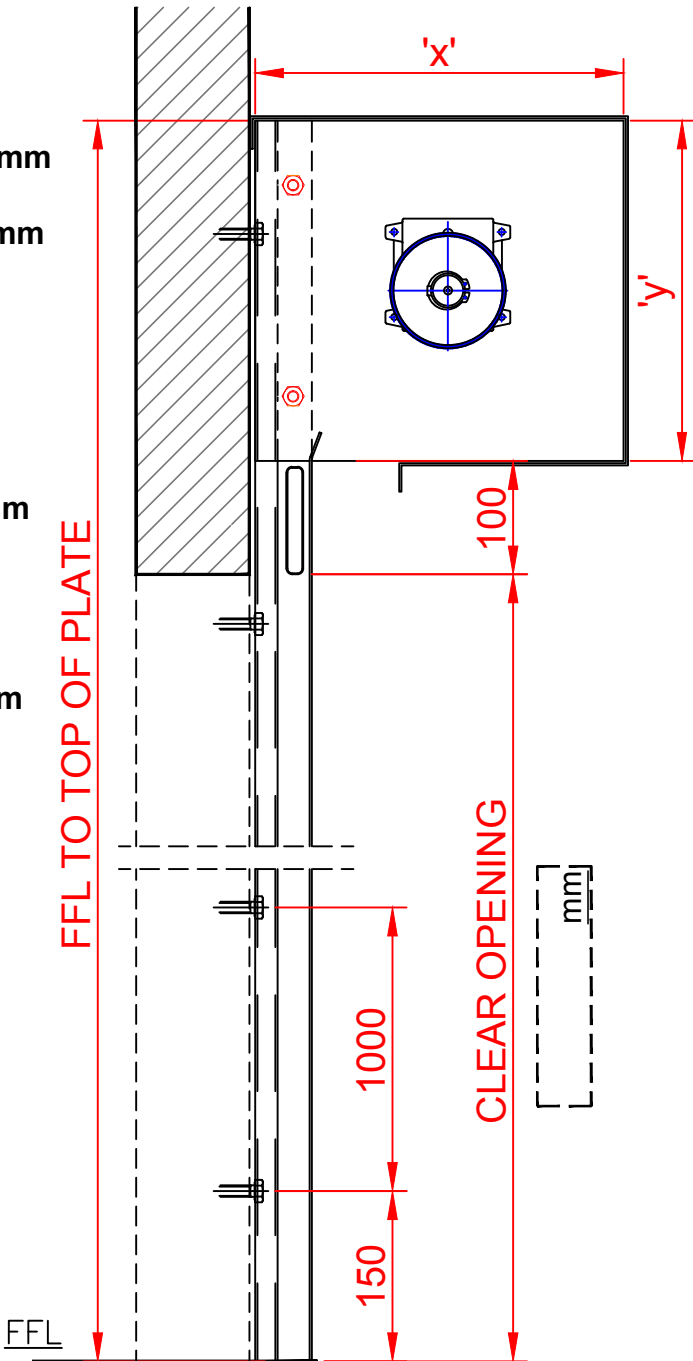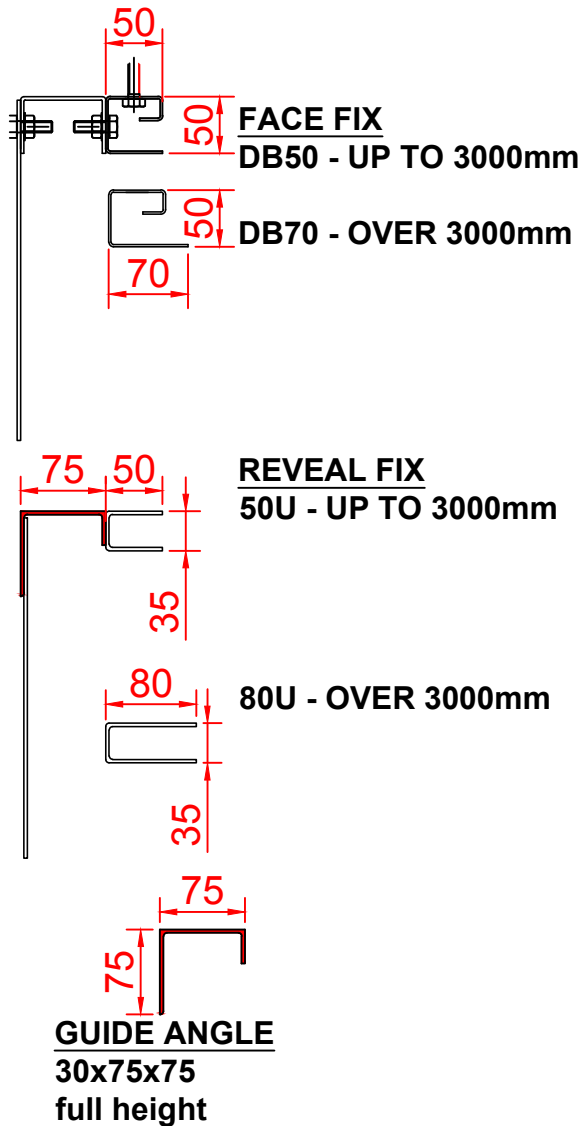

NOTE:  
\*\*ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.\*\*  
\*\*COIL CASINGS AS STANDARD WITH FCF75.\*\*  
\*\*CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS OVER 2.5M ON FCF75 ONLY\*\*  
\*\*CURTAIN ONLY WILL BE PPC COATED AS STANDARD\*\*