

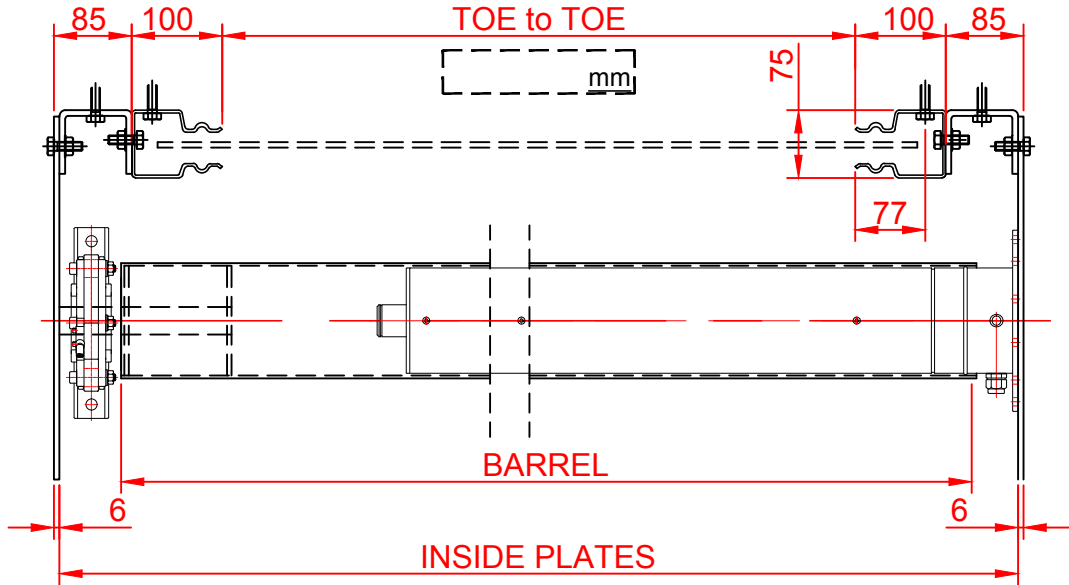


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS LPS1175 SR3 IBM SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
TIE BARS	YES/NO		
GILL ANGLE	YES/NO		
	SIZE:		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE (DB)			
PHOTOCELL'S (DB)			
COIL CASING			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div><b>FORTRESS</b> <b>SEFA</b> SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>			
05f_DBi101_SR3_IBM_NBS_V6 2016_REV2_ 1.7.19			

Type: LPS1175 SR3 Roller Shutter - IBM 1phase




GUIDE /PLATE DETAILS      PLAN      STATE MOTOR SIDE

CURTAIN UNDER 18.5M2:

BARREL Ø127 JM CLEAR OPENING HEIGHT 0-3000      'X'=450, 'Y'=450  
BARREL Ø127 JM CLEAR OPENING HEIGHT 3000-4000      'X'=500, 'Y'=500

WIDTHS & HEIGHTS OVER 4M CONTACT D/O

\*\*\*IF NO CANOPY IS REQUIRED YOU CALL ROLL THE CURTAIN OUTSIDE THE PLATES AND USE A SMALLER PLATE. CONTACT TECHNICAL FOR INFORMATION\*\*\*

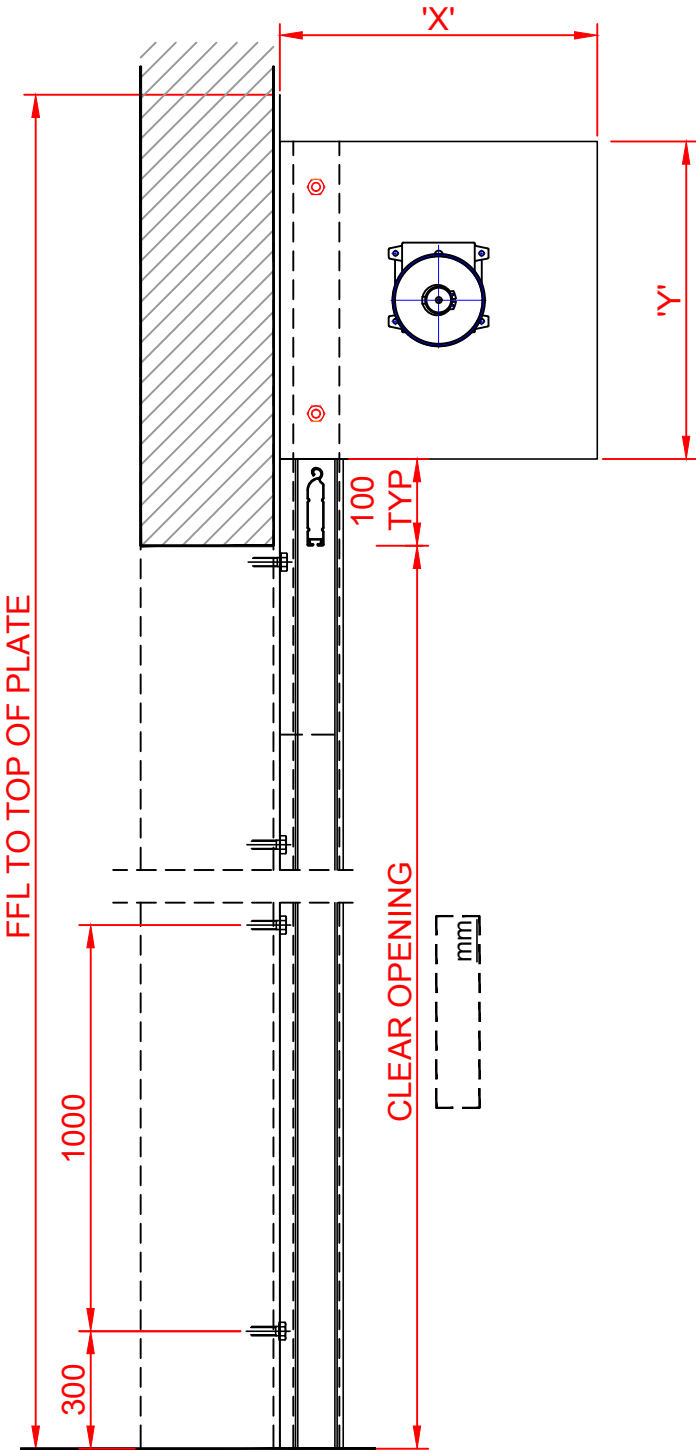

NOTE:  
\*\*ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.\*\*  
\*\*COIL CASINGS DO NOT COME AS STANDARD\*\*  
\*\*MOTOR HOODS DO NOT COME AS STANDARD\*\*  
\*\*CASING SUPPORT BRACKETS WILL NOT BE SUPPLIED \*\*  
\*\*CURTAIN ONLY WILL BE PPC COATED AS STANDARD\*\*

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.  
IBM SETUPS \*DO\* REQUIRE A SAFETY BRAKE  
JM SETUPS \*DO\* REQUIRE A SAFETY BRAKE

PINLOCKS ARE REQUIRED TO MAINTAIN SECURITY RATING.  
DEADMAN OPERATION ONLY.  
CONTACT D/O IF UNSURE.

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC