
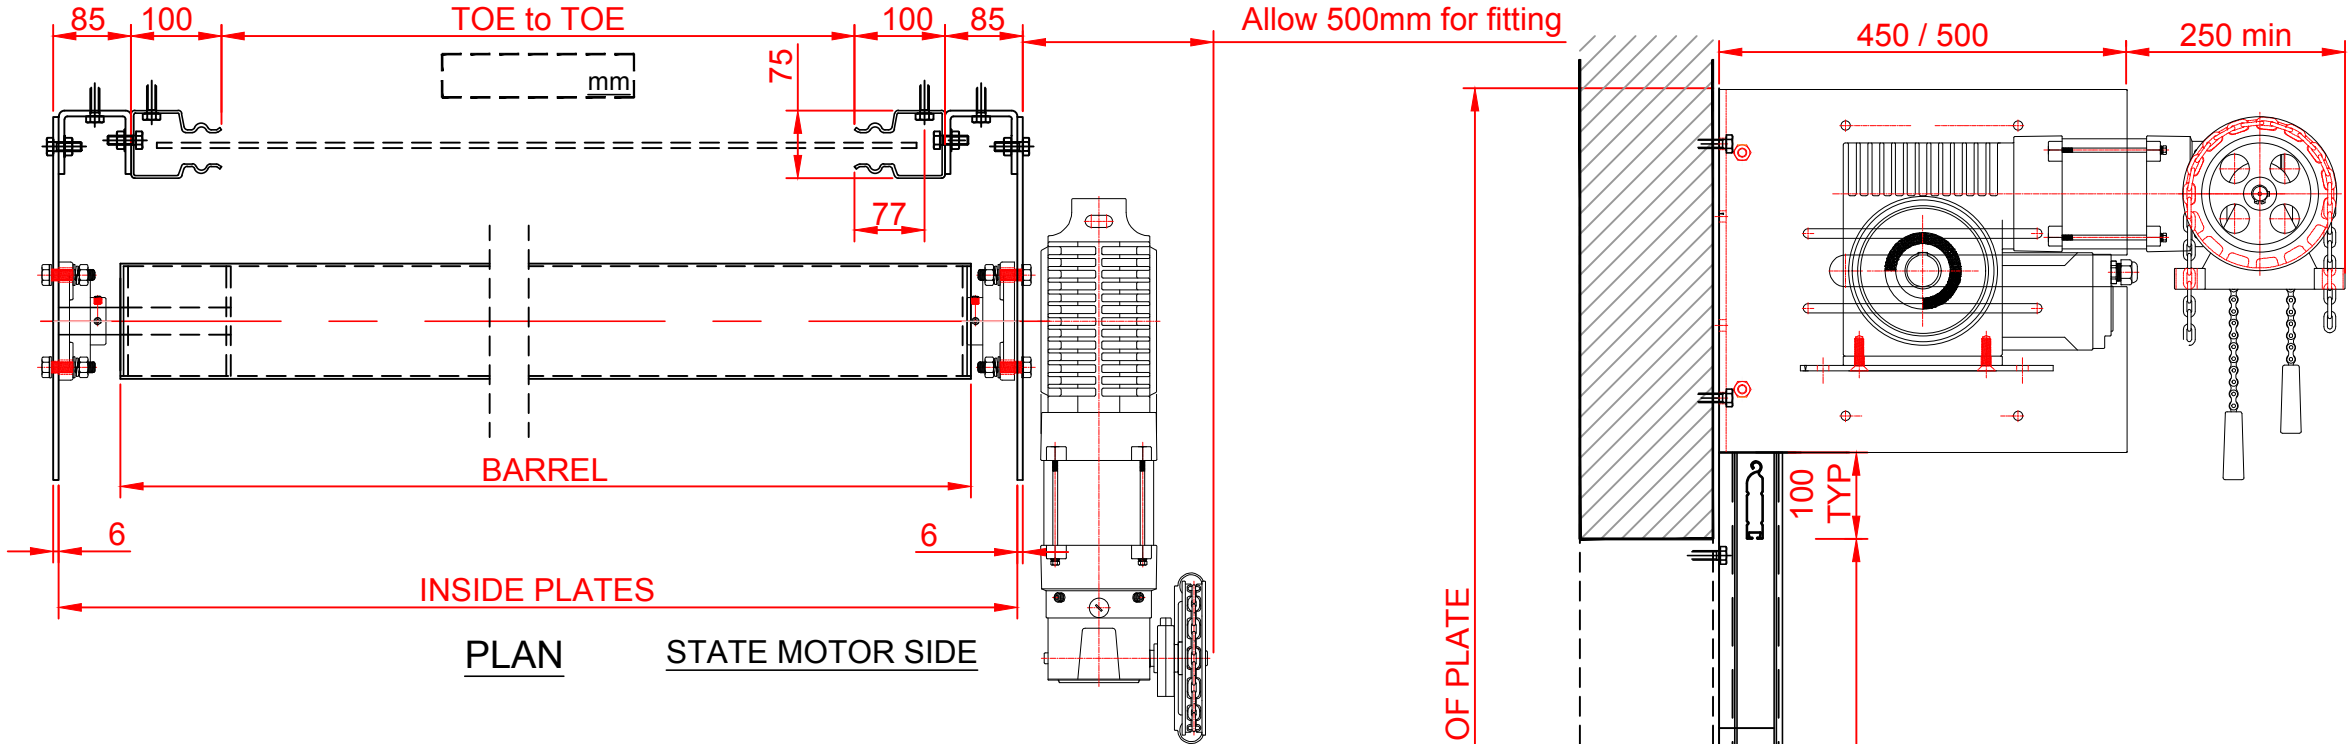


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS DBI101-DDO SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
TIE BARS	YES/NO		
SILL ANGLE	YES/NO		
	SIZE:		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE			
PHOTOCELLS			
COIL CASING			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div><b>FORTRESS</b> <b>SEFA</b> SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>			
		05d_DBi101_DDO_NBS_V6 2016_REV2 _ 1.7.19	

Type: DBi101 Industrial Roller Shutter - Direct Drive 3phase



GUIDE /PLATE DETAILS

CURTAIN UNDER 18.5M2:

BARREL Ø127 JM CLEAR OPENING HEIGHT 0-3000 'X'=450, 'Y'=450  
BARREL Ø127 JM CLEAR OPENING HEIGHT 3000-4000 'X'=500, 'Y'=500

CURTAIN OVER 18.5M2, UP TO 36M2:


BARREL Ø159 JM CLEAR OPENING HEIGHT 4000-5000 X'=500, 'Y'=500  
BARREL Ø159 JM CLEAR OPENING HEIGHT 5000-6000 X'=600, 'Y'=600

MAX SIZE 6000\*6000 SIZES OVER CONTACT D/O  
\*\*WIDTH RESTRICTION OVER 4M - CONTACT D/O

\*\*\*IF NO CANOPY IS REQUIRED YOU CALL ROLL THE CURTAIN OUTSIDE THE PLATES AND  
USE A SMALLER PLATE. CONTACT TECHNICAL FOR INFORMATION\*\*\*

NOTE:  
\*\* ALL 3PHASE DIRECT DRIVES ARE 60% DUTY RATED \*\*  
\*\* ALL SINGLE PHASE DIRECT DRIVES ARE 25% DUTY RATED  
\*\* SINGLE PHASE AVAILABLE - DDO300 \*\*  
\*\* ALL DDO MOTORS COME WITH INTERNAL SAFETY BRAKE  
AND LOW LEVEL MANUAL OVERRIDE\*\*

FFL TO TOP OF PLATE

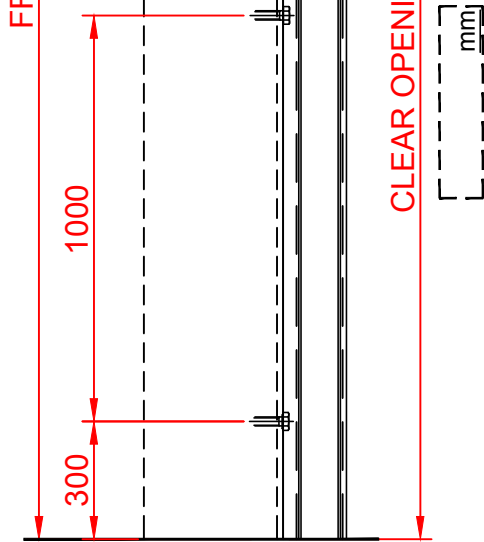

NOTE:  
\*\*ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.\*\*  
\*\*COIL CASINGS DO NOT COME AS STANDARD\*\*  
\*\*MOTOR HOODS DO NOT COME AS STANDARD\*\*  
\*\*CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS  
OVER 2.5M ON DBIF ONLY\*\*  
\*\*CURTAIN ONLY WILL BE PPC COATED AS STANDARD\*\*

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.  
JM SETUPS \*DO\* REQUIRE A SAFETY BRAKE

SKETCHES, NOTES & DETAILS - STEELWORK/ANGLES ETC