

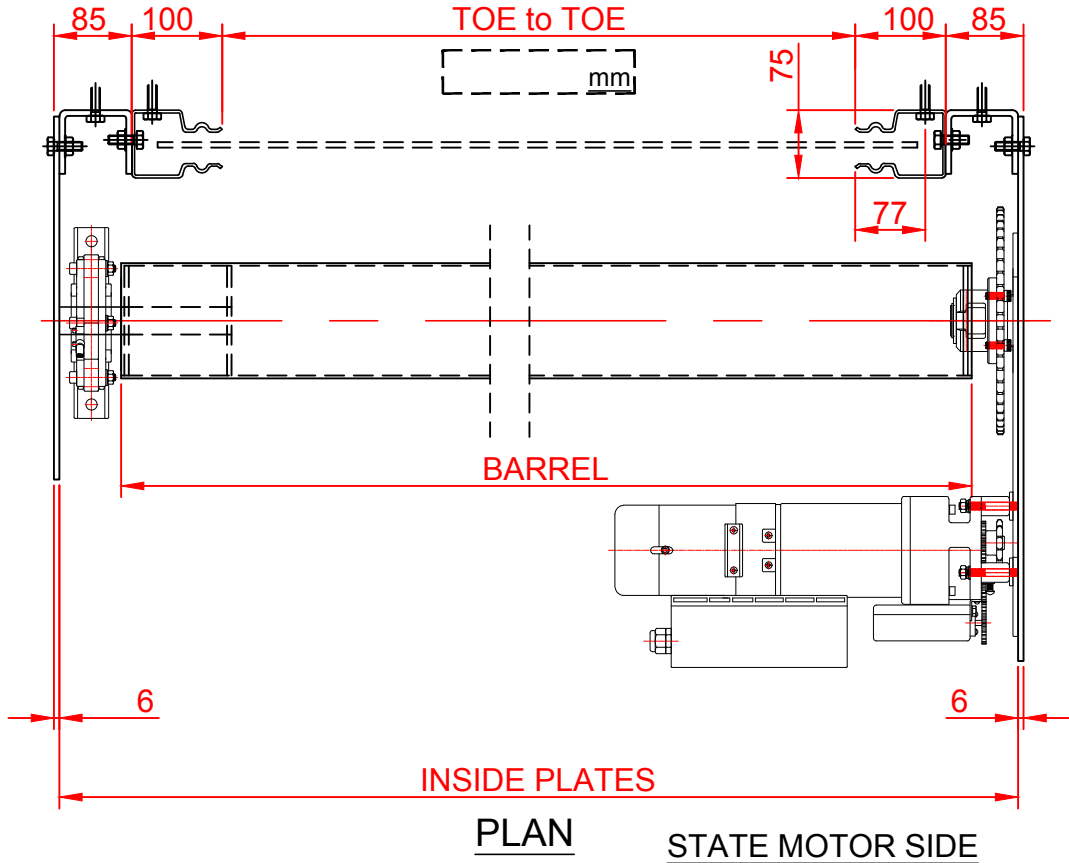


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS LPS1175 SR3 SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND. LOOP		
	FOBS		
	*SPECIAL		
TIE BARS	YES/NO		
SILL ANGLE	YES/NO		
	SIZE:		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE (DB)			
PHOTOCELL'S (DB)			
COIL CASING			
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N. IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div><div>EMAIL: INFO@FORTRESS-SEFA.COM</div><div>WWW.FORTRESS-SEFA.COM</div></div></div></div></div>			
		05a_DBi101_SR3_NBS_V6 2016_REV2_ 1.7.19	

Type: LPS1175 SR2 Roller Shutter 3phase



GUIDE /PLATE DETAILS


CURTAIN UNDER 18.5M2:

BARREL Ø127 JM CLEAR OPENING HEIGHT 0-3000 'X'=600, 'Y'=450
BARREL Ø127 JM CLEAR OPENING HEIGHT 3000-4000 'X'=750, 'Y'=500

CURTAIN OVER 18.5M2, UP TO 36M2:

BARREL Ø159 JM CLEAR OPENING HEIGHT 4000-5000 X'=750, 'Y'=500
BARREL Ø159 JM CLEAR OPENING HEIGHT 5000-6000 X'=800, 'Y'=600

MAX SIZE 6000*6000 SIZES OVER CONTACT D/O
**WIDTH RESTRICTION OVER 4M - CONTACT D/O

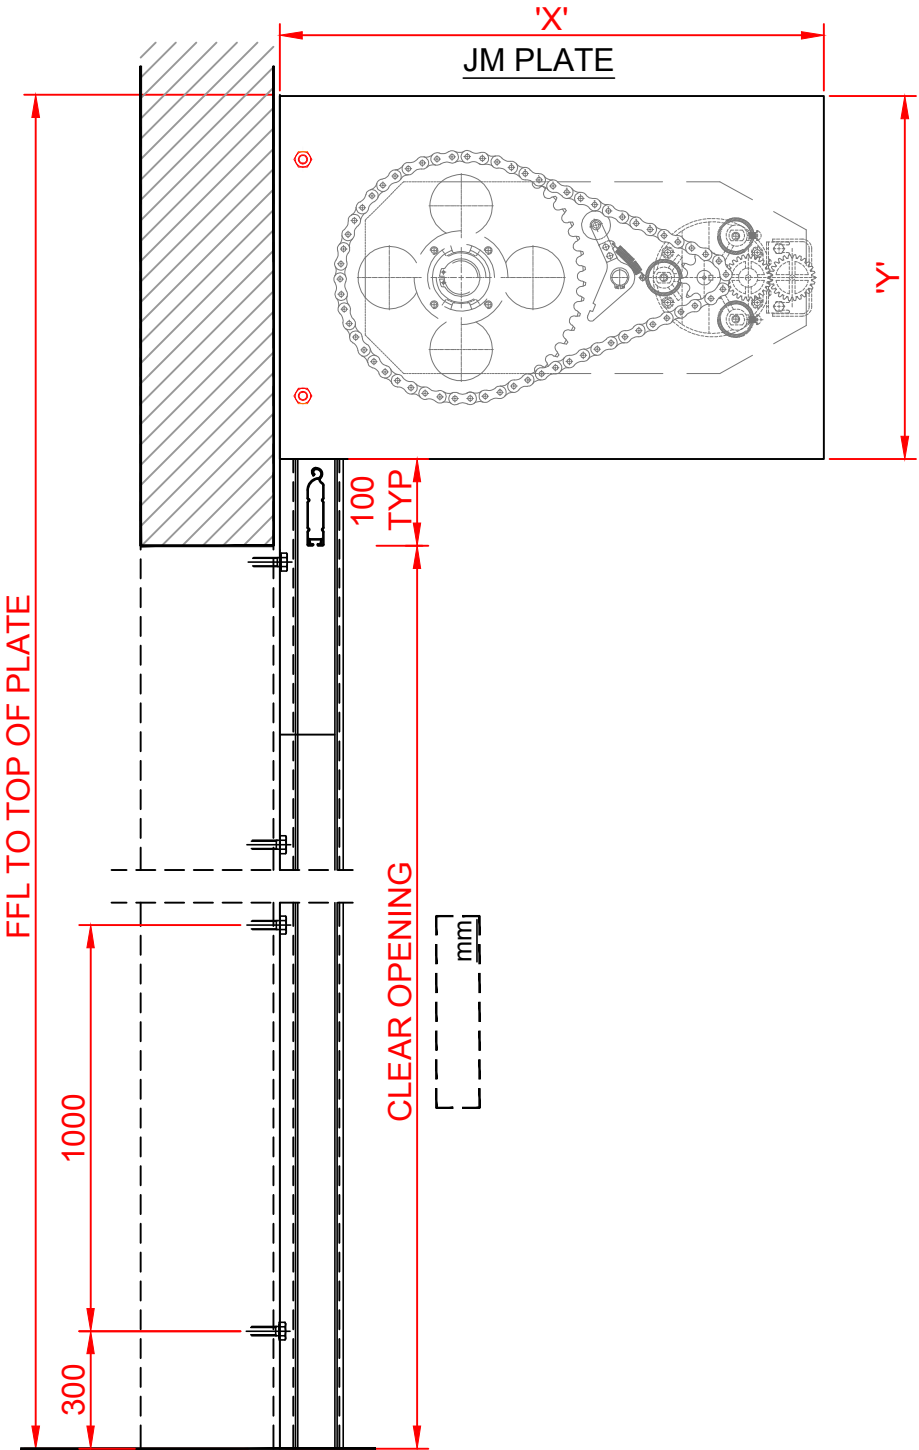

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS DO NOT COME AS STANDARD
MOTOR HOODS DO NOT COME AS STANDARD
**CASING SUPPORT BRACKETS WILL NOT BE SUPPLIED **
CURTAIN ONLY WILL BE PPC COATED AS STANDARD

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.
IBM SETUPS *DO* REQUIRE A SAFETY BRAKE
JM SETUPS *DO* REQUIRE A SAFETY BRAKE

PINLOCKS ARE REQUIRED TO MAINTAIN SECURITY RATING.
DEADMAN OPERATION ONLY.
CONTACT D/O IF UNSURE.

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC