
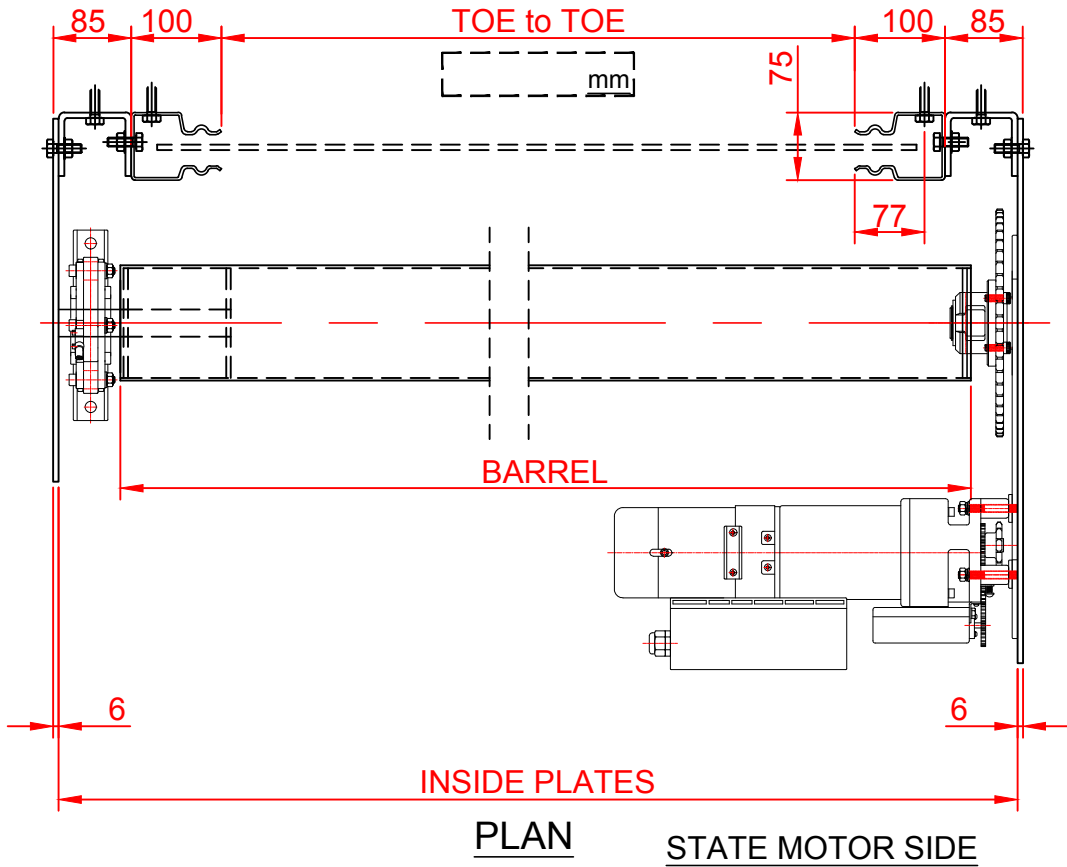


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS DBiF101 SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
FIRE LINK	FUSIBLE		
	PANEL		
	*SPECIAL		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE			
PHOTOCELLS			
COIL CASING		REQUIRED	
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div>FORTRESS SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>			
		05b_DBiF101_NBS_V6 2016_REV2 _ 1.7.19	

Type: DBiF101 Industrial Fire Shutter 3phase



GUIDE /PLATE DETAILS


CURTAIN UNDER 18.5M2:

BARREL Ø127 JM CLEAR OPENING HEIGHT 0-3000 'X'=600, 'Y'=450
BARREL Ø127 JM CLEAR OPENING HEIGHT 3000-4000 'X'=750, 'Y'=500

CURTAIN OVER 18.5M2, UP TO 36M2:

BARREL Ø159 JM CLEAR OPENING HEIGHT 4000-5000 X'=750, 'Y'=500
BARREL Ø159 JM CLEAR OPENING HEIGHT 5000-6000 X'=800, 'Y'=600

MAX SIZE 6000*6000 SIZES OVER CONTACT D/O
**WIDTH RESTRICTION OVER 4M - CONTACT D/O

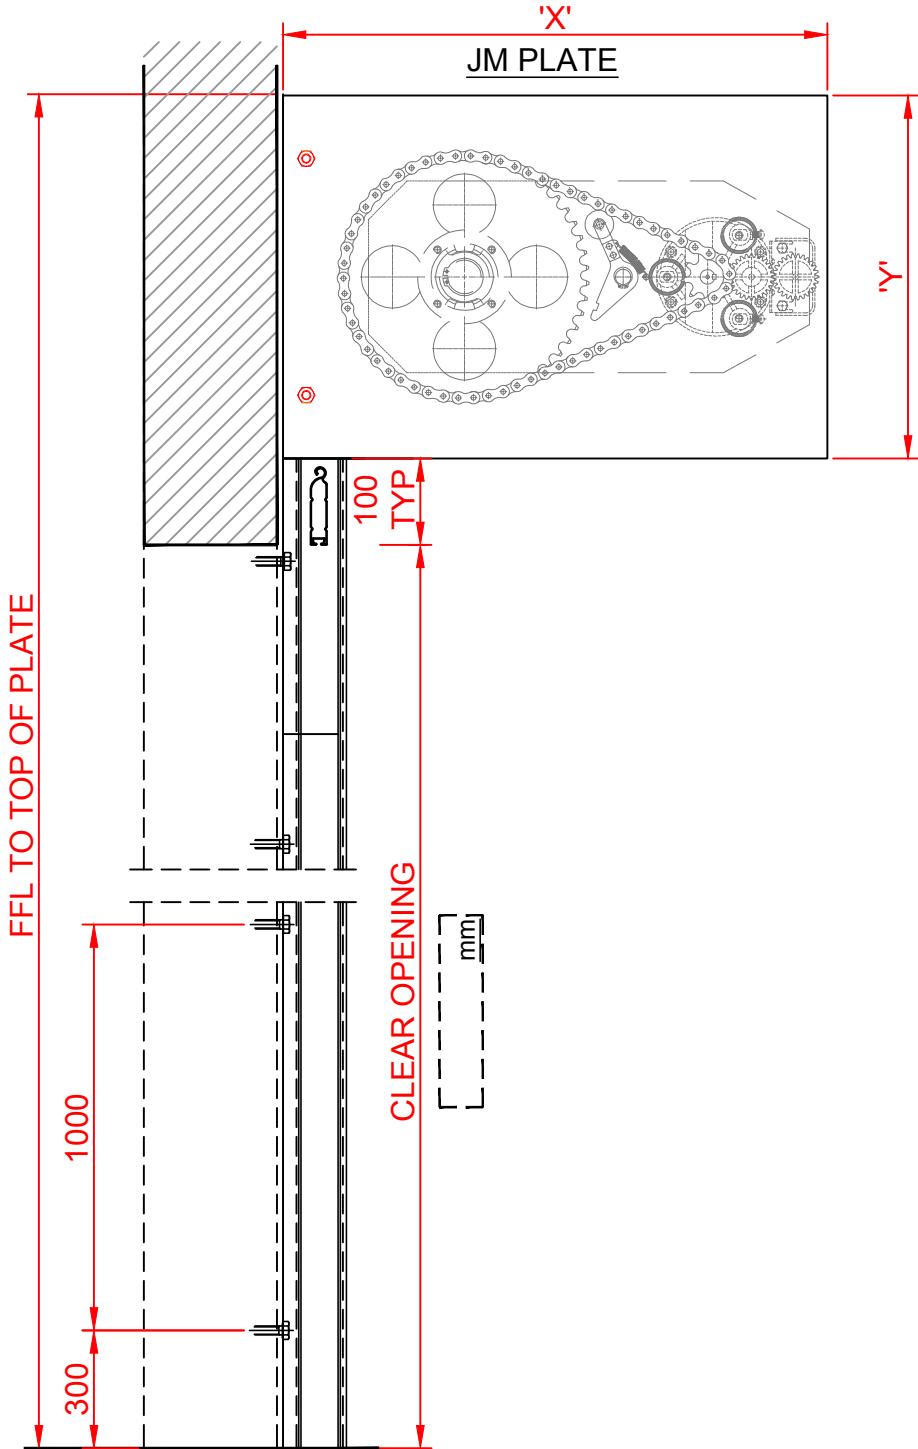

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS COME AS STANDARD
MOTOR HOODS DO NOT COME AS STANDARD
CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS OVER 2.5M ONLY
CURTAIN ONLY WILL BE PPC COATED AS STANDARD
DD MOTORS ARE NOT PERMITTED.

IBM SETUPS *DO* REQUIRE A SAFETY BRAKE
JM SETUPS *DO* REQUIRE A SAFETY BRAKE

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC