
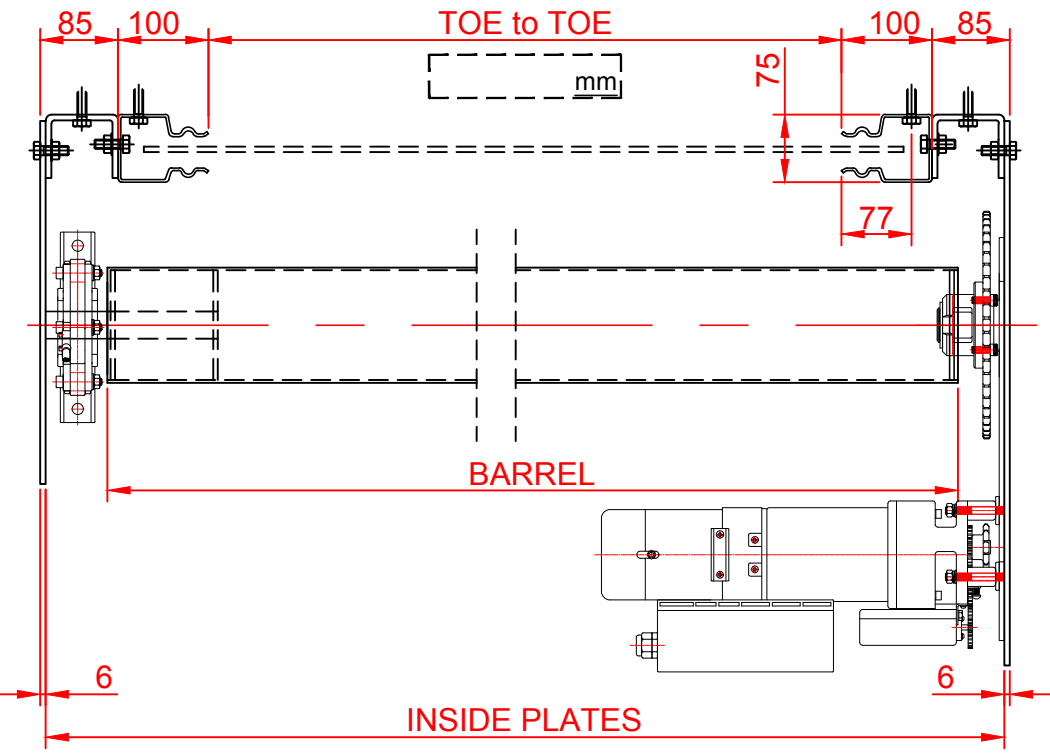


SALES ORDER:		DATE:	FITTING DATE:	
FORTRESS DB100 SURVEY				
CUSTOMER:				
JOB TITLE:				
SITE ADDRESS:				
DOOR REF		INTERNAL	EXTERNAL	
MEASURED BY		DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION				
FIXING TO				
KEYSWITCH DEADMAN	INSIDE			
	OUTSIDE			
PUSH BTN DEADMAN	INSIDE			
	OUTSIDE			
IMPULSE	RADAR			
	IND LOOP			
	FOBS			
	*SPECIAL			
TIE BARS	YES/NO			
SILL ANGLE	YES/NO			
	SIZE:			
FITTING ANGLES				
DETAIL OPPOSITE				
SAFETY EDGE				
PHOTOCELLS				
COIL CASING				
FASCIA				
MOTOR HOOD				
FIRE RATING				
COLOUR/FINISH				
FLASHINGS	INSIDE			
	OUTSIDE			
OTHER ITEMS:				
<div><div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div></div></div><div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL: +44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>				
01_DB100_NBS_V6 2016_REV2 _ 1.7.19				

Type: DB100 Industrial Roller Shutter 3phase



PLAN


STATE MOTOR SIDE

GUIDE /PLATE DETAILS

JM CLEAR OPENING HEIGHT 0-3000 'X'=600, 'Y'=400
JM CLEAR OPENING HEIGHT 3000-5500 'X'=750, 'Y'=450
JM CLEAR OPENING HEIGHT 5500+ 'X'=800, 'Y'=600

MAX SIZE 6000*6000 SIZES OVER CONTACT D/O
**WIDTH RESTRICTION OVER 4M - CONTACT D/O

SKETCHES, NOTES & DETAILS – STEELWORK/ANGLES ETC

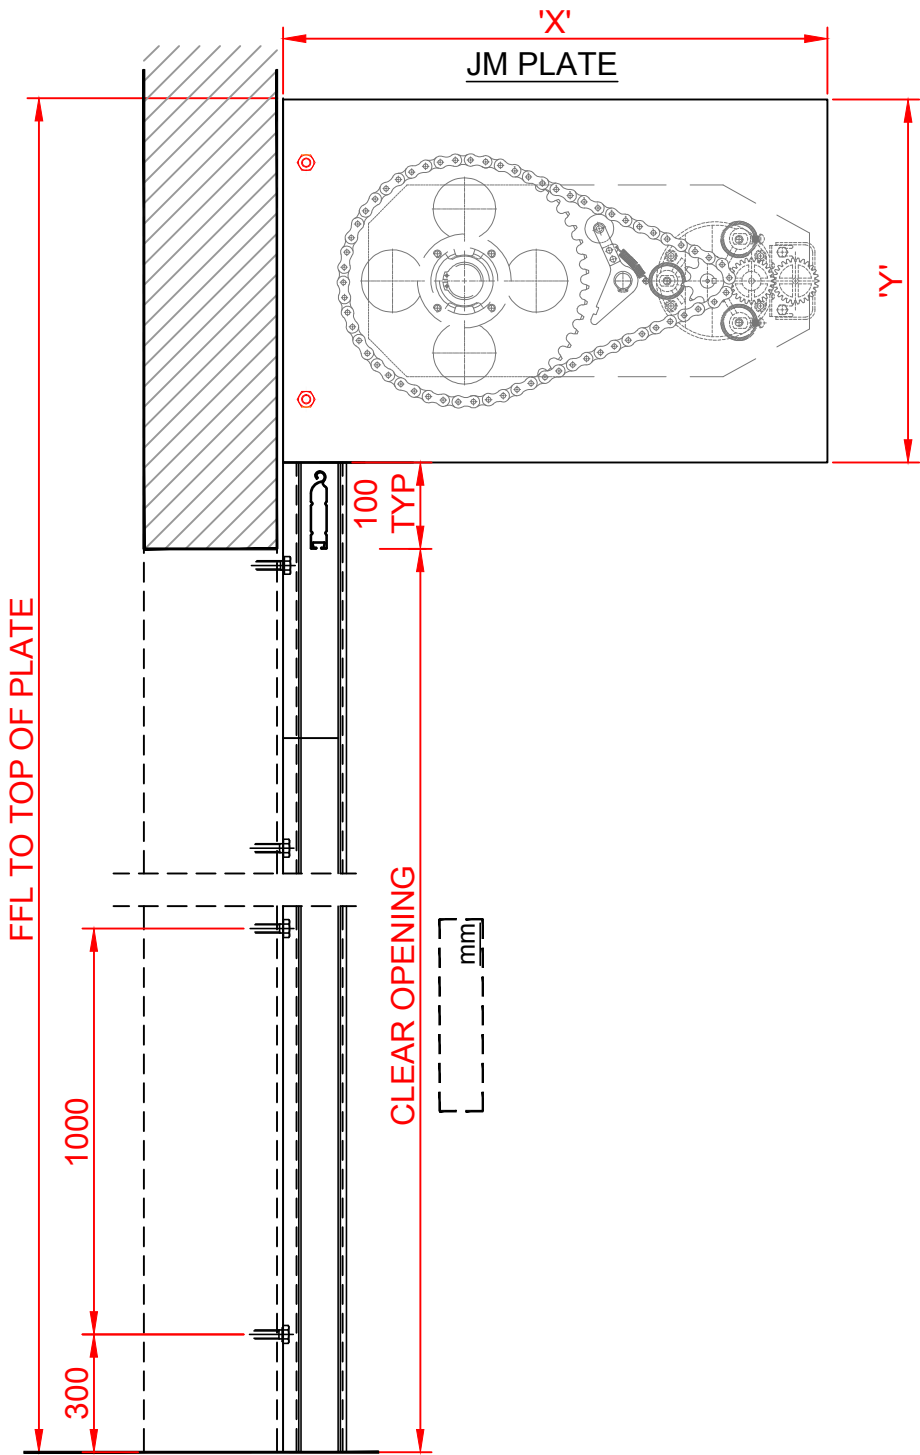

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS DO NOT COME AS STANDARD
MOTOR HOODS DO NOT COME AS STANDARD
CURTAIN ONLY WILL BE PPC COATED AS STANDARD

DIRECT DRIVE MOTORS DO NOT REQUIRE A SAFETY BRAKE.
JM SETUPS *DO* REQUIRE A SAFETY BRAKE