


SALES ORDER:		DATE:	FITTING DATE:
FORTRESS FCF75 SURVEY			
CUSTOMER:			
JOB TITLE:			
SITE ADDRESS:			
DOOR REF	INTERNAL	EXTERNAL	
MEASURED BY	DRAWN BY	SITE CONTACT	
SHUTTER SPECIFICATION			
FIXING TO			
KEYSWITCH DEADMAN	INSIDE		
	OUTSIDE		
PUSH BTN DEADMAN	INSIDE		
	OUTSIDE		
IMPULSE	RADAR		
	IND LOOP		
	FOBS		
	*SPECIAL		
FIRE LINK	FUSIBLE		
	PANEL		
	*SPECIAL		
FITTING ANGLES			
DETAIL OPPOSITE			
SAFETY EDGE (N/A)			
PHOTOCELL'S (N/A)			
COIL CASING		REQUIRED	
FASCIA			
MOTOR HOOD			
FIRE RATING			
COLOUR/FINISH			
FLASHINGS	INSIDE		
	OUTSIDE		
OTHER ITEMS:			
<div><div></div><div><div>FORTRESS</div><div>SEFA</div><div>SECURITY ENVIRONMENTAL FIRE ARCHITECTURAL</div><div>6 TRENCH ROAD, MALLUSK, NEWTOWNABBEY, CO. ANTRIM, N.IRELAND, BT36 4TY TEL:+44 (0)2890 342655</div><div>EMAIL: INFO@FORTRESS-SEFA.COM WWW.FORTRESS-SEFA.COM</div></div></div>		NOTES & DETAILS – STEELWORK/ANGLES ETC	
09_FCF75_NBS_V6 2016_REV3 _ 1.7.19			

Type: FCF75 Commercial Fire Shutter

LH SIDE

RH SIDE

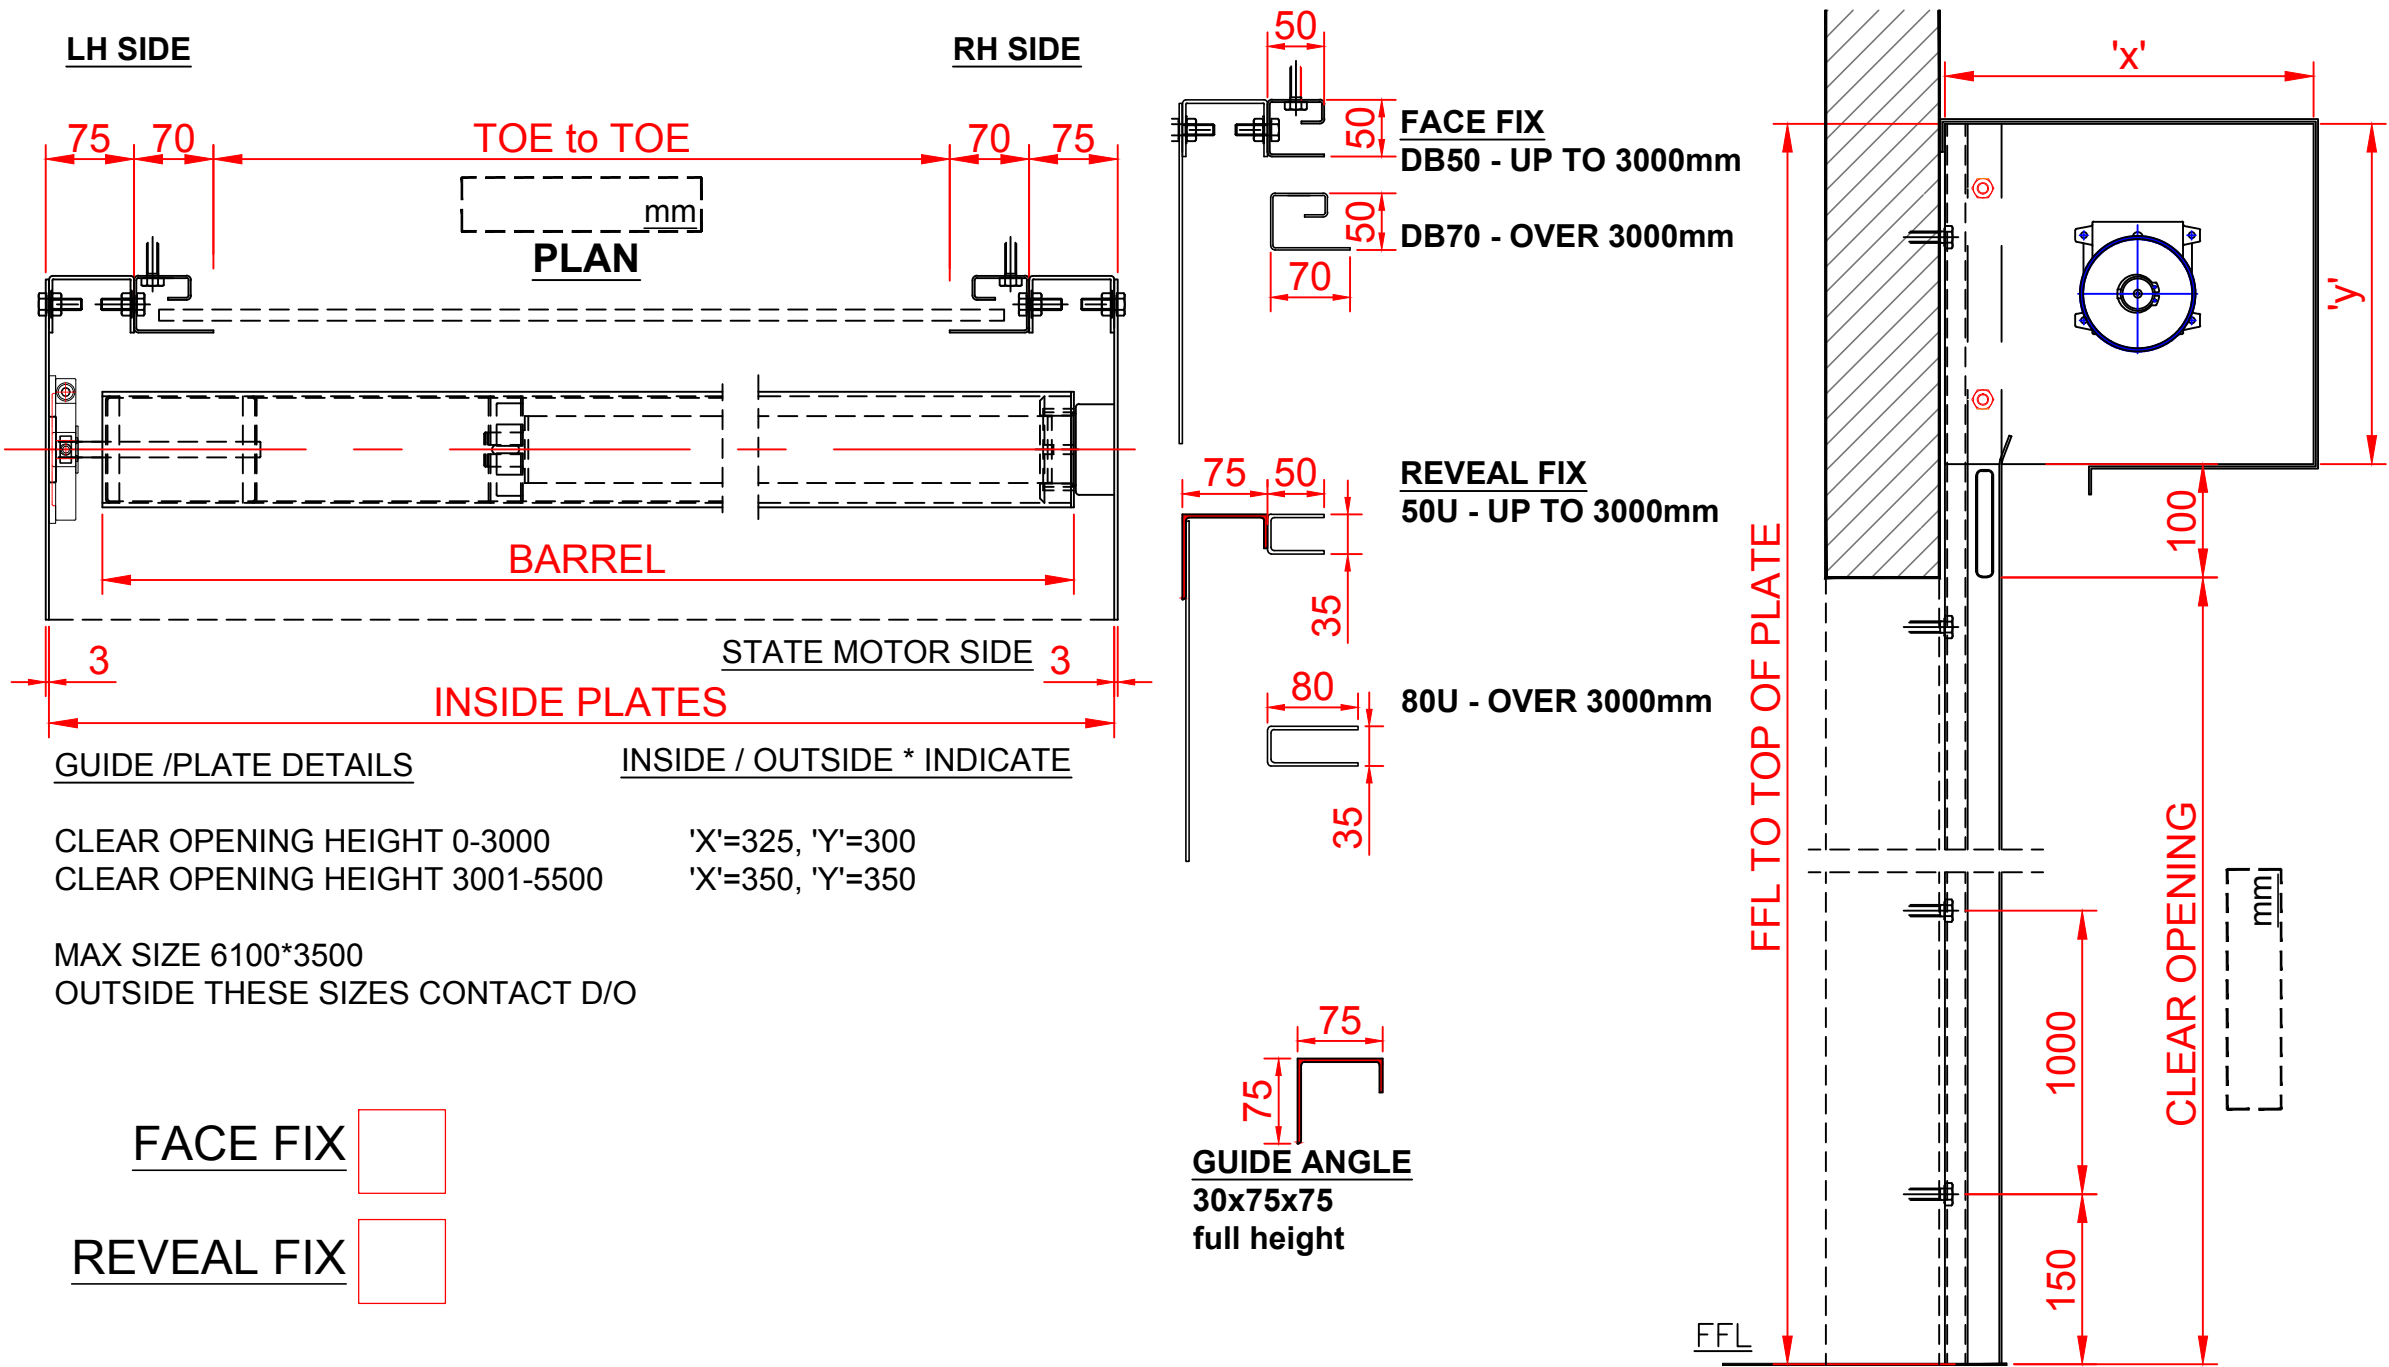

GUIDE /PLATE DETAILS INSIDE / OUTSIDE * INDICATE

CLEAR OPENING HEIGHT 0-3000 'X'=325, 'Y'=300
CLEAR OPENING HEIGHT 3001-5500 'X'=350, 'Y'=350

MAX SIZE 6100*3500
OUTSIDE THESE SIZES CONTACT D/O

FACE FIX ☐

REVEAL FIX ☐

NOTE:
ALL SHUTTERS OVER 5M WILL BE WINDLOCKED.
COIL CASINGS AS STANDARD WITH FCF75.
CASING SUPPORT BRACKETS WILL BE SUPPLIED IN WIDTHS OVER 2.5M ON FCF75 ONLY
CURTAIN ONLY WILL BE PPC COATED AS STANDARD