


Modulo Sensor de Temperatura y Humedad

Diagrama de conexión para el módulo sensor de temperatura y humedad BME280:

- MOD1** (Módulo BME280):
 - Pine 1: +3V3
 - Pine 2: +5V
 - Pine 3: GND
 - Pine 4: SCL
 - Pine 5: SDA
- BME280** (Módulo):
 - SCL1
 - SDA1




Modulo Principal


The diagram shows the pin configuration for the ESP32 module. The pins are numbered 1 through 36. The connections are as follows:

- Pin 1:** +3V3
- Pin 2:** GND
- Pin 3:** D15
- Pin 4:** D2
- Pin 5:** D4
- Pin 6:** RX2
- Pin 7:** TX2
- Pin 8:** D5
- Pin 9:** D18
- Pin 10:** D19
- Pin 11:** D21
- Pin 12:** RX0
- Pin 13:** TX0
- Pin 14:** D22
- Pin 15:** D23
- Pin 16:** EN
- Pin 17:** VP
- Pin 18:** VN
- Pin 19:** D34
- Pin 20:** D35
- Pin 21:** D32
- Pin 22:** D33
- Pin 23:** D25
- Pin 24:** D26
- Pin 25:** D27
- Pin 26:** D14
- Pin 27:** D12
- Pin 28:** D13
- Pin 29:** GND
- Pin 30:** Vin

The module is labeled **ESP32**.

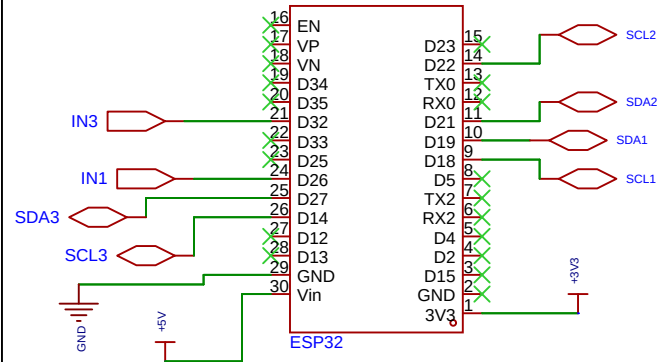


Modulo Sensor de Calidad de Aire



Step Down 12V a 3.3V

The diagram illustrates a step-down converter circuit using an LM2596 module. The input voltage is +12V, connected to pin 1 (IN+). The input is also connected to pin 2 (IN-) through a green wire. Pin 2 is also connected to ground (GND). The output is taken from pin 4 (OUT+), which is connected to +3.3V. Pin 3 (OUT-) is connected to ground (GND). The central component is labeled 'MODULO LM2596'.

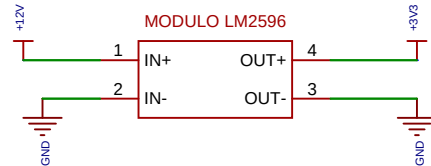


Modulo Rele Ventilador

The diagram shows a fan relay module with the following connections:


- Power Supply:** GND and +5V pins are connected to a power source.
- Control Signal:** The S pin is connected to a signal source labeled IN1.
- Relay Outputs:** The NO pin is connected to VENTILADOR+, the COM pin is connected to VENTILADOR-, and the NC pin is connected to a +12V source.

The module is labeled "Modulo Rele 5V".

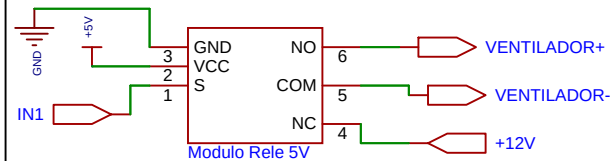


Modulo Pantalla LCD

The diagram shows the wiring of an LCD module to an Arduino Uno. The LCD module has four pins: 1 (GND), 2 (VCC), 3 (SDA), and 4 (SCL). These are connected to the Arduino's 5V, GND, A4 (SDA), and A5 (SCL) pins respectively. The Arduino pins are labeled SDA3(LCD) and SCL3(LCD).

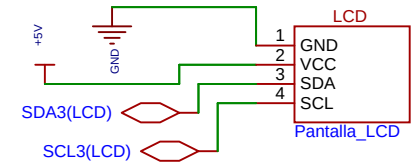

Modulo de Bornera



Modulo Rele Celda Peltier


Diagram illustrating the connection of a Peltier cell module (Modulo Rele Celda Peltier) to a 5V relay module (Modulo Rele 5V).

The Peltier cell module has four terminals: GND, VCC, S, and NO. The 5V relay module has four terminals: GND, VCC, S, and NO.

The connections are as follows:

- GND (Peltier) to GND (Relay)
- VCC (Peltier) to VCC (Relay)
- S (Peltier) to S (Relay)
- NO (Peltier) to NO (Relay)

The relay module is powered by a 5V source (Modulo Rele 5V). The Peltier cell is connected to a 12V source (PELTIER+).

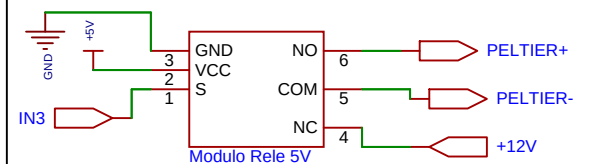


Modulo Level Shifter 12C

The diagram shows the Modulo Level Shifter 12C component with the following connections:

- LV_3V3** (Pin 4) is connected to a +3V3 supply.
- GND** (Pin 3) is connected to ground.
- LV_SCL** (Pin 2) is connected to **SCL3** (LCD).
- LV_SDA** (Pin 1) is connected to **SDA3**.
- HV_5V** (Pin 5) is connected to a +5V supply.
- GND** (Pin 6) is connected to ground.
- HV_SCL** (Pin 7) is connected to **SCL3(LCD)**.
- HV_SDA** (Pin 8) is connected to **SDA3(LCD)**.

I2C_LEVEL_SHIFTER_BSS138

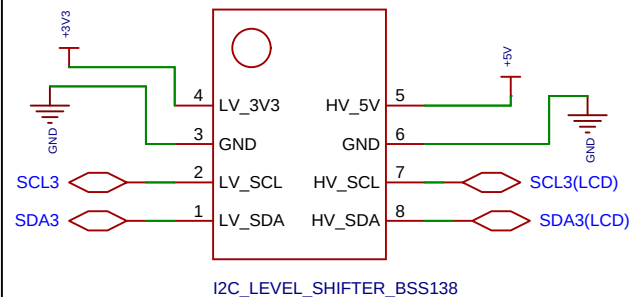

Schematic	ESQUEMATICO_ECOFRESH			Create at	2026-05-14
				Update at	2026-05-21
Board	Board1			Page	ECOFRESH1
Drawn	Equipo_05	ECOFRESH			
Reviewed					
		Version	Size	Page 1 Total 1	
		V1.0	A4	EasyEDA.com	