


Modulo Sensor de Temperatura y Humedad

Diagrama de conexión para el módulo BME280:

- Pin 1 (+3V3) conectado a +5V
- Pin 2 (+5V) conectado a +5V
- Pin 3 (GND) conectado a GND
- Pin 4 (SCL) conectado a SCL1
- Pin 5 (SDA) conectado a SDA1

El módulo está etiquetado como MOD1 y BME280.

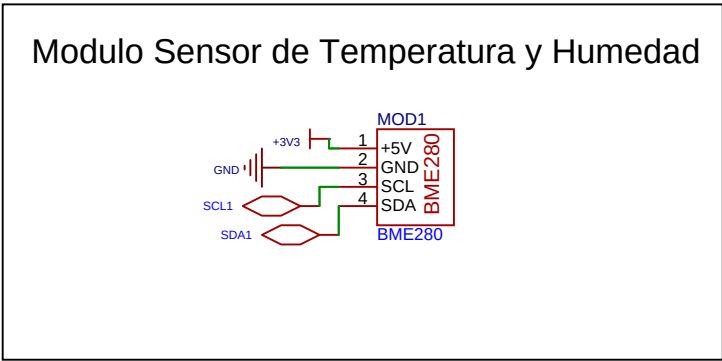


Modulo Principal

The diagram illustrates the pin configuration for the 'Modulo Principal' (Main Module). The ESP32 module is shown with pins 1 through 30. Pins 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, and 30 are marked with green X's, indicating they are not used or are crossed out. The connections are as follows:

- IN3**: Connected to pin 21.
- IN1**: Connected to pin 24.
- SDA3**: Connected to pin 26.
- SCL3**: Connected to pin 28.
- GND**: Connected to pin 30.
- +5V**: Connected to pin 30.
- ESP32**: Labeled at the bottom of the module.
- Other pins**: Pins 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, and 30 are marked with green X's, indicating they are not used or are crossed out.
- Other pins**: Pins 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, and 30 are marked with green X's, indicating they are not used or are crossed out.


Modulo Sensor de Calidad de Aire

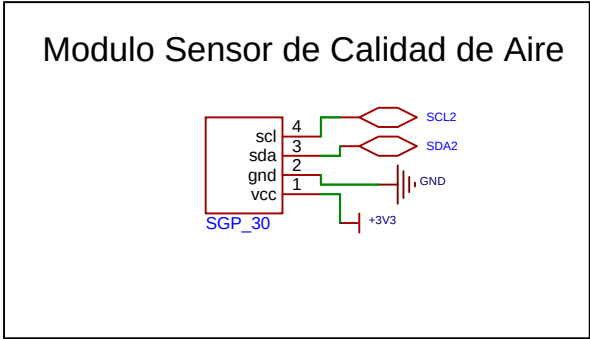

Step Down 12V a 3.3V

Diagram illustrating a step-down converter circuit using the MODULO LM2596. The circuit is configured to convert a 12V input to a 3.3V output.

- Input:** +12V is connected to pin 1 (IN+).
- Input:** GND is connected to pin 2 (IN-).
- Output:** +3V3 is connected to pin 4 (OUT+).
- Output:** GND is connected to pin 3 (OUT-).

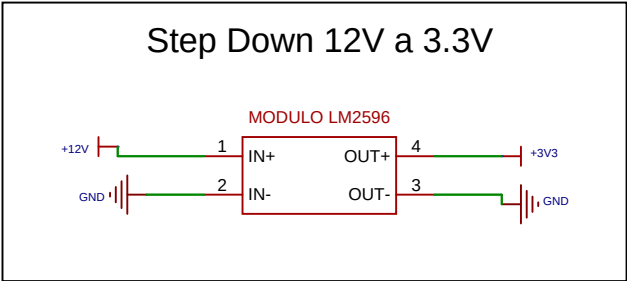


Modulo Rele Ventilador

The diagram shows a 5V relay module with the following connections:


- 5V** pin connected to a **+5V** supply.
- GND** pin connected to ground.
- IN1** pin connected to a switch.
- NO** (Normally Open) terminal connected to **VENTILADOR+**.
- COM** (Common) terminal connected to **VENTILADOR-**.
- NC** (Normally Closed) terminal connected to **+12V**.

The module is labeled **Modulo Rele 5V**.

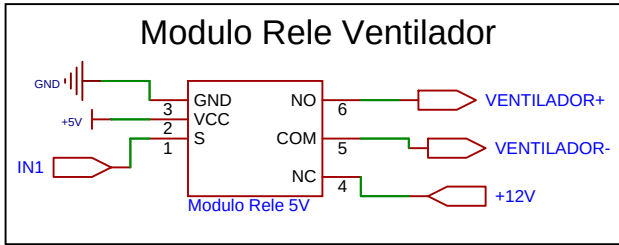


Modulo Pantalla LCD

The diagram illustrates the connection of an LCD module to a microcontroller. It features a red rectangular component labeled 'LCD' with four pins on its left side, numbered 1 to 4. Pin 1 is connected to a GND symbol. Pin 2 is connected to a +5V source. Pin 3 is connected to a green line labeled 'SDA3(LCD)'. Pin 4 is connected to a green line labeled 'SCL3(LCD)'. Below the LCD module, the text 'Pantalla_LCD' is written in blue. The entire diagram is set against a light blue background with a white border.

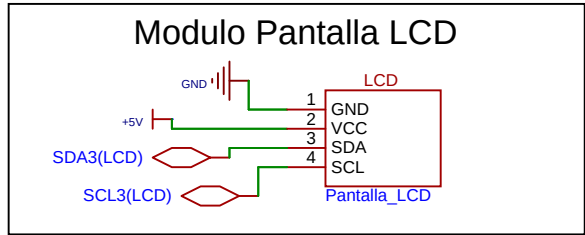

Modulo Rele Celda Peltier

The diagram shows a 5V relay module with a Peltier cell. The module has pins labeled GND, VCC, S, NO, COM, and NC. It is connected to a Peltier cell (PELTIER+ and PELTIER-), a 12V source (+12V), and an input (IN3).

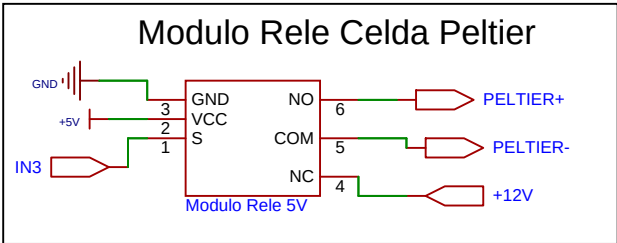

Modulo Level Shifter 12C


Pinout diagram for the Modulo Level Shifter 12C (I2C_LEVEL_SHIFTER_BSS138):

Pin	Signal	Level
1	LV_SDA	Low Voltage
2	LV_SCL	Low Voltage
3	GND	Low Voltage
4	LV_3V3	Low Voltage
5	HV_5V	High Voltage
6	GND	High Voltage
7	HV_SCL	High Voltage
8	HV_SDA	High Voltage

Connections shown:

- LV_3V3 (Pin 4) to +3V3
- GND (Pin 3) to GND
- LV_SCL (Pin 2) to SCL3(LCD)
- LV_SDA (Pin 1) to SDA3(LCD)
- HV_5V (Pin 5) to +5V
- GND (Pin 6) to GND
- HV_SCL (Pin 7) to SCL3(LCD)
- HV_SDA (Pin 8) to SDA3(LCD)

I2C_LEVEL_SHIFTER_BSS138

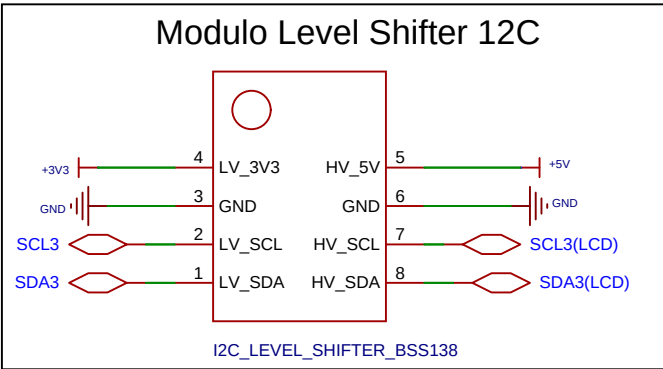

Schematic	ESQUEMATICO_ECOFRESH			Create at	2026-05-14
				Update at	2026-05-20
Board	Board1			Page	ECOFRESH1
Drawn	Equipo_05	ECOFRESH			
Reviewed					
		Version	Size	Page 1 Total 1	
		V1.0	A4	EasyEDA.com	