

Contents

1	Introduction	7
1.1	What is a fluid?	7
1.2	Describing fluid flow	7
1.3	Streamlines	8
1.4	The total derivative and acceleration	9
1.5	Viscosity	10
2	Ideal fluids	13
2.1	Properties of ideal fluids	13
2.1.1	Incompressibility of ideal fluids	13
2.1.2	Density of ideal fluids	14
2.1.3	Forces in an ideal fluid	14
2.2	Euler's equations of motion	14
2.2.1	Gravity on an ideal fluid	14
2.2.2	Bernoulli streamline equation	15
2.3	Irrotational Flow	16
3	Classical Aerofoil Theory	21
3.1	A Brief Introduction to Complex Numbers	21
3.1.1	Algebra of complex numbers	22
3.1.2	Complex functions	22
3.2	Potential Theory	24
3.2.1	The Velocity Potential, ϕ	24
3.2.2	The Stream Function, ψ	26
3.2.3	The Complex Potential, w	28
3.2.4	Combining ϕ , ψ and w	29
3.3	The Method of Images	33
3.3.1	The Method of Images	33
3.3.2	Flow within a circular boundary	35
3.4	Irrotational Flow Past a Cylinder	37
3.4.1	Milne-Thomson's Circle Theorem	37
3.4.2	Irrotational Flow Past A Cylinder	37
3.4.3	The Effect of Circulation at the Boundary	38

3.4.4	Force of a fluid on a cylinder	40
3.5	Conformal Mapping	41
3.6	Irrotational Flow Past an Elliptical Cylinder	42
3.7	Irrotational Flow Past a Flat Plane	44
3.8	Irrotational Flow Past an Aerofoil	46
4	Circulation and Vortex Motion	51
4.1	Circulation	51
4.2	Kelvin's Circulation Theorem	52
4.3	Generation of Circulation and Lift	53
4.4	Vortex Motion	57
4.4.1	Motion of a Vortex Pair	57
4.4.2	The Von Karman Vortex Street	58
5	Viscous Fluids	63
5.1	The Navier-Stokes Equations	63
5.1.1	The Stress Vector and Tensor	63
5.1.2	Cauchy's Equation of Motion	63
5.1.3	Ideal fluids	64
5.1.4	Viscous fluids	65
5.2	Simple Viscous Flows	67
5.2.1	An Impulsively Moved Boundary	67
5.2.2	Two Rigid Boundaries	71
5.2.3	Flow down an inclined plane	77
5.3	Navier-Stokes and circular flow	79
5.3.1	The equations of circular flow	79
5.3.2	Steady flow between rotating cylinders	81
6	Small Amplitude Surface Waves	87
6.1	Surface Waves on Deep Water	87
6.1.1	Boundary conditions	87
6.2	Small Amplitude Waves	89
6.2.1	Sinusoidal waves in deep water	90
6.2.2	Meaning of small amplitude	92
6.2.3	Wave packets	93
6.3	Surface Tension Effects: Capillary Waves	93
6.3.1	The surface tension term	93
7	Compressible Fluids	97
8	Non-linear waves	99
8.1	Shallow water waves	99
8.2	The flow caused by a dam break	101

8.2.1	Method of characteristics	102
8.2.2	Dam break	104

Appendices 109

A	Solutions	111
Problem 1.1	111
Problem 1.2	113
Problem 2.1	114
Problem 2.2	115
Problem 2.3	117
Problem 2.4	118
Problem 3.1	121
Problem 3.2	124
Problem 3.3	126
Problem 3.4	129
Problem 3.5	132
Problem 4.1	137
Problem 4.2	140
Problem 5.1	143
Problem 5.2	147
Problem 5.3	151
Problem 5.4	156
Problem 8.1	161
Problem 8.2	166
Problem 8.3	168
Problem 8.4	172

Chapter 1

Introduction

1.1 What is a fluid?

Before we begin our study of fluid dynamics we should look at what defines a substance as a fluid. The simple answer is “something that flows”. While this may not seem satisfactory, it is true; almost anything that flows can be modeled by the equations and principles of fluid dynamics. Examples are plentiful, the obvious choices being air and water, but even metals (when heated enough), electricity (electrons *flow* through wires) and traffic flow can be modeled as fluids.

1.2 Describing fluid flow

The main goal of fluid dynamics is to determine the way in which a fluid moves. In order to accomplish this, we need a function which describes the velocity of the fluid at every point in space and time:

$$\mathbf{u} \equiv \mathbf{u}(\mathbf{x}, t) \quad (1.1)$$

where \mathbf{x} is a spatial vector, made up of three components. Eq. 1.1 can also be written, perhaps more clearly as

$$\mathbf{u} \equiv \mathbf{u}(x, y, z, t) = [u, v, w]. \quad (1.2)$$

This function has three dimensions plus a time dependence, making it fairly complicated to model real fluids. We’ll begin by making two assumptions in order to simplify the theory:

- i. \mathbf{u} is not dependent on time (steady flow): $\partial \mathbf{u} / \partial t = 0$,
- ii. the flow is two-dimensional¹: $\mathbf{u} = \mathbf{u}(x, y, t)$

¹This is not to say that every fluid flows as an infinitesimally thin sheet, but rather that there is symmetry such that we can neglect the z component of \mathbf{u} without a loss of information.

The combination of these assumptions gives rise to a simplified function

$$\mathbf{u} \equiv \mathbf{u}(x, y) = [u(x, y), v(x, y)] \quad (1.3)$$

modelling two-dimensional steady flow.

1.3 Streamlines

A streamline is defined as a curve that at time t has the same direction as $\mathbf{u}(\mathbf{x}, t)$. It represents an instantaneous snapshot of the fluid, representing the flow at one specific instant in time. The streamlines are parametrized by s , thus the slope of a streamline in the x direction is given by dx/ds and is proportional to the x -component of the velocity. The same goes for the y and z components, giving

$$\frac{dx}{ds} = ku \quad \frac{dy}{ds} = kv \quad \frac{dz}{ds} = kw. \quad (1.4)$$

The proportionality constant k is the same in each case, so

$$\frac{dx/ds}{u} = \frac{dy/ds}{v} = \frac{dz/ds}{w}. \quad (1.5)$$

Example 1.1

Compute the streamlines of

$$\mathbf{u} = [x, x(x-1)(y+1)]$$

Solution: We know that \mathbf{u} is of the general form $\mathbf{u} = [u, v, w]$, so in this case, $u = x$, $v = x(x-1)(y+1)$ and $w = 0$. Eq. 1.5 reads as

$$\frac{dx/ds}{x} = \frac{dy/ds}{x(x-1)(y+1)} \quad \Rightarrow \quad dx = \frac{dy}{(x-1)(y+1)}.$$

This differential equation is easy to solve using separation of variables. Integration of both sides yields

$$\int (x-1) dx = \int \frac{1}{y+1} dy \quad \Rightarrow \quad \frac{1}{2}x^2 - x + C = \ln(y+1).$$

Therefore the streamlines are given by

$$y(x) = \exp \left[\frac{1}{2}x^2 - x + C \right] - 1.$$

Figure 1.1 shows the streamlines of 9 values of C .

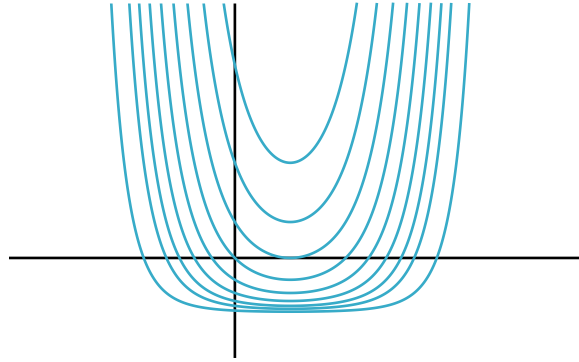


Figure 1.1

1.4 The total derivative and acceleration

Let $f(x, y, z, t)$ be some quantity of interest. It could be the a component of the velocity of the fluid, the density of the fluid or some other quantity. If we're looking at one point in space (x, y, z) , then $\partial f / \partial t$ gives the rate of change of f *at that position*. We don't want to be limited to one specific position; we'd rather "move with the fluid" and know how f changes as we go along with the flow. Rather than taking the partial derivative with respect to time, we should take the *total derivative*. The total derivative of f is given by

$$\frac{Df}{Dt} = \frac{d}{dt} [f(x(t), y(t), z(t), t)] . \quad (1.6)$$

Invoking the chain rule expands the total derivative to

$$\frac{Df}{Dt} = \frac{\partial f}{\partial x} \frac{\partial x}{\partial t} + \frac{\partial f}{\partial y} \frac{\partial y}{\partial t} + \frac{\partial f}{\partial z} \frac{\partial z}{\partial t} + \frac{\partial f}{\partial t} . \quad (1.7)$$

Looking back to Eq. 1.2, we can see that $\partial x / \partial t = u$, $\partial y / \partial t = v$ and $\partial z / \partial t = w$. The total derivative is then

$$\frac{Df}{Dt} = u \frac{\partial f}{\partial x} + v \frac{\partial f}{\partial y} + w \frac{\partial f}{\partial z} + \frac{\partial f}{\partial t} . \quad (1.8)$$

It can be condensed to the form

$$\frac{Df}{Dt} = \frac{\partial f}{\partial t} + (\mathbf{u} \cdot \nabla) f . \quad (1.9)$$

It's important to note the order of operations; take the dot product of \mathbf{u} with ∇ first and then operate on f . In the case where $f = \mathbf{u}$, Eq. 1.9 can be viewed as the acceleration of the fluid, and is dependent on both space and time.

Example 1.2

A fluid is in uniform rotation in the x, y plane with angular speed Ω . What is \mathbf{u} ? What is the acceleration?

Solution: The linear velocity is related to the angular velocity through

$$\mathbf{u} = \Omega \hat{\mathbf{k}} \times \mathbf{r} \quad (1.10)$$

Performing the cross product gives

$$\mathbf{u} = [-\Omega y, \Omega x, 0] \quad (1.11)$$

The flow is uniform (steady flow) so $\partial \mathbf{u} / \partial t = 0$, but the total derivative is

$$\begin{aligned} \frac{D\mathbf{u}}{Dt} &= (\mathbf{u} \cdot \nabla) \mathbf{u} \\ &= \left(u \frac{\partial}{\partial x} + v \frac{\partial}{\partial y} + w \frac{\partial}{\partial z} \right) \mathbf{u} \\ &= \left(-\Omega y \frac{\partial \mathbf{u}}{\partial x} + \Omega x \frac{\partial \mathbf{u}}{\partial y} \right) \mathbf{u} \\ &= -\Omega^2 y \hat{\mathbf{j}} - \Omega^2 x \hat{\mathbf{i}} \\ &= -\Omega^2 \mathbf{r} \end{aligned}$$

where \mathbf{r} is the position vector $\mathbf{r} = x\hat{\mathbf{i}} + y\hat{\mathbf{j}}$.

Returning for a moment to Eq. 1.9, in any steady flow, the rate of change of f is $(\mathbf{u} \cdot \nabla)f$ for any fluid element. If $(\mathbf{u} \cdot \nabla)f = 0$, it means that f is constant along a streamline. It could be a *different* constant along another streamline, but along any given streamline, f is constant. If $Df/Dt = 0$, f is constant for the particular fluid element. Again, it doesn't mean that other fluid elements will have the same value of f , but it does mean that for any particular fluid element, f will not change.

1.5 Viscosity

As a fluid flows along a boundary, say in a pipe, it does not slip along the surface of the pipe. The fluid elements that are in direct contact with the boundary have zero velocity. There exists a **boundary layer** where a velocity gradient is present. Traversing the boundary layer, the flow speed increases rapidly and smoothly from zero to the normal flow speed \mathbf{u} . Inside the boundary layer, the viscosity of the fluid cannot be neglected and the fluid follows **viscous theory**.

If a fluid is moving fast enough past an object, turbulence on the non-incident side of the object will exist. The Reynolds Number, R_e describes when turbulence will arise. The Reynolds Number is defined as

$$R_e \equiv \frac{uL}{\nu} \quad (1.12)$$

where u is the flow speed, ν is the kinematic viscosity and L is a length scale. The Reynolds Number is a measure of when a fluid will become turbulent.

Problem 1.1 Consider the two-dimensional flow given by

$$\mathbf{u} = [\alpha x, -\alpha y]$$

where α is a positive constant. Is the flow *incompressible*? Sketch the streamlines of the flow. Suppose a pollutant is introduced into the fluid and its concentration is given by

$$c(x, y, t) = \beta x^2 y e^{-\alpha t}$$

for $y > 0$ and where β is a constant. Does the pollutant concentration for any particular fluid element change with time?

(solution)

Problem 1.2 Consider the *unsteady* flow

$$\mathbf{u} = [u_0, kt],$$

where u_0 and k are constants. Find the equation for the streamlines and show that they are straight lines at any particular point in time. What happens as time goes on? Show that the path a fluid particle follows is parabolic rather than a straight line.

(solution)

Chapter 2

Ideal fluids

2.1 Properties of ideal fluids

Now comes the time to begin looking at the physics of fluids. We will first introduce the concept of an ideal fluid, a fluid which *i*) is incompressible, *ii*) is of constant density and *iii*) exerts a force $p\mathbf{n} \delta S$ on a surface element $\mathbf{n} \delta S$.

2.1.1 Incompressibility of ideal fluids

The incompressibility constraint can be easily thought of by considering a single fluid element, say a blob of dye. If the fluid is incompressible, the blob is not permitted to change volume. Mathematically, consider a fixed, closed surface S within the fluid. Fluid can flow into and out of S , but we know the net volume cannot change, thus

$$\int_S \mathbf{u} \cdot \hat{\mathbf{n}} dS = 0 \quad (2.1)$$

represents the rate of fluid flow across the surface in units of volume per time (here we took the speed of the fluid in length per time and integrated over the surface, multiplying by units of area). The divergence theorem states that

$$\int_S \mathbf{u} \cdot \hat{\mathbf{n}} dS = \int_V \nabla \cdot \mathbf{u} dV. \quad (2.2)$$

The only way this can be true and equal to zero is if

$$\nabla \cdot \mathbf{u} = 0. \quad (2.3)$$

Eq. 2.3 is known as the **incompressibility condition**.

Problem 2.1 Consider the rate of mass flow through a fixed, closed surface S drawn in the fluid. Following similar arguments made in Section 2.1.1, show that, even for compressible fluids, conservation of mass implies that

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0. \quad (2.4)$$

(solution)

2.1.2 Density of ideal fluids

An ideal fluid is one that has constant density ρ (mass per unit volume). Every fluid element has the same density at all time, that is

$$\frac{d\rho}{dt} = 0. \quad (2.5)$$

2.1.3 Forces in an ideal fluid

The force exerted by the surrounding fluid across any surface element dS is given by $p \hat{\mathbf{n}} dS$, where $p \equiv p(x, y, z, t)$ represents pressure. There are no tangential forces which act on the surface. Mathematically,

$$d\mathbf{F} = -p \hat{\mathbf{n}} dS \quad (2.6)$$

so using the identity $\oint_S \varphi \hat{\mathbf{n}} dS = \int_V \nabla \varphi dV$ (for an arbitrary vector \mathbf{a}),

$$\mathbf{F} = \int_V \nabla p dV \quad (2.7)$$

2.2 Euler's equations of motion

2.2.1 Gravity on an ideal fluid

Eq. 2.7 gives us the force exerted on an element of the fluid by the surrounding fluid, but any fluid in a gravitational field will also experience a downward gravitational force which cannot be neglected. The total force is then

$$\mathbf{F} = \int_V \nabla p dV + m \mathbf{g} \quad (2.8)$$

but the total mass m can be represented by $\int_V \rho dV$ so

$$\mathbf{F} = \int_V (-\nabla p + \rho \mathbf{g}) dV. \quad (2.9)$$

Dividing everything by $m = \rho V$ and recalling $\int_V dV = V$ and $\mathbf{F}/m = D\mathbf{u}/Dt$ gives

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho}\nabla p + \mathbf{g}. \quad (2.10)$$

This, along with the incompressibility condition of Eq. 2.3 constitutes Euler's Equations. We can represent the vector \mathbf{g} as the gradient of the scalar potential $\chi = gz$, changing Eq. 2.10 into

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho}\nabla p - \nabla\chi. \quad (2.11)$$

Equating this with the left-hand side of the total derivative (Eq. 1.6) gives

$$\frac{\partial\mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla)\mathbf{u} = -\frac{1}{\rho}\nabla p - \nabla\chi \quad (2.12)$$

Using the identity $(\mathbf{u} \cdot \nabla)\mathbf{u} = (\nabla \times \mathbf{u}) \times \mathbf{u} + \frac{1}{2}\nabla(\mathbf{u} \cdot \mathbf{u})$ we can rewrite Eq. 2.12 as

$$\frac{\partial\mathbf{u}}{\partial t} + (\nabla \times \mathbf{u}) \times \mathbf{u} + \frac{1}{2}\nabla(\mathbf{u}^2) = -\frac{1}{\rho}\nabla p - \nabla\chi \quad (2.13)$$

and since the gradient is a linear operator, we can move all of them to the right hand side and obtain

$$\frac{\partial\mathbf{u}}{\partial t} + (\nabla \times \mathbf{u}) \times \mathbf{u} = -\nabla \left(\frac{1}{2}(\mathbf{u}^2) + \frac{1}{\rho}p + \chi \right). \quad (2.14)$$

We'll define the three terms in the left parenthesis as

$$H \equiv \frac{1}{2}(\mathbf{u}^2) + \frac{1}{\rho}p + \chi \quad (2.15)$$

and then Eq. 2.14 becomes

$$\frac{\partial\mathbf{u}}{\partial t} + (\nabla \times \mathbf{u}) \times \mathbf{u} = -\nabla H. \quad (2.16)$$

2.2.2 Bernoulli streamline equation

Why did we bother to obtain Eq. 2.16? Firstly, if the flow is steady ($\partial\mathbf{u}/\partial t = 0$), then it becomes

$$(\nabla \times \mathbf{u}) \times \mathbf{u} = -\nabla H. \quad (2.17)$$

of which we can take the dot product with \mathbf{u} and obtain

$$\mathbf{u} \cdot ((\nabla \times \mathbf{u}) \times \mathbf{u}) = (\mathbf{u} \cdot \nabla)H. \quad (2.18)$$

The left hand side evaluates to zero¹ which allows us to conclude that

$$(\mathbf{u} \cdot \nabla)H = 0, \quad (2.19)$$

meaning that if an ideal fluid is in steady flow, then H is constant along a streamline.

2.3 Irrotational Flow

Irrotational flow is flow such that

$$\boldsymbol{\omega} \equiv \nabla \times \mathbf{u} = 0 \quad (2.20)$$

where $\boldsymbol{\omega}$ is called the *vorticity*. For steady, irrotational flow, the Euler equation reduces to

$$\nabla H = 0 \quad (2.21)$$

which means that H is constant throughout the fluid.

Example 2.1

What is the vorticity of a two dimensional fluid?

Solution: A two-dimensional fluid is given by

$$\mathbf{u} = [u, v, 0]$$

where $u = u(x, y, t)$ and $v = v(x, y, t)$. The vorticity is then

$$\boldsymbol{\omega} = \nabla \times \mathbf{u} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ u & v & 0 \end{vmatrix} = \left(0 - \frac{\partial v}{\partial z}\right)\hat{\mathbf{i}} - \left(0 - \frac{\partial u}{\partial z}\right)\hat{\mathbf{j}} + \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y}\right)\hat{\mathbf{k}}$$

Since u and v are not dependent on z , $\partial u/\partial z = \partial v/\partial z = 0$ and

$$\boldsymbol{\omega} = \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y}\right)\hat{\mathbf{k}}$$

We'll be dealing with two-dimensional flow so much that we'll define this result as ω (scalar) such that

$$\boldsymbol{\omega} \equiv \left(\frac{dv}{dx} - \frac{du}{dy}\right)\hat{\mathbf{k}} = \omega\hat{\mathbf{k}} \quad (2.22)$$

¹ How? Well, $\nabla \times \mathbf{u}$ will yield a vector perpendicular to \mathbf{u} , which when crossed with \mathbf{u} will also inevitably be perpendicular to \mathbf{u} . The dot product of two perpendicular vectors is zero.

Example 2.2

Calculate the vorticity ω for the flow

$$\mathbf{u} = [\beta y, 0, 0].$$

Solution: From the vector plot, we can see that the fluid is clearly not rotating, but let's calculate the vorticity anyway:

$$\omega = \nabla \times \mathbf{u} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ \beta y & 0 & 0 \end{vmatrix} = 0\hat{\mathbf{i}} - \left(\frac{\partial \beta y}{\partial z} - 0\right)\hat{\mathbf{j}} + \left(0 - \frac{\partial \beta y}{\partial y}\right)\hat{\mathbf{k}} = -\beta\hat{\mathbf{k}}$$

There is a constant vorticity even though the flow does not rotate. This demonstrates a very significant property of vorticity: not all fluids that have vorticity rotate.

Example 2.3

Consider the flow

$$\mathbf{u} = \frac{K}{r}\hat{\theta}$$

given in cylindrical coordinates ($\hat{\theta} = -\sin\theta\hat{\mathbf{i}} + \cos\theta\hat{\mathbf{j}}$). Find the vorticity. What happens at the origin ($r = 0$)?

Solution:

$$\omega = \nabla \times \mathbf{u} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\theta} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ u_r & ru_\theta & u_z \end{vmatrix} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\theta} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ 0 & K & 0 \end{vmatrix} = 0$$

When $r = 0$, $\omega = 0/0$; there is a singularity at the origin.

After investigating vorticity in the previous three examples we are left wondering exactly what it is. Example 2.2 showed that a non-rotating fluid had constant non-zero vorticity, while Example 2.3 showed that a specific fluid which is clearly rotating does not have vorticity. It turns out that vorticity is a measure of the *local rotation*, not the global rotation of the fluid.

Example 2.4

Consider an ideal fluid rotating under gravity with constant angular velocity Ω (say, water rotating in a water bottle). What is the fluid velocity \mathbf{u} in Cartesian coordinates? What is the shape of the free surface (the boundary between water and air)?

Solution: $\Omega = (0, 0, \Omega) = \Omega \hat{\mathbf{k}}$ is a vector that points along the z -axis. By Eq. 1.10, the velocity is then

$$\mathbf{u} = \Omega \times \mathbf{r} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ x & y & z \\ 0 & 0 & \Omega \end{vmatrix} = \Omega y \hat{\mathbf{i}} - \Omega x \hat{\mathbf{j}} = (-\Omega y, \Omega x)$$

The surface of the water is distinguished by being at atmospheric pressure. Everywhere along the surface, $p = p_0$. Equating Euler's equation (Eq. 2.10) with the total derivative (Eq. 1.6) gives us

$$\frac{D\mathbf{u}}{Dt} = \frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\frac{1}{\rho} \nabla p + \mathbf{g}.$$

This is really three equations; one for x , one for y and one for z . By expanding the dot product and gradient for each coordinate, we can obtain

$$\begin{aligned} x : \quad & \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial x} \\ y : \quad & \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial y} \\ z : \quad & \frac{\partial w}{\partial t} + u \frac{\partial w}{\partial x} + v \frac{\partial w}{\partial y} + w \frac{\partial w}{\partial z} = -\frac{1}{\rho} \frac{\partial p}{\partial z} - g \end{aligned}$$

Most of these terms are zero; they reduce to

$$\begin{aligned} x : \quad & \frac{\partial p}{\partial x} = \rho \left(v \frac{\partial u}{\partial y} \right) = -\rho \Omega y (-\Omega) = \rho \Omega^2 x \\ y : \quad & \frac{\partial p}{\partial y} = \rho \left(u \frac{\partial v}{\partial x} \right) = \rho \Omega x (\Omega) = \rho \Omega^2 y \\ z : \quad & \frac{\partial p}{\partial z} = -\rho g \end{aligned}$$

The only quantity that we don't know is the pressure, the derivative of which is

$$dp = \frac{\partial p}{\partial x} dx + \frac{\partial p}{\partial y} dy + \frac{\partial p}{\partial z} dz.$$

By inserting the partial derivatives we obtained for each component and integrating we get

$$\begin{aligned}\int dp &= \int \rho \Omega^2 x \, dx + \int \rho \Omega^2 y \, dy - \int \rho g \, dz \\ p - p_0 &= \frac{1}{2} \rho \Omega^2 x^2 + \frac{1}{2} \rho \Omega^2 y^2 - \rho g z \\ &= \frac{1}{2} \rho \Omega^2 (x^2 + y^2) - \rho g z\end{aligned}$$

We want the free surface which we know is at constant pressure. The surface will be given by the z -coordinate at each (x, y) point, thus setting $(p - p_0)$ constant and solving for z gives

$$z = \Omega^2 (x^2 + y^2) - (p - p_0)$$

as the surface of constant pressure, and the surface of the water. Figure 2.1 shows the surface and we can see that it looks much like the “vortex” that appears in a water bottle.

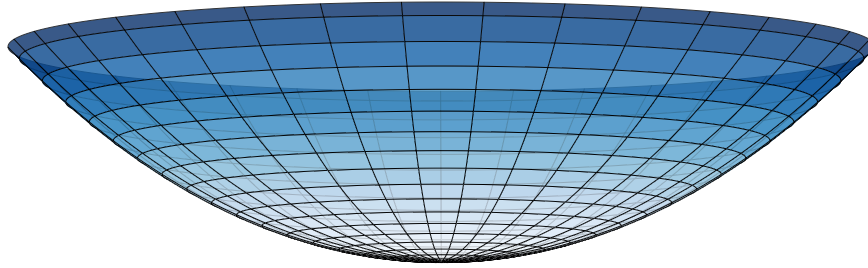


Figure 2.1

Problem 2.2 Calculate the divergence and curl for each of the following vector functions:

- (i) $\mathbf{u}_1 = [x^2, 3xz^2, -2xz]$
- (ii) $\mathbf{u}_2 = [xy, 2yz, 3zx]$
- (iii) $\mathbf{u}_3 = [y^2, 2xy + z^2, 2yz]$

Prove that the curl of a gradient is always zero, and prove that the divergence of a curl is always zero.

(solution)

Problem 2.3 Consider a fluid at rest. Show that the free surface must be a horizontal plane. How does the pressure change with depth within the fluid? (Hint: derive $p = p(d)$ where d is the distance below the free surface)

(solution)

Problem 2.4 Consider the Rankine vortex defined by the flow

$$u_\theta = \begin{cases} \Omega r & r < a \\ \frac{\Omega a^2}{r} & r > a \end{cases}$$

Find the pressure both inside the radius a and outside, and show that the difference in pressure between $r = 0$ and $r = \infty$ is

$$\Delta p = \rho \Omega^2 a^2.$$

(solution)

Chapter 3

Classical Aerofoil Theory

3.1 A Brief Introduction to Complex Numbers

Later in this chapter we will use complex numbers quite extensively. We'll quickly go over what complex numbers are and the different operations that will be useful. A complex number z is a number that can be expressed in the form $z = x + iy$, where x and y are real numbers and i is the imaginary unit (ie: $i = \sqrt{-1}$). $\text{Re}(z) = x$ is called the *real part* of z , while $\text{Im}(z) = y$ is called the *imaginary part* of z . While real numbers can be represented by a point on a number line, complex numbers are represented by a point on the two-dimensional *complex plane*, with the real part of z plotted on the horizontal axis and the imaginary part of z plotted on the vertical axis. It's evident from Figure 3.1 that

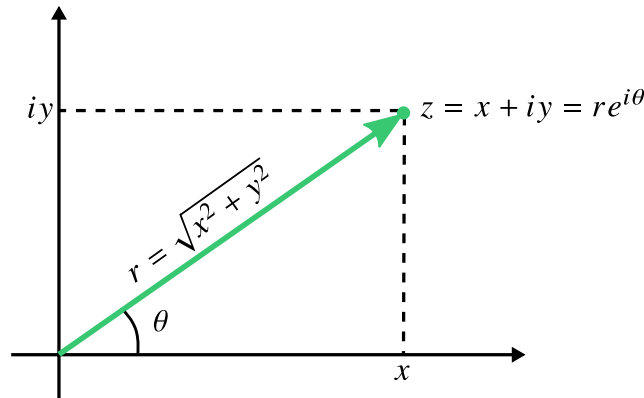


Figure 3.1

$x = r \cos \theta$ and $y = ir \sin \theta$ so Euler's formula allows us to write complex numbers also in radial form as

$$z = x + iy = r(\cos \theta + i \sin \theta) = re^{i\theta}$$

where $r = |z| = \sqrt{x^2 + y^2}$ is called the *modulus* of z and

$$\theta = \text{Arg}(z) = \arctan\left(\frac{y}{x}\right) = \arctan\left(\frac{\text{Im}(z)}{\text{Re}(z)}\right)$$

is called the argument of z . The complex *conjugate* of a complex number is given by

$$z^* = x - iy$$

and is found explicitly by replacing every i in a complex number with $-i$. The complex conjugate corresponds with a reflection of the complex number over the real axis, thus the conjugate of the conjugate is the original complex number (ie: $(z^*)^* = z$).

3.1.1 Algebra of complex numbers

In many cases, complex numbers can be thought of as “vectors” with the imaginary part corresponding to the vertical component and the horizontal component corresponding to the real part. Just like with vectors, the addition of two complex numbers is the addition of the real and imaginary parts separately. That is, if $z_1 = x_1 + iy_1$ and $z_2 = x_2 + iy_2$,

$$\begin{aligned} z_1 + z_2 &= (x_1 + iy_1) + (x_2 + iy_2) = (x_1 + x_2) + i(y_1 + y_2) \text{ and} \\ z_1 - z_2 &= (x_1 + iy_1) - (x_2 + iy_2) = (x_1 - x_2) + i(y_1 - y_2). \end{aligned}$$

Multiplication is the same as with purely real numbers, but when we multiply two complex numbers, we must take care to recognize that $i^2 = -1$, resulting in the product of two imaginary terms being real:

$$z_1 z_2 = (x_1 + iy_1)(x_2 + iy_2) = (x_1 x_2 - y_1 y_2) + i(x_1 y_2 + x_2 y_1).$$

When two complex numbers must be divided, it's usually best to first obtain a common denominator by multiplying the numerator and denominator by the complex conjugate:

$$\frac{z_1}{z_2} = \frac{x_1 + iy_1}{x_2 + iy_2} = \frac{(x_1 + iy_1)(x_2 - iy_2)}{(x_2 + iy_2)(x_2 - iy_2)} = \frac{(x_1 x_2 - y_1 y_2) + i(-x_1 y_2 + x_2 y_1)}{x_2^2 + y_2^2}.$$

Notice that the denominator is now real, giving

$$\frac{z_1}{z_2} = \left(\frac{x_1 x_2 - y_1 y_2}{x_2^2 + y_2^2} \right) + i \left(\frac{x_2 y_1 - x_1 y_2}{x_2^2 + y_2^2} \right).$$

3.1.2 Complex functions

Just as z is a complex number, made up of a real and imaginary parts, a complex *function* is a function with both real and imaginary parts. A complex function f is given by

$$f(z) = f(x + iy) = u(x, y) + iv(x, y)$$

where u and v are real-valued functions of real variables x and y .

Example 3.1

Write the function $f(z) = |z|^2 z^* + \operatorname{Im}(z)$ in the form $f(x + iy) = u + iv$, identifying u and v explicitly.

Solution: First, we'll replace every instance of z with $x + iy$ since u and v are functions of x and y , not z .

$$f(z) = |z|^2 z^* + \operatorname{Im}(z) = |x + iy|^2 (x + iy)^* + \operatorname{Im}(x + iy).$$

We'll look at the various parts separately:

$$|z|^2 = |x + iy|^2 = \left(\sqrt{x^2 + y^2} \right)^2 = x^2 + y^2.$$

$$z^* = (x + iy)^* = x - iy$$

$$\operatorname{Im}(z) = \operatorname{Im}(x + iy) = y$$

Therefore,

$$\begin{aligned} f(z) &= f(x + iy) = (x^2 + y^2)(x - iy) + y \\ &= x(x^2 + y^2) + y - iy(x^2 + y^2) \\ &= (x^3 + xy^2 + y) - i(x^2y + y^3) \\ &= u + iv \end{aligned}$$

Therefore, $u = u(x, y) = x^3 + xy^2 + y$ and $v = v(x, y) = x^2y + y^3$.

Sometimes it's much easier, or more logical to consider complex functions in polar form, that is, as functions of r and θ instead of x and y . Equivalently,

$$f(z) = f(re^{i\theta}) = u(r, \theta) + iv(r, \theta)$$

where $u(r, \theta)$ and $v(r, \theta)$ are real-valued functions of r and θ . For example, it would be tedious to find the real part of the complex-valued function $f(z) = z^8$, but in polar coordinates, the process is trivial:

Example 3.2

Write the complex function $f(z) = z^8$ in the form $f(z) = u + iv$, and identify u and v explicitly.

Solution: As discussed, it would be tedious to expand $f(z) = (x + iy)^8$ in Cartesian coordinates, so let's use polar coordinates instead. We'll write z in polar form as $z = re^{i\theta}$, meaning

$$f(z) = (re^{i\theta})^8 = r^8 e^{i8\theta}$$

so using Euler's formula, this becomes

$$f(z) = r^8 (\cos 8\theta + i \sin 8\theta) = (r^8 \cos 8\theta) + i (r^8 \sin 8\theta).$$

Therefore $u(r, \theta) = r^8 \cos 8\theta$ and $v(r, \theta) = r^8 \sin 8\theta$.

We'll use the concept of a complex function when we define the complex potential later in this chapter. It will be important to understand how to separate the real and imaginary parts of complex numbers and complex functions as we'll find that the real parts and imaginary parts are meaningful individually.

3.2 Potential Theory

Up until now we've described fluid flow in terms of various vector quantities (forces, velocities), but vectors are difficult to deal with (or at least more difficult than necessary), so we'll define some additional quantities, potentials, that allow us to describe more complicated flow in a simple manner. These potentials are scalar quantities, and thus much easier to work with than vector quantities.

3.2.1 The Velocity Potential, ϕ

Suppose we have a flow that is irrotational, that is $\nabla \times \mathbf{u} = 0$. Our goal is to eliminate the vectors, so how can we simplify this? Well, we know that the curl of a gradient is zero, so this means that \mathbf{u} must be equivalent to the gradient of some scalar function. We'll call this scalar function $\phi = \phi(x, y)$ and define it as

$$\mathbf{u} \equiv \nabla\phi, \tag{3.1}$$

naming it the **velocity potential**. A gradient is a three-dimensional derivative, so the inverse function is a line integral, giving

$$\phi = \int \mathbf{u} \cdot d\mathbf{x} \tag{3.2}$$

(remember \mathbf{u} and \mathbf{x} are vector functions, so this is really the sum of three integrals). If the fluid occupies a simply connected region,¹ then ϕ is single valued. If the fluid occupies

¹a simply connected region is one in which *any* closed path lying in the region can be contracted in on itself until the path becomes a point: a sphere is simply connected, but a donut is not.

a non-simply connected region, then ϕ will be multi-valued. Now we could go back and write all of Euler's equations in terms of ϕ , but let's instead develop a different way of attacking problems now that we have this new representation.

Example 3.3

Find the velocity potential of the flow

$$\mathbf{u} = (U, 0, 0)$$

Solution: Eq. 3.2 gives ϕ simply as

$$\phi = \int \mathbf{u} \cdot d\mathbf{x} = \int U dx = Ux + C$$

Example 3.4

We'll take this one step further, our standard two dimensional flow. Find the velocity potential of

$$\mathbf{u} = (-\alpha x, -\alpha y, 0).$$

Solution: Again Eq. 3.2 gives us ϕ , but this time, we have both horizontal and vertical components, so

$$\phi = \int \mathbf{u} \cdot d\mathbf{x} = \int u dx + \int v dy = -\frac{1}{2}\alpha x^2 - \frac{1}{2}\alpha y^2 + C$$

where C is a constant of integration. Just like gravitational potential and electrical potential (all potentials for that matter), the velocity potential does not change if a scalar value is added. Potentials are relevant by the *difference* between two points, so adding a constant merely changes the reference point. For this reason, we can neglect the constant C in the above answer, giving

$$\phi = -\frac{1}{2}\alpha x^2 - \frac{1}{2}\alpha y^2$$

Example 3.5

Find ϕ for the line vortex flow

$$\mathbf{u} = \frac{K}{r} \hat{\theta}.$$

Solution: As we've seen before, this flow is irrotational except at $r = 0$, at which point there is a "hole". The hole means the fluid is not simply connected; the velocity potential ϕ should be multi-valued. Let's see if this is true. In cylindrical coordinates,

$$\nabla\phi = \frac{\partial\phi}{\partial r} + \frac{1}{r} \frac{\partial\phi}{\partial\theta} + \frac{\partial\phi}{\partial z}.$$

The first and the last term are zero since \mathbf{u} is entirely in the $\hat{\theta}$ direction. Thus

$$\phi = K \int d\theta = K\theta.$$

We said that ϕ should end up being multi-valued and indeed it is. For any value of θ that you give it, you can simply add 2π and get the exact same value for ϕ .

When defining the velocity potential, we imagined a fluid such that $\nabla \times \mathbf{u} = 0$ and it's important to remember that ϕ is meaningful *only if* this is the case. The velocity potential corresponds to curves of constant velocity; curves along which ϕ is constant have constant velocity. We can obtain one more useful equation if we further constrain our interest to *incompressible* fluids. Then

$$\nabla \cdot \mathbf{u} = 0$$

and since $\mathbf{u} = \nabla\phi$,

$$\nabla \cdot (\nabla\phi) = 0.$$

This is Laplace's Equation

$$\nabla^2\phi = 0 \tag{3.3}$$

which will prove to be very useful later since Laplace's equation is subject to the **uniqueness theorem**. The uniqueness theorem simply states that if we find a solution for ϕ which satisfies Laplace's equation and a complete set of boundary conditions, then it *must* be the correct solution. We will exploit this in Section 3.3 when we introduce the method of images.

3.2.2 The Stream Function, ψ

Now we will imagine a flow that is *incompressible* and *two-dimensional*. We will define the stream function $\psi = \psi(x, y)$ as the volume flow rate of the fluid. If we consider a blob

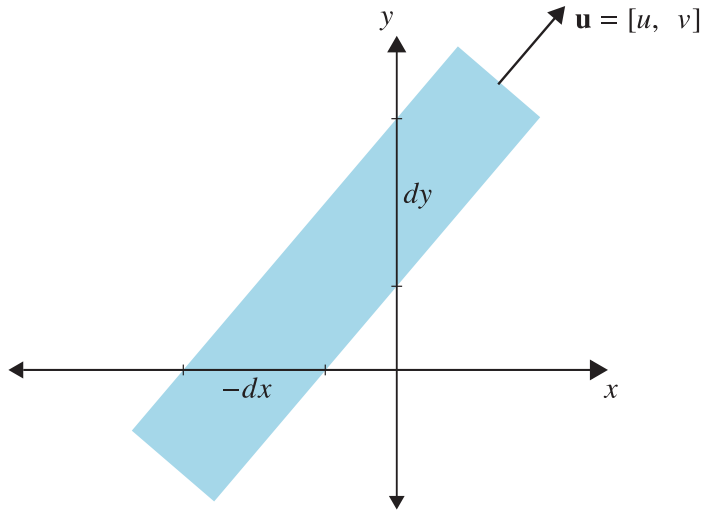


Figure 3.2

of fluid flowing across our coordinate axis as shown in Figure 3.2, the volume flow rate per length (ie: flux) through the line segment dy is $d\psi = udy$; it's the horizontal velocity of the fluid, multiplied by the length of the line over which the fluid is passing. The same volume of fluid (remember, it's incompressible so the volume can't change) passes across the x -axis, with flux $d\psi = -vdx$. Therefore, the stream function is a function ψ such that

$$u = \frac{\partial \psi}{\partial y} \quad \text{and} \quad v = -\frac{\partial \psi}{\partial x}. \quad (3.4)$$

The fluid is incompressible, thus it must satisfy the incompressibility condition, and indeed it does:

$$\nabla \cdot \mathbf{u} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = \frac{\partial^2 \psi}{\partial x \partial y} + \left(-\frac{\partial^2 \psi}{\partial y \partial x} \right) = 0 \quad (3.5)$$

The stream function gets its name from the fact that it is *constant along a streamline*, which is a reasonable statement. Paths along which the stream function is constant correspond to paths of constant volume flux, and since the fluid is assumed to be constant density, mass flux. Since the stream function is constant along a streamline, we have obtained another (and arguably more simple) way of obtaining the streamlines of a fluid: find the stream function and then set it equal to a constant. For every value of the constant, there corresponds a streamline. Some flows lend themselves better to cylindrical coordinates, in which the stream function can be given by

$$u_r = \frac{1}{r} \frac{\partial \psi}{\partial \theta} \quad \text{and} \quad u_\theta = -\frac{\partial \psi}{\partial r}. \quad (3.6)$$

Example 3.6

Show that the stream function ψ is constant along a streamline.

Solution: If ψ is constant along a streamline, then $(\mathbf{u} \cdot \nabla)\psi = 0$

$$(\mathbf{u} \cdot \nabla)\psi = u \frac{\partial \psi}{\partial x} + v \frac{\partial \psi}{\partial y} = \frac{\partial \psi}{\partial x} \frac{\partial \psi}{\partial y} - \frac{\partial \psi}{\partial x} \frac{\partial \psi}{\partial y} = 0$$

Therefore ψ is constant along a streamline.

3.2.3 The Complex Potential, w

In order to obtain the velocity potential it was required to limit our fluid to one that was irrotational. The stream function was obtained by imagining an incompressible and two-dimensional flow. We can combine these constraints to model a fluid that is irrotational, incompressible and two-dimensional. For a flow such as this, both ϕ and ψ will describe the flow such that

$$u = \frac{\partial \phi}{\partial x} = \frac{\partial \psi}{\partial y} \quad \text{and} \quad v = \frac{\partial \phi}{\partial y} = -\frac{\partial \psi}{\partial x}. \quad (3.7)$$

These relations are the Cauchy-Riemann equations of complex analysis. This suggests that we may introduce a complex function $w(z) = \phi(x, y) + i\psi(x, y)$, where $z = x + iy$ is a complex number. Using the definition of the derivative, we can calculate the derivative of w . The definition of the derivative is

$$\frac{dw}{dz} = \lim_{\delta x \rightarrow 0} \frac{w(z + \delta x) - w(z)}{\delta x}$$

where we are taking a small deviation² in z to be δx . We know that $w(z) = \phi + i\psi$ so

$$\frac{dw}{dz} = \lim_{\delta x \rightarrow 0} \frac{\phi(x + \delta x, y) + i\psi(x + \delta x, y) - \phi(x, y) - i\psi(x, y)}{\delta x}$$

and we can split up the limit, giving

$$\frac{dw}{dz} = \lim_{\delta x \rightarrow 0} \frac{\phi(x + \delta x, y) - \phi(x, y)}{\delta x} + i \lim_{\delta x \rightarrow 0} \frac{\psi(x + \delta x, y) - \psi(x, y)}{\delta x}. \quad (3.8)$$

By the definition of the derivative, the first term in Eq. 3.8 is the partial derivative of ϕ with respect to x , and the second term is the partial derivative of ψ , thus

²Here we take the small deviation to be purely real, that is, we use δx instead of the expected δz . This is acceptable since if a complex function is differentiable, it must be differentiable no matter which way we approach it. We could have equally used δy .

$$\frac{dw}{dz} = \frac{\partial\phi}{\partial x} + i \frac{\partial\psi}{\partial x} \quad (3.9)$$

but $\partial\phi/\partial x = u$ and $\partial\psi/\partial x = -v$ so

$$\frac{dw}{dz} = u - iv. \quad (3.10)$$

So now if we're given a complex potential (or the information necessary to find the complex potential), we can easily find the stream function by taking the imaginary part of w (which is useful to plot the flow). Not only that, but we can differentiate the complex potential with respect to z and obtain the velocity of the fluid. The complex potential holds all of the information about the flow of the fluid. The further power of the complex potential is that it is additive. For example, consider a uniform flow in the x direction with complex potential $w_1(z)$. If we then wanted to see what effect adding a line vortex at the origin with complex potential $w_2(z)$ has on the flow, we need only add the two complex potentials to find the final complex potential $w(z) = w_1(z) + w_2(z)$.

Example 3.7

Consider a uniform flow at an angle α from the x -axis. Find the complex potential.

Solution: The flow in Cartesian coordinates is made up of the x and y components, so

$$\mathbf{u} = [u, v] = [U \cos \alpha, U \sin \alpha].$$

Using Eq. 3.10,

$$\frac{dw}{dz} = u - iv = U \cos \alpha - iU \sin \alpha = U(\cos \alpha - i \sin \alpha) = Ue^{-i\alpha}$$

Therefore, integrating with respect to z gives $w(z) = Uz e^{-i\alpha}$. From this we can also see that when $\alpha = 0$ (uniform horizontal flow), the complex potential is $w(z) = Uz$.

3.2.4 Combining ϕ , ψ and w

We now have a very useful set of relations. Using these equations (and combinations of these equations) we can relate the velocity of fluid flow to the streamlines. The ability to add complex potentials will prove very useful in the future in analyzing more complicated flows. But the real beauty is more subtle; we no longer have any vectors to worry about. Sure, u and v are components of vectors, but components are scalars, and scalars are easy to work with. Additionally, the cylindrical representations are no more cumbersome than

the Cartesian versions, making it no more difficult if the situation lends itself well to a cylindrical coordinate system. A summary of the relationships is given in Eq. 3.11.

$$\begin{aligned} \phi : \begin{cases} u = \frac{\partial \phi}{\partial x}, & v = \frac{\partial \phi}{\partial y} \\ u_r = \frac{\partial \phi}{\partial r}, & u_\theta = \frac{1}{r} \frac{\partial \phi}{\partial \theta} \end{cases} \quad \psi : \begin{cases} u = \frac{\partial \psi}{\partial y}, & v = -\frac{\partial \psi}{\partial x} \\ u_r = \frac{1}{r} \frac{\partial \psi}{\partial \theta}, & u_\theta = -\frac{\partial \psi}{\partial r} \end{cases} \quad (3.11) \\ w : \begin{cases} w(z) = \phi + i\psi \\ \frac{dw}{dz} = u - iv \end{cases} \end{aligned}$$

Example 3.8

A line vortex is a flow in which the fluid particles move in a circular motion around the origin with speed varying with the distance from the radius. A line of fluid particles extending out from the origin will remain a line. A line vortex is an example of solid body rotation in a fluid, with the fluid moving as if it is a solid disk. The line vortex has a quantity called **circulation** Γ which determines the “strength” of the vortex. Examine the line vortex with circulation Γ and

$$\mathbf{u} = \frac{\Gamma}{2\pi r} \hat{\theta}.$$

Find the complex potential $w(z)$ and plot the streamlines.

Solution: From Eq. 3.11, $ru_\theta = \partial \phi / \partial \theta$ so through integration we obtain

$$\phi = \frac{\Gamma \theta}{2\pi}.$$

Also Eq. 3.11 tells us that $u_\theta = -\partial \psi / \partial r$, thus

$$\frac{\Gamma}{2\pi r} = -\frac{\partial \psi}{\partial r}$$

and again we integrate to find

$$\psi = -\frac{\Gamma}{2\pi} \ln(r). \quad (3.12)$$

Therefore the complex potential is

$$w(z) = \phi + i\psi = \frac{\Gamma \theta}{2\pi} - \frac{i\Gamma}{2\pi} \ln(r).$$

While it may look like we're done, we're not. w is defined as a function of the complex number $z = x + iy = re^{i\theta}$ and there isn't a z in the above equation. We must get it in this form. Factoring out a $-i$ (as well as other common factors) gives

$$\begin{aligned}
 w(z) &= -\frac{i\Gamma}{2\pi} (i\theta + \ln(r)) \\
 &= -\frac{i\Gamma}{2\pi} (\ln(e^{i\theta}) + \ln(r)) \\
 &= -\frac{i\Gamma}{2\pi} \ln(re^{i\theta}) \\
 &= -\frac{i\Gamma}{2\pi} \ln(z)
 \end{aligned} \tag{3.13}$$

Therefore, Eq. 3.13 gives the complex potential of a line vortex of circulation Γ . We will use this result frequently. We can plot the streamlines using the stream function given by Eq. 3.12. Since there is only a radial dependence, this stream function corresponds to circles about the origin, as expected. Figure 3.3 shows the circular streamlines of the line vortex.

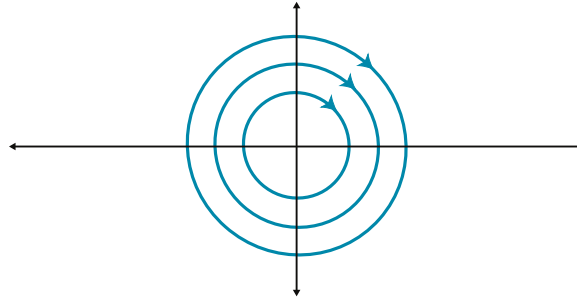


Figure 3.3

Example 3.9

Consider the 2D flow near a stagnation point (a point of zero velocity). Find the complex potential.

Solution: The first step is to expand the complex potential in a Taylor Series about the stagnation point z_0 :

$$w(z) = w(z_0) + (z - z_0)w'(z_0) + \frac{1}{2}(z - z_0)^2w''(z_0) + \dots$$

The first term $w(z_0)$ is a constant, and since we're talking about potentials, we can drop this. In the second term, $w'(z_0) = dw/dz|_{z_0} = 0$ (at the stagnation point there is no velocity, thus

both u and v are 0 and $dw/dz = u - iv = 0$). We can drop the higher order terms as we're assuming we're working *very near* the stagnation point and $(z - z_0)^n$ becomes exponentially smaller as n increases. Thus

$$w(z) \approx \frac{1}{2}(z - z_0)^2 w''(z_0)$$

The last part of this, $w''(z_0)$ is the second derivative *evaluated* at some point; it's just a number, albeit a complex one since w is a complex function. Let's call it $\alpha e^{i\beta}$ where α and β are arbitrary real constants. We will now apply a transformation, shifting coordinates in such a way as to put the stagnation point at $z = 0$ (ie: take $z_0 = 0$). Now

$$w(z) \approx \frac{1}{2}(z)^2 \alpha e^{i\beta}.$$

We will now do another less intuitive transformation: let $z = ze^{-i\beta/2}$ which gives us

$$w(z) \approx \frac{1}{2} \left(ze^{-i\beta/2} \right)^2 \alpha e^{i\beta} = \frac{1}{2} \alpha z^2.$$

Example 3.10

Starting with the result of Example 3.9, find u , v , ϕ and ψ and plot the streamlines.

Solution: We find ϕ and ψ by expanding w into its full form using $z = x + iy$. The real part is ϕ and the complex part is ψ since $w(z) = \phi + i\psi$.

$$\begin{aligned} w(z) &= \frac{1}{2} \alpha z^2 \\ &= \frac{1}{2} \alpha (x + iy)^2 \\ &= \frac{1}{2} \alpha (x^2 + 2ixy + y^2) \\ &= \frac{1}{2} \alpha (x^2 + y^2) + i \frac{1}{2} \alpha (2xy) \\ &= \phi + i\psi \end{aligned}$$

Thus $\phi = \frac{1}{2} \alpha (x^2 + y^2)$ and $\psi = \alpha xy$. To get u and v we do the same thing, instead using the derivative of w with respect to z .

$$\frac{dw}{dz} = \alpha z = \alpha (x + iy) = \alpha x + i\alpha y = u - iv$$

Thus $u = \alpha x$ and $v = -\alpha y$. In order to plot the streamlines, we could go through the process of solving Eq. 1.5 like we've done before, however the stream function gives us an

even simpler method. Since ψ is constant along a streamline (Example 3.6) we can set ψ to a constant (ie: $\psi = C$) and solve for y , directly obtaining the streamlines:

$$\psi = \alpha xy = C \quad \Rightarrow \quad y(x) = \frac{C}{\alpha x} = \frac{C}{x}$$

(here we absorbed α into the constant C). The streamlines are plotted in Figure 3.4.

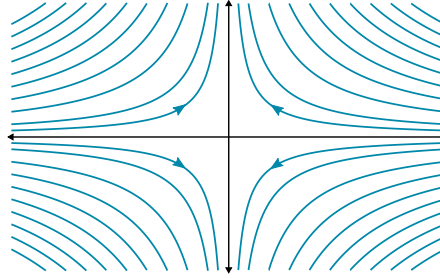


Figure 3.4

3.3 The Method of Images

3.3.1 The Method of Images

Suppose we have a line vortex positioned a distance d from the origin on the real axis. We found the complex potential of such a fluid to be

$$w(z) = \frac{-i\Gamma}{2\pi} \ln(z - d) \quad (3.14)$$

in Example 3.8. Here we've just shifted the line vortex to the right by replacing z with $z - d$. If we now place a boundary at the origin, how will the fluid react? We know that the flow must satisfy Laplace's equation

$$\nabla^2 \phi = 0$$

which we know follows the uniqueness theorem. This means that if we can come up with a solution which behaves like our fluid at the boundary and satisfies Laplace's equation, then the uniqueness theorem guarantees this is the correct solution. So let's forget about our line vortex with a boundary and consider *two* line vortices with no boundary (Figure 3.5). We'll place our original vortex at d and our imaginary one at $-d$. The first thing we need to check is that the boundary conditions are satisfied. *So what do we expect to happen at the boundary?* The fluid obviously will not pass through it so the boundary must bend the streamlines so that the fluid will flow purely in the vertical direction. It is clear from our

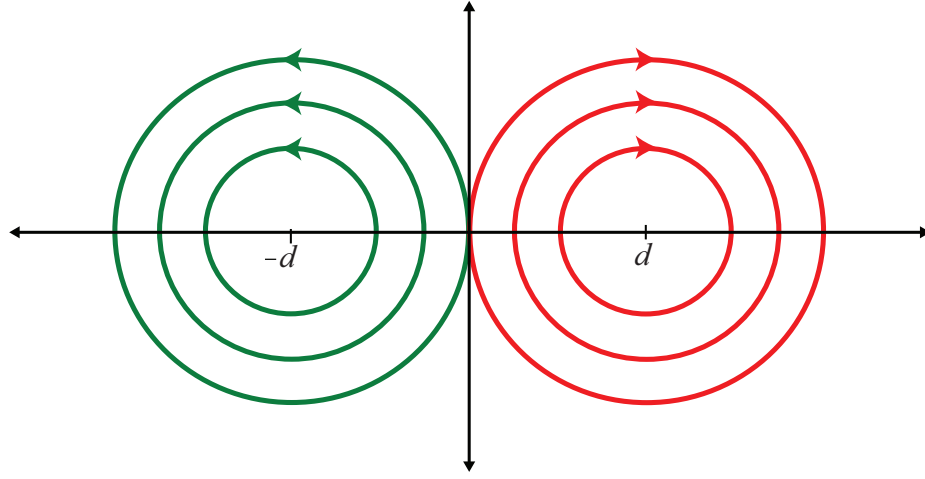


Figure 3.5

image drawing that the horizontal components of the velocity from each vortex will cancel leaving only a vertical trajectory. The boundary conditions are satisfied so by the uniqueness theorem, the solution to *this* problem must be the solution to the original problem of one line vortex. Note that the complex potential for our image vortex is

$$w(z) = \frac{i\Gamma}{2\pi} \ln(z + d).$$

It is the same as the complex potential as the original vortex, however in order to match the boundary conditions we were forced to choose a vortex with opposite circulation (hence the lack of a negative out front). Also, the vortex is placed to the left of the origin so the sign inside the logarithm changes. Since the complex potential has the useful property of being additive, the complex potential of the entire system is

$$\begin{aligned} w(z) &= \frac{-i\Gamma}{2\pi} \ln(z - d) + \frac{i\Gamma}{2\pi} \ln(z + d) \\ &= -\frac{i\Gamma}{2\pi} [\ln(z - d) - \ln(z + d)] \\ &= -\frac{i\Gamma}{2\pi} \ln\left(\frac{z - d}{z + d}\right). \end{aligned}$$

which because of the uniqueness theorem must be the complex potential of our single line vortex with a boundary along the vertical axis. The method of images allowed us to change the problem and solve an entirely different situation; it's a very powerful tool that we will exploit more later on. Problem 3.1 explores this result further by finding and plotting the streamlines.

3.3.2 Flow within a circular boundary

Now we'll examine the flow of a line vortex inside of a circular boundary, say, a bucket of radius a . If the line vortex was placed at the centre of the bucket, the boundary would have no effect on the fluid flow. This is hardly interesting, so let's place the line vortex inside the bucket a distance c from the centre of the boundary. Now we'll forget about the boundary and imagine the flow if there was another vortex at $z = a^2/c$ with opposite circulation $-\Gamma$. Figure 3.6 shows the real vortex in red, along with the image in black. At the boundary, the

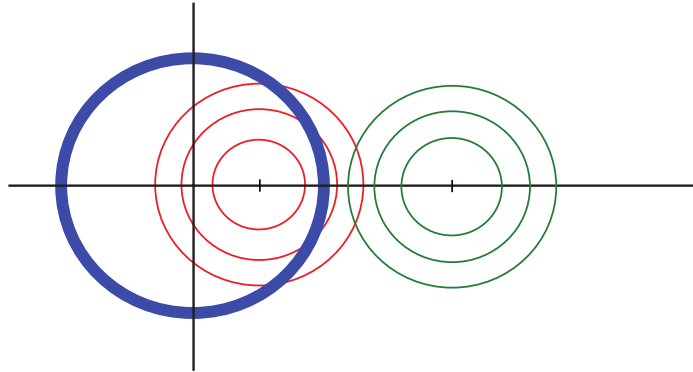


Figure 3.6

streamlines combine and the fluid flow exactly follows the blue “bucket” (Figure 3.7 shows

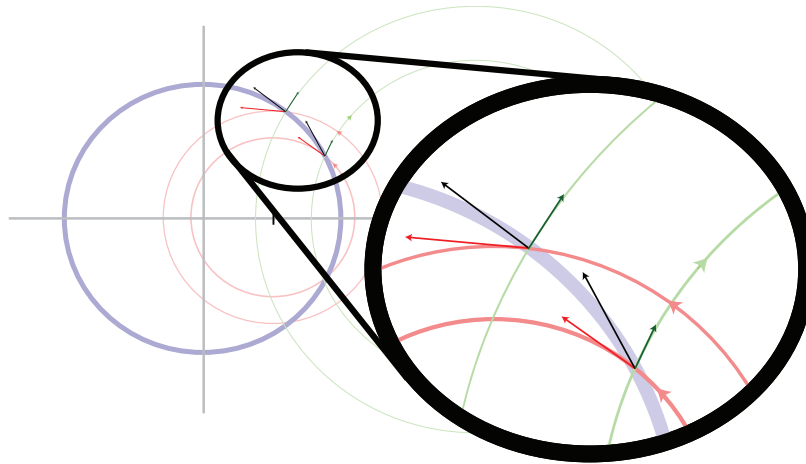


Figure 3.7

a large-scale view of the boundary; the vector sum of the streamlines at the boundary can clearly be seen to add to form the blue boundary curve). The boundary conditions are met; we must, and do, have a streamline flowing exactly over the path of the circular boundary. Recall the complex potential for a line vortex a distance c away from the origin is

$$w(z) = -\frac{i\Gamma}{2\pi} \ln(z - c),$$

so the image vortex has complex potential

$$w(z) = \frac{i\Gamma}{2\pi} \ln \left(z - \frac{a^2}{c} \right).$$

We can then find the total complex potential by adding the potentials of both the real and imaginary vortices:

$$\begin{aligned} w(z) &= -\frac{i\Gamma}{2\pi} \ln(z - c) + \frac{i\Gamma}{2\pi} \ln \left(z - \frac{a^2}{c} \right) \\ &= \frac{i\Gamma}{2\pi} \ln \left[\frac{z + \frac{a^2}{c}}{z - c} \right]. \end{aligned}$$

Figure 3.8 shows the plot of these streamlines. Notice that there is a streamline exactly

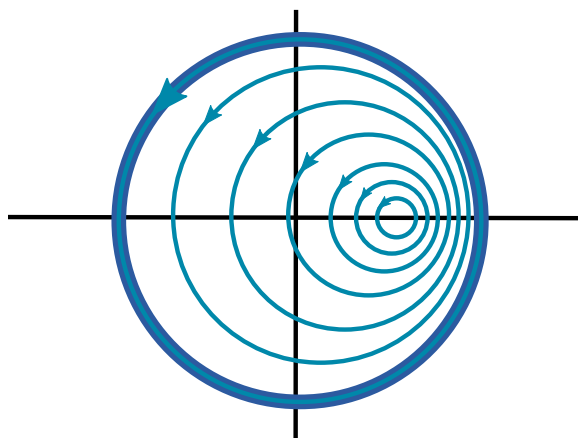


Figure 3.8

on the boundary; this is expected as the fluid cannot diverge outward from the bucket. The mathematical equations do not constrain the streamlines to the inside of the boundary, but none of the streamlines outside of the circular boundary matter since there is no fluid there anyway. The only thing that we care about is the flow of the fluid inside the boundary, which matches our expectations.

Problem 3.1 Consider the flow

$$u_r = \frac{Q}{2\pi r}, \quad u_\theta = 0;$$

if the constant $Q > 0$, the flow is called a line source and if $Q < 0$ it is called a line sink. Show that the flow is irrotational. Is it incompressible? Show that the complex potential is given by

$$w(z) = \frac{Q}{2\pi} \ln z.$$

Find the velocity potential and stream function and plot the streamlines. Now add a plane boundary a distance d from the line source/sink. Find the complex potential for this flow and plot the streamlines.

(solution)

3.4 Irrotational Flow Past a Cylinder

3.4.1 Milne-Thomson's Circle Theorem

Milne-Thomson's Circle Theorem ("the circle theorem") gives us a way to quickly find the complex potential of an arbitrary circular boundary provided two conditions are satisfied. Suppose we have a flow with complex potential $w = f(z) = f(x + iy)$. The circle theorem states that

$$w = f(z) + f^*(a^2/z^*) \quad (3.15)$$

is the flow that i) has the same singularities as $f(z)$ in $|z| > a$ (or rather $x^2 + y^2 > a^2$), and ii) has $|z| = a$ (or rather $x^2 + y^2 = a^2$) as a streamline. In words, this means that if the singularities are outside of the circle of radius a and there is a streamline that follows the boundary, then you can take the complex potential, plug in a^2/z^* , find the complex conjugate and then add this to the original complex potential to find the new complex potential. The circle theorem will allow us to easily find the flow of fluid past a cylinder.

3.4.2 Irrotational Flow Past A Cylinder

Now we'll consider a uniform flow with speed U at infinity. How will the fluid flow change when we place a cylinder $a^2 = x^2 + y^2$ at the origin³? At infinity the flow is unaffected by the cylinder, thus $w(z) = f(z) = Uz$. We can use the circle theorem since there are

³In complex notation, $|z| = |x + iy| = \sqrt{x^2 + y^2} = a$, so a cylinder can more conveniently be represented by $a = |z|$.

no singularities inside the cylinder and we know there needs to be a streamline along the cylinder. Thus the complex potential is

$$\begin{aligned}
 w(z) &= f(z) + f^*(a^2/z^*) \\
 &= Uz + [Ua^2/z^*]^* \\
 &= Uz + Ua^2/z \\
 &= U \left(z + \frac{a^2}{z} \right)
 \end{aligned} \tag{3.16}$$

Converting to polar coordinates gives

$$\begin{aligned}
 w(z) &= Ure^{i\theta} + \frac{Ua^2}{r}e^{-i\theta} \\
 &= Ur(\cos \theta + i \sin \theta) + \frac{Ua^2}{r}(\cos \theta - i \sin \theta) \\
 &= U(r + a^2/r) \cos \theta + iU(r - a^2/r) \sin \theta \\
 &= \phi + i\psi
 \end{aligned}$$

Thus the velocity potential and the stream function are

$$\phi = U(r + a^2/r) \cos \theta \quad \psi = U(r - a^2/r) \sin \theta.$$

These results are plotted in Problem 3.1. Using the circle theorem we have taken a simple uniform flow and added in a cylindrical obstruction, generating the equations that govern its flow.

3.4.3 The Effect of Circulation at the Boundary

Now let us examine what happens at the boundaries of the cylinder. By taking the derivatives of the above equations we can find the actual velocity of the fluid.

$$\begin{aligned}
 u_r &= \frac{\partial \phi}{\partial r} = \frac{\partial}{\partial r} (U(r + a^2/r) \cos \theta) = U \left(1 - \frac{a^2}{r^2} \right) \cos \theta \\
 u_\theta &= \frac{1}{r} \frac{\partial \phi}{\partial \theta} = \frac{1}{r} \frac{\partial}{\partial \theta} (U(r + a^2/r) \cos \theta) = -U \left(1 + \frac{a^2}{r^2} \right) \sin \theta
 \end{aligned}$$

Everywhere along the boundary where $r = a$, the radial component of velocity is non-existent ($u_r = 0$). This makes sense; we can't have any fluid entering or leaving the solid cylinder. Also at the boundary $u_\theta = -2U \sin \theta$. At angles $\theta = 0$ and π the flow stops altogether since $\sin \theta = 0$; these are called **stagnation points**. The velocity of the fluid is at a maximum at the top and bottom of the cylinder when $\theta = \pi/2$ and $3\pi/2$; it flows past this region at twice the speed at infinity ($u_\theta = 2U$).

Up until now we assumed that there was no circulation. Let's now examine what happens if we “place” a line vortex inside the cylinder. Exploiting the beauty of complex potentials, we need only add the complex potential of a line vortex centered at the origin (Eq. 3.13) to the complex potential of the flow past a cylinder (Eq. 3.16) to obtain the new flow.

$$w(z) = U \left(z + \frac{a^2}{z} \right) - \frac{i\Gamma}{2\pi} \ln(z)$$

The streamlines for the flow past a cylinder have been plotted in Figures 3.9a-d for varying values of Γ . Figure 3.9a is the normal flow past a cylinder where $\Gamma = 0$. The stagnation points are on the horizontal axis. Figure 3.9b has a small amount of circulation, $\Gamma \approx \pi Ua$. The stagnation points have risen to an angle above the horizontal axis. Figure 3.9c shows the critical amount of circulation, $\Gamma = 4\pi Ua$. At this point the two stagnation points converge at the top of the cylinder. Any more circulation and the flow begins to circulate around the cylinder (as in Figure 3.9d).

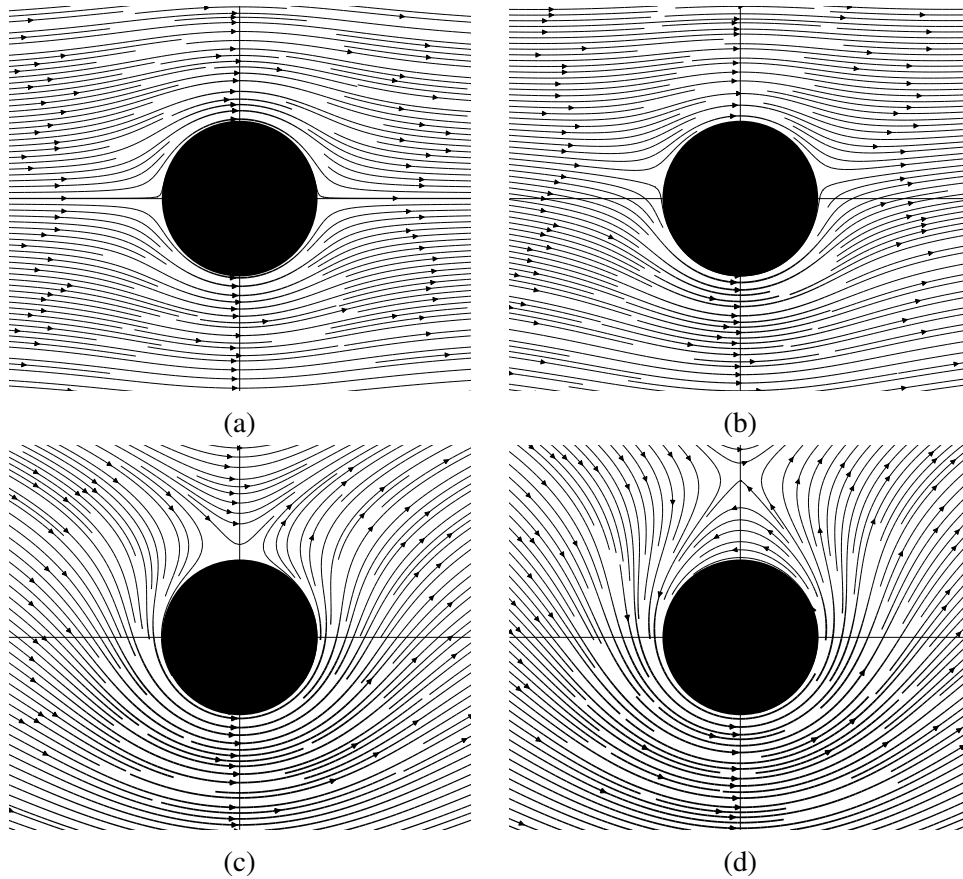


Figure 3.9

3.4.4 Force of a fluid on a cylinder

Now that we know the flow of a fluid around the cylinder, surely the force exerted on the cylinder is an important quantity. How can we find the actual force that the fluid exerts on the cylinder? We can find the pressure quite easily; we know that $H = p + \frac{1}{2}\rho\mathbf{u}^2$ is constant along a streamline (Eq. 2.19). We know that there is definitely a streamline at the boundary where $r = a$, so we need to find \mathbf{u}^2 on $r = a$. \mathbf{u}^2 is just the dot product of \mathbf{u} with itself, so

$$\begin{aligned}\mathbf{u}^2 &= u_r^2 + u_\theta^2 \\ &= 0 + \left(-2U \sin \theta + \frac{\Gamma}{2\pi a}\right)^2 \\ &= 4U^2 \sin^2 \theta + \frac{\Gamma^2}{4\pi^2 a^2} - \frac{2U\Gamma}{\pi a} \sin \theta.\end{aligned}\tag{3.17}$$

We can absorb the middle term into a constant (no θ dependence), and thus

$$\frac{p}{\rho} = \text{const} - 2U^2 \sin^2 \theta + \frac{U\Gamma}{\pi a} \sin \theta.$$

Let's now think about the above equation. θ only appears inside of a sine function, so what happens if we replace θ with $\pi - \theta$, a mirrored point on the other side of the vertical axis? Because sine is odd, the pressure will be symmetrical across the vertical axis ($\sin \theta = \sin(\pi - \theta)$), thus the x components will cancel. Contrastingly in the y -direction, no forces will cancel since $\sin(-\theta) = -\sin(\theta)$. There will be a net vertical force on the cylinder. The magnitude of the force will be equal to the pressure p on a small segment multiplied by the area element $r d\theta$, thus

$$dF = pad\theta$$

where $a = r$ is the radius of the cylinder, so the y -component of the force is simply

$$dF_y = \sin \theta (pad\theta)\tag{3.18}$$

$$\begin{aligned}F_y &= - \int_0^{2\pi} pa \sin \theta d\theta \\ &= \int_0^{2\pi} \left(c - 2\rho U^2 \sin^2 \theta + \frac{\rho U\Gamma}{2\pi} \sin \theta \right) a \sin \theta d\theta \\ &= \rho \int_0^{2\pi} \left(2U^2 \sin^2 \theta + \frac{U\Gamma}{\pi a} \sin \theta \right) a \sin \theta d\theta \\ &= -\rho U\Gamma.\end{aligned}\tag{3.19}$$

If $\Gamma < 0$, the circulation is counterclockwise and we get a positive force; this is **lift**!

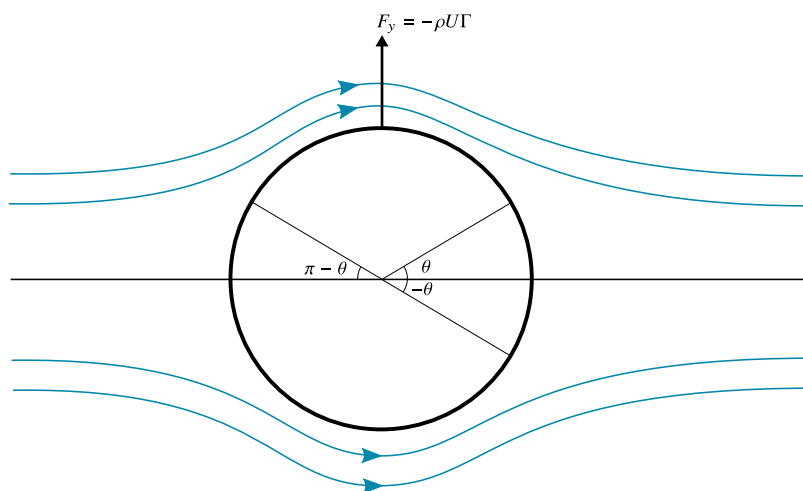


Figure 3.10

Problem 3.2 Find and plot the streamlines (and any boundaries present) for the following flows:

- (a) A line vortex a distance d from a plane boundary.
- (b) a line vortex a distance c from the centre of a circular boundary
- (c) uniform flow past a circular boundary (no circulation).

(solution)

Problem 3.3 Show that the velocity potential ϕ satisfies Laplace's equation:

$$\nabla^2 \phi = 0$$

Solve Laplace's equation for ϕ for the case of uniform flow past a circular cylinder and show that you get the same result as the Milne's Circle theorem method we used in class. (Hint: Think carefully about boundary conditions; use cylindrical coordinates and apply separation of variables.)

(solution)

3.5 Conformal Mapping

We now introduce the idea of conformal mapping which will allow us to use easy-to-work-with shapes (like circles) to find the flow around more complicated objects. The mathematical definitions are somewhat tedious, but we'll introduce them anyway for completeness. Don't worry too much about the definitions—using the result is what we're interested in.

Suppose we have an **analytic**⁴ function of z such that $Z = f(z)$ which has an inverse $z = F(Z)$. It is said that Z is a mapping which maps all complex numbers on the z plane onto a “new” Z plane. Then the complex potential $W(Z) = w(F(Z))$ is an analytic function of Z . We can write Z as a combination of its real and imaginary parts, just like before;

$$Z = X + iY$$

and split W up into its real and complex functions;

$$W(Z) = \Phi(X, Y) + i\Psi(X, Y).$$

Since W is analytic, Φ and Ψ satisfy the Cauchy-Riemann conditions.

$$\mathcal{U}(X, Y) = \frac{\partial \Phi}{\partial X} = \frac{\partial \Psi}{\partial Y} \quad \text{and} \quad \mathcal{V}(X, Y) = \frac{\partial \Phi}{\partial Y} = -\frac{\partial \Psi}{\partial X}$$

represent the velocity components of an irrotational, incompressible flow in the z -plane. Because $W(Z)$ and $w(z)$ take the same value at corresponding points, it follows that Φ and Ψ are the same at corresponding points. This means that streamlines get mapped to streamlines and because there is always a streamline hugging a boundary, boundaries get mapped to boundaries. So when we’re faced with a problem we can use a known flow and use a conformal mapping to map it to a flow for which we want to solve. Once we’ve solved the flow, we know that the complex potential obtained in the mapped plane is the same as the complex potential in the unmapped plane, thus we have solved the problem.

3.6 Irrotational Flow Past an Elliptical Cylinder

How can we find the flow past an elliptical cylinder? We’re familiar with the flow past a circular cylinder from the previous sections so let’s exploit this knowledge. We’ll use the complex mapping

$$Z = z + \frac{c^2}{z}, \tag{3.20}$$

known as the **Joukowski transformation** (with conformal mapping, the challenge is to come up with a suitable mapping). What effect does this mapping have on the circle $z = ae^{i\theta}$ in the complex plane (assuming $0 \leq c \leq a$)? Substituting our circle into our mapping gives

$$Z = X + iY = ae^{i\theta} + \frac{c^2}{ae^{i\theta}} = ae^{i\theta} + \frac{c^2}{a}e^{-i\theta},$$

⁴**analytic function:** a function whose derivative exists within an arbitrary region.

which using Euler's formula expands to

$$Z = a (\cos \theta + i \sin \theta) + \frac{c^2}{a} (\cos \theta - i \sin \theta)$$

$$X + iY = \left(a + \frac{c^2}{a}\right) \cos \theta + i \left(a - \frac{c^2}{a}\right) \sin \theta.$$

Thus, the real part and imaginary parts are separate and

$$X = \left(a + \frac{c^2}{a}\right) \cos \theta \quad \text{and} \quad Y = \left(a - \frac{c^2}{a}\right) \sin \theta.$$

This is just a parametrization of the ellipse⁵

$$\frac{X^2}{\left(a + \frac{c^2}{a}\right)^2} + \frac{Y^2}{\left(a - \frac{c^2}{a}\right)^2} = 1.$$

The Joukowski transformation maps circles in z to ellipses in Z (Figure 3.11). So how can

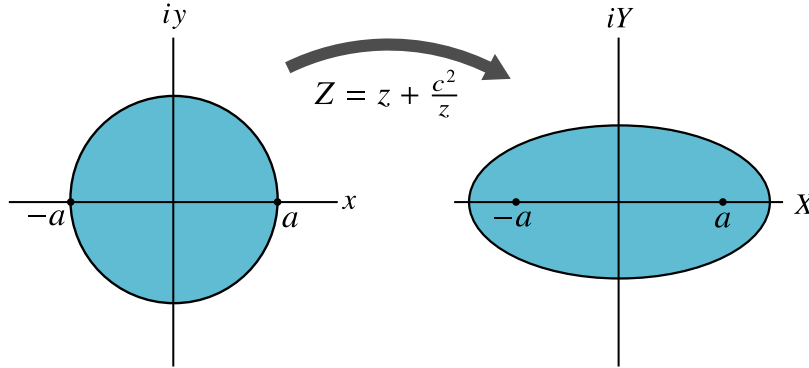


Figure 3.11

we actually use the Joukowski transformation with fluid dynamics? Consider a fluid with constant flow at an angle α to the real axis. The complex potential, as we've seen before is

$$w(z) = Uz e^{-i\alpha}.$$

We will then superimpose a circular cylinder onto this flow and add a line vortex at the origin to provide circulation giving the complex potential

$$w(z) = U \left(z e^{-i\alpha} + \frac{a^2}{z} e^{i\alpha} \right) - \frac{i\Gamma}{2\pi} \ln(z). \quad (3.21)$$

Solving Eq. 3.20 for z gives the inverse Joukowski transformation

⁵The ellipse $\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$ can be parametrized by $x = a \cos \theta$, $y = b \sin \theta$.

$$z = \frac{1}{2}Z + \left(\frac{1}{4}Z^2 - c^2\right)^{1/2}. \quad (3.22)$$

Substituting Eq. 3.22 into Eq. 3.21 gives

$$W(Z) = \left[\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - c^2\right)^{1/2}\right] Ue^{-i\alpha} + \frac{a^2}{c^2} \left[\frac{1}{2}Z - \left(\frac{1}{4}Z^2 - c^2\right)^{1/2}\right] Ue^{i\alpha} - \frac{i\Gamma}{2\pi} \ln \left[\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - c^2\right)^{1/2}\right] \quad (3.23)$$

as the complex potential of the flow past an elliptical cylinder. As always, we could separate the imaginary and real parts in order to find the stream function and plot the flow, however this is a tedious task and we'll leave it like this. Like always, the imaginary part of Eq. 3.23 gives the streamlines. They are plotted in Figure 3.12.

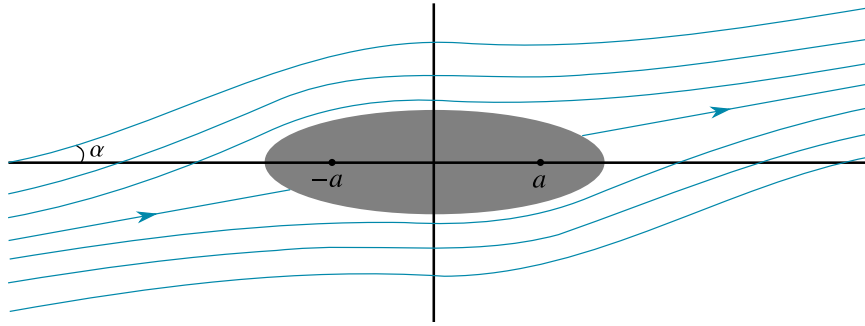


Figure 3.12

3.7 Irrotational Flow Past a Flat Plane

For a flat plate, we'll use the same mapping, except this time we'll set $c = a$, transforming the circle into an infinitely thin plate of length $4a$ lying on the X -axis. The complex potential for an ellipse (Eq. 3.23) becomes

$$W(Z) = \left[\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - a^2\right)^{1/2}\right] Ue^{-i\alpha} + \left[\frac{1}{2}Z - \left(\frac{1}{4}Z^2 - a^2\right)^{1/2}\right] Ue^{i\alpha} - \frac{i\Gamma}{2\pi} \ln \left[\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - a^2\right)^{1/2}\right]. \quad (3.24)$$

Let's now find the speed of the fluid, \mathcal{U} and \mathcal{V} . We know that

$$\mathcal{U} - i\mathcal{V} = \frac{dW}{dZ}$$

but that derivative would be laborious to compute so let's use a trick to make the process easier. Since w and W are equivalent (just in a different space), we can differentiate w with respect to z and divide our result by the derivative of Z with respect to z :

$$\mathcal{U} - i\mathcal{V} = \frac{dW}{dZ} = \frac{dw/dz}{dZ/dz} = \frac{Ue^{-i\alpha} - Ue^{i\alpha} \left(\frac{a^2}{z^2} \right) - i\Gamma/2\pi z}{1 - (a^2/z^2)}. \quad (3.25)$$

At the ends of the plate ($z = \pm a$, or rather $Z = \pm 2a$), the denominator goes to zero; the speed of the fluid is infinite at this point. This mathematical problem is a consequence of modeling the plate as infinitely thin and arises because at the end of the plate, the fluid must curve around from one side of the plate to the other in an infinitely small amount of time. In a real life situation the plate would have some finite thickness and this would not occur. Nonetheless we need to get rid of the singularities. We can do this by introducing a very specific circulation which forces the numerator of Eq. 3.25 to zero at the right (trailing) edge of the plate. We'll choose

$$\Gamma = -4\pi Ua \sin \alpha$$

which successfully makes the numerator zero at $z = a$. The zero in the numerator keeps the zero in the denominator under control. Now we can go back to Eq. 3.25 and calculate the speed at the trailing edge. We'll replace Γ with our chosen Γ and take the limit as $z \rightarrow a$.

$$\mathcal{U} - i\mathcal{V} = \lim_{z \rightarrow a} \frac{Ue^{-i\alpha} - Ue^{i\alpha} \left(\frac{a^2}{z^2} \right) + 2iU \sin \alpha \left(\frac{a}{z} \right)}{1 - \left(\frac{a^2}{z^2} \right)}. \quad (3.26)$$

We'll use Euler's formula to obtain

$$\mathcal{U} - i\mathcal{V} = U \lim_{z \rightarrow a} \frac{\cos \alpha - i \sin \alpha - \left(\frac{a^2}{z^2} \right) \cos \alpha - i \left(\frac{a^2}{z^2} \right) \sin \alpha + 2i \sin \alpha \left(\frac{a}{z} \right)}{1 - \frac{a^2}{z^2}}$$

and factoring the numerator gives

$$\mathcal{U} - i\mathcal{V} = U \lim_{z \rightarrow a} \frac{\cos \alpha \left(1 - \frac{a^2}{z^2} \right) - i \sin \alpha \left(1 + \frac{a^2}{z^2} - 2 \left(\frac{a}{z} \right) \right)}{1 - \frac{a^2}{z^2}}.$$

Notice that if we plug in $z = a$, the numerator *and* denominator go to zero. Thus we can use L'Hôpital's rule; differentiating the numerator and denominator gives

$$\begin{aligned} \mathcal{U} - i\mathcal{V} &= U \lim_{z \rightarrow a} \frac{\frac{2ia^2 \cos \alpha}{z^3} + \frac{2a(a-z) \sin \alpha}{z^3}}{\frac{2a^2}{z^3}} \\ &= U \lim_{z \rightarrow a} \left(\cos \alpha + \frac{2i(a-z) \sin \alpha}{a} \right). \end{aligned}$$

Now we can evaluate the limit; plugging in $z = a$ kills the imaginary term and we're left with

$$\mathcal{U} - i\mathcal{V} = \mathcal{U} = U \cos \alpha.$$

At the trailing edge of the plate the flow is purely horizontal, coming off the plate at speed $\mathcal{U} = U \cos \alpha$. Choosing that specific circulation has gotten rid of one singularity. The left singularity, however, remains unaffected. We could again choose a circulation which gets rid of this singularity, but doing so would reintroduce the other one; we are always stuck with one or the other. In order to get rid of this one we must make a modification. We'll see this in the next section. Figure 3.13 shows the streamlines for both the flow

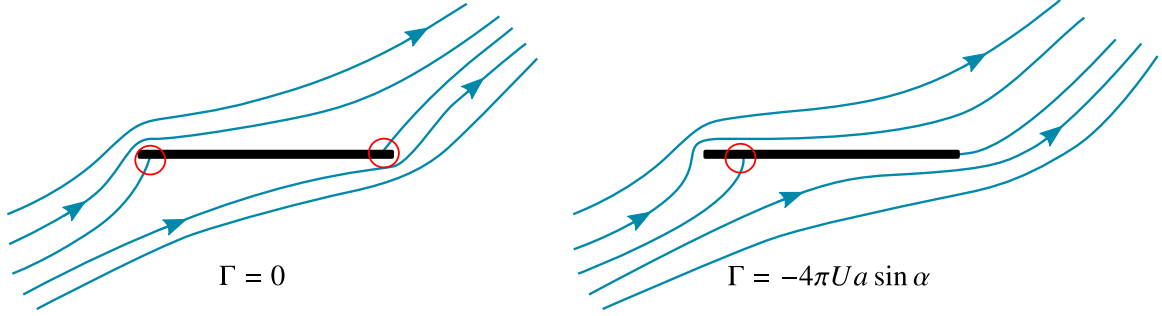


Figure 3.13

with no circulation and the flow with the very specific circulation $\Gamma = -4\pi U a \sin \alpha$. The singularities are circled; with no circulation, there is one singularity at each end of the plate. When we add this specific circulation, the fluid leaves the trailing edge of the plate smoothly.

3.8 Irrotational Flow Past an Aerofoil

Recall our original circular cylinder from Section 3.4. Now we will expand it to a radius $a + \lambda$ and shift it to the left a distance λ . An arbitrary point on the new circle is given in polar form by $z = (a + \lambda)e^{i\gamma} - \lambda$, where γ is the new polar angle (the additional $-\lambda$ occurs because we shifted the point over along the real axis to be centered at $-\lambda$). We can obtain the complex potential of this new circle without much work using the circle theorem:

$$w(z) = U \left[(z + \lambda)e^{-i\alpha} + \frac{(a + \lambda)^2}{z + \lambda} e^{i\alpha} \right] - \frac{i\Gamma}{2\pi} \ln(z + \lambda) \quad (3.27)$$

To obtain this, we've just taken the complex potential for a cylinder (Eq. 3.21) and added λ to every variable representing a position, effectively shifting the cylinder to the left. The Joukowski transformation maps this modified cylinder to an aerofoil as seen in Figure 3.14. Now we use the Joukowski transformation by substituting the inverse Joukowski $z = \frac{1}{2}Z +$

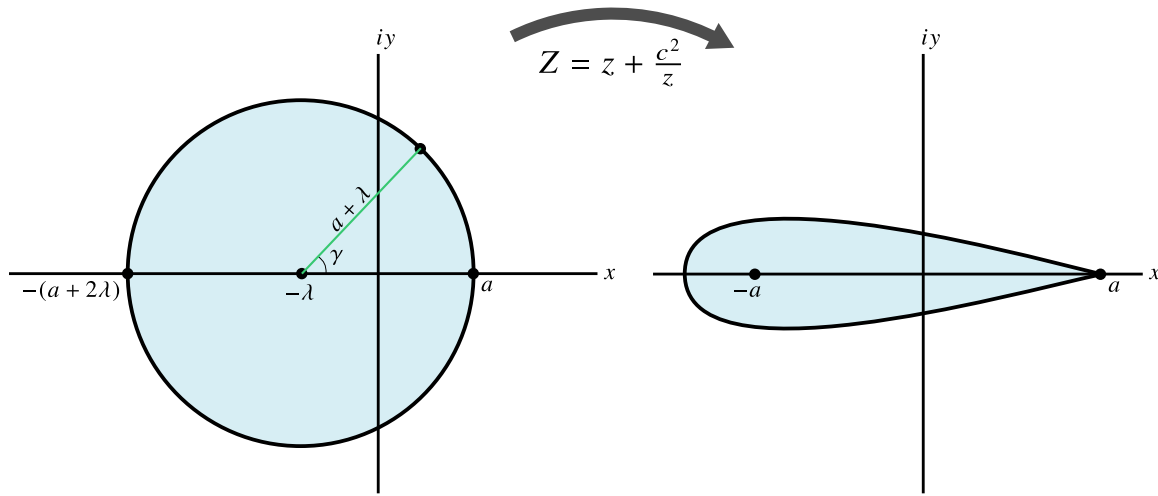


Figure 3.14

$\left(\frac{1}{4}Z^2 - a^2\right)^{\frac{1}{2}}$ into Eq. 3.27:

$$W(Z) = U \left[\left(\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - a^2 \right)^{\frac{1}{2}} + \lambda \right) e^{-i\alpha} + \frac{(a + \lambda)^2}{\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - a^2 \right)^{\frac{1}{2}} + \lambda} e^{i\alpha} \right] - \frac{i\Gamma}{2\pi} \ln \left(\frac{1}{2}Z + \left(\frac{1}{4}Z^2 - a^2 \right)^{\frac{1}{2}} + \lambda \right) \quad (3.28)$$

It would clearly be very complicated and tedious to find the streamlines, but as always, the imaginary part of Eq. 3.28 will give us Ψ , and since streamlines map to streamlines, ψ (Figure 3.15). We'll use the same trick as with the flat plate to find the fluid velocity:

$$\mathcal{U} - i\mathcal{V} = \frac{dW}{dZ} = \frac{dw/dz}{dZ/dz} = \frac{U \left[e^{-i\alpha} - \left(\frac{a+\lambda}{z+\lambda} \right)^2 e^{i\alpha} \right] - \frac{i\Gamma}{2\pi(z+\lambda)}}{1 - \frac{a^2}{z^2}}, \quad (3.29)$$

again choosing a very specific circulation

$$\Gamma = -4\pi U(a + \lambda) \sin \alpha \quad (3.30)$$

in order to eliminate the trailing edge singularity at $z = a$. Looking at Eq. 3.29 you might ask what we've actually accomplished, after all, the equation still blows up at $z = -a$. The answer is clear when looking at Figure 3.14; the point $z = -a$ is now inside of the aerofoil—there isn't any fluid there so it doesn't matter that there is a mathematical singularity. As long as the circulation is $-4\pi U(a + \lambda) \sin \alpha$ the flow will be physically viable at both ends of the aerofoil. Another interesting thing to consider is the irrotationality of the fluid. The flow past the aerofoil is indeed irrotational. The vorticity equation

$$(\mathbf{u} \cdot \nabla)\omega = 0 \quad (3.31)$$

tells us that ω is constant along a streamline. Since the flow at infinity is irrotational (ie: $\omega = 0$ at infinity), ω must be zero along all streamlines.

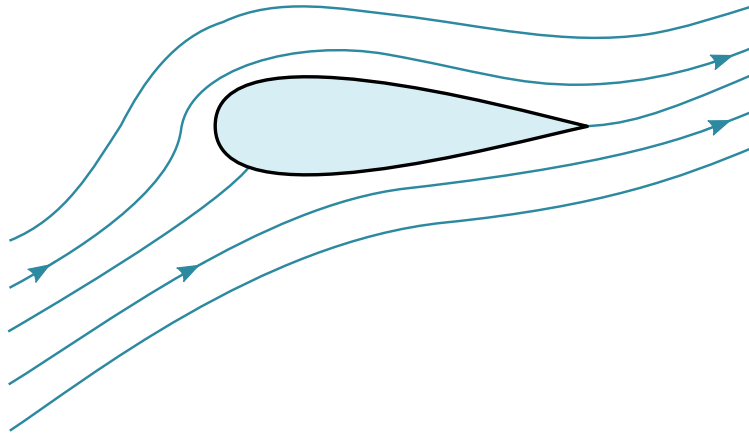


Figure 3.15

Problem 3.4 Consider the flow described by the complex potential

$$w(z) = \frac{A}{2} (z^2 - 2cz),$$

where A and c are constants. Find the velocity potential ϕ and stream function ψ and plot the streamlines. Describe the motion of the fluid; does something interesting happen at $x = c$? Add a circular cylinder to the flow and find the stream function.

(solution)

Problem 3.5 Find the velocity at the trailing (right) edge of a flat plate when the circulation

$$\Gamma = -4\pi Ua \sin \alpha$$

is chosen as the circulation. Then show that, with this choice of circulation, the flow speed on the whole plate is given by

$$U \left| \cos \alpha \pm \sin \alpha \left(\frac{1-s}{1+s} \right)^{1/2} \right|,$$

where $s = X/2a$. Finally, find the pressure along the top and bottom of the plate and plot this pressure as a function of s .

(solution)

Chapter 4

Circulation and Vortex Motion

4.1 Circulation

We've talked about a parameter Γ called *circulation*, but we don't really know what it is. We magically solved the problem of flow singularities by choosing a suitable value for Γ but what are we actually talking about when we say "circulation"? Let C be some closed curve lying in the fluid region. The circulation Γ around C is

$$\Gamma = \oint_C \mathbf{u} \cdot d\mathbf{x}. \quad (4.1)$$

Thus when \mathbf{u} is perpendicular to $d\mathbf{x}$ everywhere around the curve, the circulation is at a minimum. When \mathbf{u} and $d\mathbf{x}$ are parallel, circulation is at a maximum. Looking at Figure 4.1, it's clear that circulation must have something to do with the "twisting" motion of the fluid.

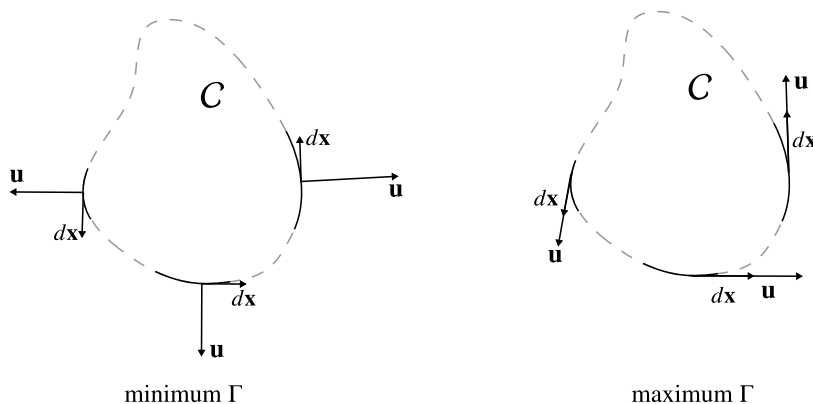


Figure 4.1

Invoking Stokes' Theorem on Eq. 4.1 yields

$$\Gamma = \oint_C \mathbf{u} \cdot d\mathbf{x} = \iint_S (\nabla \times \mathbf{u}) \cdot d\mathbf{S}$$

where S is a surface lying entirely inside of the fluid. Clearly the circulation is directly related to the vorticity $\omega = \nabla \times \mathbf{u}$ of the fluid, and in fact, circulation is the vorticity flux; the amount of vorticity passing through a closed curve. Thus for an irrotational flow where $\nabla \times \mathbf{u} = 0$, $\Gamma = 0$ as well. This should seem unsettling – we proved in section 3.8 that the flow around an aerofoil is irrotational, yet we demanded that there be some non-zero circulation so that we could correct the singularities. With this result, how can we say that if $\omega = 0$ then $\Gamma = 0$? The answer lies with our invocation of Stokes’ theorem. We can only use Stokes’ theorem if the surface S lies entirely inside of the fluid. Stoke’s theorem cannot be used if C encloses an obstruction. Thus for a objects like the aerofoil, it’s possible that the flow be irrotational but there still be circulation around the object. *But why is there circulation in the first place?* After all, we “added” it in seemingly artificially by placing a line vortex within the obstruction. Were we justified in doing so? It turns out we were. The **Kutta condition** says that in real life, there will be circulation around the object, and that circulation will assume the precise value so that the flow is non-singular. This is a bit handwavy, but what it means is that the observed value will be the one that makes the math work.

4.2 Kelvin’s Circulation Theorem

Let an inviscid, incompressible fluid of constant density be in motion in the presence of a gravitational field $\mathbf{g} = -\nabla\chi$. Let $C(t)$ be a time-dependent closed circuit of fluid elements which consists of the same fluid elements as time proceeds. Kelvin’s theorem states that the circulation

$$\Gamma = \oint_{C(t)} \mathbf{u} \cdot d\mathbf{x}$$

around $C(t)$ is independent of time. For illustration, in Figure 4.2 $C(t_1)$ and $C(t_2)$ are

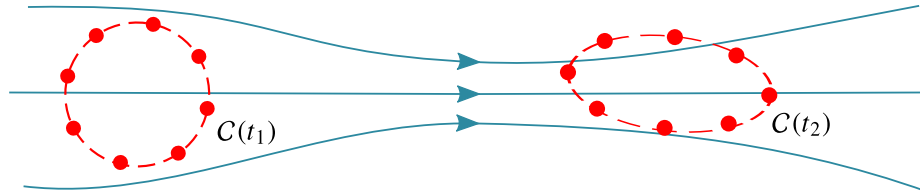


Figure 4.2

comprised of the same eight fluid elements. The fluid elements change position in time, morphing $C(t_1)$ into $C(t_2)$ at a later time. The circulation of both curves is identical. Kelvin’s circulation theorem implies that

$$\frac{D\Gamma}{Dt} = 0.$$

Let’s prove it. We know that

$$\frac{d\Gamma}{dt} = \frac{d}{dt} \left(\oint_{C(t)} \mathbf{u} \cdot d\mathbf{x} \right) = \oint_{C(t)} \frac{D\mathbf{u}}{Dt} \cdot d\mathbf{x}.$$

Euler's equation tells us that

$$\frac{D\mathbf{u}}{Dt} = -\nabla \left(\frac{p}{\rho} + \chi \right),$$

thus

$$\frac{d\Gamma}{dt} = - \oint_{C(t)} \nabla \left(\frac{p}{\rho} + \chi \right) \cdot d\mathbf{x}.$$

The gradient almost cancels with the integral, except that we must take the difference of the integrand evaluated at both ends of the curve $C(t)$, thus

$$\frac{d\Gamma}{dt} = - \left[\frac{p}{\rho} + \chi \right]_{C(t)}$$

but p , ρ , and χ are single-valued functions; they're the same at the start and end of the closed curve, thus we see that the circulation does not change in time since

$$\frac{d\Gamma}{dt} = 0.$$

Note that this still holds if the fluid is not simply-connected. $C(t)$ is any closed circuit, not necessarily a continuous single-valued surface, thus obstructions (ie: objects) are allowed to lie interior to $C(t)$.

4.3 Generation of Circulation and Lift

We still have avoided mentioning what actually causes circulation, but now it's time. With the results of section 4.2 in mind, think back to the aerofoil and the circulation that *must* (as a result of the Kutta condition) be created to fix the trailing edge singularity. Consider the wing of an airplane as the ideal Joukowski aerofoil that we referred to previously. When the airplane is stationary, there is obviously no circulation around the wing. By Kelvin's circulation theorem, the total circulation around the wing must remain zero for all time after the airplane starts moving. Thus, in reference to Figure 4.3, the circulation around the closed circuit ABCDA must be zero for any time t . The Kutta condition demands that there be circulation around the aerofoil in order to take care of the trailing edge singularities, thus the circulation around the circuit ADCA is non-zero. There must, then be some circulation also around the circuit ABCA, equal and opposite, so that the total circulation remains zero. In order for this to occur, the viscous boundary layer of fluid around the aerofoil *sheds*, creating a **starting vortex** in the continuous fluid to the right of the aerofoil. By Stokes' theorem, we find the circulation on the left to be related to the vorticity introduced by the starting vortexes:

$$\iint_S \boldsymbol{\omega} \cdot d\mathbf{S} = \oint_C \mathbf{u} \cdot d\mathbf{x} = \Gamma.$$

Vortex shedding is the primary method that airplanes obtain lift. As the airplane travels

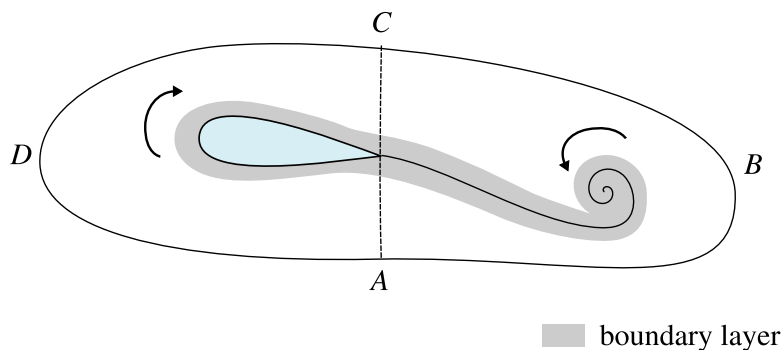


Figure 4.3

through the air it sheds vortices downward. This is known as a **downwash** (Figure 4.4). The airplane wing flings massive amounts of air downward, imparting large downward momentum. Of course, the air opposes this large downward force, exerting an equal and



Figure 4.4

opposite force upwards; this force we call **lift**. On what then does this lift force depend? Let's consider the wing of an airplane with width x moving in a fluid with relative velocity U . Let's say that the velocity of the fluid in the region just above the aerofoil and the region just below the fluid differs by some small amount Δu so that the fluid above the wing moves at velocity $\mathbf{u} = U$ and the fluid below the wing at $\mathbf{u} = U + \Delta u$. Subsequently there will be a pressure difference, with the pressure on top of the wing being $p = p_0 + \Delta p$ and the

pressure below the wing being $p = p_0$ (where p_0 can be considered the pressure a great distance away from the wing). The circulation around the wing is given by

$$\Gamma = \oint_C \mathbf{u} \cdot d\mathbf{x}$$

but if we conveniently choose our path of integration to be the rectangle C as seen in Figure 4.5, then the vertical sides of the path do not contribute since along these sides \mathbf{u}

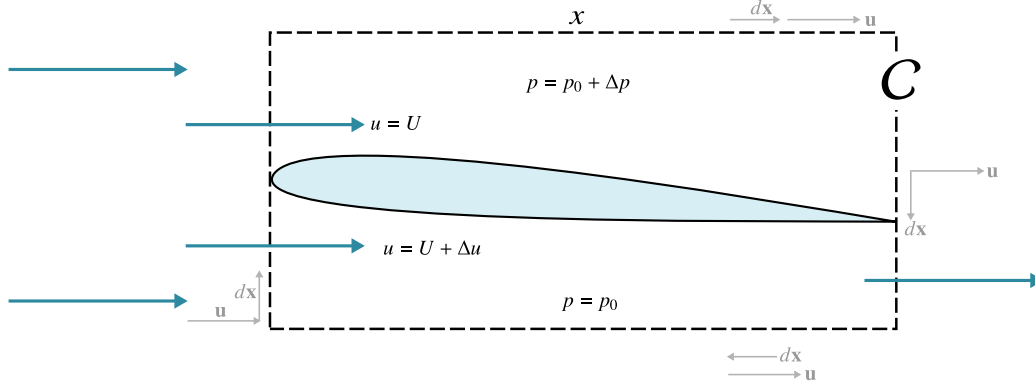


Figure 4.5

is perpendicular to our path of integration $d\mathbf{x}$. The circulation is thus given by the sum of the path integrals over the top and bottom sides of C , keeping in mind the orientation of integration. The circulation is accordingly

$$\begin{aligned} \Gamma &= \int_0^x U dx + \int_x^0 (U + \Delta u) dx \\ &= Ux - (U + \Delta u)x \\ &= -\Delta u x. \end{aligned} \tag{4.2}$$

We'll now consider the pressure on either side of the wing. By Bernoulli's equation we know that the quantity $\frac{1}{2}\mathbf{u}^2 + \frac{p}{\rho}$ is constant along streamlines. We can draw two streamlines that are arbitrarily close together very far away from the wing, but each diverge at the leading edge of the wing to opposite sides of the wing. Thus we'll draw these two streamlines close together so that

$$\left(\frac{1}{2}\mathbf{u}^2 + \frac{p}{\rho} \right)_{\text{top}} \approx \left(\frac{1}{2}\mathbf{u}^2 + \frac{p}{\rho} \right)_{\text{bottom}}.$$

Of course, we know \mathbf{u} and p on the top and bottom, so plugging these values in gives

$$\frac{1}{2}U^2 + \frac{p + \Delta p}{\rho} = \frac{1}{2}(U + \Delta u)^2 + \frac{p}{\rho}.$$

Multiplying everything by ρ and expanding the term on the right leads to

$$\Delta p = \rho U \Delta u + \frac{1}{2} \rho (\Delta u)^2$$

but Δu is very small so its square is even smaller and we can neglect this term. Thus

$$\Delta p = \rho U \Delta u$$

is the pressure difference between the top and bottom of the wing. Force is the product of pressure and area, so force *per unit length*, dL is the pressure multiplied by the width of the wing, x . Therefore

$$dL = \rho U \Delta u x$$

but recall from Eq. 4.2 that $\Delta u x = -\Gamma$, thus the force (or lift) per unit length of the airplane wing is

$$dL = -\rho U \Gamma. \quad (4.3)$$

Eq. 4.3 is known as the **Kutta-Joukowski hypothesis** and carries the added implication that (intuitively) the lift is perpendicular to the velocity of the fluid. It's important to note that at first glance it doesn't appear that the lift depends on the pitch (tilt) of the wing, which is an obvious problem. However, remember that by the Kutta condition, the circulation must follow that of Eq. 3.30 since we cannot have any trailing edge singularities in real life. Eq. 3.30 depends on the angle of attack α of the fluid, with a positive value of α (fluid "striking" the bottom of the wing) yielding a *negative* circulation and thus positive lift. For angles less than 0, the fluid strikes the top of the wing, $\sin \alpha$ is negative, thus circulation is positive and there is a net downward "lift". Figure 4.6 shows clearly the immense downward momentum that an airplane injects into the fluid as it passes.

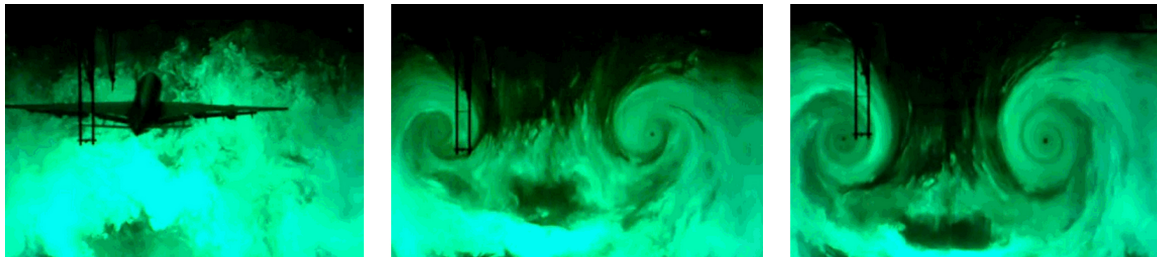


Figure 4.6: See www.uoitphysics.ca/c/fd/airplane_downwash for an animation of the downwash shown above.

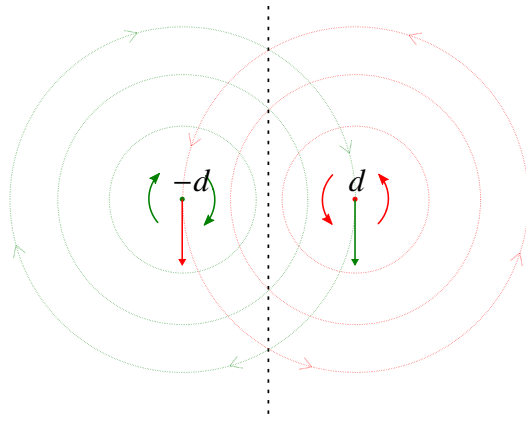


Figure 4.7

4.4 Vortex Motion

4.4.1 Motion of a Vortex Pair

Whenever we've talked about vortices we've assumed that they're stuck in place, somehow held stationary. For a single unbounded vortex in an infinite plane, this is the case, but if there is any boundary (or any asymmetry in the flow), then the position of the vortex will change in time. We will consider a line vortex at initial position $x = d$ with an infinite rigid boundary on the imaginary axis ($x = 0$). Of course, we know that this flow is identical to the flow of two line vortices, the original one at $x = d$ and an image vortex at $x = -d$ (Section 3.3). If we ignore our real vortex, then the fluid at that point in space will have an upward velocity due to the image vortex. We know that at the fluid velocity a distance r from a line vortex is given by

$$u_r = 0, \quad u_\theta = \frac{\Gamma}{2\pi r}$$

so the vertical component of the fluid at both points $z = d$ and $z = -d$ is

$$v = \frac{\Gamma}{2\pi(2d)} = \frac{\Gamma}{4\pi d}.$$

We want to find the speed at which the vortices move. The important thing to keep in mind is that *a vortex cannot influence its own motion*, but all other surrounding vortices will influence it. Thus each vortex will be swept downstream by the influence of the other vortex at speed $v = \Gamma/4\pi d$. Of course, the left hand vortex is just an image so the only one we actually care about is the real vortex on the right hand side. We've found the path of the vortex; it moves downwards at speed $v = \Gamma/4\pi d$.

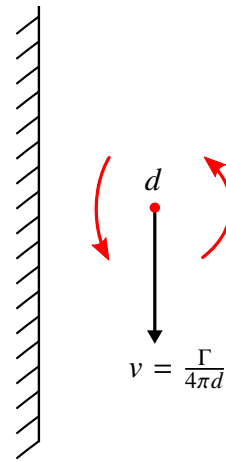


Figure 4.8

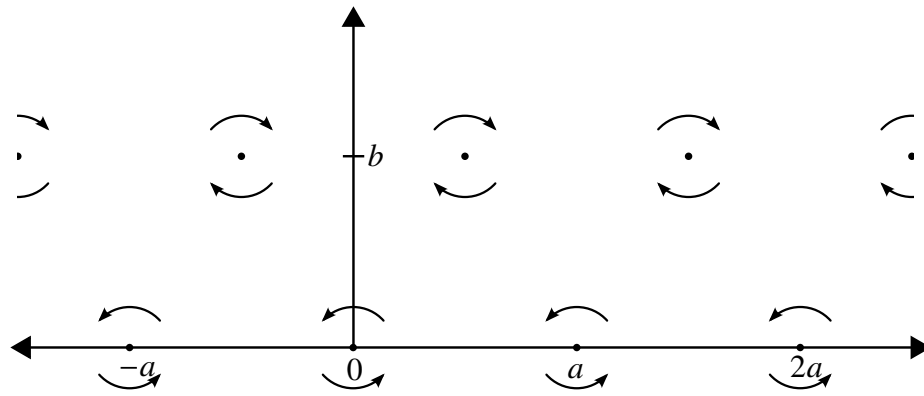


Figure 4.9

4.4.2 The Von Karman Vortex Street

Consider one infinite set of vortices of strength Γ positioned at $z = na$ in the presence of a second set of vortices with strength $-\Gamma$ at position $z = (n + \frac{1}{2})a + ib$, where $n = 0, \pm 1, \pm 2, \pm 3 \dots$ (Figure 4.9). Every vortex on the bottom row influences every vortex except itself, but it is not too difficult to see that the net velocity of the fluid at the point where each vortex lies is to the left: the top row pushes the bottom to the left, the bottom row pushes the top row to the left and the all vertical components cancel. This is perhaps more clear in Figure 4.10 where the streamlines are drawn on the figure. None of the vortices in the top row have any influence whatsoever on the other vortices in the top row. It's the same for the bottom row; all components from the adjacent vortices cancel. Thus the top row only "feels" the complex potential due to the bottom row. All of the vortices, being of the same strength, travel to the left at some speed u . To find this speed we should naturally turn to the complex potential. The process will be as follows: i) find the complex

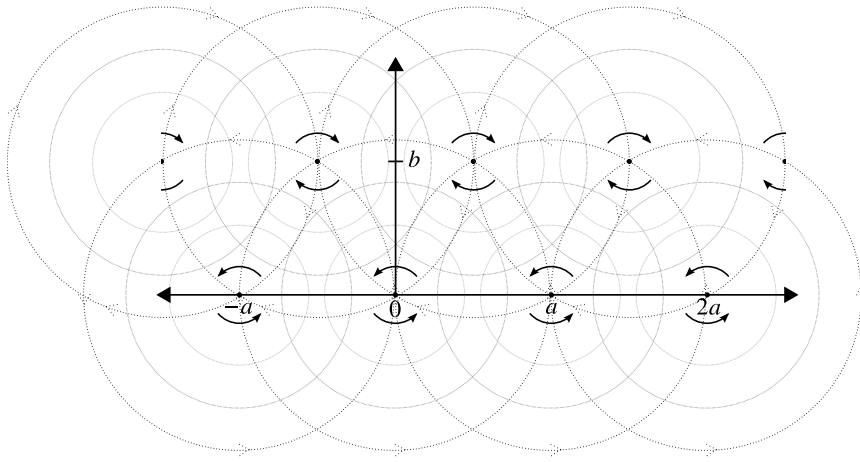


Figure 4.10

potential of a single vortex on the bottom, then ii) use this form to find the complex potential *due to the entire bottom row* and once we have this iii) take the derivative and evaluate it at the position of one of the upper vortices to find the speed at which they are moving. Since all vortices move at the same speed, we will then have obtained the speed of the vortex street. Consider a *single* vortex on the bottom at position $z = na$. The complex potential of this individual vortex is

$$w_0(z) = -\frac{i\Gamma}{2\pi} \ln(z - na).$$

Now we'll do a peculiar trick and factor out a $(-na)$ from the argument of the logarithm:

$$w_0(z) = -\frac{i\Gamma}{2\pi} \ln \left[-na \left(-\frac{z}{na} + 1 \right) \right].$$

The logarithm of a product of two numbers is the sum of the log of these two numbers, thus

$$w_0(z) = -\frac{i\Gamma}{2\pi} \left[\ln(-na) + \ln \left(1 - \frac{z}{na} \right) \right],$$

however, the first term, $\ln(-na)$ is a constant and since we're dealing with the potential, we can neglect this, making the complex potential for an individual vortex

$$w_0(z) = -\frac{i\Gamma}{2\pi} \ln \left(1 - \frac{z}{na} \right).$$

In order to find the complex potential of the entire system, we need to add up infinitely many vortices at $n = 0, \pm 1, \pm 2, \pm 3$ and so on. In order to avoid dividing by zero, we'll split the summation into three sections, using the normal vortex complex potential for the $n = 0$ case. Thus the complex potential of the bottom row of vortices is

$$w(z) = -\frac{i\Gamma}{2\pi} \sum_{n=-\infty}^{-1} \left[\ln \left(1 - \frac{z}{na} \right) \right] - \frac{i\Gamma}{2\pi} \ln(z) - \frac{i\Gamma}{2\pi} \sum_{n=1}^{\infty} \left[\ln \left(1 - \frac{z}{na} \right) \right]$$

If we were to factor out a negative sign, then we'd have the sum of a lot of logarithms here, so using logarithm rules, the above is equivalent to writing

$$-\frac{i\Gamma}{2\pi} \ln \left[(z) \dots \left(1 - \frac{z}{-2a} \right) \left(1 - \frac{z}{-a} \right) \left(1 - \frac{z}{a} \right) \left(1 - \frac{z}{2a} \right) \dots \right]$$

and we can write the infinite number of terms in the logarithm in Π notation giving

$$w(z) = -\frac{i\Gamma}{2\pi} \ln \left[x \prod_{n=1}^{\infty} \left(1 - \frac{z^2}{n^2 a^2} \right) \right].$$

It may not be obvious that the infinite product along with the sum is conveniently similar to the identity

$$\sin x = x \prod_{n=1}^{\infty} \left(1 - \frac{x^2}{\pi^2 n^2} \right),$$

thus

$$w(z) = \frac{-i\Gamma}{2\pi} \ln \left[\sin \left(\frac{\pi z}{a} \right) \right].$$

Taking the derivative of this isn't trivial but nonetheless gives

$$\frac{dw}{dz} = -\frac{i\Gamma}{2a} \cot \left(\frac{\pi z}{a} \right).$$

We will then evaluate this at the location of one of the upper vortices, say $z = \frac{1}{2}a + ib$, giving

$$u - iv = -\frac{i\Gamma}{2a} \cot \left(\frac{\pi(\frac{1}{2}a + ib)}{a} \right) = -\frac{i\Gamma}{2a} \cot \left(\frac{\pi}{2} + \frac{i\pi b}{a} \right).$$

The cotangent is just the tangent flipped across the x -axis and phase shifted by $\frac{\pi}{2}$, so

$$u - iv = -\frac{i\Gamma}{2a} \cot \left(\frac{\pi}{2} + \frac{i\pi b}{a} \right) = \frac{i\Gamma}{2a} \tan \left(\frac{i\pi b}{a} \right).$$

Knowing that $\tan(ix) = -i \tanh(x)$ makes this

$$u - iv = -\frac{\Gamma}{2a} \tanh \left(\frac{\pi b}{a} \right)$$

where the right side is purely real. Therefore the fluid at the point $z = \frac{1}{2}a + ib$ is traveling horizontally to the left at speed

$$u = \frac{\Gamma}{2a} \tanh\left(\frac{\pi b}{a}\right).$$

This means that the vortex at this location is, itself swept to the left at this speed, and since all vortices move at the same speed, the entire vortex street moves to the left at this speed.

Problem 4.1 Inviscid fluid occupies the region $x \geq 0$, $y \geq 0$ bounded by two rigid boundaries $x = 0$, $y = 0$. Its motion results wholly from the presence of a line vortex, which itself moves according to the Helmholtz vortex theorems. Show that the path taken by the vortex is

$$\frac{1}{x^2} + \frac{1}{y^2} = \text{constant}.$$

(solution)

Problem 4.2 Suppose that there is, in $y \geq 0$, the irrotational flow

$$u = -\alpha x, \quad v = \alpha y,$$

where α is a positive constant. There is a rigid boundary at $y = 0$. In addition, there are two line vortices, one of strength $-\Gamma$ at $z = z_1(t)$ and the other of strength $+\Gamma$ at $z = z_2(t)$. Find the complex potential for the entire flow (including boundaries and vortices). Assuming that a vortex moves with the fluid (i.e., due to everything but itself), show that the two vortices move with speeds

$$\frac{dz_1^*}{dt} = -\frac{i\Gamma}{2\pi} \left[\frac{1}{z_1 - z_2} - \frac{1}{z_1 - z_2^*} + \frac{1}{z_1 - z_1^*} \right] - \alpha z_1 \quad (4.4)$$

$$\frac{dz_2^*}{dt} = \frac{i\Gamma}{2\pi} \left[\frac{1}{z_2 - z_1} - \frac{1}{z_2 - z_1^*} + \frac{1}{z_2 - z_2^*} \right] - \alpha z_2. \quad (4.5)$$

Now suppose the vortices are located at

$$z_1 = d(-1 + i), \quad z_2 = d(1 + i). \quad (4.6)$$

For what value of d will they be at rest?

(solution)

Chapter 5

Viscous Fluids

5.1 The Navier-Stokes Equations

5.1.1 The Stress Vector and Tensor

Let's consider the force exerted on a small surface element dS in a fluid. The force exerted on this fluid by the fluid element directly “above” it (the fluid element towards which the surface normal vector $\hat{\mathbf{n}}$ points) can be written as

$$d\mathbf{F} = \mathbf{t}dS \quad (5.1)$$

where \mathbf{t} is called the **stress vector** and does not necessarily point along $\hat{\mathbf{n}}$; we expect that the force on the fluid will be made of components both normal and tangential to the surface element. Since $\hat{\mathbf{n}}$ itself is made up of three components, the force on a single fluid element is really nine pieces of information; the three $\hat{\mathbf{n}}$ components each having three components of force. In order to better handle this information, let's introduce the **stress tensor**, a 3×3 matrix \mathbf{T} , where \mathbf{T}_{ij} is the i -component of stress on a surface element dS whose normal $\hat{\mathbf{n}}$ points in the j -direction. Therefore, the stress vector can be written as

$$\mathbf{t} = \mathbf{T} \cdot \hat{\mathbf{n}} \quad (5.2)$$

or more explicitly as

$$\mathbf{t}_i = \sum_{j=1}^3 \mathbf{T}_{ij}n_j = \mathbf{T}_{ix}n_x + \mathbf{T}_{iy}n_y + \mathbf{T}_{iz}n_z \quad (5.3)$$

5.1.2 Cauchy's Equation of Motion

As always, if we want to derive the equations of motion, we start with Newton's equation

$$\mathbf{F} = m\mathbf{a} = \int_V \rho \frac{D\mathbf{u}}{Dt} dV.$$

Consider a small blob of dyed fluid with surface area S and volume V in a gravitational field. The fluid element experiences the force of gravity (in the i -direction)

$$\mathbf{F} = m\mathbf{g} = \int_V \rho \mathbf{g} dV = \int_V \rho g_i dV. \quad (5.4)$$

It also experiences forces from the surrounding fluid

$$\mathbf{F} = \int_S \mathbf{t} dS = \int_S \mathbf{T} \cdot \hat{\mathbf{n}} dS$$

which we can convert to a volume integral by invoking the divergence theorem

$$\mathbf{F} = \int_S \mathbf{T} \cdot \hat{\mathbf{n}} dS = \int_V (\nabla \cdot \mathbf{T}) dV. \quad (5.5)$$

We can write the divergence of \mathbf{T} as

$$\nabla \cdot \mathbf{T} = \sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j}$$

since the divergence is just the sum of the partial derivatives with respect to each spatial component. The total force is then the sum of Eqs. 5.4 and 5.5:

$$\mathbf{F} = \int_V \left(\sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j} + \rho g_i \right) dV = \int_V \rho \frac{Du_i}{Dt} dV.$$

Dropping the integrals from both sides gives

$$\sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j} + \rho g_i = \rho \frac{Du_i}{Dt} \quad (5.6)$$

or

$$\nabla \cdot \mathbf{T} + \rho \mathbf{g} = \rho \frac{D\mathbf{u}}{Dt} \quad (5.7)$$

in more general vector notation, with the summation disguised as the divergence. This is known as **Cauchy's equation of motion**.

5.1.3 Ideal fluids

Let us now turn back to ideal fluids, a concept we're very familiar with, in order to test our new knowledge and ensure that our generalisation reduces to the equations we're familiar with. For an ideal fluid, consider the stress tensor

$$\mathbf{T}_{ij} = -p\delta_{ij} = \begin{pmatrix} -p & 0 & 0 \\ 0 & -p & 0 \\ 0 & 0 & -p \end{pmatrix},$$

where $\delta_{ij} = 1$ if $i = j$ and 0 if $i \neq j$. The i -component of the stress vector is then

$$\begin{aligned} t_i &= \sum_j \mathbf{T}_{ij} n_j \\ &= \sum_j (-p \delta_{ij}) n_j \\ &= -p (\delta_{i1} n_1 + \delta_{i2} n_2 + \delta_{i3} n_3) \\ &= -p n_i \end{aligned}$$

meaning the stress vector is $\mathbf{t} = -p \hat{\mathbf{n}}$. The divergence of the stress tensor is

$$\nabla \cdot \mathbf{T} = \sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j} = \sum_j \frac{\partial}{\partial x_j} (-p \delta_{ij}).$$

The Kronecker-Delta kills the summation, leaving only

$$\nabla \cdot \mathbf{T} = -\frac{\partial p}{\partial x_i} = -\nabla p.$$

Thus, Cauchy's equation of motion (Eq. 5.7) reduces to

$$-\nabla p + \rho \mathbf{g} = \rho \frac{D\mathbf{u}}{Dt}$$

or

$$\rho \frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho} \nabla p + \rho \mathbf{g}$$

which is Euler's Equation for an ideal fluid – a familiar result.

5.1.4 Viscous fluids

Now consider the fluid element with

$$\mathbf{T}_{ij} = -p \delta_{ij} + \mu \left(\frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j} \right). \quad (5.8)$$

For cases where $\mu = 0$, this reduces to an ideal fluid. The full tensor is

$$\mathbf{T} = \begin{pmatrix} -p + \mu \frac{\partial u}{\partial x} & \mu \left(\frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & \mu \left(\frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) \\ \mu \left(\frac{\partial v}{\partial x} + \frac{\partial u}{\partial y} \right) & -p + 2\mu \frac{\partial v}{\partial y} & \mu \left(\frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) \\ \mu \left(\frac{\partial w}{\partial x} + \frac{\partial u}{\partial z} \right) & \mu \left(\frac{\partial w}{\partial y} + \frac{\partial v}{\partial z} \right) & -p + 2\mu \frac{\partial w}{\partial z} \end{pmatrix}$$

which is a symmetric matrix; we really only have unique elements to describe the full force on a fluid element. It is however, much easier to work with the indexed Cauchy equation of motion (Eq. 5.6) than a nine element matrix. The summation in the Cauchy equation is

$$\sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j} = \sum_j \frac{\partial}{\partial x_j} \left(-p \delta_{ij} + \mu \left(\frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j} \right) \right).$$

We can pull the pressure outside of the summation since only the $j = i$ partial derivative survives the Kronecker delta.

$$\begin{aligned} \sum_j \frac{\partial \mathbf{T}_{ij}}{\partial x_j} &= -\frac{\partial p}{\partial x_i} + \mu \sum_j \frac{\partial}{\partial x_j} \left(\frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j} \right) \\ &= -\frac{\partial p}{\partial x_i} + \mu \sum_j \left(\frac{\partial^2 u_j}{\partial x_j \partial x_i} + \frac{\partial^2 u_i}{\partial x_j^2} \right) \end{aligned}$$

But the first term inside the summation is zero since $\partial u_j / \partial x_j = 0$, which reduces the summation to the sum of the partial second derivatives – the Laplacian. So,

$$\sum_j \frac{\partial^2 u_i}{\partial x_j^2} = \nabla^2 \mathbf{u}$$

and since

$$-\frac{\partial p}{\partial x_i} = -\nabla p,$$

we arrive at the **Navier-Stokes Equation**,

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho} \nabla p + \frac{\mu}{\rho} \nabla^2 \mathbf{u} + \mathbf{g}. \quad (5.9)$$

The viscosity of the fluid μ is more frequently written in terms of the **kinematic viscosity** ν where

$$\nu = \mu / \rho.$$

Example 5.1

Now a very simple example: Consider the flow $\mathbf{u} = y\hat{\mathbf{i}}$ of an ideal fluid with viscosity μ . Find the stress tensor and stress vector.

Solution: So what does this flow look like? The velocity is dependent only on the y -component, thus it is simply a linear flow in the x -direction, with increasing speed the further from the y -axis (Figure 5.1). Since $\mathbf{u} = y\hat{\mathbf{i}}$, $u = y$ and $v = 0$. From Eq. 5.8, the stress tensor is

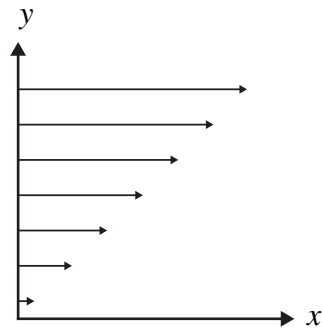


Figure 5.1

$$\mathbf{T} = \begin{pmatrix} -p & \mu & 0 \\ \mu & -p & 0 \\ 0 & 0 & -p \end{pmatrix}.$$

The stress vector is simply

$$\mathbf{t} = \mathbf{T} \cdot \hat{\mathbf{n}} = \mu \hat{\mathbf{i}} - p \hat{\mathbf{j}}.$$

5.2 Simple Viscous Flows

5.2.1 An Impulsively Moved Boundary

Consider a stationary ideal fluid above the x -axis (fluid present only in $0 < y < \infty$) with an infinitely large boundary present on the xz -plane (Figure 5.2). At $t = 0$, the boundary begins to move at speed U in the positive x direction. What is the velocity a time t later? Let's first consider this conceptually. At $t = 0$ each fluid element will have speed

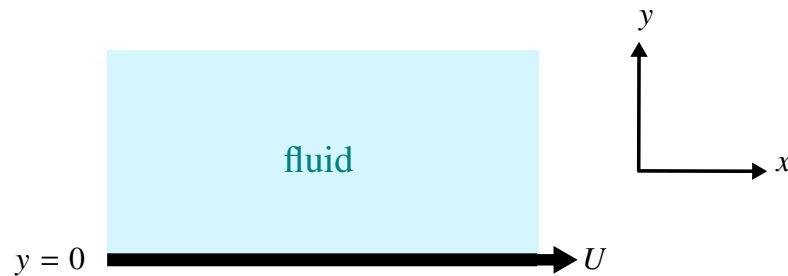


Figure 5.2

$$\mathbf{u} = [u(x, y, t), v(x, y, t)]$$

(we neglect the z -component under the assumption that the fluid is symmetric along z). What do we expect to happen? Of course we expect the fluid to begin moving along with the boundary. The boundary is moving in the x direction so the fluid will also travel solely in the x -direction, thus the y -component of the flow is 0, giving

$$\mathbf{u} = [u(x, y, t), 0].$$

Now we look at the movement along x . Since this is an infinite sheet, the x -components of the fluid velocity will all be the same; there is no x dependence on the fluid's velocity. Thus

$$\mathbf{u} = [u(y, t), 0] = u(y, t)\hat{\mathbf{i}}. \quad (5.10)$$

Note that the time dependence remains; as time proceeds, the momentum imparted on the fluid in contact with the boundary will transfer to the elements above it. The velocity will essentially “accumulate”, resulting in a time dependence of any one fluid element's velocity. In order to find this function u , we turn to the Navier-Stokes Equation (Eq. 5.9), in this case

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho}\nabla p + \mu\nabla^2\mathbf{u}$$

or rather its expanded form

$$\frac{\partial\mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla)\mathbf{u} = -\frac{1}{\rho}\nabla p + \mu\nabla^2\mathbf{u}$$

Writing this out in full for the x -component gives

$$\frac{\partial u}{\partial t} + u\frac{\partial u}{\partial x} + v\frac{\partial u}{\partial y} = -\frac{1}{\rho}\frac{\partial p}{\partial x} + \nu\left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2}\right)$$

but there is no dependence of the flow speed in the x -direction; no matter where you go on the x -axis, the flow will be the same since this is an infinite plane. This means all partial derivatives with respect to x disappear. This reduces our equation to

$$\frac{\partial u}{\partial t} + \cancel{v\frac{\partial u}{\partial y}} = \nu\frac{\partial^2 u}{\partial y^2}$$

but the incompressibility condition $\nabla \cdot \mathbf{u} = \partial u/\partial x + \partial v/\partial y = 0 + \partial v/\partial y = 0$ kills off another term and we're left with

$$\frac{\partial u}{\partial t} = \nu\frac{\partial^2 u}{\partial y^2} \quad (5.11)$$

which is a second-order linear ordinary differential equation. In order to solve this differential equation we need boundary/initial conditions. At the lower boundary, the no-slip theorem guarantees that the fluid will not have any velocity with respect to the plate so at $y = 0$ the fluid must flow along with the plate at speed U , suggesting

$$u(0, t) = U. \quad (\text{boundary condition 1}) \quad (5.12)$$

At $y = \infty$, the plate will have no effect on the fluid, thus

$$u(\infty, t) = 0. \quad (\text{boundary condition 2}) \quad (5.13)$$

At time $t = 0$ the fluid has not yet begun to move. This suggests that

$$u(y, 0) = 0. \quad (\text{initial condition}) \quad (5.14)$$

Our first instinct to attack such a problem would be using separation of variables, but let's, for now, refrain from that method and use a different method (we'll use separation of variables in the next example). For this problem we'll use what is called a **similarity solution**. Let's examine the dimensions of the problem; dropping the derivatives shows

$$\frac{u}{t} \sim \nu \frac{u}{y^2}.$$

This is, of course, not a solution to the problem, but it shows clearly the relationship between y and t . Rearranging this for y gives

$$y \sim \sqrt{\nu t}.$$

Now comes the trick; we will remove all dimensionality from the problem by defining a new *dimensionless* variable η such that

$$\eta \equiv \frac{y}{\sqrt{\nu t}} = y \nu^{-\frac{1}{2}} t^{-\frac{1}{2}}. \quad (5.15)$$

This places a strict restriction on the way that y and t are allowed to vary with respect to one another. Imagine we scale t by a constant α . In order to keep η dimensionless, we are forced to scale y by $\sqrt{\alpha}$. Not doing so would introduce dimensionality into η . By doing this, we have assumed that in our eventual solution, y will depend only on t through the relationship $y \sim \sqrt{\nu t}$. By saying that y and t will always appear in the form η , we have reduced our multivariate function for speed $u(y, t)$ into a new function $f(\eta)$ which holds the same information, but is single variate

$$u(y, t) = f(\eta) \quad (5.16)$$

Thus we can rewrite our partial differential equation

$$\frac{\partial u}{\partial t} = \nu \frac{\partial^2 u}{\partial y^2}$$

in terms of η by differentiating Eq. 5.16 with respect to t . We must invoke the chain rule in order to take the derivative of $f(\eta)$ with respect to t , since η itself is a function of t . Thus

$$\frac{\partial u}{\partial t} = \frac{df}{d\eta} \frac{\partial \eta}{\partial t}$$

but we can compute $\partial \eta / \partial t$ literally (differentiating Eq. 5.15 with respect to t), giving

$$\frac{\partial u}{\partial t} = -\frac{1}{2} y v^{-\frac{1}{2}} t^{-\frac{3}{2}} \frac{df}{d\eta} \quad (5.17)$$

as the equivalent left hand side of our differential equation. We'll do the same with the derivative with respect to y in order to obtain the right hand side. Using the chain rule again gives

$$\frac{\partial u}{\partial y} = \frac{df}{d\eta} \frac{\partial \eta}{\partial y}$$

and then the product rule gives

$$\frac{\partial^2 u}{\partial y^2} = \frac{\partial}{\partial y} \left(\frac{df}{d\eta} \frac{\partial \eta}{\partial y} \right) = \frac{\partial}{\partial y} \left(\frac{df}{d\eta} \right) \frac{\partial \eta}{\partial y} + \frac{\partial^2 \eta}{\partial y^2} \frac{df}{d\eta}.$$

We cross out the second term above since if we twice differentiate η with respect to y , we get 0. We then use the chain rule to perform the remaining derivative

$$\frac{\partial^2 u}{\partial y^2} = \frac{d^2 f}{d\eta^2} \frac{\partial \eta}{\partial y} \frac{\partial \eta}{\partial y} = \frac{d^2 f}{d\eta^2} \left(\frac{\partial \eta}{\partial y} \right)^2.$$

Similar to before, we can replace $(\partial \eta / \partial y)^2$ with its explicit value and obtain

$$\frac{\partial^2 u}{\partial y^2} = \frac{d^2 f}{d\eta^2} v^{-1} t^{-1}. \quad (5.18)$$

Plugging Eqs. 5.17 and 5.18 into Eq. 5.11 gives

$$-\frac{1}{2} y v^{-\frac{1}{2}} t^{-\frac{3}{2}} \frac{df}{d\eta} = v v^{-1} t^{-1} \frac{d^2 f}{d\eta^2}$$

which through simplification reduces to

$$f'' + \frac{1}{2} \eta f' = 0. \quad (5.19)$$

Through the similarity solution, we've managed to reduce a partial differential equation to an ordinary differential equation which is easily integrable. We'll let $g = f'$ and $g' = f''$, and then

$$g' + \frac{1}{2} \eta g = 0 \quad \Rightarrow \quad \frac{dg}{d\eta} \frac{1}{g} = -\frac{1}{2} \eta \quad \Rightarrow \quad \frac{dg}{g} = -\frac{1}{2} \eta d\eta.$$

Integrating both sides gives the solution

$$g = Be^{-\eta^2/4} = f'.$$

Integrating once more we get

$$f(\eta) = A + B \int_0^\eta e^{-s^2/4} ds \quad (5.20)$$

which is the error function and cannot be simplified any more for arbitrary η . Now we need to apply our boundary conditions which we specified in the beginning of the problem. We specified them in terms of our original function $u(y, t)$ so we need to ensure they haven't changed for $f(\eta)$. Recall that $u(\infty, t) = 0$. Since $f(\eta)$ is the same function as $u(y, t)$, we can say that as $y \rightarrow \infty$, $\eta = y/\sqrt{\nu t} \rightarrow \infty$ so $f(\infty) = u(\infty, t) = 0$. Similarly we obtain $u(0, t) = f(0) = U$ as our second boundary condition. We can apply these boundary conditions to Eq. 5.20:

$$\begin{aligned} f(0) = U &= A + B \int_0^0 e^{-s^2/4} ds = A + 0 &\Rightarrow A = U \\ f(\infty) = 0 &= U + B \int_0^\infty e^{-s^2/4} ds = U + B\sqrt{\pi} &\Rightarrow B = -U/\sqrt{\pi} \end{aligned}$$

Therefore, our final solution is given by $f(\eta)$ and is

$$u(y, t) = U - \frac{U}{\sqrt{\pi}} \int_0^{y/\sqrt{\nu t}} e^{-s^2/4} ds \quad (5.21)$$

Notice that we didn't need to use our initial condition; when we specified that $\eta = y/\sqrt{\nu t}$, an added bonus was that y going to ∞ is the same as t going to 0 – our initial condition became merely extra information. The beauty of this solution is that it is scale-independent. We have nothing in the problem to give us a sense of scale; if we look at a small area of the fluid and then zoom out and look at a larger area, both will be indistinguishable. We have no way of knowing how “big” of a slice we're looking at without some sort of reference. This is known as **self similarity**.

5.2.2 Two Rigid Boundaries

Consider fluid between two rigid boundaries, separated a distance h . At time $t = 0$, the bottom boundary begins to move at speed U , while the top boundary stays stationary (Figure ??). What is the speed of the fluid as a function of space and time?

We will start with the Navier-Stokes equation

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \mathbf{u}$$

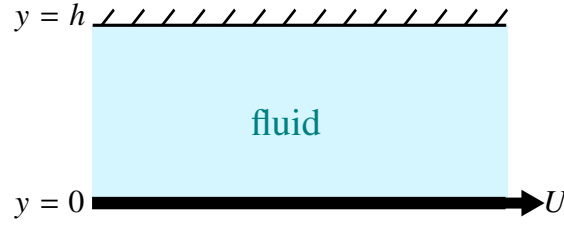


Figure 5.3

which is of course really three equations, one for each component. Usually, the first course of action when dealing with the Navier-Stokes equation is to eliminate as many terms as possible by physically considering the problem. An immediate conclusion is that we can neglect the z -component entirely and assume a two-dimensional problem. Furthermore, we have a stationary fluid which is subjected to a purely horizontal force (the moving plate). The horizontal motion of the plate can't possibly bring about any vertical motion, thus $v = 0$ and we're only left with one of the Navier-Stokes equations remaining: the one for the x component. This equation is going to contain multiple partial derivatives with respect to x , but our plate is infinite; there is no x dependence on the velocity and all partial derivatives with respect to x disappear. We're left with

$$\frac{\partial u}{\partial t} + \cancel{u \frac{\partial u}{\partial x}} + \cancel{v \frac{\partial u}{\partial y}} = -\cancel{\frac{1}{\rho} \frac{\partial p}{\partial x}} + \nu \left(\cancel{\frac{\partial^2 u}{\partial x^2}} + \frac{\partial^2 u}{\partial y^2} \right)$$

or

$$\frac{1}{\nu} \frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial y^2}. \quad (5.22)$$

We've reduced the set of Navier-Stokes equations into a single partial differential equation which we know how to solve. In addition to this, we have also concluded that there cannot be any x or z dependence on the flow, thus $\mathbf{u}(x, y, z, t) = u(y, t)$; the velocity only depends on y and t and points purely in the y direction (it's a scalar). We'll turn to the boundary conditions: at $y = 0$, the no-slip theorem demands that the fluid move at the same velocity as the moving plate, thus

$$u(0, t) = U. \quad (5.23)$$

The same no slip theorem thus demands that the fluid near the top plate be stationary and

$$u(h, t) = 0. \quad (5.24)$$

At time $t = 0$ the fluid has not yet begun to move so we have an initial condition

$$u(y, 0) = 0. \quad (5.25)$$

Notice that Eq. 5.23 is not homogeneous; we must look for the steady state solution $V(y)$ such that

$$u(y, t) = u_1(y, t) + V(y). \quad (5.26)$$

The steady-state solution implies that

$$\frac{\partial u}{\partial t} = 0$$

so when we denote the steady state solution of u as V , Eq. 5.22 becomes

$$\frac{d^2 V}{dy^2} = 0$$

which we can integrate twice to obtain

$$V(y) = c_1 y + c_2.$$

From the boundary conditions we know that $u(0, t) = V(0) = U$, so $c_2 = U$. From the other boundary condition we obtain $c_1 = -U/h$, so

$$V(y) = U \left(1 - \frac{y}{h}\right). \quad (5.27)$$

Looking back to Eq. 5.26, in order to find $u(y, t)$ we must now find the transient solution, $u_1(y, t)$. Our new differential equation is

$$\frac{\partial u_1}{\partial t} = \nu \frac{\partial^2 u_1}{\partial y^2} \quad (5.28)$$

but our boundary conditions are in terms of u , so we must make them in terms of u_1 in order to solve this. Ideally, we should end up with homogeneous boundary conditions. We can rearrange Eq. 5.26 to show

$$u_1(y, t) = u(y, t) - V(y)$$

or rather

$$u_1(y, t) = u(y, t) - U \left(1 - \frac{y}{h}\right) \quad (5.29)$$

and therefore at $y = 0$, Eq. 5.23 tells us that

$$u_1(0, t) = U - U(1 - 0) = 0.$$

Similarly at $y = h$, Eq. 5.24 gives us

$$u_1(h, t) = 0 - U \left(1 - \frac{h}{h}\right) = 0.$$

The initial condition, Eq. 5.25, is then

$$u_1(y, 0) = 0 - U \left(1 - \frac{y}{h}\right) = -U \left(1 - \frac{y}{h}\right).$$

We now have a homogeneous differential equation which we can solve using the physicist's favourite method: separation of variables. We will assume that $u_1(y, t)$ is a product of two functions: one solely dependent on y and one solely dependent on t :

$$u_1(y, t) = Y(y)T(t).$$

Plugging this into Eq. 5.28 gives

$$Y \frac{dT}{dt} = \nu T \frac{d^2 Y}{dy^2}$$

and dividing through by νYT gives

$$\frac{1}{\nu T} \frac{dT}{dt} = \frac{1}{Y} \frac{d^2 Y}{dy^2}.$$

Look closely at this: the left side depends only on t where the right side depends only on y . This means that both sides must be equal to a constant (in fact, the same constant). Otherwise, if we were to slightly change t , then we would change the left side without changing the right side. We'll choose this separation constant to be negative, giving two differential equations, one from the right and one from the left:

$$\frac{1}{\nu T} \frac{dT}{dt} = -\kappa^2 \quad \text{and} \quad \frac{1}{Y} \frac{d^2 Y}{dy^2} = -\kappa^2. \quad (5.30)$$

The "squared" on κ merely ensures that we force the constant to be negative. At first it's probably not obvious why the constant must be negative; we'll see in a minute why this is so. So our first differential equation is

$$\frac{1}{T} \frac{dT}{dt} = -\kappa^2 \nu$$

so thus

$$\frac{dT}{T} = -\kappa^2 \nu dt$$

and integrating gives

$$\ln T = -\kappa^2 \nu t + A$$

where A is a constant of integration. Thus, solving for T :

$$T(t) = A e^{-\kappa^2 \nu t}.$$

(It's now clear why we needed to force the separation constant $(-\kappa^2)$ negative; if it were positive, the time dependent part of u_1 would blow up as time progressed. Obviously, since u_1 is the speed of the fluid, it can't blow up as time goes on). Now we'll move on to the second differential equation from Eq. 5.30:

$$\frac{d^2 Y}{dy^2} = -\kappa^2 y.$$

The solution to this is sinusoidal, in fact a linear combination of sine and cosine terms:

$$Y(y) = B \sin(\kappa y) + D \cos(\kappa y).$$

Now we have $T(t)$ and $Y(y)$ so we can assemble them to get $u_1(y, t)$:

$$u_1(y, t) = A e^{-\kappa^2 \nu t} (B \sin(\kappa y) + D \cos(\kappa y)). \quad (5.31)$$

Now, in order to find the constants A , B and D , we must use the boundary conditions. When $y = 0$, u_1 must be zero, therefore

$$u_1(0, t) = 0 = A e^{-\kappa^2 \nu t} (B \sin(0) + D \cos(0)) = D \quad \Rightarrow \quad D = 0.$$

The solution must also be zero when $y = h$, thus

$$u_1(h, t) = 0 = A e^{-\kappa^2 \nu t} \sin(\kappa h). \quad (5.32)$$

This doesn't give us any information about the integration constant, but it does tell us something about κ . In order for the above to be zero, κh must be an integer multiple of π ($\sin(n\pi) = 0$). Thus,

$$\kappa h = n\pi \quad \Rightarrow \quad \kappa = \frac{n\pi}{h}, \quad n \in (1, 2, 3, \dots).$$

We call κ an **eigenvalue** since it takes on specific discrete values. u_1 is called an **eigenfunction** because it depends on the eigenvalue κ . Plugging the eigenvalue κ back in to Eq. 5.32 gives

$$u_1(y, t) = A_n e^{-n^2 \pi^2 \nu t / h^2} \sin\left(\frac{n\pi y}{h}\right)$$

We now have an infinite number of possible values of n which we must consider. For each value of n we have a different weighting coefficient A_n telling us how much the n th eigenfunction contributes to the total solution. This is best given by an infinite summation,

$$u_1(y, t) = \sum_{n=1}^{\infty} A_n e^{-n^2 \pi^2 \nu t / h^2} \sin\left(\frac{n\pi y}{h}\right). \quad (5.33)$$

We can use our initial condition to find the value of A_n . When $t = 0$, the exponential drops away ($e^0 = 1$) so

$$u_1(y, 0) = \sum_{n=1}^{\infty} A_n \sin\left(\frac{n\pi y}{h}\right) = -U (1 - y/h).$$

We'll now use a trick which may seem to come out of left field if you're not already familiar with the process. We'll multiply both sides by an *orthogonal* function and integrate over the domain.

$$\int_0^h \sum_{n=1}^{\infty} A_n \sin\left(\frac{n\pi y}{h}\right) \sin\left(\frac{m\pi y}{h}\right) dy = - \int_0^h U \left(1 - \frac{y}{h}\right) \sin\left(\frac{m\pi y}{h}\right) dy$$

In this case the orthogonal function is $\sin(m\pi y/h)$, where m is just an integer like n . We'll pull the summation on the left outside of the integral, giving

$$\sum_{n=1}^{\infty} \int_0^h A_n \sin\left(\frac{n\pi y}{h}\right) \sin\left(\frac{m\pi y}{h}\right) dy = - \int_0^h U \left(1 - \frac{y}{h}\right) \sin\left(\frac{m\pi y}{h}\right) dy \quad (5.34)$$

It now becomes clear why we multiplied by the orthogonal function. Since the two sine terms in the left hand side are orthogonal, the integral of their products is zero unless the integer m and n are the same. Thus when $m = n$ Eq. 5.34 becomes

$$A_n \int_0^h \sin^2\left(\frac{n\pi y}{h}\right) dy = - \int_0^h U \left(1 - \frac{y}{h}\right) \sin\left(\frac{n\pi y}{h}\right) dy$$

and we can solve for A_n by performing the definite integrals. Thus

$$A_n = \frac{\int_0^h \sin^2\left(\frac{n\pi y}{h}\right) dy}{-\int_0^h U \left(1 - \frac{y}{h}\right) \sin\left(\frac{n\pi y}{h}\right) dy} = \frac{-2U}{n\pi}. \quad (5.35)$$

We can now plug this back into Eq. 5.33 to obtain

$$u_1(y, t) = -\frac{2U}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} e^{-n^2 \pi^2 \nu t / h^2} \sin\left(\frac{n\pi y}{h}\right). \quad (5.36)$$

Recalling from Eq. 5.26 that $u(y, t) = u_1(y, t) + V(y)$ and that $V(y) = U(1 - y/h)$ (Eq. 5.27), we can now assemble the total solution to the problem:

$$u(y, t) = U \left[1 - \frac{y}{h} - \frac{2}{\pi} \sum_{n=1}^{\infty} \frac{1}{n} e^{-n^2 \pi^2 \nu t / h^2} \sin\left(\frac{n\pi y}{h}\right) \right]. \quad (5.37)$$

Figure 5.4 plots the speed versus the y position. The steady state solution - the solution as $t \rightarrow \infty$ is shown as a straight line in agreement with Eq. 5.27.

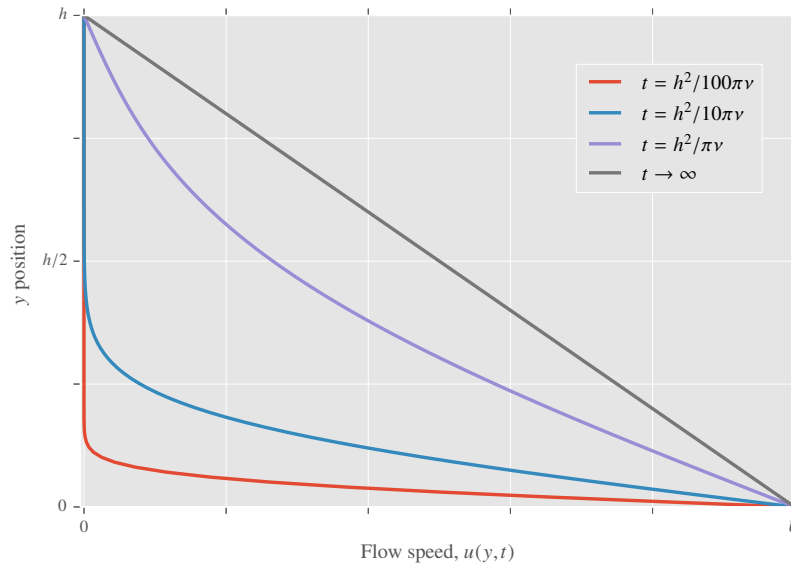


Figure 5.4

5.2.3 Flow down an inclined plane

Now we'll tackle another typical problem involving the Navier-Stokes equation. Consider the flow of a viscous fluid down an inclined plane. We'll assume a very large plane, and a lot of fluid so that the plane and fluid extend infinitely in all directions. We'll assume that the air-fluid interface is ideal, which is a valid assumption for viscous fluid with a much higher viscosity than air. The air will not exert any forces on the surface of the fluid; there will be no tangential stresses. It will be simplest to tilt our head and consider the y coordinate as the vector normal to the plane, and x along the plane. We'll call the fluid depth h , and the angle of incline α . The situation is shown in Figure 5.5.

Of course, our goal is to find the velocity of the fluid $\mathbf{u}(\mathbf{x}, t)$. As always, we'll start by considering it conceptually. The flow extends infinitely in the x direction; there's symmetry here which tells us that the flow can't depend on x . The same symmetry exists in the z direction, and in fact, we can say that there is actually no velocity component in z at all.

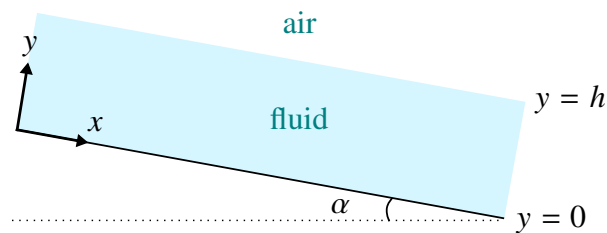


Figure 5.5

We can also assume that the fluid has been moving for quite some time, and that there isn't going to be any change of motion with respect to time. This only leaves a y -dependence, which we can't eliminate, so we know that

$$\mathbf{u}(\mathbf{x}, t) = \mathbf{u}(y) = \mathbf{u}[u(y), v(y), 0].$$

We'll be working with the Navier-Stokes equation eventually, but first let's look at the incompressibility condition

$$\nabla \cdot \mathbf{u} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0,$$

and note that we've already said that \mathbf{u} doesn't depend on the position along x (ie: $\partial u / \partial x = 0$) so consequently $\partial v / \partial y = 0$ as well. Now we'll look at a boundary condition, in particular, the no-slip condition along the inclined plane. Along the plane (at $y = 0$), the fluid cannot be moving, thus $u = 0$ and $v = 0$. This is obvious on its own, but pairing this with the result of the incompressibility condition is interesting. Since v doesn't vary in y , then if $v = 0$ at the boundary, v must be zero *everywhere*. Finally we'll bring in the Navier-Stokes equation. We've already said that there isn't a time dependence so that leaves

$$(\mathbf{u} \cdot \nabla) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \mathbf{u} + \mathbf{g}.$$

In the y direction specifically we have

$$\cancel{u \frac{\partial u}{\partial x}}^{\partial u / \partial x = 0} + \cancel{v \frac{\partial u}{\partial y}}^{v = 0} = -\frac{1}{\rho} \frac{\partial p}{\partial y} + \nu \left(\cancel{\frac{\partial^2 v}{\partial x^2}} + \cancel{\frac{\partial^2 v}{\partial y^2}} \right)^{v = 0} - g \cos \alpha$$

but most of these terms are zero; the first two we've already discussed above, and since $v = 0$ everywhere, the expanded Laplacian is also zero. This leaves only

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial y} - g \cos \alpha$$

or rather

$$\frac{\partial p}{\partial y} = -\rho g \cos \alpha$$

which we can integrate to obtain the pressure

$$p(y, x) = - \int \rho g \cos \alpha dy = -\rho g \cos \alpha y + f(x) \quad (5.38)$$

where $f(x)$ is an arbitrary integration "constant". We can use the boundary condition at the surface ($y = h$) to find it. At the surface, the pressure is the atmospheric pressure p_0 and there is no tangential stress, thus

$$p(h, x) = p_0 = -\rho g h \cos \alpha + f(x)$$

so

$$f(x) = p_0 + \rho g h \cos \alpha$$

which actually doesn't depend on x at all, so

$$\begin{aligned} p(y) &= -\rho g y \cos \alpha + p_0 + \rho g h \cos \alpha \\ p - p_0 &= -\rho g \cos \alpha (y + h) \\ &= \rho g \cos \alpha (h - y). \end{aligned}$$

We'll turn back to the Navier-Stokes equation, this time in x . With similar cancellations as in y , we obtain

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial x} + \nu \frac{\partial^2 u}{\partial y^2} + g \sin \alpha$$

but our condition of no tangential stresses means that the pressure can't depend on x so $\partial p / \partial x = 0$. This means that

$$\frac{\partial^2 u}{\partial y^2} = -\frac{g}{\nu} \sin \alpha.$$

We can integrate twice and obtain

$$u(y) = -\frac{g}{2\nu} y^2 \sin \alpha + c_1 y + c_2 \quad (5.39)$$

where c_1 and c_2 integration constants. We can immediately see that $c_2 = 0$ since $u = 0$ at $y = 0$. Additionally, at the surface,

$$\left. \frac{\partial u}{\partial y} \right|_{y=h} = 0$$

since above the surface there cannot be a y dependence on the flow speed. Differentiating Eq. 5.39, evaluating it at $y = h$ and setting equal to 0 gives us c_1 as

$$c_1 = \frac{g}{\nu} h \sin \alpha.$$

Plugging this back in to Eq. 5.39 gives us our final solution:

$$u(y) = \frac{g}{\nu} y \left(h - \frac{y}{2} \right) \sin \alpha \quad (5.40)$$

5.3 Navier-Stokes and circular flow

5.3.1 The equations of circular flow

The extension of the Navier-Stokes equation to cylindrical coordinate systems is logical but gets quite tedious because of the way unit vectors act in cylindrical coordinate systems.

The process of tackling problems in cylindrical coordinates is the same: start with the full Navier-Stokes equation and systematically eliminate terms which do not contribute. Let's first write out the cylindrical Navier-Stokes equations in full.

In r we have

$$\frac{\partial u_r}{\partial t} + (\mathbf{u} \cdot \nabla)u_r - \frac{u_\theta^2}{r} = -\frac{1}{\rho} \frac{\partial p}{\partial r} + \nu \left(\nabla^2 u_r - \frac{u_r}{r^2} - \frac{2}{r^2} \frac{\partial u_\theta}{\partial \theta} \right) \quad (5.41)$$

and in θ ,

$$\frac{\partial u_\theta}{\partial t} + (\mathbf{u} \cdot \nabla)u_\theta + \frac{u_r u_\theta}{r} = -\frac{1}{\rho r} \frac{\partial p}{\partial \theta} + \nu \left(\nabla^2 u_\theta + \frac{2}{r^2} \frac{\partial u_r}{\partial \theta} - \frac{u_\theta}{r^2} \right) \quad (5.42)$$

and in z ,

$$\frac{\partial u_z}{\partial t} + (\mathbf{u} \cdot \nabla)u_z = -\frac{1}{\rho} \frac{\partial p}{\partial z} + \nu \nabla^2 u_z \quad (5.43)$$

where

$$(\mathbf{u} \cdot \nabla) = \left(u_r \frac{\partial}{\partial r} + \frac{u_\theta}{r} \frac{\partial}{\partial \theta} + u_z \frac{\partial}{\partial z} \right) \quad (5.44)$$

and

$$\nabla^2 = \frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{\partial}{\partial r} \right) + \frac{1}{r^2} \frac{\partial^2}{\partial \theta^2} + \frac{\partial^2}{\partial z^2}. \quad (5.45)$$

The incompressibility condition also becomes much more complicated:

$$\nabla \cdot \mathbf{u} = \frac{1}{r} \frac{\partial}{\partial r} (r u_r) + \frac{1}{r} \frac{\partial u_\theta}{\partial \theta} + \frac{\partial u_z}{\partial z} = 0 \quad (5.46)$$

This set of equations would be extremely complicated to solve for a system where no simplifications can be made, so let's limit our focus to fluid flowing only in the $\hat{\theta}$ direction, depending only on radial position from the centre and time. That is, let

$$\mathbf{u} = u_\theta(r, t) \hat{\theta}.$$

It's a good exercise to go through Eqs. 5.41 to 5.45 and eliminate as many terms as possible under these constraints so we'll do this once. We'll first look at Eq. 5.44; it turns out that the entire equation is zero:

$$(\mathbf{u} \cdot \nabla) = \left(u_r \frac{\partial}{\partial r} + \frac{u_\theta}{r} \frac{\partial}{\partial \theta} + u_z \frac{\partial}{\partial z} \right) = 0.$$

The first term disappears since $u_r = 0$, the second because the velocity has no θ dependence, and the third because $u_z = 0$. This subsequently kills off one term in each of the preceding equations. Then Eq. 5.41 reduces to

$$\frac{u_\theta^2}{r} = \frac{1}{\rho} \frac{\partial p}{\partial r}, \quad (5.47)$$

Eq. 5.42 reduces to

$$\frac{\partial u_\theta}{\partial t} = -\frac{1}{\rho} \frac{\partial p}{\partial \theta} + \nu \left(\frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{\partial u_\theta}{\partial r} \right) - \frac{u_\theta}{r^2} \right), \quad (5.48)$$

and Eq. 5.43 reduces to

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial z}. \quad (5.49)$$

Clearly this says that the pressure doesn't depend on z , but what about the other variables? Our newly simplified Eq. 5.48 gives us some more information. If we rearrange it for pressure we obtain

$$\frac{\partial p}{\partial \theta} = f(r, t)$$

where f is just a placeholder function of r and t . Integration yields

$$p(r, \theta, t) = f(r, t)\theta + g(r, t).$$

The first term of this is a major problem: θ is multivalued ($\theta = 0$ corresponds to the same point in space as $\theta = 2\pi$) but the pressure must not be multivalued. Thus we must conclude that the function f is 0, and that pressure varies only in r and t . We are now in a position to write down two equations governing the system in their most simple form:

$$\frac{\partial u_\theta}{\partial t} = \nu \left(\frac{\partial^2 u_\theta}{\partial r^2} + \frac{1}{r} \frac{\partial u_\theta}{\partial r} - \frac{u_\theta}{r^2} \right) \quad (5.50)$$

and

$$\frac{u_\theta^2}{r} = \frac{1}{\rho} \frac{dp}{dr}. \quad (5.51)$$

The former is called the **evolution equation** and governs the time-evolution of the system.

5.3.2 Steady flow between rotating cylinders

Consider two concentric cylinders with fluid occupying the region between the cylinders as shown in Figure 5.6. The inner cylinder with radius r_1 is rotating at angular speed Ω_1 and the outer with radius r_2 at speed Ω_2 . We want to find the velocity of the fluid u_θ at every point within the cylinders. We'll start with Eq. 5.50, the evolution equation. Assuming the flow is steady, that is $\partial u / \partial t = 0$, the evolution equation becomes

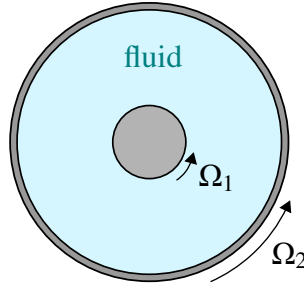


Figure 5.6

$$r^2 \frac{\partial^2 u_\theta}{\partial r^2} + r \frac{\partial u_\theta}{\partial r} - u_\theta = 0.$$

We have three terms here with the order of the derivatives coinciding with powers of r . This suggests we assume that u_θ takes the form

$$u_\theta = r^\alpha.$$

Plugging this (and its derivatives) back into the above equation gives us

$$r^2(\alpha)(\alpha - 1)r^{\alpha-2} + r(\alpha)r^{\alpha-1} - r^\alpha = 0$$

or

$$\alpha(\alpha - 1)r^\alpha + \alpha r^\alpha - r^\alpha = 0.$$

Dividing by r^α gives a quadratic equivalent to

$$(\alpha + 1)(\alpha - 1) = 0.$$

Thus there are two suitable values for α : $\alpha = \pm 1$ and we must consider a linear combination of both as the general solution:

$$u_\theta(r) = Ar + \frac{B}{r}. \quad (5.52)$$

In order to find the coefficients A and B , we must use boundary conditions. Our boundary conditions are given simply by the speed of the fluid at both radius r_1 and r_2 , that is

$$u_\theta(r_1) = \Omega_1 r_1 \quad \text{and} \quad u_\theta(r_2) = \Omega_2 r_2.$$

Simply plugging these into Eq. 5.52 one at a time and solving for A and B (through a bit of algebra), gives the coefficients

$$A = \frac{\Omega_2 r_2^2 - \Omega_1 r_1^2}{r_2^2 - r_1^2} \quad \text{and} \quad B = \frac{(\Omega_1 - \Omega_2) r_1^2 r_2^2}{r_2^2 - r_1^2},$$

thus the final solution is

$$u_{\theta}(r) = \frac{\Omega_2 r_2^2 - \Omega_1 r_1^2}{r_2^2 - r_1^2} r + \frac{(\Omega_1 - \Omega_2) r_1^2 r_2^2}{r (r_2^2 - r_1^2)}. \quad (5.53)$$

Problem 5.1 The physician Poiseuille studied the problem of blood flowing through blood vessels; we'll look at two different so-called "Poiseuille" flows: a) For viscous fluid flows between two stationary rigid boundaries at $y = \pm h$ under a constant pressure gradient $P = -dp/dx$, show that

$$u = \frac{P}{2\mu} (h^2 - y^2), \quad v = w = 0$$

and plot the flow. b) For viscous fluid flow down a pipe of circular cross-sectional radius $r = a$ under a constant pressure gradient $P = -dp/dz$, show that

$$u_z = \frac{P}{4\mu} (a^2 - r^2), \quad u_r = u_\theta = 0$$

and plot the flow.

(solution)

Problem 5.2 Consider the problem in Section 5.2.1 and the similarity solution (Eq. 5.21) we obtained:

$$u(y,t) = U - \frac{U}{\sqrt{\pi}} \int_0^{y/\sqrt{\nu t}} e^{-s^2/4} ds$$

a) Plot the flow at $t = 1$ and $t = 10$ (set $U = \nu = 1$) with the horizontal axis running from $y = 0$ to $y = 10$. Then plot the same function on a horizontal axis from $y = 0$ to $y = 10/\sqrt{\nu t}$. Comment on the plots.

b) The decay of a line vortex is described by the evolution equation

$$\frac{\partial \Gamma}{\partial t} = \nu \left(\frac{\partial^2 \Gamma}{\partial r^2} - \frac{1}{r} \frac{\partial \Gamma}{\partial r} \right) \quad (5.54)$$

where $\Gamma(r,t) = 2\pi r u_\theta(r,t)$, with the initial condition $\Gamma(r,0) = \Gamma_0$ and the boundary condition $\Gamma(0,t) = 0$ for $t > 0$. Find a similarity solution

$$\Gamma = f(\eta),$$

where $\eta = r/\sqrt{\nu t}$, and show that the flow is thus

$$u_\theta = \frac{\Gamma_0}{2\pi r} \left(1 - e^{-r^2/4\nu t} \right).$$

Plot the flow and the vorticity for a couple of different times.

(solution)

Problem 5.3 Suppose viscous fluid occupies the region $r \leq a$ within a circular cylinder of radius a , and suppose that both the cylinder and fluid are initially rotating with uniform angular velocity Ω . The cylinder is suddenly brought to rest at time $t = 0$. Show that the flow is

$$u_\theta(r, t) = -2\Omega a \sum_{n=1}^{\infty} \frac{J_1(\lambda_n r/a)}{\lambda_n J_0(\lambda_n)} \exp(-\lambda_n^2 \nu t/a^2)$$

where J_k is the k -th order Bessel function of the first kind, and λ_n are the zeros of the function $J_1(\lambda)$, that is $J_1(\lambda_n) = 0$. Plot the flow for a few different times.

(solution)

Problem 5.4 In this problem, we want to explore the effect that a boundary would have on an otherwise inviscid fluid. (a) Start with the fluid given by

$$u = \alpha x, \quad v = -\alpha y \quad (5.55)$$

where there is a boundary at $y = 0$ and the fluid exists only in $y > 0$. Sketch the flow and determine if it is irrotational and incompressible. Show that it satisfies Euler's equations if the pressure is

$$p(x, y) = p_0 - \frac{1}{2} \rho \alpha^2 (x^2 + y^2),$$

where p_0 is the pressure at the origin.

(b) Does this flow satisfy the Navier-Stokes equations (with the same pressure)? What does this imply about the fluid? (c) Modify the fluid flow in the following way:

$$u = \alpha x f'(\eta), \quad v = -\sqrt{\nu \alpha} f(\eta)$$

where $\eta = \sqrt{\alpha/\nu} y$. Motivate this choice of flow in terms of adding a boundary layer. Find the function f that: (i) satisfies the Navier-Stokes equation, (ii) satisfies the boundary conditions for viscous fluids, and (iii) reduces to the inviscid fluid far away from the boundary. Plot the function $f(\eta)$. (Note: It is difficult, if not impossible to solve f analytically; a numerical solution is acceptable (ie: a plot).)

(solution)

Chapter 6

Small Amplitude Surface Waves

Waves are very different from what we've encountered so far. With waves, we're not greatly concerned with what happens in the fluid, although we will briefly discuss this. Our goal is to find out the surface of the fluid and how it evolves in time.

6.1 Surface Waves on Deep Water

We will consider two dimensional water waves, given by

$$\mathbf{u} = [u(x, y, t), \quad v(x, y, t), \quad 0]$$

where the wave is symmetrical along the z -axis. For a large amount of fluid, initially at rest (no vorticity), the fluid will remain irrotational, so we can use the velocity potential ϕ . Recall

$$u = \frac{\partial \phi}{\partial x}, \quad v = \frac{\partial \phi}{\partial y}$$

and that the incompressibility of the fluid guarantees that Laplace's equation for ϕ is satisfied:

$$\nabla^2 \phi = \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0 \tag{6.1}$$

Our goal is to solve this differential equation. Now we need a way to represent the free surface of the fluid; we'll call this curve $y = \eta(x, t)$.

6.1.1 Boundary conditions

What actually happens above, below and at the free surface. We must look at boundary conditions. The first comes from an obvious statement: *fluid particles on the surface stay on the surface*. We will define a function

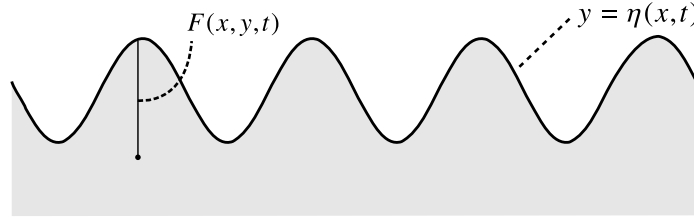


Figure 6.1

$$F(x, y, t) = y - \eta(x, t)$$

as the distance from any point within the fluid to the free surface. Obviously F is a constant for elements on the free surface, and in fact, it's zero, so

$$\frac{DF}{Dt} = 0$$

which means that

$$\frac{\partial F}{\partial t} + (\mathbf{u} \cdot \nabla) F = 0.$$

Now,

$$\frac{\partial F}{\partial t} = \frac{\partial}{\partial t} (y - \eta(x, t)) = -\frac{\partial \eta}{\partial t}$$

and

$$(\mathbf{u} \cdot \nabla) F = -u \frac{\partial \eta}{\partial x} + v \frac{\partial F}{\partial y} = -u \frac{\partial \eta}{\partial x} + v.$$

Combining these we obtain the **kinematic condition**,

$$\frac{\partial \eta}{\partial t} + u \frac{\partial \eta}{\partial x} = v \quad (\text{on } y = \eta(x, t)) \quad (6.2)$$

which only holds on the surface of the fluid at $y = \eta(x, t)$. Now recall Euler's equation with $\nabla \times \mathbf{u} = 0$ and $\mathbf{u} = \nabla \phi$:

$$\frac{\partial}{\partial t} (\nabla \phi) = -\nabla \left(\frac{p}{\rho} + \frac{1}{2} \mathbf{u}^2 + \chi \right).$$

For now, we'll leave \mathbf{u} as is, but keep in mind that it's directly related to ϕ . We will combine the gradient to obtain

$$\nabla \left(\frac{\partial \phi}{\partial t} + \frac{p}{\rho} + \frac{1}{2} \mathbf{u}^2 + \chi \right) = 0$$

and integrate spatially, giving

$$\frac{\partial \phi}{\partial t} + \frac{p}{\rho} + \frac{1}{2} \mathbf{u}^2 + \chi = G(t) \quad (6.3)$$

where $G(t)$ is an arbitrary function of time; we can set it to anything we choose. We will do something clever; let us set $G(t) = p_0/\rho$, where p_0 is the pressure at the surface. We will now evaluate Eq. 6.3 at the free surface. We know that at the surface, $y = \eta$, so $\chi = gy = g\eta$. The pressure at the surface is just p_0 so our clever choice of $G(t)$ cancels with the pressure term on the left hand side. We're left with the **pressure condition**:

$$\frac{\partial \phi}{\partial t} + \frac{1}{2} (u^2 + v^2) + g\eta = 0 \quad (\text{on } y = \eta(x, t)). \quad (6.4)$$

These two boundary conditions are applicable to waves in deep water.

6.2 Small Amplitude Waves

The boundary conditions we obtained are non-linear making the analysis of waves very complicated. To ease our analysis we will assume that the waves have small amplitude. We will take $\eta(x, t)$ (and consequently its derivative) and the flow speed u and v to be small in relation to the wavelength of the waves. Doing so allows us to neglect quadratic and higher terms of these variables as the result of multiplying small quantities is an even smaller quantity. In effect, we're **linearizing** the wave equations. The kinematic condition, Eq. 6.2, becomes

$$\frac{\partial \eta}{\partial t} = v \quad (6.5)$$

by neglecting the $u(\partial \eta / \partial t)$ term since it is a product of two small quantities. We can take our linearization a bit further by writing Eq. 6.5 as

$$v(x, \eta, t) = \frac{\partial \eta(x, t)}{\partial t} \quad (\text{on } y = \eta(x, t))$$

and writing out the first few terms of the Taylor expansion around $\eta = 0$ (we expand around $\eta = 0$ since we're assuming that η , the shape of the surface, is almost 0 for small amplitudes). Thus

$$v(x, \eta, t) \approx v(x, 0, t) + \eta \frac{\partial v(x, 0, t)}{\partial \eta} + \dots$$

$\nearrow \eta = 0$

We can neglect all but the first term, since all subsequent terms will be products of small quantities. This gives the result

$$v(x, 0, t) = \frac{\partial \eta}{\partial t} \quad (\text{on } y = \eta = 0)$$

and since $v = \partial \phi / \partial y$, our new boundary condition is

$$\frac{\partial \phi}{\partial y} = \frac{\partial \eta}{\partial t} \quad (\text{on } y = 0). \quad (6.6)$$

Similarly, the pressure condition, Eq. 6.4 becomes

$$\frac{\partial \phi}{\partial t} + g\eta = 0 \quad (\text{on } y = 0) \quad (6.7)$$

as we can neglect u^2 and v^2 ; they are quadratic and small. These are our two boundary conditions for small amplitude waves. At first, this looks like we're now really describing a flat surface, but hold on; it will all work out in the end.

6.2.1 Sinusoidal waves in deep water

Recall that the differential equation we're trying to solve is Laplace's equation, Eq. 6.1. The problem is that we really have two unknown functions: ϕ and η . We can't obtain both, so we must make an assumption; we'll assume that our wave is a traveling sinusoidal wave of the form

$$\eta(x, t) = A \cos(kx - \omega t) \quad (6.8)$$

where A is the amplitude in units of length, k is the wave number, in units of inverse distance, and ω is the angular frequency, in units of inverse time. Differentiating Eq. 6.8 with respect to t gives

$$\frac{\partial \eta}{\partial t} = -A\omega \sin(kx - \omega t)$$

so we know from our first boundary condition, (Eq. 6.6) that

$$\frac{\partial \phi}{\partial y} = \frac{\partial \eta}{\partial t} = -A\omega \sin(kx - \omega t)$$

so integrating this with respect to y gives us the general form of ϕ :

$$\phi = f(y) \sin(kx - \omega t) \quad (6.9)$$

where $f(y)$ is a specific function of y . Now that we "know" ϕ , let's plug it into Laplace's equation:

$$\begin{aligned} \frac{\partial^2}{\partial x^2} (f(y) \sin(kx - \omega t)) + \frac{\partial^2}{\partial y^2} (f(y) \sin(kx - \omega t)) &= 0 \\ -k^2 f(y) \sin(kx - \omega t) + f''(y) \sin(kx - \omega t) &= 0. \end{aligned}$$

Therefore $f(y)$ is given by the differential equation

$$f'' - k^2 f = 0$$

for which the solution is

$$f(y) = Ce^{ky} + De^{-ky}.$$

Since we have infinitely deep water, we can immediately kill the second term as it explodes as $y \rightarrow -\infty$ (the first term remains; we don't care what happens as $y \rightarrow +\infty$ as there is no fluid there). Therefore, $f(y) = Ce^{ky}$ and the velocity potential is

$$\phi = Ce^{ky} \sin(kx - \omega t). \quad (6.10)$$

Now we'll look back to the boundary condition (Eq. 6.6). Taking both derivatives gives

$$kCe^{ky} \sin(kx - \omega t) = \omega A \sin(kx - \omega t)$$

but the boundary condition is only true at $y = 0$ so, setting $y = 0$ leads us to

$$c = \frac{\omega A}{k}. \quad (6.11)$$

Now we will use our second boundary condition, (Eq. 6.7) to obtain

$$-\omega \frac{\omega A}{k} e^{ky} \cos(kx - \omega t) + gA \cos(kx - \omega t) = 0$$

which is only true when $y = 0$, so

$$\omega \equiv \omega(k) = \sqrt{gk}. \quad (6.12)$$

This is known as the **dispersion relation**. The dispersion relation tells us the relationship between the frequency of the waves and the wavenumber, and since the wavenumber tells us the wavelength, the dispersion relation is the relationship between the wavelength of the wave and the frequency of the wave. We know the wave *speed* is given by $c = \lambda f = \omega/k$. This means that the speed of the wave is going to be dependent on its wavelength and frequency. This is a big deal; water waves travel at different speeds depending on their wavelength. We can solve for the speed of the wave:

$$c = \frac{\omega}{k} = \frac{\sqrt{gk}}{k} = \sqrt{\frac{g\lambda}{2\pi}}, \quad (6.13)$$

thus larger wavelength waves travel faster than shorter wavelength waves. This is of course completely different than electromagnetic and sound waves, which travel at the same speed no matter what the wavelength. You've actually likely seen this effect in real life. If you throw a large rock into a lake, the large wavelength waves will reach your feet first, and the slower moving, small wavelength waves will come later.

Assembling everything gives us the full velocity potential

$$\phi(x, y, t) = \frac{A\omega}{k} e^{ky} \sin(kx - \omega t). \quad (6.14)$$

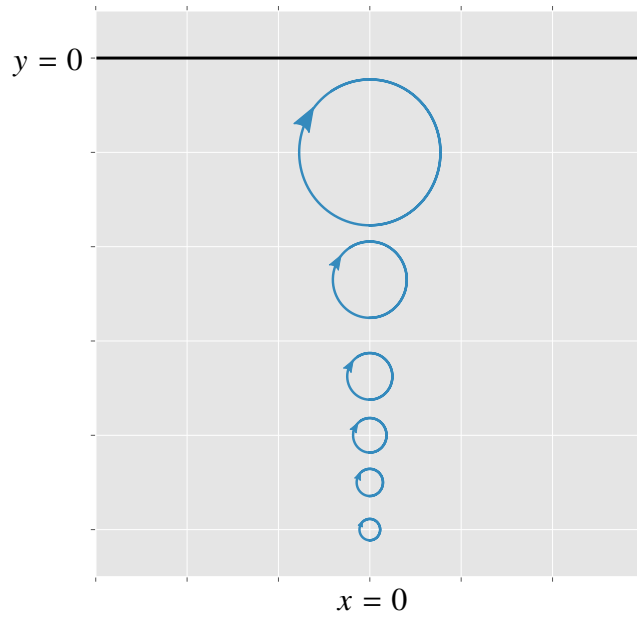


Figure 6.2

But how does a single fluid element under the surface move? The velocity of the fluid can be found by differentiating the complex potential with respect to x and y :

$$\begin{aligned}\frac{\partial x}{\partial t} = u &= \frac{\partial \phi}{\partial x} = A\omega e^{ky} \cos(kx - \omega t) \\ \frac{\partial y}{\partial t} = v &= \frac{\partial \phi}{\partial y} = A\omega e^{ky} \sin(kx - \omega t)\end{aligned}$$

Assuming the fluid element is, on average, at point (x_0, y_0) , we can integrate (with respect to time) the above relationship to obtain the path of the element:

$$\begin{aligned}x(t) &= -Ae^{ky_0} \sin(kx_0 - \omega t) - x_0 \\ y(t) &= Ae^{ky_0} \cos(kx_0 - \omega t) - y_0\end{aligned}$$

These parametric curves are plotted in Figure 6.2. A single fluid element follows a circular path, centered around its mean position (x_0, y_0) . The motion decays as depth increases. (Animation: <https://www.youtube.com/watch?v=7yPTa8qi5X8>)

6.2.2 Meaning of small amplitude

In the analysis of small amplitude waves we dropped terms where two small numbers were multiplied – terms that were “quadratic in smallness”. We dropped $u(\partial\eta/\partial x)$ because it was negligible compared to v . Using the velocity potential that we found (Eq. 6.14), we can say that

$$|u| = \left| \frac{\partial \phi}{\partial x} \right| \sim A\omega \quad \text{and} \quad |v| = \left| \frac{\partial \phi}{\partial y} \right| \sim A\omega$$

so what we're really saying when we say "small amplitude" is really that the free surface displacement – the amplitude – is small compared to the wavelength. Thus the small amplitude approximation for deep water is applicable if $A \ll \lambda$.

6.2.3 Wave packets

In the previous section, we assumed that a wave was perfectly sinusoidal, but that's not very realistic for many disturbances. It might be a good approximation for waves in deep water in the middle of the ocean, but if we throw a rock into a pond, the resulting disturbance is not going to be a perfect sine function. We need to talk about a more generalized form of Eq. 6.8. For this, we'll invoke the concept of a Fourier Series: *any periodic function $f(x)$ can be written as a function of sines and cosines:*

$$f(x) = \frac{a_0}{2} + \sum_{n=1}^{\infty} \quad (6.15)$$

6.3 Surface Tension Effects: Capillary Waves

6.3.1 The surface tension term

What is the effect of surface tension on a wave? Up until now, gravity was the only force we considered acting upon our wave, but what happens when the surface tension forces are the dominant forces? Image we're looking at a very small element ds of the wave as seen in Figure 6.3. The surface tension at the surface is always tangential to the surface. There will be two surface tension forces acting on the element; a force to the left, T_L and a force to the right T_R .

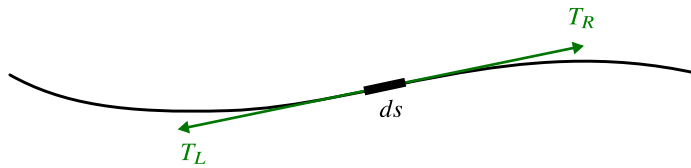


Figure 6.3

The wave is curved, so the forces are not necessarily equal and opposite, so in general $T_L \neq T_R$. However, since we're talking about small amplitude waves, we can assume that the horizontal components *are* equal and opposite; we can assume $T_{L_x} = T_{R_x}$. The net force in this case, is in the vertical direction. So what is the magnitude of the net force? First, let's consider the right side:

$$T_{Ry} = T_R \sin \theta = T_R \frac{\Delta \eta}{\Delta s} = T_R \frac{\partial \eta}{\partial s} = T_R \frac{\partial \eta}{\partial x}$$

Here, we again used the fact of small amplitude to say that $ds = dx$. At small amplitude, the fluid element is essentially oriented horizontally so the full value of its length lies in x . A similar result is obtained for the left side, making the net force

$$T_{\text{net}} = T_R \left. \frac{\partial \eta}{\partial x} \right|_{\text{right}} - T_L \left. \frac{\partial \eta}{\partial x} \right|_{\text{left}}.$$

We can assume that both tensions are the same magnitude: $T_L = T_R \equiv T$ and then

$$T_{\text{net}} = T \left. \frac{\partial \eta}{\partial x} \right|_{x+dx} - T \left. \frac{\partial \eta}{\partial x} \right|_{x-dx}.$$

This is the definition of the second derivative, thus the force per unit length is

$$T_{\text{net}} = T \frac{\partial^2 \eta}{\partial x^2}$$

so multiplying this by a unit length gives the force per unit area, or pressure:

$$T_{\text{net}} = T \frac{\partial^2 \eta}{\partial x^2} dx. \quad (6.16)$$

This is the **surface tension term**. We can then incorporate this pressure term into the pressure at the surface of the fluid. At the surface, the pressure is going to be equal to the atmospheric pressure p_0 , minus the pressure as a result of the surface tension, thus

$$p = p_0 - T \frac{\partial^2 \eta}{\partial x^2} \quad (6.17)$$

at $y = \eta(x, t)$. Now we want to go through the analysis of waves, just like we did with gravity waves, but now with the extra pressure term. We again start with the kinematic condition

$$\frac{\partial \eta}{\partial t} + u \frac{\partial \eta}{\partial x} = v$$

which will not be affected by new pressure. The pressure condition,

$$\frac{\partial \phi}{\partial t} = \frac{1}{2} (u^2 + v^2) + g\eta = 0$$

however, will change. Recall that we started with the Bernoulli equation for unsteady flow:

$$\frac{\partial \phi}{\partial t} + \frac{p}{\rho} + \frac{1}{2} u^2 + \chi = G(t)$$

and recall that we can make the arbitrary function $G(t)$ anything we want. If we plug Eq. 6.17 into this equation, and set $G(t) = p_o/\rho$, we obtain the new pressure condition, given by

$$\frac{\partial \phi}{\partial t} + \frac{1}{2} (u^2 + v^2) + g\eta - \frac{T}{\rho} \frac{\partial^2 \eta}{\partial x^2} = 0 \quad (6.18)$$

on $y = \eta(x, t)$. We will again linearize our condition by dropping quadratic or higher “small” terms, in this case u and v , giving us the small amplitude pressure condition

$$\frac{\partial \phi}{\partial t} + g\eta - \frac{T}{\rho} \frac{\partial^2 \eta}{\partial x^2} = 0 \quad (6.19)$$

on $y = 0$. The extra consideration of surface tension adds only this additional term in the pressure condition; the rest of the analysis remains the same.

!!TALK SOME MORE ABOUT DISPERSION RELATION!!!

Chapter 7

Compressible Fluids

Chapter 8

Non-linear waves

8.1 Shallow water waves

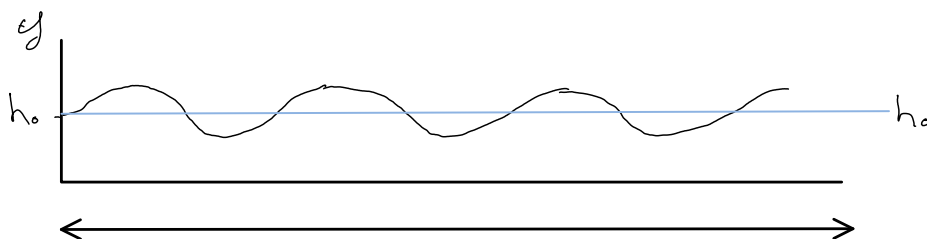


Figure 8.1

We will now relax our assumption of small amplitude waves, but we will introduce a flat bottom at $y = 0$. The free surface we'll represent by the function $y = h(x, t)$. We'll introduce the shallow water approximation: if h_0 is some typical value of $h(x, t)$ and L is a typical horizontal length, then $h_0 \ll L$. Basically what this means is that our surface amplitude no longer has to be very small compared to the depth of our water, but we do need a large horizontal scale, where the length of our waves is much greater than the depth. We'll write down the Euler equations:

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial x} \quad (8.1)$$

$$\frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial y} - g \quad (8.2)$$

as well as the incompressibility condition, since we're again working with an incompressible fluid

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0.$$

We're going to assume that the force of gravity is the dominant force in the y direction and that the acceleration in the y direction is much less than the acceleration due to gravity:

$$\frac{Dv}{Dt} \ll g.$$

This allows us to kill the entire left hand side of Eq. 8.2, giving us

$$\frac{\partial p}{\partial y} = -\rho g. \quad (8.3)$$

Integrating this gives us the pressure,

$$p = -\rho g y + f(x, t)$$

and we know at $y = h_0$ (on the surface), the pressure is equal to the atmospheric pressure p_0 , thus $f(x, t) = p_0 + \rho g h(x, t)$. The pressure anywhere in the fluid is then

$$p = p_0 - \rho g (y - h(x, t)).$$

This pressure in the fluid is coming directly from the force of gravity above it. There's nothing new here. We're now going to take this result and plug it in to Eq. 8.1, giving us

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho} \left(\rho g \frac{\partial h}{\partial x} \right) = -g \frac{\partial h}{\partial x}.$$

Thus the change in \mathbf{u} with respect to time is independent of y . This implies that if \mathbf{u} is independent of y initially, it will be forever. Thus, $\partial u / \partial y = 0$ and this kills off a term in Eq. 8.1, giving us

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} = -g \frac{\partial h}{\partial x}. \quad (8.4)$$

From the incompressibility condition,

$$\frac{\partial u}{\partial y} = -\frac{\partial v}{\partial x}$$

so integration gives

$$v = -\frac{\partial u}{\partial x} y + F(x, t).$$

Now we need to think of what the integration constant $F(x, t)$ is. If we look at a fluid element at $y = 0$, the fluid can't have any vertical motion, so $v = 0$ at $y = 0$ which means that our integration constant must also be 0.

Now we'll go back to the kinematic condition (the non-linearized one of course—we're not talking about small amplitudes anymore):

$$\frac{\partial h}{\partial t} + u \frac{\partial h}{\partial x} = v \quad (\text{on } y = h(x, t).)$$

We now have two expressions for v , so let's equate them to obtain

$$\frac{\partial h}{\partial t} + u \frac{\partial h}{\partial x} + h \frac{\partial u}{\partial x} = 0. \quad (8.5)$$

which along with Eq. 8.4:

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} = -g \frac{\partial h}{\partial x}$$

constitute the **shallow water equations**. These can be used in situations where the shallow water assumptions are applicable, such as...

8.2 The flow caused by a dam break

Let's consider a dam positioned at $x = 0$, holding back a fluid of height h_0 (Figure 8.2). We want to find the shape of the fluid surface at any time after the dam is instantaneously removed. We'll be using the **method of characteristics**. We're going to manipulate the

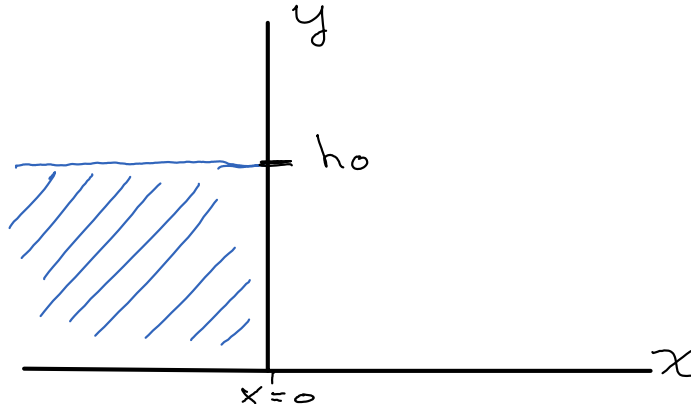


Figure 8.2

shallow water equations a bit to make them more accommodating for this problem. Let's define

$$c(x, t) = \sqrt{gh(x, t)}$$

which consequently means that

$$h = \frac{c^2}{g}, \quad \frac{\partial h}{\partial t} = \frac{2c}{g} \frac{\partial c}{\partial t} \quad \text{and} \quad \frac{\partial h}{\partial x} = \frac{2c}{g} \frac{\partial c}{\partial x}. \quad (8.6)$$

Our shallow water equations then become

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + c \frac{\partial(2c)}{\partial x} = 0 \quad (8.7)$$

and

$$\frac{\partial(2c)}{\partial t} + u \frac{\partial(2c)}{\partial x} + c \frac{\partial u}{\partial x} = 0. \quad (8.8)$$

Notice how symmetric these two equations are; almost everywhere we have a u in Eq. 8.7 we have a $2c$ in Eq. 8.8 and vice versa. We add these together to obtain

$$\left[\frac{\partial}{\partial t} + (u + c) \frac{\partial}{\partial x} \right] (u + 2c) = 0 \quad (8.9)$$

and subtract them to obtain

$$\left[\frac{\partial}{\partial t} + (u - c) \frac{\partial}{\partial x} \right] (u - 2c) = 0. \quad (8.10)$$

8.2.1 Method of characteristics

We will use the method of characteristics to solve Eqs. 8.9 & 8.10. Starting with Eq. 8.9, we will define a *characteristic curve*, parametrized by s as

$$x = x(s) \quad \text{and} \quad t = t(s)$$

starting at the point (x_0, t_0) and has $dt/ds = 1$ and $dx/ds = u + c$. We will replace the $(u + c)$ in Eq. 8.9 with dx/ds and insert a dt/ds at the beginning (it's equal to 1, so we can put it anywhere, but we'll choose to put it at the front). This gives

$$\left[\frac{dt}{ds} \frac{\partial}{\partial t} + \frac{dx}{ds} \frac{\partial}{\partial x} \right] (u + 2c) = 0$$

and by the chain rule,

$$\left[\frac{\cancel{dt}}{ds} \frac{\partial}{\partial \cancel{t}} + \frac{\cancel{dx}}{ds} \frac{\partial}{\partial \cancel{x}} \right] (u + 2c) = 0,$$

thus

$$\frac{\partial}{\partial s} (u + 2c) = 0.$$

We do the same for Eq. 8.10, using a different curve, again parametrized in the x - t plane, but with $dx/ds = u - c$, giving us the similar result

$$\frac{\partial}{\partial s} (u - 2c) = 0.$$

Therefore, the quantity $(u \pm 2c)$ is constant along the curves defined by

$$\frac{dx/ds}{dt/ds} = \frac{dx}{dt} = \frac{u \pm c}{1} = u \pm c.$$

We don't yet know anything more about these mysterious curves that pass through x - t space; we don't know their shape, we don't know where they come from or where they go, but we do know that anywhere on them, if we were to measure the quantity $u \pm 2c$, we'd get the same result every time. The other thing to note is that we are still looking at the shallow water equations; we have recast them in a totally different parametrized form, but the physics is still the same.

8.2.2 Dam break

Now that we have our machinery set up, let's tackle the actual problem to give more insight into this technique. What we are really after is the function which defines the surface of the water, $h(x, t)$. Let's draw our x - t axis: Our approach will be to analyze the physical

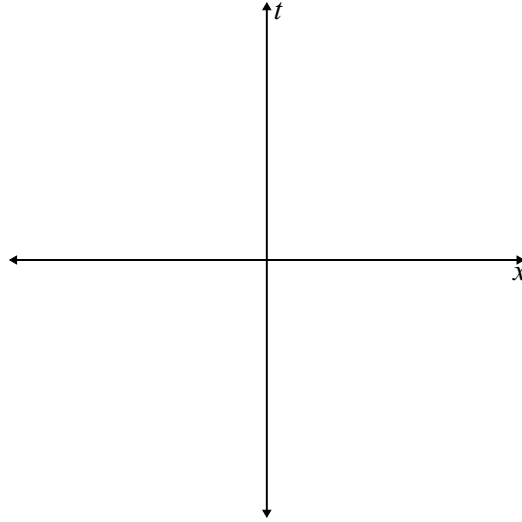


Figure 8.3

problem and to draw characteristic curves for the fluid in every region.

Region 1: $x < 0, t < 0$ We'll first look at the region $x < 0, t < 0$. Our dam is being removed at time $t = 0$, so $t < 0$ corresponds to a time before the fluid begins to move. Also, the fluid height for any position $x < 0, t < 0$ is just the initial height of the fluid, h_0 . Thus, at any position in the lower right quadrant, the fluid has height $h(x, t) = h_0$ and speed $u = 0$. Then our value for c is given by $c(x, t) = \sqrt{gh(x, t)} = \sqrt{gh_0} \equiv c_0$. The slope of our characteristic curve is given by

$$\frac{dx}{dt} = u \pm c = 0 \pm c_0 = \pm c_0,$$

therefore, we're going to have two sets of curves: one set with positive c_0 slope, and one set with negative c_0 slope. We don't yet know what c_0 is, but it's just some number, so we can draw in the characteristic curves. They are straight lines; the slopes are constant, and the negatively sloping lines cross the positively sloping lines at right angles.

Region 2: $x < 0, t > 0$ Now we'll move on to the next region. We're still looking at the same *position*: the left side of the dam, but now we're looking at what is going to happen when the dam is gone, for time $t > 0$. Consider a point P in this region where two characteristic curves intersect (Figure 8.5a). We don't know whether these curves will be straight lines, but they will cross at some point. These curves started in region 1, and

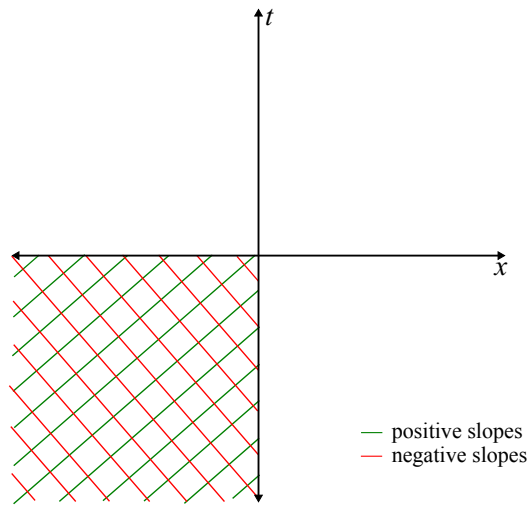


Figure 8.4

we know that the quantity $u \pm 2c$ must be conserved along the curve, so this must be true everywhere along that line, even when it passes into region 2. Thus the slope is constant for the extension of the curves into region 2. So in region 2, it turns out the curves are still straight lines with slope $dx/dt = u \pm c = \pm c_0$. So we can extend the lines from region 1 into region 2, provided that they started in region 1 (Figure 8.5b). We can't extend any negatively sloping lines above the $x = -c_0 t$ line as they did not start with the first region. What this means physically is that any fluid under the $x = -c_0 t$ has not yet received notification that the dam has broken and the fluid remains unchanged. This information about the dam break propagates at speed c_0 , so any fluid with $x < -c_0 t$ remains unaffected. Now let's look at a point Q which lies above $x = -c_0 t$, but still in $x < 0$, $t > 0$. For the positively sloping lines in this region, we notice that they started in region 1, so their conserved quantity $(u + 2c)$ is still applicable. The negative lines, however, do *not* begin in region 1, so we don't know what $u - 2c$ is for them. We'll call it k , an unknown constant. Thus

$$\begin{aligned} u + 2c &= 2c_0 && \text{(positively sloping)} \\ u - 2c &= k && \text{(negatively sloping)} \end{aligned}$$

We will add these together to obtain

$$u = c_0 + \frac{1}{2}k$$

and

$$c = \frac{1}{2}c_0 - \frac{1}{4}k.$$

We know k and c_0 are both constants, so this means that u and c are constants as well. For every single negative sloping line on our plot $dx/dt = u - c$, so since we now know u and

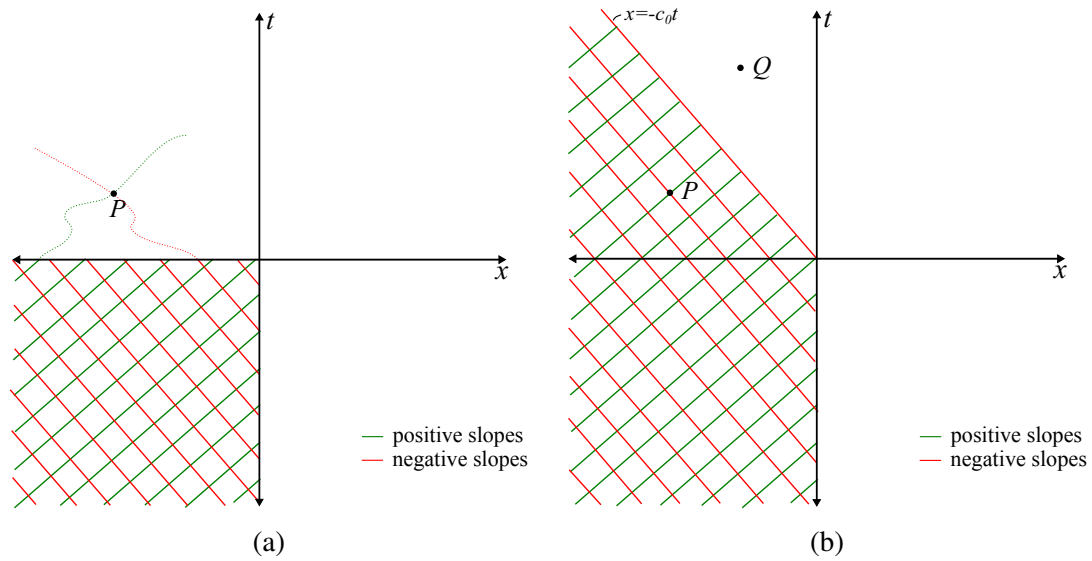


Figure 8.5

c ,

$$\frac{dx}{dt} = \frac{1}{2}c_0 + \frac{3}{4}k.$$

Every characteristic line in this region will have a different slope because k is not the same value for each. We can't have two negative characteristic lines crossing at any point other than at $x = 0, t = 0$ since that would mean that the fluid has two different speeds at that point. Thus, if they have different slopes, and can't cross anywhere except at point $(0,0)$, then the characteristic curves must start at the origin (Figure 8.5a)

Now that we know they pass through the origin, we can integrate the slope

$$\frac{dx}{dt} = u - c \quad \Rightarrow \quad \int dx = \int (u - c) dt$$

to obtain the equation of these lines:

$$x(t) = (u - c)t \quad (8.11)$$

where the integration constant disappears because we know they pass through the origin. This is, of course true only in the region where Q lies. Now we need to find the positively sloping curves. We know that for them

$$u + 2c = 2c_0$$

so we can combine this with Eq. 8.11 to obtain

$$u = \frac{2}{3} \left(c_0 + \frac{x}{t} \right)$$

$$c = \frac{1}{3} \left(2c_0 - \frac{x}{t} \right)$$

Recall that $c = \sqrt{gh}$, so c isn't allowed to be negative, so looking at the second equation above, $2c_0 > x/t$. Therefore, this solution is only valid for $x < 2c_0t$. We're now looking at a solution which can pass into the third region, as long as $x < 2c_0t$. We will then extend these curves into this region (Figure 8.6b)

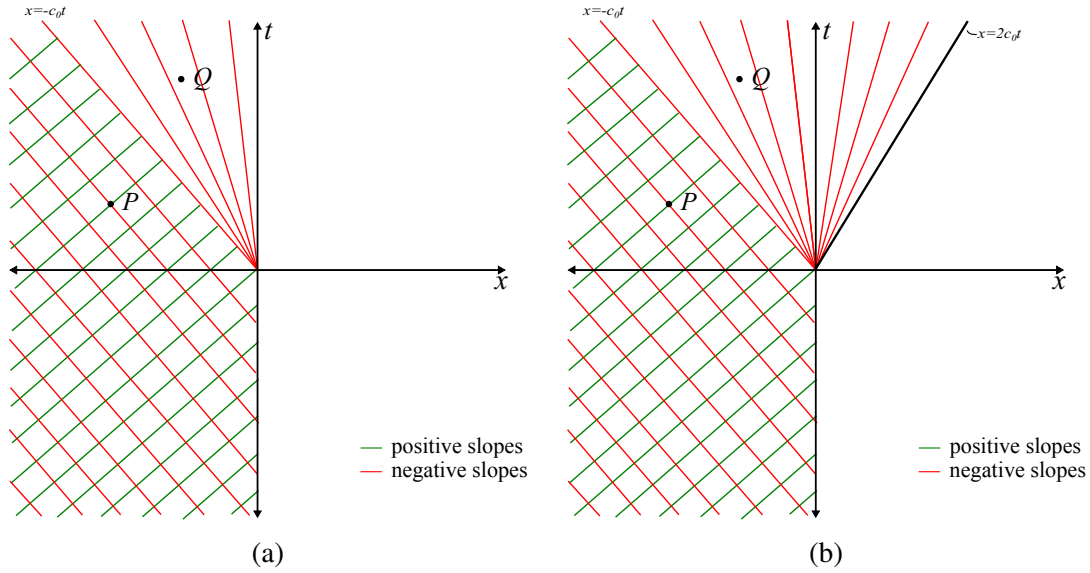


Figure 8.6

So we know

$$c = \sqrt{gh} = \frac{1}{3} \left(2c_0 - \frac{x}{t} \right)$$

so we can solve for $h(x, t)$:

$$h(x, t) = \frac{1}{9g} \left(2\sqrt{gh_0} - \frac{x}{t} \right)^2 \quad (\text{for } -c_0t < x < 2c_0t)$$

giving our full solution as

$$h(x, t) = \begin{cases} h_0 & x \leq -c_0t \\ \frac{1}{9g} \left(2\sqrt{gh_0} - \frac{x}{t} \right)^2 & -c_0t < x < 2c_0t \\ 0 & x \geq 2c_0t \end{cases}$$

Problem 8.1 Find the dispersion relation for a fluid of finite depth h . Under what conditions does it hold (ie: how does the boundary layer change the analysis of what is meant by “small amplitude”). Find and sketch the path of the fluid particles.

(solution)

Problem 8.2 A ripple tank is a device for simulating certain aspects of wave propagation. It consists of a shallow layer of water in a glass-bottomed container, and is illuminated from below in such a way that images of surface waves are thrown onto a screen. The waves have a tendency to disperse, on account of the small depth (see the question above) as well as due to the surface tension. Show that, by choosing the depth h such that

(solution)

Problem 8.3 An inviscid, perfect gas is contained in a rigid sphere of radius L . Show that the natural frequencies of spherically symmetric oscillations of the gas are given by

$$\tan(\omega L/a) = \omega L/a.$$

(solution)

Problem 8.4

Water of depth h_0 lies at rest in the region $x < 0$, and there is a vertical plate at $x = 0$. At $t = 0$ the plate is moved into the region $x > 0$ with uniform speed $V < 2c_0$, where $c_0^2 = gh_0$. Use analysis similar to the dam break problem to show that

$$c = \begin{cases} c_0 & \text{in } x < -c_0 t \\ \frac{1}{3}(2c_0 - x/t) & \text{in } -c_0 t \leq x < \left(\frac{3}{2}V - c_0\right)t \\ c_0 - \frac{1}{2}V & \text{in } \left(\frac{3}{2}V - c_0\right)t \leq x < Vt. \end{cases}$$

(solution)

Appendices

Appendix A

Solutions

Problem 1.1

Problem 1.1

The flow is incompressible if $\nabla \cdot \mathbf{u} = 0$ (Eq. 2.3).

$$\begin{aligned}\nabla \cdot \mathbf{u} &= \frac{\partial}{\partial x}(u) + \frac{\partial}{\partial y}(v) \\ &= \frac{\partial}{\partial x}(\alpha x) + \frac{\partial}{\partial y}(-\alpha y) \\ &= \alpha - \alpha \\ &= 0\end{aligned}$$

Therefore the flow is compressible. The streamlines can be computed by using Eq. 1.5.

$$\begin{aligned}\frac{dx/ds}{u} &= \frac{dy/ds}{v} \\ \int \frac{dx}{\alpha x} &= \int \frac{dy}{-\alpha y} \\ \frac{1}{\alpha} \ln x &= -\frac{1}{\alpha} \ln y + C \\ y(x) &= \frac{C}{x}\end{aligned}$$

Streamlines for $C = -4$ to 4 are plotted in Figure A.1. The total derivative (Eq. 1.9) tells us

whether the pollutant concentration for any particular fluid element changes with time.

$$\begin{aligned}
 \frac{Dc}{Dt} &= \frac{\partial c}{\partial t} + (\mathbf{u} \cdot \nabla)c \\
 &= \beta x^2 y (-\alpha) e^{-\alpha t} + u \frac{\partial c}{\partial x} + v \frac{\partial c}{\partial y} \\
 &= \beta x^2 y (-\alpha) e^{-\alpha t} + \alpha x \frac{\partial c}{\partial x} - \alpha y \frac{\partial c}{\partial y} \\
 &= \beta x^2 y (-\alpha) e^{-\alpha t} + 2\beta x^2 y \alpha e^{-\alpha t} - \alpha \beta x^2 y e^{-\alpha t} \\
 &= 0
 \end{aligned}$$

So the concentration of the pollutant in any fluid element does not change in time.

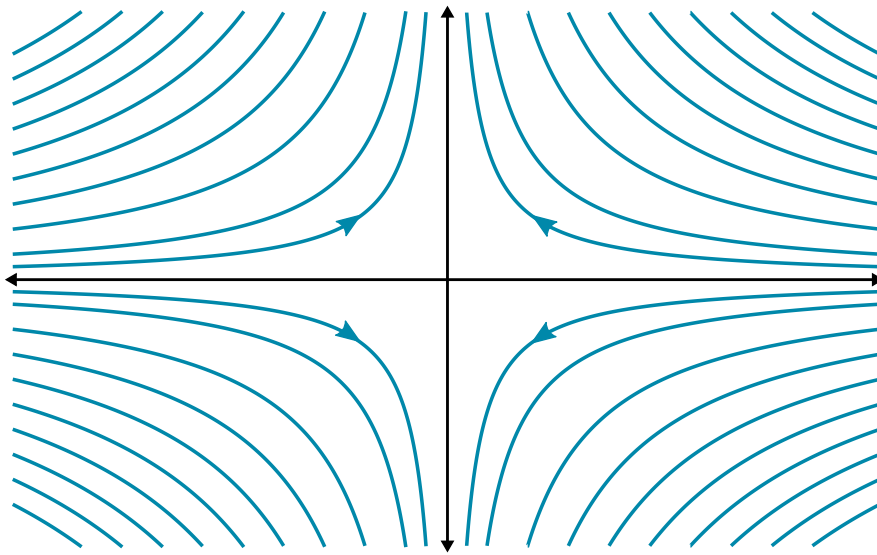


Figure A.1

Problem 1.2

Problem 1.2

Once again we use Eq. 1.5 to find the streamlines.

$$\frac{dx/ds}{u} = \frac{dy/ds}{v} \quad \Rightarrow \quad \frac{dx}{u_0} = \frac{dy}{kt}$$

Integration of both sides gives

$$\frac{1}{u_0}x + C = \frac{1}{kt}y,$$

so the streamlines are

$$y(x) = \frac{kt}{u_0}x + C.$$

At a particular point in time, t can be considered constant, and y varies linearly with x . As time progresses, the slope of the streamline increases. To find the actual path that the particle takes in the i direction, we must integrate the i component of velocity over time:

$$x_i = \int u_i dt.$$

So then the path of the particles is

$$\begin{aligned} \mathbf{x} &= \left[\int u_0 dt, \quad \int kt dt, \quad 0 \right] \\ \mathbf{x} &= \left[u_0 t + C, \quad \frac{1}{2}kt^2 + D, \quad K \right] \end{aligned}$$

where C , D and K are constants of integration.

Problem 2.1

Problem 2.1

Similarly to how we obtained Eq. 2.1, we can multiply the speed of the fluid by the density ρ and integrate over the entire surface.

$$\int_S \rho \mathbf{u} \cdot \hat{\mathbf{n}} dS$$

This gives us the mass flow rate, in kg/s. If there is a net mass “flux”, then the density of the enclosed fluid must change (if we’re packing more mass into the same volume, the density must be changing). The mass rate will be equal to the rate of change of density integrated over the entire volume. This means that

$$\int_S \rho \mathbf{u} \cdot \hat{\mathbf{n}} dS = - \int_V \frac{\partial \rho}{\partial t} dV$$

(the negative arises since $\hat{\mathbf{n}}$ points out of the surface. If the density is increasing, the mass inside is increasing and the net flow is against $\hat{\mathbf{n}}$). Applying the divergence theorem to the first term changes it from a surface to a volume integral

$$\int_V \nabla \cdot (\rho \mathbf{u}) dV = - \int_V \frac{\partial \rho}{\partial t} dV$$

in which both integration volumes are identical allowing us to drop the integrals, leaving only

$$\nabla \cdot (\rho \mathbf{u}) = - \frac{\partial \rho}{\partial t}$$

or

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \mathbf{u}) = 0.$$

Problem 2.2

Problem 2.2

First, let's review what the divergence and curl are for any three-dimensional vector function \mathbf{F} where

$$\mathbf{F} = [u, v, w] = u\hat{\mathbf{i}} + v\hat{\mathbf{j}} + w\hat{\mathbf{k}}.$$

$$\text{div } \mathbf{F} = \nabla \cdot \mathbf{F} = \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \quad (\text{A.1})$$

$$\text{curl } \mathbf{F} = \nabla \times \mathbf{F} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ u & v & w \end{vmatrix} \quad (\text{A.2})$$

$\nabla \times \mathbf{F}$ can be expanded and written more explicitly as

$$\nabla \times \mathbf{F} = \left(\frac{\partial w}{\partial y} - \frac{\partial v}{\partial z} \right) \hat{\mathbf{i}} + \left(\frac{\partial u}{\partial z} - \frac{\partial w}{\partial x} \right) \hat{\mathbf{j}} + \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right) \hat{\mathbf{k}} \quad (\text{A.3})$$

The divergence of a vector is a scalar. The curl of a vector is a vector. So

$$\begin{aligned} \nabla \cdot \mathbf{u}_1 &= \frac{\partial}{\partial x} (x^2) + \frac{\partial}{\partial y} (3xz^2) + \frac{\partial}{\partial z} (-2xz) = 2x + 0 - 2x = 0 \\ \nabla \times \mathbf{u}_1 &= (0 - 6xz) \hat{\mathbf{i}} + (0 - (-2z)) \hat{\mathbf{j}} + (3z^2 - 0) \hat{\mathbf{k}} = -6xz \hat{\mathbf{i}} + 2z \hat{\mathbf{j}} + 3z^2 \hat{\mathbf{k}} \\ \nabla \cdot \mathbf{u}_2 &= \frac{\partial}{\partial x} (xy) + \frac{\partial}{\partial y} (2yz) + \frac{\partial}{\partial z} (3zx) = y + 2z + 3x \\ \nabla \times \mathbf{u}_2 &= (0 - 2y) \hat{\mathbf{i}} + (0 - 3z) \hat{\mathbf{j}} + (0 - x) \hat{\mathbf{k}} = -2y \hat{\mathbf{i}} - 3z \hat{\mathbf{j}} - x \hat{\mathbf{k}} \\ \nabla \cdot \mathbf{u}_3 &= \frac{\partial}{\partial x} (y^2) + \frac{\partial}{\partial y} (2xy + z^2) + \frac{\partial}{\partial z} (2yz) = 0 + 2x + 2y = 2(x + y) \\ \nabla \times \mathbf{u}_3 &= (2z - 2z) \hat{\mathbf{i}} + (0 - 0) \hat{\mathbf{j}} + (2y - 2y) \hat{\mathbf{k}} = 0\hat{\mathbf{i}} + 0\hat{\mathbf{j}} + 0\hat{\mathbf{k}} = \mathbf{0} \end{aligned}$$

To prove that the curl of a gradient is always zero, let f be a scalar function. The gradient of f is

$$\nabla f = \frac{\partial f}{\partial x} \hat{\mathbf{i}} + \frac{\partial f}{\partial y} \hat{\mathbf{j}} + \frac{\partial f}{\partial z} \hat{\mathbf{k}} \quad (\text{A.4})$$

Then

$$\begin{aligned}\nabla \times (\nabla f) &= \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ \frac{\partial f}{\partial x} & \frac{\partial f}{\partial y} & \frac{\partial f}{\partial z} \end{vmatrix} \\ &= \left(\frac{\partial^2 f}{\partial y \partial z} - \frac{\partial^2 f}{\partial z \partial y} \right) \hat{\mathbf{i}} + \left(\frac{\partial^2 f}{\partial z \partial x} - \frac{\partial^2 f}{\partial x \partial z} \right) \hat{\mathbf{j}} + \left(\frac{\partial^2 f}{\partial x \partial y} - \frac{\partial^2 f}{\partial y \partial x} \right) \hat{\mathbf{k}}\end{aligned}$$

and since order of differentiation doesn't matter, as long as f is twice differentiable, all of the terms cancel and

$$\nabla \times (\nabla f) = \mathbf{0}. \quad (\text{A.5})$$

To prove that the divergence of a curl is always zero, I'll take the expanded form of the curl (Eq. A.3) and apply the divergence operator (Eq. A.1):

$$\nabla \cdot (\nabla \times \mathbf{F}) = \frac{\partial}{\partial x} \left(\frac{\partial w}{\partial y} - \frac{\partial v}{\partial z} \right) + \frac{\partial}{\partial y} \left(\frac{\partial u}{\partial z} - \frac{\partial w}{\partial x} \right) + \frac{\partial}{\partial z} \left(\frac{\partial v}{\partial x} - \frac{\partial u}{\partial y} \right)$$

Differentiation is a linear operator; we can expand the parenthesis:

$$\nabla \cdot (\nabla \times \mathbf{F}) = \frac{\partial^2 w}{\partial x \partial y} - \frac{\partial^2 v}{\partial x \partial z} + \frac{\partial^2 u}{\partial y \partial z} - \frac{\partial^2 w}{\partial y \partial x} + \frac{\partial^2 v}{\partial z \partial x} - \frac{\partial^2 u}{\partial z \partial y}$$

Again, as long as each component of \mathbf{F} is twice-differentiable, order of differentiation doesn't matter and all of the terms cancel. Therefore

$$\nabla \cdot (\nabla \times \mathbf{F}) = 0 \quad (\text{A.6})$$

Problem 2.3

Problem 2.3

The fluid is at rest so Euler's equation is given by

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho}\nabla p + \mathbf{g} = 0$$

since $D\mathbf{u}/Dt = 0$. Rearranging this gives

$$\nabla p = -\rho\mathbf{g}.$$

Since ∇p and \mathbf{g} are both three-dimensional vectors, we have really obtained three equations.

$$\begin{aligned} x : \quad & \frac{\partial p}{\partial x} = -\rho g_x = 0 \\ y : \quad & \frac{\partial p}{\partial y} = -\rho g_y = 0 \\ z : \quad & \frac{\partial p}{\partial z} = -\rho g_z = -\rho g \end{aligned}$$

The $\partial p/\partial x = \partial p/\partial y = 0$ since gravity only acts in the z direction. It's for this same reason that $\partial p/\partial z$ survives as $-\rho g$. The total derivative of pressure can be taken:

$$dp = \frac{\partial p}{\partial x}dx + \frac{\partial p}{\partial y}dy + \frac{\partial p}{\partial z}dz$$

This reduces to

$$dp = -\rho g dz$$

since (from above) the first two partial derivatives are zero. Integrating both sides yields

$$p = -\rho g z + p_0$$

So the pressure *difference* between the surface of the fluid and a point $-z$ below the fluid surface is

$$p = p_0 - \rho g z.$$

Additionally, we can find the surface of constant pressure by rearranging for z ,

$$z = -(p - p_0)/\rho g$$

Thus the surface of the fluid is a horizontal plane (all quantities on the right are constants).

Problem 2.4

Problem 2.4

First, let's begin by examining the case when $r > a$. For $r > a$

$$\mathbf{u} = [u_r, u_\theta, u_z] = [0, \Omega a^2/r, 0].$$

Now, we could use Euler's equations as we did in Example A.4, but that is a lot of work. We'll use a different approach; we'll calculate the vorticity of the fluid:

$$\nabla \times \mathbf{u} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ 0 & \Omega a^2 & 0 \end{vmatrix} = 0$$

Great! The vorticity is zero, which means we can use Eq. 2.17 to easily obtain the pressure.

$$(\nabla \times \mathbf{u}) \times \mathbf{u} = -\nabla H$$

Since $\nabla \times \mathbf{u} = 0$,

$$-\nabla H = 0.$$

We defined H as

$$H = \frac{1}{2} \mathbf{u}^2 + \frac{1}{\rho} p + gz$$

so this means that

$$0 = -\nabla \left(\frac{1}{2} \mathbf{u}^2 + \frac{1}{\rho} p + gz \right).$$

We can simplify this to

$$0 = -\nabla \left(\frac{\rho \Omega^2 a^4}{2r^2} + p + \rho g z \right)$$

since $\mathbf{u}^2 = \mathbf{u} \cdot \mathbf{u} = (u_r^2 + u_\theta^2 + u_z^2) = u_\theta^2 = \Omega^2 a^4 / r^2$. The gradient is a linear operator so we can move $-\nabla p$ to the left and obtain

$$\nabla p = -\nabla \left(\frac{\rho \Omega^2 a^4}{2r^2} + \rho g z \right).$$

Integrating both sides (the “inverse” of the gradient) gives

$$p(r, z) = -\frac{\rho \Omega^2 a^4}{2r^2} - \rho g z + p_{01}$$

where p_0 is the pressure at $r = \infty$ and $z = 0$. So we've found the pressure when $r > a$, but what about $r < a$? If we follow the same procedure we find that

$$\nabla \times \mathbf{u} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ 0 & \Omega r^2 & 0 \end{vmatrix} = \frac{1}{r} (2\Omega r \hat{\mathbf{z}}) = 2\Omega \hat{\mathbf{z}}.$$

This time, the vorticity is nonzero! In order to use $(\nabla \times \mathbf{u}) \times \mathbf{u} = -\nabla H$ we must now find the cross product on the left. We know $\nabla \times \mathbf{u} = (0, 0, 2\Omega)$ so

$$(\nabla \times \mathbf{u}) \times \mathbf{u} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & \hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ 0 & 0 & 2\Omega \\ 0 & \Omega r^2 & 0 \end{vmatrix} = -2\Omega^2 r \hat{\mathbf{r}}$$

and we know that this is equal to $-\nabla H$. We can write this out in full as

$$-2\Omega^2 r \hat{\mathbf{r}} = -\nabla \left(\frac{\Omega^2 r^2}{2} + \frac{p}{\rho} + gz \right)$$

since this time $\mathbf{u}^2 = \Omega^2 r^2$. On the left hand side we have only an $\hat{\mathbf{r}}$ contribution, thus the gradient on the right must yield only $\hat{\mathbf{r}}$ components; $\partial H/\partial \theta = \partial H/\partial z = 0$. So working implicitly in the $\hat{\mathbf{r}}$ direction, the gradient can be rewritten as $\partial/\partial r$ giving

$$2\Omega^2 r = \frac{\partial}{\partial r} \left(\frac{\Omega^2 r^2}{2} + \frac{p}{\rho} + gz \right)$$

which can be integrated with respect to r

$$\int 2\Omega^2 r \, dr = \frac{\Omega^2 r^2}{2} + \frac{p}{\rho} + gz$$

to give

$$\Omega^2 r^2 = \frac{\Omega^2 r^2}{2} + \frac{p}{\rho} + gz.$$

Solving for the pressure gives

$$p(r, z) = \frac{\rho \Omega^2 r^2}{2} - \rho g z + p_{0_2}.$$

Now that we know the pressure of the fluid at any radius (whether it be larger than a or not), we can find the difference between the pressure at the centre of the fluid ($r = 0$) and $r = \infty$ by subtraction.

$$\Delta p = p(\infty, z) - p(0, z) = \left(-\frac{\rho \Omega^2 a^4}{2r^2} - \rho g z + p_{0_1} \right) - \left(\frac{\rho \Omega^2 r^2}{2} - \rho g z + p_{0_2} \right)$$

When we plug in $r = \infty$ into the first parentheses, the first term disappears. Similarly, when we plug in $r = 0$ into the second parentheses, the first term also vanishes. We're left with

$$\Delta p = -\rho g z + \rho g z + p_{0_1} - p_{0_2} = p_{0_1} - p_{0_2}.$$

In order to find this quantity, we apply the boundary condition; p must be continuous at $r = a$, such that

$$-\frac{\rho\Omega^2 a^4}{2r^2}\bigg|_{r=a} - \rho g z + p_{0_1} = \frac{\rho\Omega^2 r^2}{2}\bigg|_{r=a} - \rho g z + p_{0_2}$$

$$-\frac{1}{2}\rho\Omega^2 a^2 + p_{0_1} = \frac{1}{2}\rho\Omega^2 a^2 + p_{0_2}$$

$$p_{0_1} - p_{0_2} = \frac{1}{2}\rho\Omega^2 a^2 - (-\frac{1}{2}\rho\Omega^2 a^2)$$

$$p_{0_1} - p_{0_2} = \rho\Omega^2 a^2$$

Therefore, the difference in pressure between $r = 0$ and $r = \infty$ is $\Delta p = \rho\Omega^2 a^2$.

Problem 3.1

Problem 3.1

The flow is irrotational if $\nabla \times \mathbf{u} = 0$.

$$\nabla \times \mathbf{u} = \frac{1}{r} \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ \frac{\partial}{\partial r} & \frac{\partial}{\partial \theta} & \frac{\partial}{\partial z} \\ \frac{Q}{2\pi r} & 0 & 0 \end{vmatrix} = 0\hat{\mathbf{r}} + 0\hat{\boldsymbol{\theta}} + 0\hat{\mathbf{z}} = 0$$

Therefore the flow is irrotational. The flow is incompressible if $\nabla \cdot \mathbf{u} = 0$.

$$\begin{aligned} \nabla \cdot \mathbf{u} &= \frac{1}{r} \left(\frac{\partial ru_r}{\partial r} \right) + \frac{1}{r} \frac{\partial u_\theta}{\partial \theta} + \frac{\partial u_z}{\partial z} \\ &= \frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{Q}{2\pi r} \right) + \frac{1}{r} \frac{\partial}{\partial \theta} (0) + 0 \\ &= 0 \end{aligned}$$

Thus, the flow is incompressible. The complex potential is given by

$$\begin{aligned} w(z) = \phi + i\psi &= \int u_r dr + i \int ru_r d\theta \\ &= \int \frac{Q}{2\pi r} dr + i \int r \frac{Q}{2\pi r} d\theta \\ &= \frac{Q}{2\pi} \ln(r) + \frac{iQ\theta}{2\pi} \\ &= \frac{Q}{2\pi} (\ln(r) + i\theta) \\ &= \frac{Q}{2\pi} (\ln(r) + \ln(e^{i\theta})) \\ &= \frac{Q}{2\pi} \ln(re^{i\theta}) \\ &= \frac{Q}{2\pi} \ln(z) \end{aligned}$$

In the process of finding the complex potential, we obtained the velocity potential ϕ and the stream function ψ :

$$\phi = \frac{Q}{2\pi} \ln(r), \quad \psi = \frac{Q\theta}{2\pi}$$

The streamlines can be plotted by setting ψ equal to a constant. Thus, we need to plot

the function $\theta = C$, where C is a constant. This plot is given in Figure A.3a. If arrows indicating direction were drawn on the plot, the arrows would point inward if $Q < 0$, indicating a sink, and outward if $Q > 0$, indicating a source. The thicker the streamline, the higher the velocity at that point. We will now add the boundary described in the question. We will place the boundary on the imaginary axis and place the line source/sink a distance d away on the real axis at point $z = d$. We'll then place an image of the source/sink on the other side of the boundary at point $z = -d$. Figure A.2 shows this image as well as the real

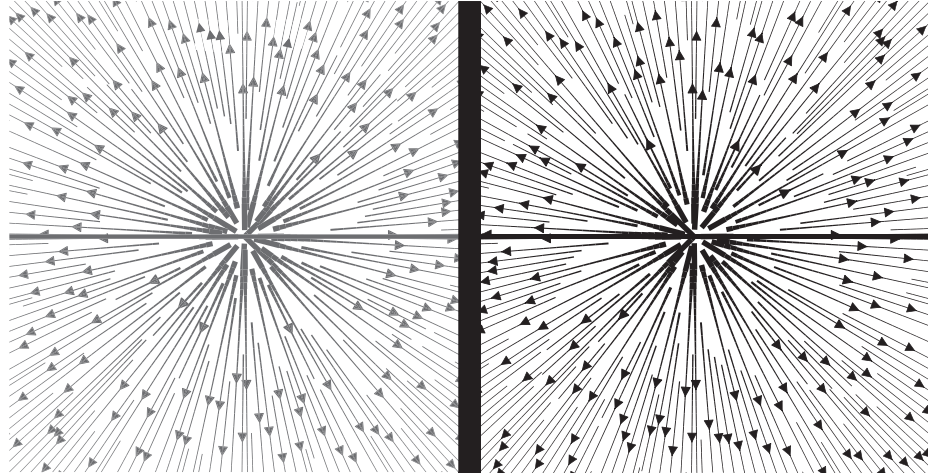


Figure A.2

source/sink. We ensure that the boundary conditions are satisfied by both flows; along the imaginary axis there will be contribution from both sources, but the horizontal components will cancel so long as the image is an exact mirror of the real source. The flow will be purely vertical, just as it would be with a single source and a boundary. We have matched the boundary conditions of the original flow, so by the uniqueness theorem, this must be a valid solution. The complex potential is now just the sum of the complex potential from the real source and the image:

$$\begin{aligned}
 w(z) &= \frac{Q}{2\pi} \ln(z + d) + \frac{Q}{2\pi} \ln(z - d) \\
 &= \frac{Q}{2\pi} \ln[(z + d)(z - d)] \\
 &= \frac{Q}{2\pi} \ln(z^2 - d^2).
 \end{aligned}$$

Now we need to obtain the streamlines. We know $\psi = \text{Im}(w(z_1))$ where in our case

$$\begin{aligned} z_1 &\equiv z^2 - d^2 \\ &= (x + iy)^2 - d^2 \\ &= x^2 + 2ixy - y^2 - d^2 \\ &= (x^2 - y^2 - d^2) + i(2xy). \end{aligned} \tag{A.7}$$

(I've separated the real and imaginary parts of z_1 for use later). Using the complex logarithm,

$$w(z) = \frac{Q}{2\pi} \ln(z_1) = \frac{Q}{2\pi} \ln|z_1| + i \frac{Q}{2\pi} \arg(z_1)$$

so

$$\psi = \text{Im}(w(z_1)) = \frac{Q}{2\pi} \arg(z_1).$$

We can find the argument of z_1 using the real and imaginary parts of Eq. A.7 and the definition of the argument of a complex number

$$\arg(z_1) = \text{atan}\left(\frac{\text{Im}(z_1)}{\text{Re}(z_1)}\right) = \text{atan}\left(\frac{2xy}{x^2 - y^2 - d^2}\right)$$

So the stream function is

$$\psi = \frac{Q}{2\pi} \text{atan}\left(\frac{2xy}{x^2 - y^2 - d^2}\right)$$

and is plotted in Figure A.3b for $Q > 0$.

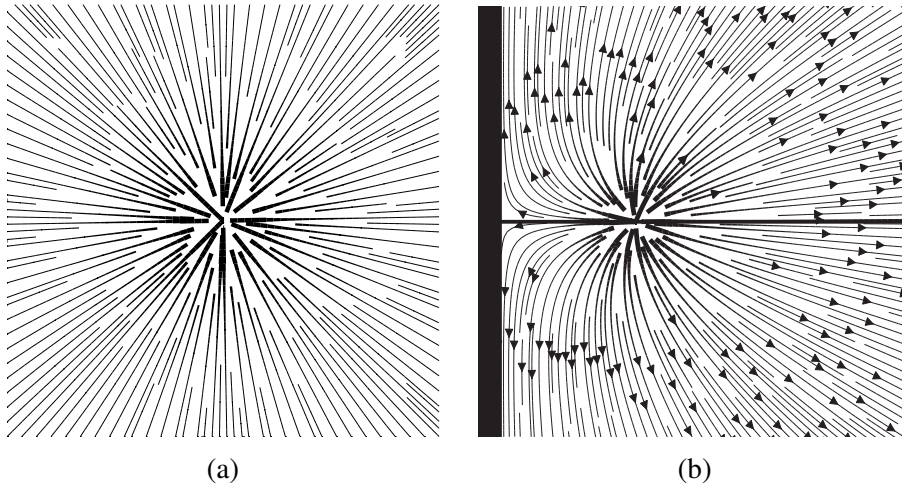


Figure A.3

Problem 3.2

Problem 3.2

(a) **A line vortex a distance d from a plane boundary.**

We know the complex potential for a line vortex a distance d from a plane boundary is

$$w(z) = -\frac{i\Gamma}{2\pi} \ln \left(\frac{z-d}{z+d} \right).$$

Since $w = \phi + i\psi$, we know that $\psi = \text{Im}(w)$. There is an explicit i in w so the real part of the natural logarithm will combine with the constants to make the imaginary part of w . We need to find the real part of $\ln(z-d/z+d)$. The complex logarithm of a complex number z is

$$\ln(z) = \ln|z| + i \arg(z) \quad (\text{A.8})$$

thus, letting $z = x + iy$, the stream function is

$$\begin{aligned} \psi = \text{Re}(\ln w) &= \ln|z| = -\frac{\Gamma}{2\pi} \ln \left| \frac{z-d}{z+d} \right| \\ &= -\frac{\Gamma}{2\pi} \ln \frac{|x+iy-d|}{|x+iy+d|} \\ &= -\frac{\Gamma}{2\pi} \ln \left(\frac{(x-d)^2 + y^2}{(x+d)^2 + y^2} \right)^{\frac{1}{2}} \\ &= -\frac{\Gamma}{4\pi} \ln \frac{(x-d)^2 + y^2}{(x+d)^2 + y^2}. \end{aligned}$$

From the second to third line above, I took the modulus of both the numerator and denominator using

$$|z_1| = \sqrt{\text{Re}(z_1)^2 + \text{Im}(z_1)^2}$$

and wrote the square root as an exponent. Then the exponent could be moved down and absorbed into the coefficient. By setting ψ constant (stream function is constant along a streamline), computer software can be used to plot this result. The streamline plot is shown in Figure A.4a. On the plot, the thicker the streamline, the faster the fluid is moving at that point.

(b) **a line vortex a distance c from the centre of a circular boundary**

We know the complex potential for a line vortex a distance c from the centre of a circular boundary is given by

$$w(z) = -\frac{i\Gamma}{2\pi} \ln \left(\frac{z + a^2/c}{z - c} \right).$$

Following the same process as (a), we obtain the stream function

$$\begin{aligned} \psi = \operatorname{Re}(\ln w) &= \ln |z| = \frac{\Gamma}{2\pi} \ln \left| \frac{z + a^2/c}{z - c} \right| \\ &= \frac{\Gamma}{2\pi} \ln \frac{|x + iy + a^2/c|}{|x + iy - c|} \\ &= \frac{\Gamma}{4\pi} \ln \frac{(x + a^2/c)^2 + y^2}{(x - c)^2 + y^2}. \end{aligned}$$

This has been plotted in Figure A.4b

(c) uniform flow past a circular boundary (no circulation).

We have already determined ψ to be

$$\psi = U \left(r - a^2/r \right) \sin \theta$$

for this flow. This was plotted in Figure A.4c (taking into consideration the polar coordinates).

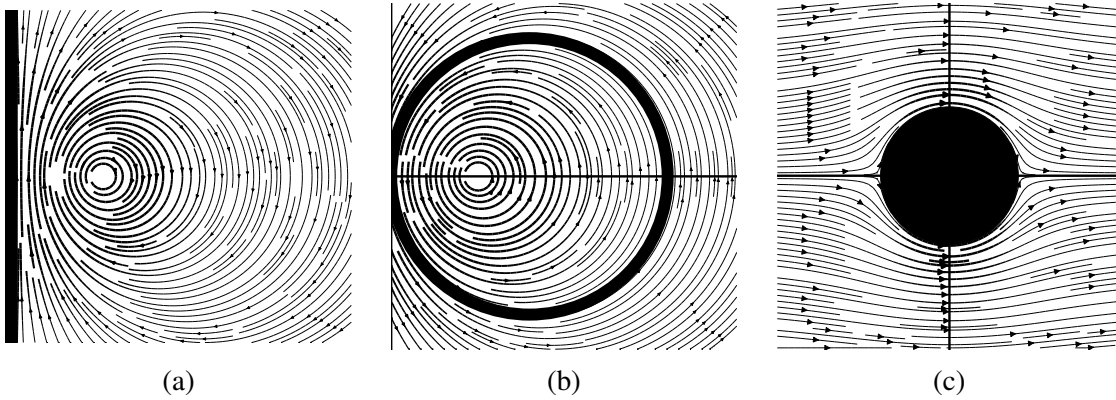


Figure A.4

Problem 3.3

Problem 3.3

$$\nabla^2 \phi = \frac{\partial^2}{\partial x^2} \phi + \frac{\partial^2}{\partial y^2} \phi = \frac{\partial}{\partial x} \left(\frac{\partial \phi}{\partial x} \right) + \frac{\partial}{\partial y} \left(\frac{\partial \phi}{\partial y} \right) = \frac{\partial}{\partial x} \left(\frac{\partial \psi}{\partial y} \right) + \frac{\partial}{\partial y} \left(-\frac{\partial \psi}{\partial x} \right) = 0$$

In polar coordinates Laplace's equation is

$$\nabla^2 \phi = \frac{1}{r} \frac{\partial}{\partial r} \left(r \frac{\partial \phi}{\partial r} \right) + \frac{1}{r^2} \left(\frac{\partial^2 \phi}{\partial \theta^2} \right) = 0.$$

Using the product rule, I'll expand the first term, giving

$$\nabla^2 \phi = \frac{1}{r} \frac{\partial \phi}{\partial r} + \frac{r}{r} \frac{\partial^2 \phi}{\partial r^2} + \frac{1}{r^2} \left(\frac{\partial^2 \phi}{\partial \theta^2} \right) = 0. \quad (\text{A.9})$$

I'll now assume that ϕ is a separable function, that is

$$\phi = R(r)T(\theta)$$

and then differentiating this expression we get

$$\frac{\partial \phi}{\partial r} = T \frac{\partial R}{\partial r}; \quad \frac{\partial^2 \phi}{\partial r^2} = T \frac{\partial^2 R}{\partial r^2} \quad \text{and} \quad \frac{\partial \phi}{\partial \theta} = R \frac{\partial T}{\partial \theta}; \quad \frac{\partial^2 \phi}{\partial \theta^2} = R \frac{\partial^2 T}{\partial \theta^2}.$$

Substituting these into Eq. A.9 gives

$$0 = \frac{T}{r} \frac{\partial R}{\partial r} + T \frac{\partial^2 R}{\partial r^2} + \frac{R}{r^2} \frac{\partial^2 T}{\partial \theta^2}.$$

Next I'll multiply by r^2/TR which will aid in separating the functions of θ and r .

$$0 = \frac{r}{R} \frac{\partial R}{\partial r} + \frac{r^2}{R} \frac{\partial^2 R}{\partial r^2} + \frac{1}{T} \frac{\partial^2 T}{\partial \theta^2}$$

Moving all functions of θ to the left side gives

$$-\frac{1}{T} \frac{\partial^2 T}{\partial \theta^2} = \frac{r}{R} \frac{\partial R}{\partial r} + \frac{r^2}{R} \frac{\partial^2 R}{\partial r^2}$$

Now, looking at this, I'll conclude that both sides must be equal to the same constant. Otherwise, if I were to change θ by some arbitrary amount the left side would change and the right side would not, breaking the inequality. I will call this constant κ^2 . This gives two completely separate differential equations,

$$\frac{\partial^2 T}{\partial \theta^2} = -\kappa^2 T$$

and

$$0 = \frac{\partial^2 R}{\partial r^2} + \frac{1}{r} \frac{\partial R}{\partial r} - \frac{\kappa^2 R}{r^2}.$$

The general solution for the first (we'll come back to the second later) is a linear combination of sinusoidal functions:

$$T = A \sin(\kappa\theta) + B \cos(\kappa\theta)$$

Now we apply the boundary condition as $r \rightarrow \infty$. At very large r , the fluid is moving only horizontally and has no angular velocity component ($u_\theta = 0$). It does, however, have a radial component $u_r = U \cos \theta$. The velocity potential is thus

$$\phi = \int u_r dr = Ur \cos \theta.$$

This tells us that at large r , the velocity potential must contain only a cosine term. Since T depends only on θ , we can immediately conclude that the sine term must disappear, thus $A = 0$. Also, the argument of the cosine function must be solely θ , so we conclude that $\kappa = 1$. Thus $T = B \cos \theta$ and $\phi = R(r)B \cos \theta$. Now we need only find $R(r)$ by returning to the second differential equation we found. We now know that $\kappa = 1$ so the differential equation is now

$$0 = \frac{\partial^2 R}{\partial r^2} + \frac{1}{r} \frac{\partial R}{\partial r} - \frac{R}{r^2}$$

which is a second-order linear homogeneous ordinary differential equation with general solution

$$R(r) = Cr + \frac{D}{r}$$

We again apply a boundary condition; at the boundary of the cylinder, the radial component is nonexistent (clearly there's no fluid entering or leaving the cylinder through the boundary) so we can say $dR/dr|_{r=a} = 0$. From this

$$0 = Ca - \frac{D}{a} \quad \Rightarrow \quad D = Ca^2.$$

Therefore,

$$R(r) = C \left(r + \frac{a^2}{r} \right)$$

and combining with the solution for T gives

$$\phi = BC \left(r + \frac{a^2}{r} \right) \cos \theta. \quad (\text{A.10})$$

We need to apply one final boundary condition to find the value of BC . At large r we already found that $\phi = Ur \cos \theta$. Looking at Eq. A.10, as $r \rightarrow \infty$, the a^2/r term shrinks to a negligible size compared to the r term, so

$$\phi = BC r \cos \theta = Ur \cos \theta \quad \Rightarrow \quad BC = U$$

and the complex potential is

$$\phi = U \left(r + \frac{a^2}{r} \right) \cos \theta.$$

This is the same result as the one obtained using Milne's Circle Theorem. While the circle theorem is easier in this case, it is useful to be familiar with the process of solving Laplace's equation for situations where the circle theorem cannot be used.

Problem 3.4

Problem 3.4

We know that ψ is the imaginary part of w , so plugging in $z = x + iy$ we can obtain ψ :

$$\begin{aligned}\psi &= \text{Im}(w(z)) \\ &= \text{Im}\left(\frac{A}{2}(x^2 + 2ixy - y^2 - 2cx - 2icy)\right) \\ &= \frac{A}{2}(2xy - 2cy) \\ &= Ay(x - c).\end{aligned}$$

Similarly, ϕ is the real part of w so

$$\begin{aligned}\phi &= \text{Re}(w(z)) \\ &= \text{Re}\left(\frac{A}{2}(x^2 + 2ixy - y^2 - 2cx - 2icy)\right) \\ &= \frac{A}{2}(x^2 - y^2 - 2cx) \\ &= \frac{Ax^2}{2} - \frac{Ay^2}{2} - cx.\end{aligned}$$

Figure A.5a shows the streamlines. The flow acts as if there is a boundary at $z = c$, with a stagnation point at the point $z = c$. As for the addition of the cylinder, we'll utilize the circle theorem

$$w'(z) = f(z) + f^*(a^2/z^*)$$

where $f(z) = \frac{A}{2}(z^2 - 2cz)$ is our original complex potential and $w'(z)$ is the complex potential of the new flow. Thus

$$\begin{aligned}w'(z) &= \frac{A}{2}(z^2 - 2cz) + \frac{A}{2}\left[\left(\frac{a^2}{z^*}\right)^2 - 2c\left(\frac{a^2}{z^*}\right)\right]^* \\ &= \frac{A}{2}\left[(z^2 - 2cz) + \left(\frac{a^2}{z^*}\right)^2 - 2c\left(\frac{a^2}{z^*}\right)\right]^*\end{aligned}$$

The complex conjugates cancel out and

$$\begin{aligned}w'(z) &= \frac{A}{2}\left[(z^2 - 2cz) + \left(\frac{a^2}{z}\right)^2 - 2c\left(\frac{a^2}{z}\right)\right] \\ &= \frac{A}{2}\left[z^2 - 2cz + \frac{a^4}{z^2} - \frac{2ca^2}{z}\right].\end{aligned}$$

Noting that $z = x + iy$ and rationalizing the denominators gives

$$w'(z) = \frac{A}{2} \left[z^2 - 2cz + \frac{a^4(z^*)^2}{(x^2 + y^2)^2} - \frac{2ca^2z^*}{x^2 + y^2} \right].$$

Now, noting that

$$(z^*)^2 = (x - iy)^2 = (x^2 + y^2) - 2ixy \quad \text{and} \quad (\text{A.11})$$

$$z^2 = (x + iy)^2 = (x^2 - y^2) + 2ixy, \quad (\text{A.12})$$

the new complex potential becomes

$$w'(z) = \frac{A}{2} \left[(x^2 - y^2) + 2ixy - 2c(x + iy) + \frac{a^4((x^2 + y^2) - 2ixy)}{(x^2 + y^2)^2} - \frac{2ca^2(x - iy)}{x^2 + y^2} \right]. \quad (\text{A.13})$$

Since the stream function ψ' is the imaginary part of $w'(z)$, we need only write down the imaginary part of Eq. A.13 to obtain ψ' .

$$\begin{aligned} \text{Im}(w'(z)) = \psi' &= \frac{A}{2} \left[2xy - 2cy - \frac{2xya^4}{(x^2 + y^2)^2} + \frac{2ca^2y}{x^2 + y^2} \right] \\ &= Ay \left[x - c - \frac{xa^4}{(x^2 + y^2)^2} + \frac{ca^2}{x^2 + y^2} \right] \\ &= Ay \left[x \left(1 - \frac{a^4}{(x^2 + y^2)^2} \right) - c \left(1 - \frac{a^2}{x^2 + y^2} \right) \right] \\ &= Ay \left[x \left(1 - \frac{a^2}{x^2 + y^2} \right) \left(1 + \frac{a^2}{x^2 + y^2} \right) - c \left(1 - \frac{a^2}{x^2 + y^2} \right) \right] \\ &= Ay \left[x \left(1 + \frac{a^2}{x^2 + y^2} \right) - c \right] \left(1 - \frac{a^2}{x^2 + y^2} \right) \end{aligned} \quad (\text{A.14})$$

Eq. A.14 is the stream function and is plotted in Figure A.5b

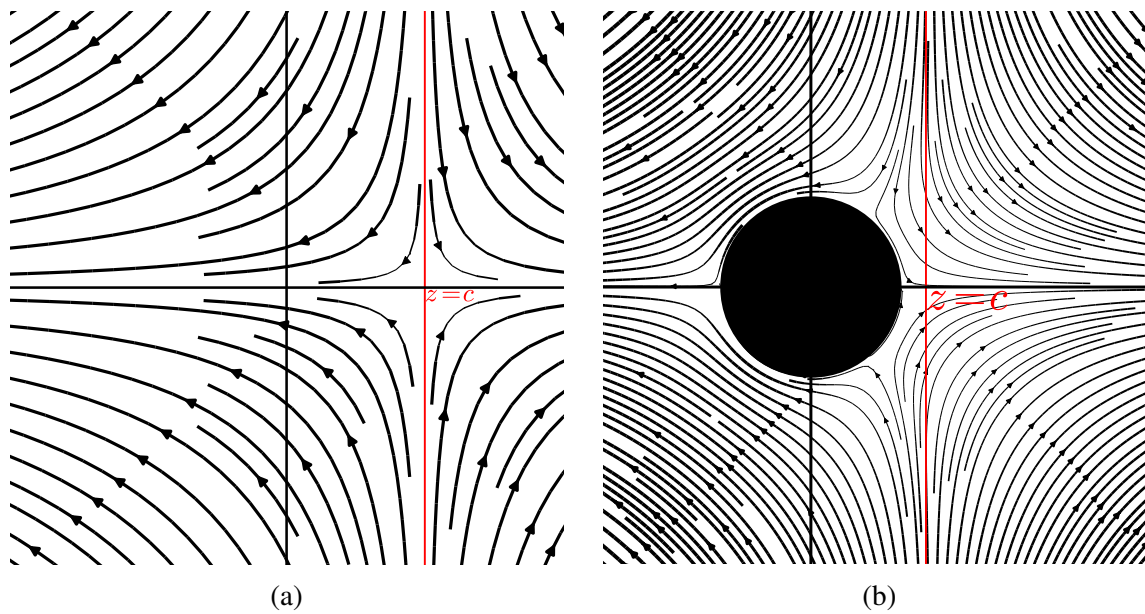


Figure A.5

Problem 3.5

Problem 3.5

The mapped complex potential of a flat plate is given in differential form by

$$u_* - iv_* = \frac{dW}{dZ} = \frac{\left[Ue^{-i\alpha} - Ue^{i\alpha} \left(\frac{a^2}{z^2} \right) - \frac{i\Gamma}{2\pi z} \right]}{\left(1 - \frac{a^2}{z^2} \right)} \quad (\text{A.15})$$

which is equivalent (through Euler's Formula) to

$$u_* - iv_* = \frac{\left[U \cos \alpha - Ui \sin \alpha - U \cos \alpha \left(\frac{a^2}{z^2} \right) - Ui \sin \alpha \left(\frac{a^2}{z^2} \right) - \frac{i\Gamma}{2\pi z} \right]}{\left(1 - \frac{a^2}{z^2} \right)}.$$

Separating the real and imaginary terms gives

$$\begin{aligned} u_* - iv_* &= \frac{U \cos \alpha - U \cos \alpha \left(\frac{a^2}{z^2} \right)}{\left(1 - \frac{a^2}{z^2} \right)} + \frac{\left[-Ui \sin \alpha - Ui \sin \alpha \left(\frac{a^2}{z^2} \right) - \frac{i\Gamma}{2\pi z} \right]}{\left(1 - \frac{a^2}{z^2} \right)} \\ &= \frac{U \cos \alpha \left[1 - \left(\frac{a^2}{z^2} \right) \right]}{\left(1 - \frac{a^2}{z^2} \right)} - Ui \sin \alpha \left(\frac{1 + \frac{a^2}{z^2} + \frac{\Gamma}{2\pi z U \sin \alpha}}{1 - \frac{a^2}{z^2}} \right) \end{aligned}$$

Choosing $\Gamma = -4\pi Ua \sin \alpha$ further reduces this to

$$u_* - iv_* = U \cos \alpha - Ui \sin \alpha \left(\frac{1 + \frac{a^2}{z^2} + \frac{2a}{z}}{1 - \frac{a^2}{z^2}} \right).$$

Taking the limit as we approach the trailing edge, or rather as $z \rightarrow a$ gives

$$\begin{aligned} u_* - iv_* &= U \cos \alpha - Ui \sin \alpha \lim_{z \rightarrow a} \left(\frac{1 + \frac{a^2}{z^2} + \frac{2a}{z}}{1 - \frac{a^2}{z^2}} \right) \\ &= U \cos \alpha - Ui \sin \alpha (0) \\ &= U \cos \alpha. \end{aligned}$$

Therefore, $u_* = U \cos \alpha$ and $v_* = 0$. In order to find the speed at any point along the plate, we'll again begin with Eq. A.15. This time, we want to generalise the solution to *any* point on the plate. Since the plate began as a circle with radius a in the z -plane any point on the circle is given by $z = ae^{i\theta}$. Once mapped onto the Z -plane, $z = ae^{i\theta}$ becomes the set of points making up the flat plane. For this reason, we'll replace all occurrences of z in Eq. A.15 with $ae^{i\theta}$.

$$u_* - iv_* = \frac{\left[Ue^{-i\alpha} - Ue^{i\alpha} \left(\frac{a^2}{(ae^{i\theta})^2} \right) - \frac{i\Gamma}{2\pi(ae^{i\theta})} \right]}{\left(1 - \frac{a^2}{(ae^{i\theta})^2} \right)}$$

Some basic simplification gives

$$u_* - iv_* = \frac{\left[Ue^{-i\alpha} - Ue^{i\alpha}e^{-2i\theta} - \frac{i\Gamma}{2\pi a}e^{-i\theta} \right]}{(1 - e^{-2i\theta})}.$$

Dividing every term by $e^{-i\theta}$ simplifies this further to

$$\begin{aligned} u_* - iv_* &= \frac{\left[Ue^{-i\alpha}e^{i\theta} - Ue^{i\alpha}e^{-i\theta} - \frac{i\Gamma}{2\pi a} \right]}{(e^{i\theta} - e^{-i\theta})} \\ &= \frac{\left[Ue^{i(\theta-\alpha)} - Ue^{i(\alpha-\theta)} - \frac{i\Gamma}{2\pi a} \right]}{(e^{i\theta} - e^{-i\theta})}. \end{aligned}$$

Invoking Euler's Formula transforms this to

$$\begin{aligned} u_* - iv_* &= U \left[\frac{\cos(\theta - \alpha) + i \sin(\theta - \alpha) - \cos(\alpha - \theta) - i \sin(\alpha - \theta) - \frac{i\Gamma}{2U\pi a}}{\cos \theta + i \sin \theta - \cos \theta + i \sin \theta} \right] \\ &= U \left[\frac{\cos(\theta - \alpha) + i \sin(\theta - \alpha) - \cos(\alpha - \theta) - i \sin(\alpha - \theta) - \frac{i\Gamma}{2U\pi a}}{2i \sin \theta} \right]. \end{aligned}$$

We now recognize that $(\alpha - \theta) = -(\theta - \alpha)$ and exploit the fact that since the cosine function is even, $\cos(\theta - \alpha) - \cos(\alpha - \theta) = 0$. Similarly, the sine function is odd so $i \sin(\theta - \alpha) - i \sin(\alpha - \theta) = 2i \sin(\theta - \alpha)$. Thus

$$u_* - iv_* = \frac{2Ui \sin(\theta - \alpha) - \frac{i\Gamma}{2\pi a}}{2i \sin \theta} \quad (\text{A.16})$$

We will now invoke the trigonometric identity

$$\sin(a + b) = \sin a \cos b - \sin b \cos a$$

allowing us to write Eq. A.16 as

$$u_* - iv_* = \frac{2Ui (\sin \theta \cos \alpha - \sin \alpha \cos \theta) - \frac{i\Gamma}{2\pi a}}{2i \sin \theta}. \quad (\text{A.17})$$

We are now at a point where we need to determine $\sin \theta$ and $\cos \theta$ under our mapping. In order to transform a circle in the z -plane to a flat plate in the Z -plane, we used the mapping

$$Z = z + \frac{a^2}{z}$$

so substituting the equation of our circle into this mapping yields

$$\begin{aligned}
 Z &= ae^{i\theta} + \frac{a^2}{ae^{i\theta}} \\
 &= (a + a) \cos \theta + (a - a) \sin \theta \\
 &= 2a \cos \theta.
 \end{aligned} \tag{A.18}$$

Our plate lies entirely on the real axis in the Z -plane so every point of the plate has the form $Z = X$ (ie: $Z = X + 0i$) where $-2a \leq X \leq 2a$. We can conveniently parametrize this by

$$X = 2as \quad \text{where} \quad -1 \leq s \leq 1$$

(at the extreme values of s , X reduces to $\pm 2a$ which is desirable). Thus

$$Z = 2a \cos \theta = X = 2as$$

and we conclude that

$$\cos \theta = s \quad \text{and} \quad \theta = \arccos(s)$$

meaning that

$$\sin \theta = \sin(\arccos(s)) = \pm \sqrt{1 - s^2}.$$

We now turn back to Eq. A.17 with these results.

$$u_* - iv_* = \frac{2Ui \left(\cos \alpha \left(\pm \sqrt{1 - s^2} \right) - (s) \sin \alpha \right) - \frac{i\Gamma}{2\pi a}}{2i \pm \sqrt{1 - s^2}}. \tag{A.19}$$

Plugging in our chosen circulation $\Gamma = (-4\pi U a \sin \alpha)$ gives

$$\begin{aligned}
 u_* - iv_* &= \frac{2Ui \left(\cos \alpha \left(\pm \sqrt{1-s^2} \right) - (s) \sin \alpha + \sin \alpha \right)}{2i \pm \sqrt{1-s^2}} \\
 &= \frac{U \left(\cos \alpha \left(\pm \sqrt{1-s^2} \right) - \sin \alpha (1-s) \right)}{\pm \sqrt{1-s^2}} \\
 &= \frac{U \cos \alpha \left(\pm \sqrt{1-s^2} \right)}{\pm \sqrt{1-s^2}} - \frac{U \sin \alpha (1-s)}{\pm \sqrt{1-s^2}} \\
 &= U \cos \alpha - U \sin \alpha \left(\frac{1-s}{\pm \sqrt{1-s^2}} \right) \\
 &= U \cos \alpha - U \sin \alpha \left(\frac{1-s}{\pm \sqrt{(1+s)(1-s)}} \right) \\
 &= U \cos \alpha \pm U \sin \alpha \left(\frac{(1-s)}{(1+s)^{1/2}(1-s)^{1/2}} \right) \\
 &= U \cos \alpha \pm U \sin \alpha \left(\frac{1-s}{1+s} \right)^{1/2}
 \end{aligned}$$

The speed of the fluid is then

$$|u_* - iv_*| = U \left| \cos \alpha \pm \sin \alpha \left(\frac{1-s}{1+s} \right)^{1/2} \right|. \quad (\text{A.20})$$

In order to find the pressure we utilize Eq. 2.15, neglecting gravity. We know that H is constant along streamlines so

$$H = p_0 = \frac{\rho}{2}(u^2) + p.$$

Solving for the pressure p gives

$$p = p_0 - \frac{\rho}{2}u^2$$

where

$$\begin{aligned}
 u^2 &= U^2 \left(\cos \alpha \pm \sin \alpha \left(\frac{1-s}{1+s} \right)^{1/2} \right)^2 \\
 &= U^2 \left(\cos^2 \alpha \pm 2 \sin \alpha \cos \alpha \left(\frac{1-s}{1+s} \right)^{1/2} + \sin^2 \alpha \left(\frac{1-s}{1+s} \right) \right).
 \end{aligned}$$

The pressure is then

$$p = p_0 - \frac{\rho}{2} U^2 \left(\cos^2 \alpha \pm 2 \sin \alpha \cos \alpha \left(\frac{1-s}{1+s} \right)^{1/2} + \sin^2 \alpha \left(\frac{1-s}{1+s} \right) \right)$$

but recall in the first part of the problem we found $U \cos \alpha = u_*$ at the trailing edge (where $s = 1$), therefore $U^2 \cos^2 \alpha = (u_*)^2$ and

$$\frac{\rho}{2} U^2 \cos^2 \alpha = p(1).$$

Therefore

$$p = p(1) - \frac{\rho}{2} U^2 \left(\sin^2 \alpha \left(\frac{1-s}{1+s} \right) \pm 2 \sin \alpha \cos \alpha \left(\frac{1-s}{1+s} \right)^{1/2} \right)$$

is the pressure on the plate. The pressure distribution is plotted in Figure A.6 for $\alpha = \frac{\pi}{8}$. The bottom curve is the pressure on the upper surface of the plate; it is negative as it is downward. The upper curve is the pressure on the bottom of the plate and is positive since the fluid is pushing upward. At the leading edge $p \rightarrow -\infty$ as there is a singularity at this location.

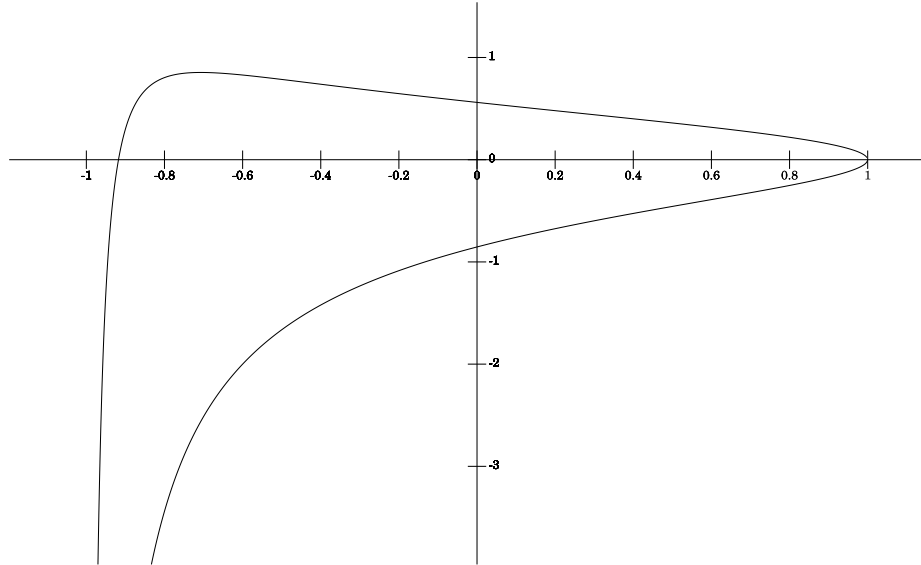


Figure A.6

Problem 4.1

Problem 4.1

First we will find the complex potential of the entire system using the method of images. Figure A.7 shows the setup of the image vortices. If our original vortex is at point $z_0(t) = x_0(t) + iy_0(t) = x_0 + iy_0$ with circulation $-\Gamma$, then we need three image vortices; one at $z_0^* = x_0 - iy_0$ with circulation $-\Gamma$, one at $-z_0 = -x_0 - iy_0$ with circulation Γ and one at $-z_0^* = -x_0 + iy_0$ with circulation Γ . (Note that in this solution, z_0 , x_0 and y_0 are

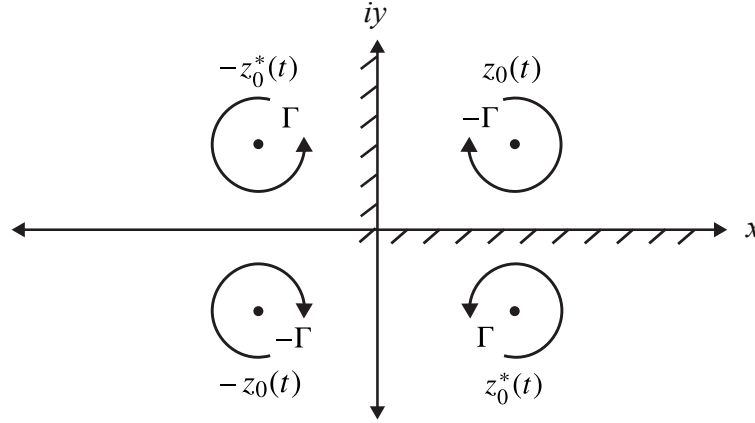


Figure A.7

time-dependent functions, not static points) The complex potential of the system is

$$\begin{aligned} w(z) &= \frac{-i\Gamma}{2\pi} \left[\cancel{\ln(z - z_0)} - \ln(z - z_0^*) + \ln(z - (-z_0)) - \ln(z - (-z_0^*)) \right] \\ &= \frac{-i\Gamma}{2\pi} \left[-\ln(z - z_0^*) + \ln(z + z_0) - \ln(z + z_0^*) \right]. \end{aligned}$$

Note we exclude the contribution of the real vortex from our system since we are interested only in the complex potential at the point where our vortex lies. The vortex cannot affect its own motion, so we exclude it from the entire complex potential. We differentiate this with respect to z to obtain

$$\frac{dw}{dz} = \frac{-i\Gamma}{2\pi} \left[-\frac{1}{z - z_0^*} + \frac{1}{z + z_0} - \frac{1}{z + z_0^*} \right]. \quad (\text{A.21})$$

We know that

$$\frac{dw}{dz} = u - iv$$

and that

$$u = \operatorname{Re} \left(\frac{dw}{dz} \right) = \frac{dx}{dt} \quad \text{and} \quad v = -\operatorname{Im} \left(\frac{dw}{dz} \right) = \frac{dy}{dt} \quad (\text{A.22})$$

so we need to find the real and imaginary parts of dw/dz . First, since we're only concerned with the complex potential at the point $z_0(t)$ where our line vortex lies, we will evaluate dw/dz (Eq. A.21) at $z = z_0(t) = z_0$.

$$\begin{aligned} \left. \frac{dw}{dz} \right|_{z=z_0} &= -\frac{i\Gamma}{2\pi} \left[-\frac{1}{z_0 - z_0^*} + \frac{1}{z_0 + z_0} - \frac{1}{z_0 + z_0^*} \right] \\ &= -\frac{i\Gamma}{2\pi} \left[-\frac{1}{z_0 - z_0^*} + \frac{1}{2z_0} - \frac{1}{z_0 + z_0^*} \right] \end{aligned}$$

We can simplify this further by noting that $z_0 - z_0^* = x_0 + iy_0 - x_0 + iy_0 = 2iy_0$ and $z_0 + z_0^* = x_0 + iy_0 + x_0 - iy_0 = 2x_0$, thus, defining $K \equiv dw/dz|_{z=z_0}$ for simplicity,

$$\begin{aligned} K \equiv \left. \frac{dw}{dz} \right|_{z=z_0} &= -\frac{i\Gamma}{2\pi} \left[\frac{1}{2x_0 + 2iy_0} - \frac{1}{2iy_0} - \frac{1}{2x_0} \right] \\ &= -\frac{i\Gamma}{2\pi} \left[\frac{2(x_0 - iy_0)}{4(x_0^2 + 4y_0^2)} + \frac{i}{2y_0} - \frac{1}{2x_0} \right] \\ &= -\frac{i\Gamma}{4\pi} \left[\left(\frac{x_0}{x_0^2 + y_0^2} - \frac{1}{x_0} \right) + i \left(\frac{1}{y_0} - \frac{y_0}{x_0^2 + y_0^2} \right) \right] \\ &= -\frac{\Gamma}{4\pi} \left(\frac{y_0}{x_0^2 + y_0^2} - \frac{1}{y_0} \right) - i \frac{\Gamma}{4\pi} \left(\frac{x_0}{x_0^2 + y_0^2} - \frac{1}{x_0} \right) \end{aligned}$$

From this, and looking back to Eq. A.22, it's easy to see that in defining $x \equiv x_0(t) = x_0$ and $y \equiv y_0(t) = y_0$ for simplicity the individual time derivatives are

$$\operatorname{Re}(K) = u = \frac{dx}{dt} = -\frac{\Gamma}{4\pi} \left(\frac{y}{x^2 + y^2} - \frac{1}{y} \right)$$

and

$$-\operatorname{Im}(K) = v = \frac{dy}{dt} = \frac{\Gamma}{4\pi} \left(\frac{x}{x^2 + y^2} - \frac{1}{x} \right).$$

Dividing these gives

$$\frac{dy/dt}{dx/dt} = \frac{dy}{dx} = \frac{\frac{\Gamma}{4\pi} \left(\frac{x}{x^2 + y^2} - \frac{1}{x} \right)}{-\frac{\Gamma}{4\pi} \left(\frac{y}{x^2 + y^2} - \frac{1}{y} \right)},$$

so

$$\frac{dy}{dx} = -\frac{\left(\frac{x}{x^2+y^2} - \frac{1}{x}\right)}{\left(\frac{y}{x^2+y^2} - \frac{1}{y}\right)} = -\frac{\left(\frac{x^2-x^2+y^2}{x(x^2+y^2)}\right)}{\left(\frac{y^2-x^2-y^2}{y(x^2+y^2)}\right)} = -\left(\frac{y^2}{x(x^2+y^2)}\right)\left(\frac{y(x^2+y^2)}{-x^2}\right) = -\frac{y^3}{x^3}$$

which is a separable differential equation. We solve this by separating the dy and the dx and integrating

$$\frac{dy}{y^3} = -\frac{dx}{x^3}$$

$$\int \frac{dy}{y^3} = -\int \frac{dx}{x^3}$$

$$\frac{1}{2}y^{-2} = -\frac{1}{2}x^{-2} + C$$

$$C = \frac{1}{2}y^{-2} + \frac{1}{2}x^{-2}.$$

Multiplying through by 2 gives

$$\frac{1}{x^2} + \frac{1}{y^2} = \text{constant}$$

as the path of our vortex. This path is shown in Figure A.8.

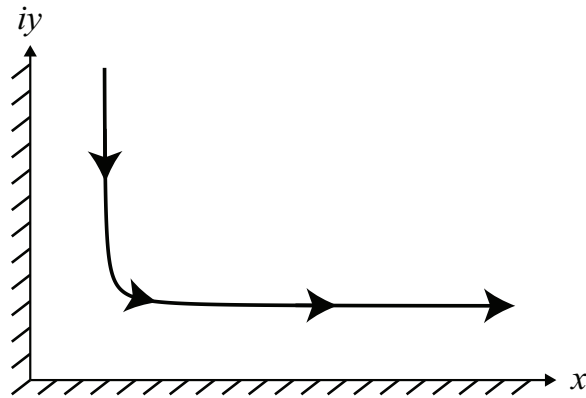


Figure A.8

Problem 4.2

Problem 4.2

We will build the entire complex potential out of the sum of the individual flows. We have three things to do: find the complex potential of the original flow, superimpose the vortices, and then take care of the boundary. We're given u and v , so obtaining the complex potential of the original flow w_0 is trivial by now:

$$\frac{dw_0}{dz} = u - iv = -\alpha x - i\alpha y = -\alpha(x + iy) = -\alpha z$$

so therefore

$$w_0(z) = \int \left(\frac{dw_0}{dz} \right) dz = \int (-\alpha z) dz = -\frac{1}{2}\alpha z^2.$$

The complex potential of the line vortex at z_1 is

$$w_1 = -\frac{i\Gamma}{2\pi} \ln(z - z_1)$$

and the complex potential of the line vortex (with opposite circulation $+\Gamma$) at z_2 is

$$w_2 = \frac{i\Gamma}{2\pi} \ln(z - z_2).$$

However, there is a boundary on the x -axis so we must use the method of images. In this case, it is easy to see that we need to mirror the two-vortex system across the real axis. Mirroring a point across the real axis is equivalent to taking the complex conjugate of the point, thus the image vortices will be located at z_1^* and z_2^* as seen in Figure A.9. The vortices at z_1 and z_1^* must have opposing circulation in order to satisfy the boundary conditions along the real axis. The same is true for z_2 and z_2^* .

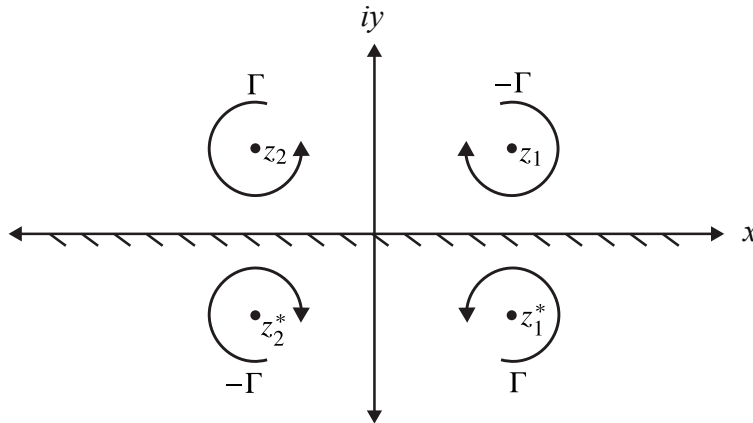


Figure A.9

The total complex potential of the system is then the complex potential of the original flow plus the complex potentials of the four vortices in Figure A.9:

$$w(z) = -\frac{1}{2}\alpha z^2 - \frac{i\Gamma}{2\pi} [-\ln(z - z_1) + \ln(z - z_2) + \ln(z - z_1^*) - \ln(z - z_2^*)] . \quad (\text{A.23})$$

The speed of a vortex can be found by excluding that vortex's contribution to the complex potential (a vortex's own potential cannot cause it to move) and taking the derivative with respect to z . Thus to find the speed of the vortex at z_1 we write

$$w(z) = -\frac{1}{2}\alpha z^2 - \frac{i\Gamma}{2\pi} [\cancel{-\ln(z - z_1)} + \ln(z - z_2) + \ln(z - z_1^*) - \ln(z - z_2^*)]$$

and therefore

$$\frac{dw}{dz} = -\alpha z - \frac{i\Gamma}{2\pi} \left(\frac{1}{z - z_1^*} + \frac{1}{z - z_2} - \frac{1}{z - z_2^*} \right) .$$

Since we know

$$\left. \frac{dw}{dz} \right|_{z=z_1} = u - iv = \frac{dx_1}{dt} - i \frac{dy_1}{dt} = \frac{dz_1^*}{dt}$$

then

$$\left. \frac{dw}{dz} \right|_{z=z_1} = -\alpha z_1 - \frac{i\Gamma}{2\pi} \left(\frac{1}{z_1 - z_1^*} + \frac{1}{z_1 - z_2} - \frac{1}{z_1 - z_2^*} \right) = \frac{dz_1^*}{dt} .$$

To find the speed of the vortex at z_2 we return to Eq. A.23 and write

$$w(z) = -\frac{1}{2}\alpha z^2 - \frac{i\Gamma}{2\pi} [-\ln(z - z_1) + \cancel{\ln(z - z_2)} + \ln(z - z_1^*) - \ln(z - z_2^*)] ,$$

removing the indicated term since the complex potential from the vortex at z_2 can't affect its own motion. Therefore

$$\frac{dw}{dz} = -\alpha z - \frac{i\Gamma}{2\pi} \left(\frac{1}{z - z_1} - \frac{1}{z - z_1^*} + \frac{1}{z - z_2^*} \right) .$$

Then, similar to before,

$$\left. \frac{dw}{dz} \right|_{z=z_2} = -\alpha z_2 - \frac{i\Gamma}{2\pi} \left(\frac{1}{z_2 - z_1} - \frac{1}{z_2 - z_1^*} + \frac{1}{z_2 - z_2^*} \right) = \frac{dz_2^*}{dt} .$$

For the vortices to be at rest, $dz_1/dt = dz_2/dt = 0$ so

$$0 = -\alpha z_1 - \frac{i\Gamma}{2\pi} \left(\frac{1}{z_1 - z_1^*} + \frac{1}{z_1 - z_2} - \frac{1}{z_1 - z_2^*} \right) . \quad (\text{A.24})$$

We are told that $z_1 = d(-1 + i)$ and $z_2 = d(1 + i)$ so therefore

$$\begin{aligned} z_1 &= -d + di & z_2 &= d + di \\ z_1^* &= -d - di & z_2^* &= d - di \end{aligned}$$

and Eq. A.24 becomes

$$0 = -\frac{i\Gamma}{2\pi} \left(\frac{1}{-d + di - d + di} - \frac{1}{-d + di - d + di} + \frac{1}{-d + di + d + di} \right) + \alpha d - \alpha di$$

so

$$\begin{aligned} 0 &= -\frac{i\Gamma}{2\pi} \left(\frac{1}{-2d} - \frac{1}{-2d(1-i)} + \frac{1}{2di} \right) + \alpha d - \alpha di \\ 0 &= -\frac{i\Gamma}{2\pi} \left(-\frac{1}{2d} - \frac{2d(1+i)}{4d^2(1+i)(1-i)} - \frac{i}{2d} \right) + \alpha d - \alpha di. \\ 0 &= -\frac{i\Gamma}{2\pi} \left[\left(\frac{2}{8d} - \frac{1}{2d} \right) + i \left(\frac{2}{8d} - \frac{1}{2d} \right) \right] + \alpha d - \alpha di \equiv K. \end{aligned}$$

Let us define this equation as K . For this expression to be equal to zero, both the real and imaginary parts must be equal to zero, but we're lucky and $\text{Re}(K) = -\text{Im}(K)$ so we can solve either one for d . Let's choose the real part so that

$$0 = \text{Re}(K)$$

$$0 = \frac{\Gamma}{2\pi} \left(\frac{2}{8d} - \frac{1}{2d} \right) + \alpha d$$

$$0 = \frac{\Gamma}{4\pi} \left(\frac{1}{2d} - \frac{1}{d} \right) + \alpha d$$

$$0 = -\frac{\Gamma}{4\pi} \left(\frac{1}{2d} \right) + \alpha d$$

$$d^2 = \frac{\Gamma}{8\pi\alpha}$$

$$d = \sqrt{\frac{\Gamma}{8\pi\alpha}}.$$

So the vortices will be at rest at points

$$z_1 = (-1 + i) \sqrt{\frac{\Gamma}{8\pi\alpha}} \quad \text{and} \quad z_2 = (1 + i) \sqrt{\frac{\Gamma}{8\pi\alpha}}.$$

Problem 5.1

Problem 5.1

a) We'll first conceptually consider the problem. The pressure gradient is only dependent on x , thus pressure is fully in the x direction, parallel to u . There is no pressure, and therefore no force, in the y or z directions, so there can't possibly be v or w components of velocity. Thus $v = w = 0$. For the flow in the x -direction, we start with the Navier-Stokes equation

$$\frac{D\mathbf{u}}{Dt} = -\frac{1}{\rho}\nabla p + \mu\nabla^2\mathbf{u} + \mathbf{g}$$

or rather, since we're not concerned with gravity,

$$\frac{\partial\mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla)\mathbf{u} = -\frac{1}{\rho}\nabla p + \mu\nabla^2\mathbf{u}. \quad (\text{A.25})$$

In the x -direction, this expands to

$$\frac{\partial\mathbf{u}}{\partial t} + u\frac{\partial u}{\partial x} + v\frac{\partial u}{\partial y} + w\frac{\partial u}{\partial z} = -\frac{1}{\rho}\frac{\partial p}{\partial x} + \mu\frac{\partial^2 u}{\partial x^2} + \mu\frac{\partial^2 u}{\partial y^2} + \mu\frac{\partial^2 u}{\partial z^2}.$$

Since the flow is steady, $\partial\mathbf{u}/\partial t = 0$. Additionally the flow does not at all depend on the x and z positions, so all partial derivatives with respect to x and z are zero, leaving only

$$v\frac{\partial u}{\partial y} = \frac{P}{\rho} + \mu\frac{\partial^2 u}{\partial y^2}.$$

There is no flow in the vertical direction, meaning $v = 0$ so

$$\frac{\partial^2 u}{\partial y^2} = -\frac{P}{\mu\rho}.$$

This can be easily solved by integrating twice:

$$\begin{aligned} u(y) &= \iint \left(-\frac{P}{\mu\rho}\right) dy \, dy \\ &= \int \left(-\frac{P}{\mu\rho}y + C_1\right) dy \\ &= -\frac{P}{2\mu\rho}y^2 + C_1y + C_2. \end{aligned}$$

In order to determine C_1 and C_2 , we must use boundary conditions. Due to the no slip theorem, the flow at $y = \pm h$ must be zero, so

$$u(h) = u(-h) = 0$$

so

$$-\frac{P}{2\mu\rho}h^2 + C_1(h) + C_2 = -\frac{P}{2\mu\rho}(-h)^2 + C_1(-h) + C_2$$

which reduces to

$$hC_1 = -hC_1$$

which can be satisfied iff $C_1 = 0$. So

$$u(y) = -\frac{P}{2\mu\rho}y^2 + C_2$$

but we still have one unknown constant, so we'll turn again to the boundary condition that $u(h) = 0$ and thus

$$u(h) = -\frac{P}{2\mu\rho}h^2 + C_2 = 0$$

so $C_2 = Ph^2/2\mu\rho$ and our full solution is

$$\begin{aligned} u(y) &= -\frac{P}{2\mu\rho}y^2 + \frac{Ph^2}{2\mu\rho} \\ &= \frac{P}{2\mu\rho}(h^2 - y^2) \end{aligned}$$

Figure A.10a shows a two-dimensional plot of this flow. The fluid is as expected, traveling the fastest at the midpoint between the boundaries and is not moving at the boundary, consistent with the no slip condition.

b) Similar to part a, the fluid flow is symmetrical in θ and z ; its velocity is fully in the z -direction, thus $u_\theta = u_r = 0$, and u_z should depend only on r . Jumping directly into the Navier-Stokes equation, Eq. A.25 expands to

$$\frac{\partial u_z}{\partial t} + u_r \frac{\partial u_z}{\partial r} + \frac{u_\theta}{r} \frac{\partial u_z}{\partial \theta} + u_z \frac{\partial u_z}{\partial z} = \frac{P}{\rho} + \frac{\mu}{r} \frac{\partial}{\partial r} \left(r \frac{\partial u_z}{\partial r} \right) + \frac{\mu}{r^2} \frac{\partial^2 u_z}{\partial \theta^2} + \frac{\partial^2 u_z}{\partial z^2}$$

for the z -component of velocity (in cylindrical coordinates). This looks very complicated, however we've discussed that there should be no θ or z -dependence, so all derivatives with respect to θ or z are zero. Furthermore, this is steady flow so $\partial u_z / \partial t = 0$ and the fluid flows only in the z -direction so $u_r = 0$. Thus we're left with only

$$-\frac{P}{\rho\mu} = \frac{1}{r} \frac{d}{dr} \left(r \frac{du_z}{dr} \right).$$

This can be solved by separating and integrating, giving

$$\int \left(-\frac{Pr}{\rho\mu} \right) dr = r \frac{du_z}{dr}$$

so therefore,

$$-\frac{Pr^2}{2\rho\mu} + C_1 = r \frac{du_z}{dr}$$

and dividing through by r gives

$$-\frac{Pr}{2\rho\mu} + \frac{C_1}{r} = \frac{du_z}{dr}.$$

Integrating once more give us the function we're looking for,

$$\int \left(-\frac{Pr}{2\rho\mu} + \frac{C_1}{r} \right) dr = u_z(r).$$

So therefore

$$u_z(r) = -\frac{Pr^2}{4\rho\mu} + C_1 \ln(r) + C_2$$

and we need to use boundary conditions to find C_1 and C_2 . We can immediately notice a problem with this; near the centre of the pipe (as $r \rightarrow 0$), the middle term explodes to $-\infty$. We can't have that behaviour in our solution, so we must set $C_1 = 0$. As for C_2 , we can look to the behaviour at $r = a$. The no slip condition dictates that the velocity at $r = a$ must be zero, thus

$$u_z(a) = -\frac{Pa^2}{4\rho\mu} + C_2 = 0$$

so

$$C_2 = \frac{Pa^2}{4\rho\mu}$$

and our final solution is

$$u_z(r) = \frac{P}{4\rho\mu} (a^2 - r^2).$$

Figure A.10b shows this result, oriented as if gravity were providing the pressure gradient inside a vertical pipe. Near the edges, the velocity of the fluid is zero; it isn't flowing. In the centre of the pipe ($r = 0$), the fluid is flowing at its fastest speed, $-Pa^2/4\rho\mu$.

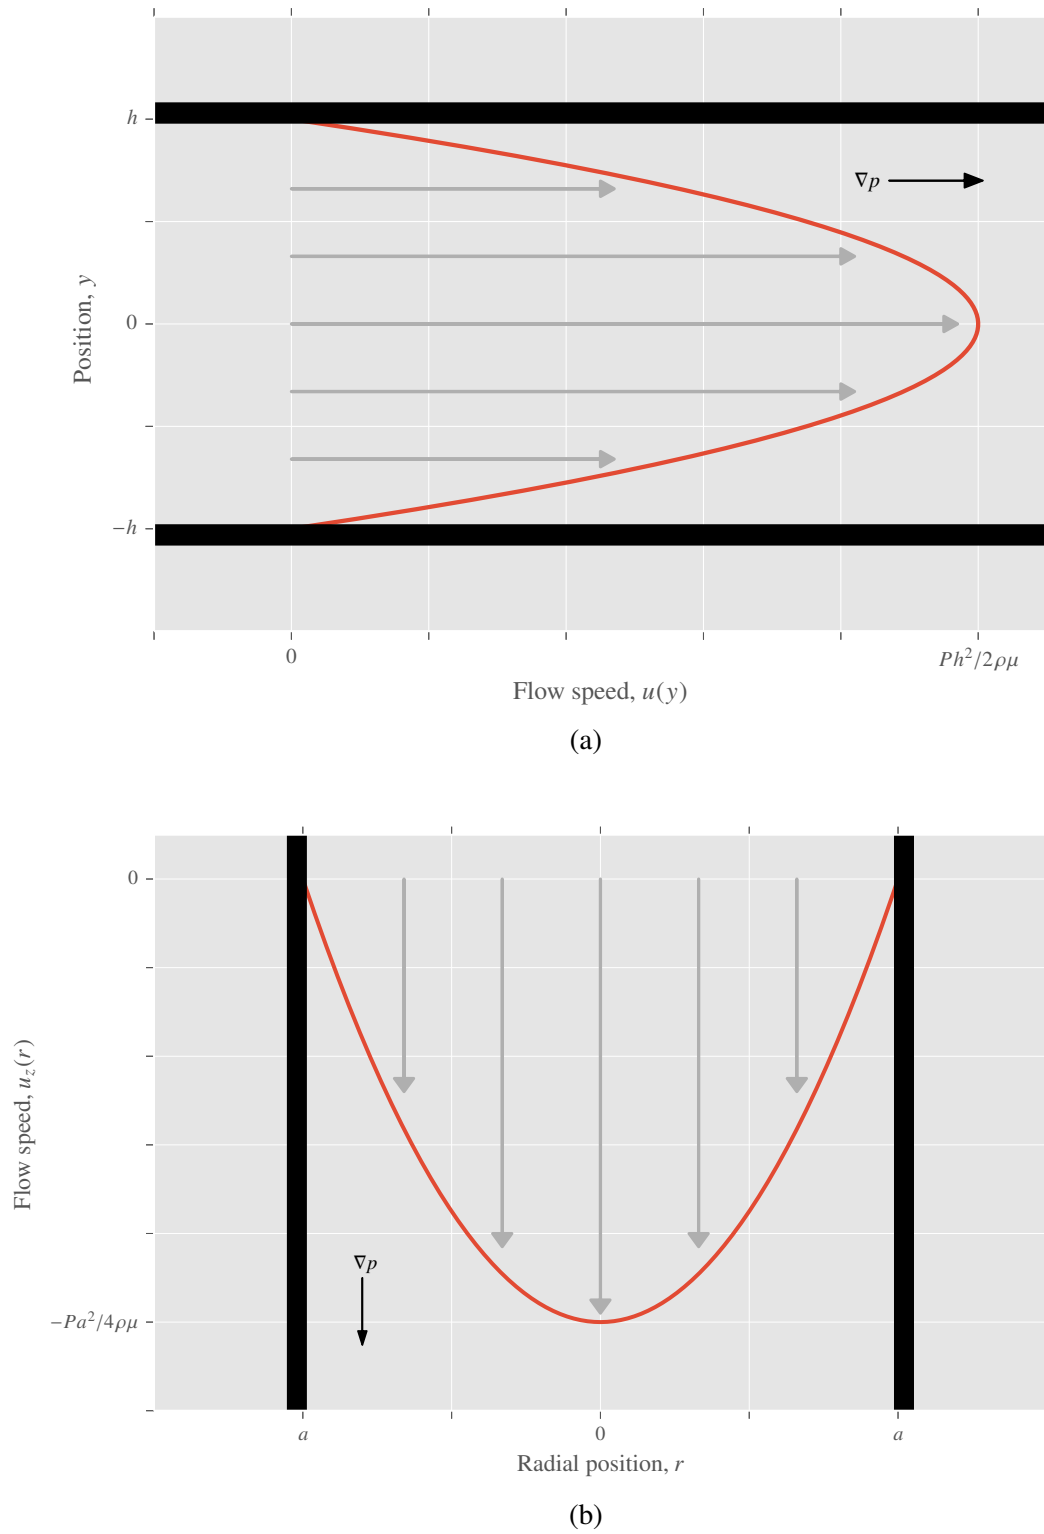


Figure A.10

Problem 5.2

Problem 5.2

a) Figure A.11 shows the requested plots. The only difference between the left and right image is the scale of the horizontal axis. Since this is a similarity solution, scaling the y value by $1/\sqrt{\nu t}$ means the t will scale by $1/\nu t$; the left plot at $t = 10$ is identical in shape to the right plot at $t = 1$; scaling the horizontal axis by a constant scales the time by the square of the same constant.

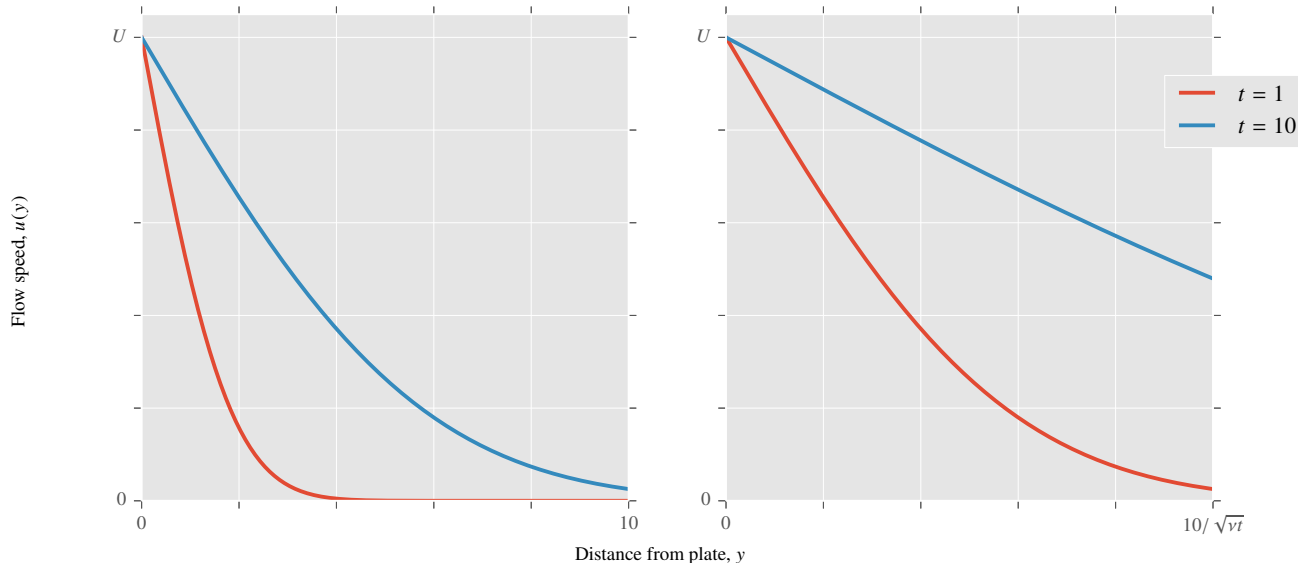


Figure A.11

b) We start with the evolution equation,

$$\frac{\partial \Gamma}{\partial t} = \nu \left(\frac{\partial^2 \Gamma}{\partial r^2} - \frac{1}{r} \frac{\partial \Gamma}{\partial r} \right)$$

and seek a solution $\Gamma = f(\eta)$ where

$$\eta = r\nu^{-\frac{1}{2}}t^{-\frac{1}{2}}.$$

Therefore,

$$\frac{\partial \Gamma}{\partial t} = f'(\eta) \frac{\partial \eta}{\partial t} = -\frac{1}{2} f'(\eta) \left(r\nu^{-\frac{1}{2}} t^{-\frac{3}{2}} \right) \quad (\text{A.26})$$

(since f is a function of η which is itself a function of t , the variable we are differentiating with respect to, we must use the chain rule, that is, multiply the derivative of the function ($f'(\eta)$) with the derivative of its argument). Additionally,

$$\frac{\partial \Gamma}{\partial r} = f'(\eta) \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} \quad (\text{A.27})$$

and

$$\begin{aligned} \frac{\partial^2 \Gamma}{\partial r^2} &= \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} \frac{\partial f'(\eta)}{\partial r} \\ &= \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} \left(f''(\eta) \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} \right) \\ &= f''(\eta) \nu^{-1} t^{-1}. \end{aligned} \quad (\text{A.28})$$

Plugging Eqns. A.26, A.27 and A.28 back into the evolution equation gives

$$\begin{aligned} -\frac{1}{2} r f'(\eta) \left(\nu^{-\frac{1}{2}} t^{-\frac{3}{2}} \right) &= \nu \left(f''(\eta) \nu^{-1} t^{-1} - \frac{1}{r} f'(\eta) \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} \right) \\ f''(\eta) &= -\frac{1}{2} r \nu^{-\frac{1}{2}} t^{-\frac{1}{2}} f'(\eta) + \frac{1}{r} \nu^{\frac{1}{2}} t^{\frac{1}{2}} f'(\eta) \end{aligned}$$

but, remembering $\eta = r / \sqrt{\nu t}$ makes this

$$f''(\eta) = f'(\eta) \left(\eta^{-1} - \frac{1}{2} \eta \right). \quad (\text{A.29})$$

We will now let $g = f'(\eta)$ and thus $g' = f''(\eta)$ and we can write Eq. A.29 as

$$\frac{g'}{g} = \frac{1}{\eta} - \frac{\eta}{2}$$

so thus

$$g(\eta) = \eta e^{-\frac{1}{4}\eta^2 + C} = C \eta e^{-\eta^2/4}.$$

We know that

$$f(\eta) = \int g d\eta = C \int \eta e^{-\eta^2/4}$$

so we let $u = -\frac{1}{4}\eta^2$ and the integral becomes

$$f(\eta) = C \int \eta e^u \left(\frac{-2}{\eta} \right) du = -2C \int e^u du = -2C_1 e^{-\eta^2/4} + C_2$$

We have now solved the differential equation and our similarity solution (absorbing the -2 into C_1) is

$$f(\eta) = C_1 e^{-\eta^2/4} + C_2$$

but we still don't know the constants C_1 and C_2 so we will use the boundary conditions. For this, we need to replace η with the original variables, thus

$$\Gamma(r, t) = f(\eta) = C_1 e^{-r^2/4\nu t} + C_2.$$

At $t = 0$,

$$\Gamma(r, 0) = \Gamma_0 = C_1 e^{-\infty} + C_2 = C_2 \quad \Rightarrow \quad C_2 = \Gamma_0$$

and at $r = 0$,

$$\Gamma(0, t) = 0 = C_1 e^0 + \Gamma_0 = C_1 + \Gamma_0 \quad \Rightarrow \quad C_1 = -\Gamma_0$$

so therefore our solution is

$$\begin{aligned} \Gamma(r, t) &= -\Gamma_0 e^{-r^2/4\nu t} + \Gamma_0 \\ &= \Gamma_0 (1 - e^{-r^2/4\nu t}) \end{aligned}$$

Since $\Gamma(r, t) = 2\pi r u_\theta(r, t)$,

$$u_\theta(r, t) = \frac{\Gamma(r, t)}{2\pi r} = \frac{\Gamma_0}{2\pi r} (1 - e^{-r^2/4\nu t})$$

The velocity of the fluid at three times is plotted in Figure A.12. A short time after the influence of the line vortex ceases, the velocity of the fluid at the location of the vortex is zero. Over time, the spike dissipates and levels off as effects of the “missing” vortex propagate away from $r = 0$.

The vorticity of the fluid is given by

$$\boldsymbol{\omega} = \nabla \times \mathbf{u} = \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ u_r & ru_\theta & u_z \end{vmatrix} = \begin{vmatrix} \hat{\mathbf{r}} & r\hat{\boldsymbol{\theta}} & \hat{\mathbf{z}} \\ \partial/\partial r & \partial/\partial \theta & \partial/\partial z \\ 0 & r\left(\frac{\Gamma_0}{2\pi r}\right)(1 - e^{-r^2/4\nu t}) & 0 \end{vmatrix} = \frac{\Gamma_0}{4\pi\nu t} e^{-r^2/4\nu t} \hat{\mathbf{z}}$$

Figure A.13 plots the vorticity ω_z for four different times against the distance from the location of the line vortex. Initially, near the origin there is a high amount of vorticity, but as time goes on, the vorticity decays.

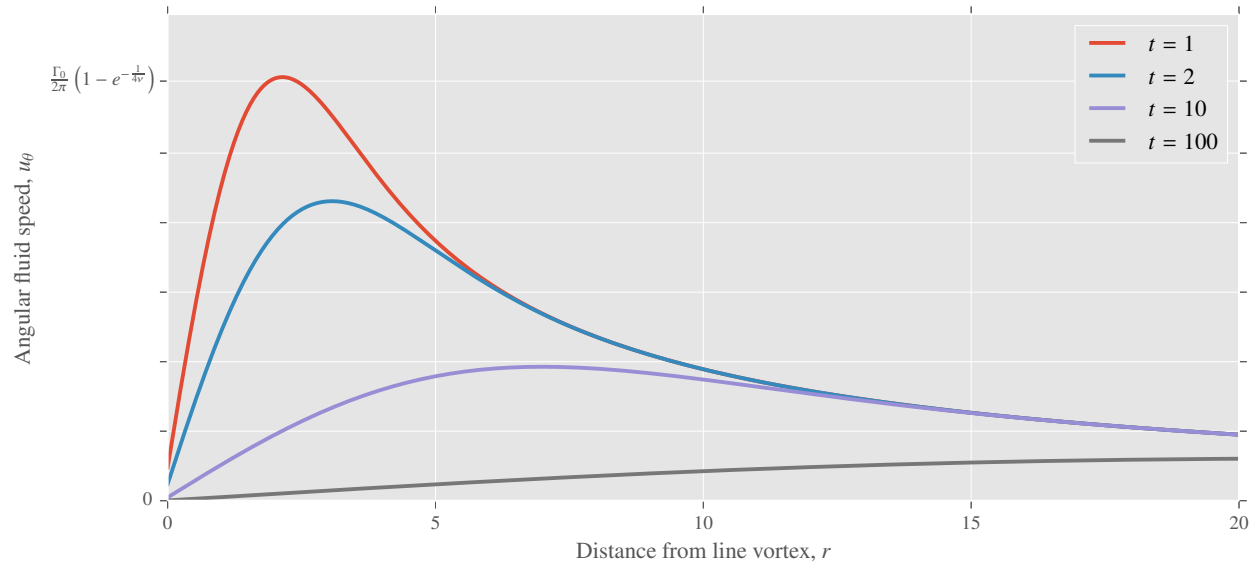


Figure A.12

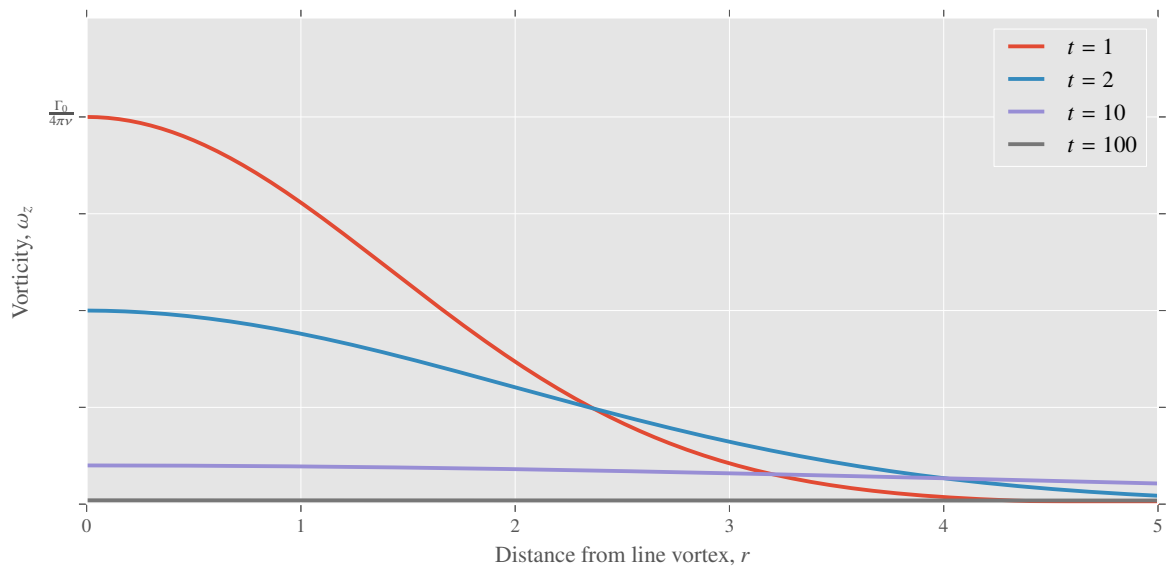


Figure A.13

Problem 5.3

Problem 5.3

We'll begin with the evolution equation in cylindrical coordinates,

$$\frac{\partial u_\theta}{\partial t} = \nu \left(\frac{\partial^2 u_\theta}{\partial r^2} + \frac{1}{r} \frac{\partial u_\theta}{\partial r} - \frac{u_\theta}{r^2} \right)$$

and specify the boundary conditions. For the sake of simplicity, I will drop the θ subscript since know the θ -component is the only non-zero velocity component. The no-slip theorem demands that the fluid at the walls of the cylinder be moving at the same speed as the cylinder itself, so after $t = 0$ the fluid will be at rest with the cylinder. Thus

$$u(a, t) = 0 \quad (\text{A.30})$$

and we know that a very long time in the future the fluid will come to rest, so

$$u(r, \infty) = 0. \quad (\text{A.31})$$

At time $t = 0$, both the cylinder and the fluid are rotating at an angular velocity Ω , so the velocity at any point r is initially

$$u(r, 0) = \Omega r. \quad (\text{A.32})$$

Now we have two boundary conditions and an initial condition; enough to go ahead and solve the evolution equation. We'll use our favourite method, separation of variables. Assume that the solution is of the form

$$u(r, t) = R(r)T(t),$$

with differentiation of this yielding

$$\frac{\partial u}{\partial t} = R \frac{dT}{dt}, \quad \frac{\partial u}{\partial r} = T \frac{dR}{dr} \quad \text{and} \quad \frac{\partial^2 u}{\partial r^2} = T \frac{d^2 R}{dr^2},$$

with the partial derivatives becoming normal derivatives.

Plugging these results back into the evolution equation gives us

$$R \frac{dT}{dt} = \nu T \frac{d^2 R}{dr^2} + \frac{\nu T}{r} \frac{dR}{dr} - \frac{RT\nu}{r^2}$$

and dividing through by νRT gives

$$\frac{1}{T\nu} \frac{dT}{dt} = \frac{1}{R} \frac{d^2 R}{dr^2} + \frac{1}{Rr} \frac{dR}{dr} - \frac{1}{r^2}. \quad (\text{A.33})$$

The equations are separated; the left side is fully in terms of t and the right side is in terms of r . This means that both equations must be equal to the same constant. Let's call this constant $-\lambda^2$. First we'll tackle the time part. We have

$$\frac{1}{T} \frac{dT}{dt} = -\lambda^2 \nu$$

Therefore we can get the solution to the time part by simple integration,

$$\begin{aligned} T(t) &= \exp \left(\int -\lambda^2 \nu dt \right) \\ &= \exp \left(-\lambda^2 \nu t + A \right) \\ &= A \exp \left(-\lambda^2 \nu t \right) \end{aligned} \tag{A.34}$$

where A is an integration constant. Now we'll move over to the radial part of Eq. A.33, that is

$$\frac{1}{R} \frac{d^2 R}{dr^2} + \frac{1}{Rr} \frac{dR}{dr} - \frac{1}{r^2} = -\lambda^2$$

we we rewrite as

$$\frac{1}{R} R'' + \frac{1}{Rr} R' - \frac{1}{r^2} + \lambda^2 = 0.$$

Multiplying through by Rr^2 gives

$$0 = r^2 R'' + r R' + \lambda^2 r^2 R - R \quad \text{or,}$$

$$0 = r^2 R'' + r R' + (\lambda^2 r^2 - 1) R$$

which is the Bessel Differential Equation. The solution to such an equation is

$$R(r) = BJ_1(\lambda r) + CY_1(\lambda r)$$

where J_1 and Y_1 are known as **Bessel functions**. By the properties of Bessel functions, Y_1 shoots off to infinity at $r = 0$ so we can immediately kill that term and our solution to the radial part of u becomes

$$R(r) = BJ_1(\lambda r). \tag{A.35}$$

We combine our solutions (Eqns. A.34 and A.35) to get our full solution,

$$u(r, t) = BJ_1(\lambda r) \exp \left(-\lambda^2 \nu t \right)$$

Now we use our boundary/initial conditions to determine the constants. From Eq. A.30, we know that $u = 0$ at $r = a$, thus

$$u(a, t) = 0 = BJ_1(\lambda a) \exp(-\lambda^2 \nu t).$$

The exponential will never go to zero, and $B = 0$ is trivial, so for this boundary condition to be fulfilled, we must make $J_1(\lambda a) = 0$. Like sine and cosine, the Bessel function has infinite zeros, but they are not well defined analytically as they are with sine and cosine. We will let λ_n be the n -th zero of J_1 and then,

$$J_1(\lambda_n) = 0 = J_1(\lambda a)$$

so therefore

$$\lambda = \lambda_n/a$$

and our equation becomes

$$u(r, t) = BJ_1(\lambda_n r/a) \exp(-\lambda_n^2 \nu t/a^2).$$

But the full solution can be any linear combination of this function with different λ_n values and coefficients, so really,

$$u(r, t) = \sum_{n=1}^{\infty} B_n J_1(\lambda_n r/a) \exp(-\lambda_n^2 \nu t/a^2). \quad (\text{A.36})$$

We now turn to our initial condition, Eq. A.32, to find the coefficients B_n . At $t = 0$, the exponential disappears and Eq. A.36 becomes

$$u(r, 0) = \sum_{n=1}^{\infty} B_n J_1(\lambda_n r/a) = \Omega r.$$

so

$$\Omega r = \sum_{n=1}^{\infty} B_n J_1(\lambda_n r/a).$$

Multiplying both sides by $J_1(\lambda_m r/a)$, (note the index m ; it is an orthogonal function) and integrating from $r = 0$ to $r = a$ (we're in cylindrical coordinates so the integrand is $r dr$, not just dr) gives

$$\int_0^a J_1(\lambda_m r/a) \Omega r r dr = \sum_{n=1}^{\infty} B_n \int_0^a J_1(\lambda_n r/a) J_1(\lambda_m r/a) r dr.$$

The only term of the summation which survives due to the orthogonality of the λ_n and λ_m Bessel functions is the one where $m = n$, giving

$$\Omega \int_0^a r^2 J_1(\lambda_m r/a) dr = B_n \int_0^a r (J_1(\lambda_m r/a))^2 dr$$

and we can solve for the coefficient B_n :

$$B_n = \frac{\Omega \int_0^a r^2 J_1(\lambda_m r/a) dr}{\int_0^a r (J_1(\lambda_m r/a))^2 dr}$$

We'll do these integrals separately in a symbolic math program; the integral in the numerator is

$$\begin{aligned} \Omega \int_0^a r^2 J_1(\lambda_m r/a) dr &= \frac{-\Omega a^3 [\lambda_m J_0(\lambda_m) - 2J_1(\lambda_m)]}{\lambda_m^2} \\ &= \frac{-\Omega a^3 J_0(\lambda_m)}{\lambda_m} \end{aligned}$$

(since by definition $J_1(\lambda_n) = 0$ since λ_m is a zero of the first order Bessel function). The denominator is

$$\begin{aligned} \int_0^a r J_1(\lambda_m r/a)^2 dr &= \frac{a^2 (\lambda_m J_0(\lambda_m)^2 + \lambda_m J_1(\lambda_m)^2 - 2J_0(\lambda_m)J_1(\lambda_m))}{2\lambda_m} \\ &= \frac{1}{2} (a J_0(\lambda_m))^2 \end{aligned}$$

so, renaming the dummy index m to n the coefficients B_n are

$$\begin{aligned} B_n &= \frac{-\Omega a^3 J_0(\lambda_n)}{\lambda_n} \frac{2}{(a J_0(\lambda_n))^2} \\ &= \frac{2\Omega a}{\lambda_n J_0(\lambda_n)}. \end{aligned}$$

Plugging this in to our general solution, Eq. A.36, gives us our full solution

$$u(r, t) = \sum_{n=1}^{\infty} \left(\frac{-2\Omega a}{\lambda_n J_0(\lambda_n)} \right) J_1(\lambda_n r/a) \exp(-\lambda_n^2 \nu t/a^2)$$

$$u_{\theta}(r, t) = -2\Omega a \sum_{n=1}^{\infty} \frac{J_1(\lambda_n r/a)}{\lambda_n J_0(\lambda_n)} \exp(-\lambda_n^2 \nu t/a^2)$$

Figure A.14 shows a plot of the fluid velocity at multiple times. At time $t = 0$, the fluid is flowing at speed Ω at $r = a$. As time progresses, the velocity of the fluid near the boundary very rapidly decreases; at $t = 1$ there is already a significant velocity decrease. After a long time, it can be seen that the fluid velocity drops to 0, consistent with the boundary conditions and our conceptual understanding of the problem.

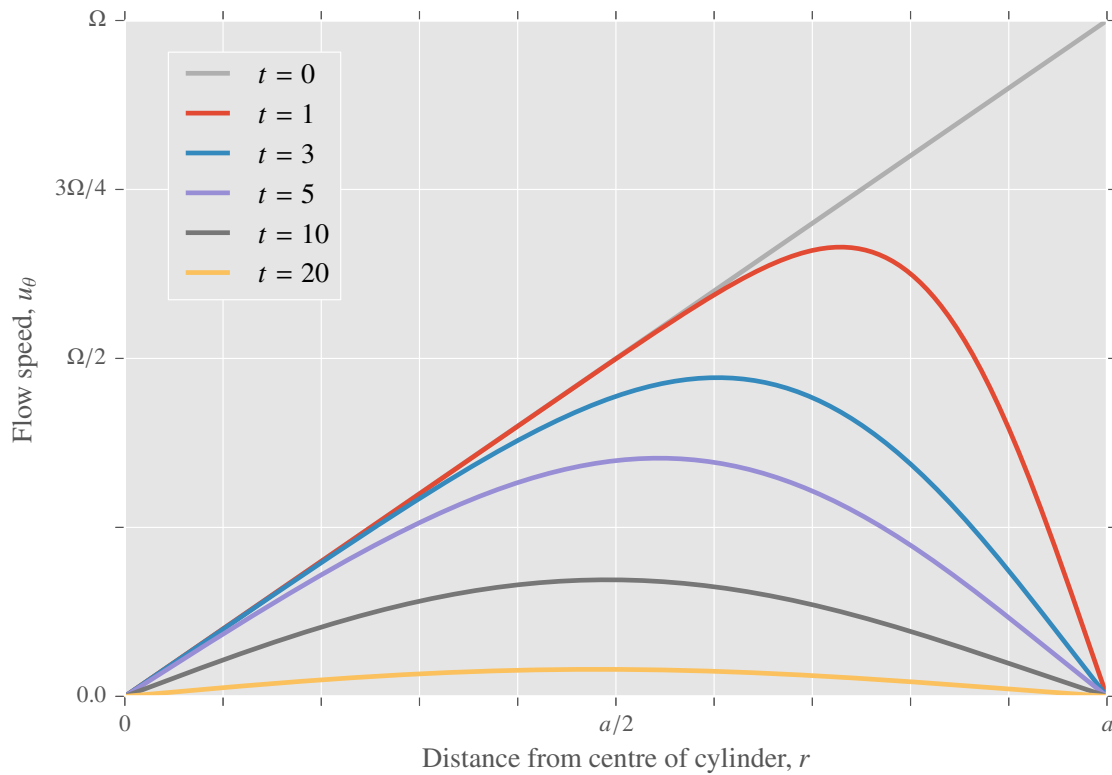


Figure A.14

Problem 5.4

Problem 5.4

We've seen this flow many times before. It is plotted in Figure A.15. We test its irrota-

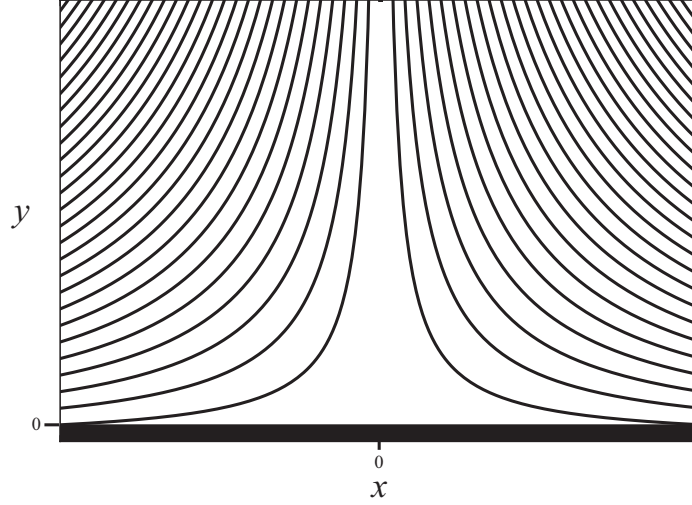


Figure A.15

tionality through the curl,

$$\nabla \times \mathbf{u} = \begin{vmatrix} \hat{\mathbf{i}} & \hat{\mathbf{j}} & \hat{\mathbf{k}} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ \alpha x & -\alpha y & 0 \end{vmatrix} = 0\hat{\mathbf{i}} + 0\hat{\mathbf{j}} + 0\hat{\mathbf{k}} = 0$$

and so it is irrotational. Its incompressibility is tested by the divergence,

$$\nabla \cdot \mathbf{u} = \frac{\partial}{\partial x} (\alpha x) + \frac{\partial}{\partial y} (-\alpha y) = \alpha - \alpha = 0$$

and so it is also incompressible. The Navier-Stokes equation is given by

$$\frac{\partial \mathbf{u}}{\partial t} + (\mathbf{u} \cdot \nabla) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \nabla^2 \mathbf{u} + \mathbf{g}$$

or rather,

$$\left(\alpha x \frac{\partial}{\partial x} - \alpha y \frac{\partial}{\partial y} \right) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \left(\frac{\partial^2}{\partial x^2} (\alpha x) + \frac{\partial^2}{\partial y^2} (-\alpha y) \right).$$

The result of the Laplacian disappears as both partial second derivatives are zero. This consequently implies that if the fluid is to satisfy the Navier-Stokes equation (with the viscosity term gone), it necessarily satisfies Euler's Equation, since it is, by definition, Navier-Stokes equation in the absence of viscosity ($\nu = 0$). For the x -component, the Navier-Stokes equation becomes

$$\alpha x \frac{\partial}{\partial x} (\alpha x) - \alpha y \frac{\partial}{\partial y} (\alpha x) = -\frac{1}{\rho} \frac{\partial p}{\partial x}$$

so

$$\frac{\partial p}{\partial x} = -\alpha^2 \rho x, \quad (\text{A.37})$$

with integration giving

$$p(x) = -\frac{1}{2} \alpha^2 \rho x^2 + g(y)$$

where $g(y)$ is an unknown function of y . Similarly, the y -component of Navier-Stokes is

$$\alpha x \frac{\partial}{\partial x} (-\alpha y) - \alpha y \frac{\partial}{\partial y} (-\alpha y) = -\frac{1}{\rho} \frac{\partial p}{\partial y}$$

so

$$\frac{\partial p}{\partial y} = -\alpha^2 \rho y,$$

with integration giving a similar result:

$$p(y) = -\frac{1}{2} \alpha^2 \rho y^2 + f(x).$$

Combining these two results gives the pressure of the fluid at any point,

$$p(x, y) = -\frac{1}{2} \alpha^2 \rho (x^2 + y^2) + p_0.$$

Thus, the Navier-Stokes equations, and consequently Euler's equations, are satisfied with this pressure. Since the viscosity term disappeared, it implies that modeling a viscous flow with this set of equations is not sufficient; no matter what viscosity we have, all dependence on it will disappear (by means altogether different than setting $\nu = 0$). Furthermore, we can see that the flow in Eq. 5.55 does not obey the no-slip theorem along the boundary. At $y = 0$, there is still a definite velocity in the x -direction. The no-slip theorem dictates that the velocity of the fluid along the boundary must be zero. For these reasons, we will modify the flow, introducing a new unknown function $f(\eta)$ such that

$$u = \alpha x f'(\eta), \quad v = -\sqrt{\nu \alpha} f(\eta)$$

where $\eta = y \sqrt{\alpha/\nu}$. Our task now is to find this function f . With the addition of this function, the Navier-Stokes equation becomes

$$\left(u \frac{\partial}{\partial x} + v \frac{\partial}{\partial y} \right) \mathbf{u} = -\frac{1}{\rho} \nabla p + \nu \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right) \mathbf{u}$$

which for the x -component, reduces to

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial x} + \nu \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right). \quad (\text{A.38})$$

Let's break this up term-by-term, using the chain rule any time the derivative of $f(\eta)$ is taken with respect to y , since η depends on y .

$$u \frac{\partial u}{\partial x} = x \alpha f'(\eta) \frac{\partial}{\partial x} (\alpha x f'(\eta)) = \alpha^2 x f'(\eta)^2 = \alpha^2 x f'^2$$

$$v \frac{\partial u}{\partial y} = -\sqrt{\nu \alpha} f(\eta) \frac{\partial}{\partial y} (\alpha x f'(\eta)) = -\sqrt{\nu \alpha} \alpha f(\eta) f''(\eta) \sqrt{\alpha/\nu} = -\alpha^2 x f f''$$

$$\frac{\partial^2 u}{\partial y^2} = \frac{\partial^2}{\partial y^2} (\alpha x f'(\eta)) = \alpha x \frac{\partial}{\partial y} (f''(\eta) \sqrt{\alpha/\nu}) = \alpha x f'''(\eta) (\alpha/\nu) = \alpha^2 \nu^{-1} x f'''$$

$$\frac{\partial^2 u}{\partial x^2} = 0$$

These results turn Eq. A.38 into

$$\alpha^2 x f'^2 - \alpha^2 x f f'' = -\frac{1}{\rho} \frac{\partial p}{\partial x} + \nu \alpha^2 \nu^{-1} x f'''$$

which simplifies to

$$f'^2 - f f'' - f''' = -\frac{1}{\alpha^2} \frac{1}{\rho} \frac{\partial p}{\partial x}. \quad (\text{A.39})$$

We'll now turn to the Navier-Stokes equation for the y -component,

$$u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial y} + \nu \left(\frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right).$$

We will, like before, compute these term-by-term:

$$\frac{\partial v}{\partial x} = 0, \quad \frac{\partial^2 v}{\partial x^2} = 0$$

$$\frac{\partial v}{\partial y} = \frac{\partial}{\partial y} (-\sqrt{\alpha \nu} f(\eta)) = -\sqrt{\alpha \nu} \sqrt{\alpha/\nu} f' = -\alpha f'$$

$$\frac{\partial^2 v}{\partial y^2} = \frac{\partial}{\partial y} (-\alpha f') = -\alpha \sqrt{\alpha/\nu} f''.$$

Inserting these computed terms back into the Navier-Stokes gives

$$\begin{aligned}\sqrt{\nu\alpha}\alpha f f' &= -\frac{1}{\rho}\frac{\partial p}{\partial y} - \nu\alpha\sqrt{\alpha/\nu}f'' \\ -\frac{1}{\rho}\frac{\partial p}{\partial y} &= \sqrt{\nu\alpha}\alpha f f' + \sqrt{\nu\alpha}\alpha f'' \\ -\frac{1}{\rho\alpha\sqrt{\alpha\nu}}\frac{\partial p}{\partial y} &= f f' + f''.\end{aligned}$$

Substituting the differential $\partial y = \partial\eta\sqrt{\nu/\alpha}$ into this allows us to integrate easily (integrating f with respect to η is easier than with respect to y) and

$$f f' + f'' = -\frac{1}{\rho\alpha\sqrt{\alpha\nu}\sqrt{\nu/\alpha}}\frac{\partial p}{\partial\eta}$$

becomes, after integrating with respect to η ,

$$\frac{1}{2}f^2 + f' + g(x) = -\frac{1}{\rho\alpha\nu}p,$$

where $g(x)$ is an arbitrary function of x . Differentiating this with respect to x gives

$$\frac{dg}{dx} = -\frac{1}{\rho\alpha\nu}\frac{\partial p}{\partial x}$$

from which we can deduce that $\partial p/\partial x$ is a function of x only. Far away from the boundary, we require that $f(\eta)$ not influence the flow, thus the pressure must follow the same form as the inviscid pressure, and $\partial p/\partial x = -\alpha^2\rho x$ (from Eq. A.37). This reduces the right hand side of Eq. A.39 to unity and the differential equation simplifies to

$$f''' + f f'' + 1 - f'^2 = 0. \quad (\text{A.40})$$

This is a third order, nonlinear ordinary differential equation which can be solved numerically. Figure A.16a shows the solution of $f(\eta)$, and Figure A.16b shows the solution to the derivative, $f'(\eta)$. Notice that at $\eta = 0$ (and correspondingly $y = 0$), both the function and its derivative go to zero; our boundary condition at $y = 0$ is satisfied. At $y = 0$, f kills v and f' kills u , resulting in zero velocity of the fluid, consistent with the no-slip theorem. At large y , $f(\eta)$ continues to increase, doing so linearly with respect to y . This causes u to behave like it did as an inviscid fluid, following $v = -\alpha y$ at large y . The $f'(\eta)$ function on the other hand asymptotically approaches unity at large y , reducing the horizontal component to $u = \alpha x$, also consistent with the inviscid flow. We have successfully taken an inviscid flow and modified it in order for it to satisfy the conditions of a viscous fluid near a boundary.

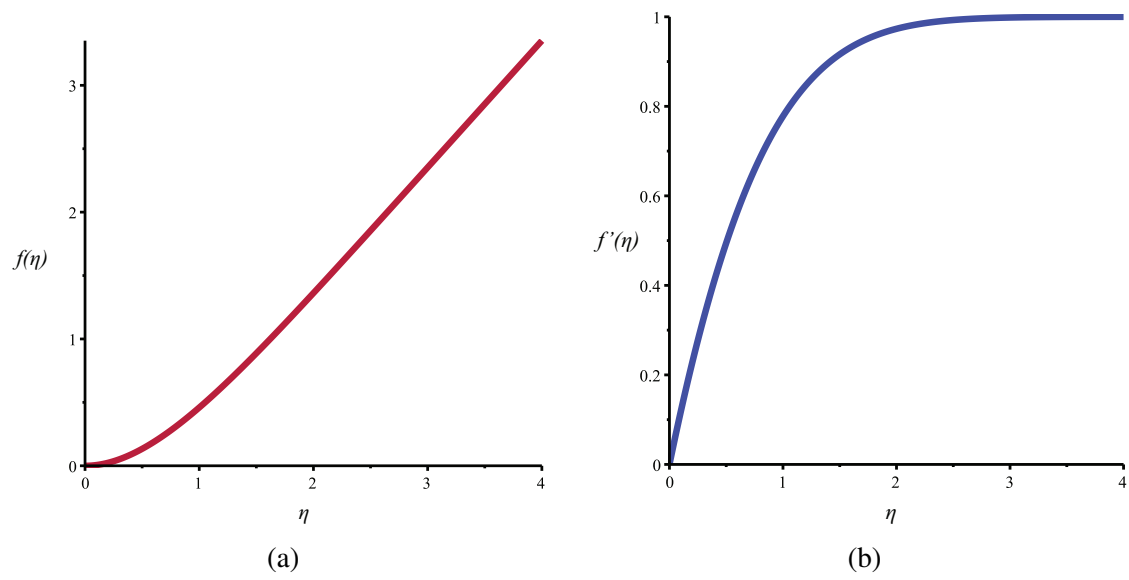


Figure A.16

Problem 8.1

Problem 8.1

We will begin with Eq. 6.9; we know the velocity potential of any fluid element is

$$\phi(x, y) = f(y) \sin(kx - \omega t), \quad (\text{A.41})$$

where $f(y)$ is some unknown function of y . We know the fluid is incompressible, thus $\nabla \cdot \mathbf{u} = 0$ which implies that

$$\nabla^2 \phi = \frac{\partial^2 \phi}{\partial x^2} + \frac{\partial^2 \phi}{\partial y^2} = 0. \quad (\text{A.42})$$

Differentiating Eq. A.41 to obtain these derivatives gives

$$-k^2 f(y) \sin(kx - \omega t) + f''(y) \sin(kx - \omega t) = 0$$

or rather the ordinary linear differential equation

$$f'' - k^2 f = 0, \quad (\text{A.43})$$

for which the solution is

$$f(y) = Ce^{ky} + De^{-ky}$$

giving

$$\phi = (Ce^{ky} + De^{-ky}) \sin(kx - \omega t).$$

From the kinematic condition, Eq. 6.6, we know that at $y = 0$,

$$\frac{\partial \phi}{\partial y} = \frac{\partial \eta}{\partial t},$$

where $\eta = A \cos(kx - \omega t)$ is just the vertical displacement of the surface of the wave. Computing both derivatives gives

$$(Cke^{ky} - Dke^{-ky}) \sin(kx - \omega t) = \omega A \sin(kx - \omega t)$$

which at $y = 0$ reduces to

$$C - D = \frac{\omega A}{k}. \quad (\text{A.44})$$

The pressure condition, Eq. 6.7, tells us

$$\frac{\partial \phi}{\partial t} + g\eta = 0$$

or, after taking the derivatives,

$$-\omega (Ce^{ky} + De^{-ky}) \cos(kx - \omega t) + gA \cos(kx - \omega t) = 0.$$

Since this is only valid at $y = 0$, we can reduce this to

$$C + D = \frac{gA}{\omega}. \quad (\text{A.45})$$

Then, dividing Eq. A.44 by Eq. A.45 gives

$$\frac{C - D}{C + D} = \frac{\omega^2}{gk}. \quad (\text{A.46})$$

Since we have a finite depth, we have one more piece of information to use in order to find C or D . At $y = -h$, the fluid cannot have velocity in the y -direction (obviously, the fluid cannot pass through the floor). Thus

$$u_y = \frac{d\phi}{dy} = Cke^{-kh} - Dke^{kh} = 0,$$

so $D = Ce^{-2kh}$. Plugging this result into Eq. A.46 gives

$$\frac{De^{2kh} - D}{De^{2kh} + D} = \frac{\omega^2}{gk}.$$

The constant D divides out:

$$\frac{e^{2kh} - 1}{e^{2kh} + 1} = \frac{\omega^2}{gk}$$

and multiplying the numerator and denominator on the left side by e^{-hk} gives

$$\frac{e^{hk} - e^{-hk}}{e^{hk} + e^{-hk}} = \frac{\omega^2}{gk}.$$

Recognizing that $\sinh(x) = e^{hk} - e^{-hk}$ and $\cosh(x) = e^{hk} + e^{-hk}$, reduces our expression to

$$\frac{\sinh hk}{\cosh hk} = \tanh hk = \frac{\omega^2}{gk}.$$

Therefore, the dispersion relation is given by

$$\omega^2 = gk \tanh kh.$$

We can then assemble the complex potential:

$$\begin{aligned}\phi &= f(y) \sin(kx - \omega t) \\ &= (Ce^{ky} + De^{-ky}) \sin(kx - \omega t) \\ &= D(e^{2kh+ky} + e^{-ky}) \sin(kx - \omega t).\end{aligned}\tag{A.47}$$

If we were to differentiate the complex potential with respect to x and y , we'd obtain the flow speed. We would see that $u, v \sim A\omega/\exp(h) \sim A/h\lambda$, so for u and v to be negligibly small, A must be much less than h and λ . For the small amplitude approximation to hold, $A \ll \lambda$ and $A \ll h$. The path of a fluid element can be obtained by differentiating Eq. A.47:

$$\frac{dx}{dt} = u = \frac{\partial \phi}{\partial x} = kD(e^{2kh+ky} + e^{-ky}) \cos(kx - \omega t)\tag{A.48}$$

$$\frac{dy}{dt} = v = \frac{\partial \phi}{\partial y} = D(ke^{2kh+ky} - ke^{-ky}) \sin(kx - \omega t)\tag{A.49}$$

and then integration with respect to t yields

$$x(t) = \frac{kD}{\omega} (e^{2kh+ky_0} + e^{-ky_0}) \sin(kx_0 - \omega t) - x_0\tag{A.50}$$

$$y(t) = -\frac{kD}{\omega} (e^{2kh+ky_0} - e^{-ky_0}) \cos(kx_0 - \omega t) - y_0\tag{A.51}$$

Here we evaluated the function at the mean position of the fluid element (x_0, y_0) . Recall from Eq. A.44 that

$$C - D = \frac{\omega A}{k}$$

and $C = De^{2kh}$ from the boundary condition at $y = -h$. Therefore,

$$De^{2kh} - D = \frac{\omega A}{k}$$

and

$$D = \frac{\omega A}{k} (e^{2kh} - 1)^{-1}$$

turning Eqs. A.50 & A.51 into

$$x(t) = \frac{\omega A}{k} (e^{2kh} - 1)^{-1} \left(\frac{k}{\omega} \right) (e^{2kh+ky_0} + e^{-ky_0}) \sin(kx_0 - \omega t) - x_0$$

$$y(t) = -\frac{\omega A}{k} (e^{2kh} - 1)^{-1} \left(\frac{k}{\omega} \right) (e^{2kh+ky_0} - e^{-ky_0}) \cos(kx_0 - \omega t) - y_0.$$

which simplify to

$$x(t) = 2Ae^{1-hk} \cosh(kh + ky_0) \sin(kx_0 - \omega t) - x_0 \quad (\text{A.52})$$

$$y(t) = 2Ae^{1-hk} \sinh(kh + ky_0) \cos(kx_0 - \omega t) - y_0. \quad (\text{A.53})$$

From these parametric equations, we can see that the path of the fluid particles will be ellipses, with decreasing size and decreasing height as we descend into the fluid. At $y_0 = -h$, there will be no y component as $\sinh(0) = 0$. This is consistent with the boundary condition, that there must be no motion in the vertical direction at the bottom of the fluid. This is confirmed in Figure A.17, where the paths of six arbitrary fluid elements are shown.

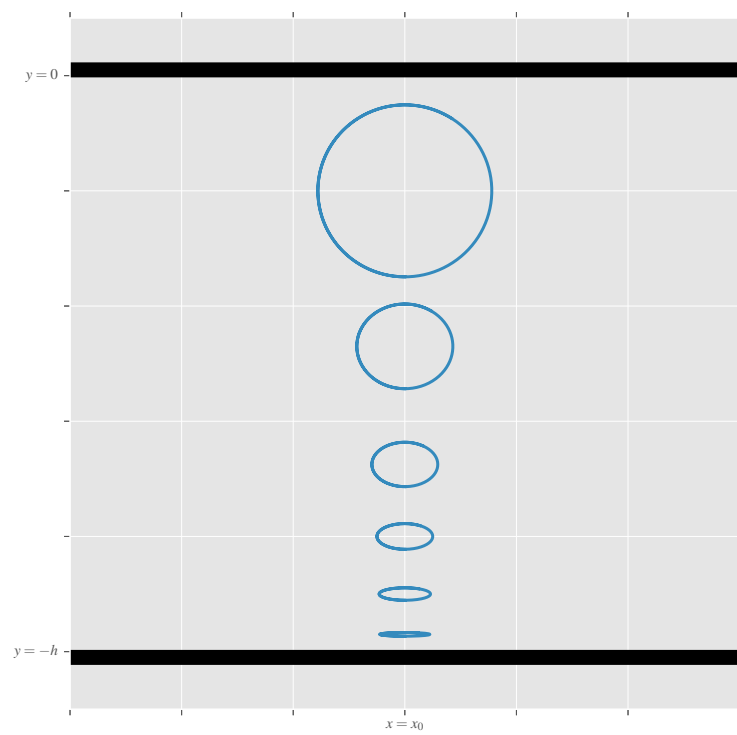


Figure A.17

Problem 8.2

Problem 8.2

Eq. A.44 still holds as the additional consideration of surface tension does not affect the of the kinematic condition. The pressure condition with surface tension is given by

$$\frac{\partial \phi}{\partial t} + g\eta - \frac{T}{\rho} \frac{\partial^2 \eta}{\partial x^2} = 0 \quad (\text{on } y = 0)$$

so computing the derivatives gives

$$-\omega (Ce^{ky} + De^{-ky}) \cos(kx - \omega t) + gA \cos(kx - \omega t) + \frac{T}{\rho} k^2 A \cos(kx - \omega t) = 0$$

on $y = 0$. The exponentials disappear at $y = 0$ and the cosines divide away, giving

$$-\omega (C + D) + gA + \frac{T}{\rho} k^2 A = 0.$$

Thus

$$\omega(C + D) = gA + \frac{T}{\rho} Ak^2 \quad (\text{A.54})$$

and dividing Eq. A.44 by Eq. A.54 gives

$$\frac{C - D}{\omega(C + D)} = \frac{\omega A}{k} \left(\frac{1}{gA + \frac{T}{\rho} k^2 A} \right). \quad (\text{A.55})$$

Recall from the previous problem that

$$\frac{C - D}{C + D} = \tanh hk,$$

thus Eq. A.55, solved for ω^2 is

$$\omega^2 = \left(gk + \frac{T}{\rho} k^3 \right) \tanh kh$$

and this is the dispersion relation for bounded waves with surface tension. Since $c = \omega/k$,

$$c^2 = \left(\frac{g}{k} + \frac{T}{\rho} k \right) \tanh kh.$$

Now we'll expand the hyperbolic tangent in a Taylor series

$$c^2 = \left(\frac{g}{k} + \frac{T}{\rho} k \right) \left(hk - \frac{1}{3} (hk)^3 + \frac{2}{15} (hk)^5 + \dots \right)$$

crossing out all but the first two terms as the value of hk is small and high powers are negligible. Expanding the first parenthesis out gives

$$c^2 = \frac{g}{k} \left(hk - \frac{1}{3} (hk)^3 \right) + \frac{T}{\rho} k \left(hk - \frac{1}{3} (hk)^3 \right)$$

and further expansion gives

$$c^2 = gh - \frac{gk^2h^3}{3} + \frac{Tk^2h}{\rho g} - \frac{Tk^4h^3}{3\rho}$$

in which we can neglect the last term because k and h are very small, and high powers of small numbers are even smaller. Thus,

$$c^2 = gh \left(1 - \frac{k^2h^2}{3} + \frac{Tk^2}{\rho g} \right).$$

Plugging in the value $h = \sqrt{3T/\rho g}$, makes this

$$c^2 = g \sqrt{\frac{3T}{\rho g}} \left(1 - \frac{k^2(3T)}{3\rho g} + \frac{Tk^2}{\rho g} \right) = g \sqrt{\frac{3T}{\rho g}}.$$

This can be evaluated numerically for water waves in a ripple tank. For water, the surface tension is about 72.8 millinewtons per metre and the density of water is 1000 kilograms per cubic metre. Therefore,

$$h = \sqrt{\frac{3(72.8 \text{ mN/m})}{(1000 \text{ kg/m}^3)(9.81 \text{ m/s}^2)}} = 0.472 \text{ cm},$$

meaning that

$$c = \sqrt{gh} = \sqrt{(9.81 \text{ m/s}^2)(0.472 \text{ m})} = 0.215 \text{ m/s}$$

meaning that all water waves (except those with very large wavenumber, and consequently very small wavelength) travel at about 22 cm/s in a ripple tank of depth $h = \sqrt{3T/\rho g}$.

Problem 8.3

Problem 8.3

We'll start with the three dimensional wave equation

$$\frac{\partial^2 p}{\partial t^2} = a^2 \nabla^2 p.$$

The spherically symmetric case has no θ or ϕ dependence; the Laplacian is only dependent on r , thus

$$\frac{\partial^2 p}{\partial t^2} = \frac{a^2}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial p}{\partial r} \right). \quad (\text{A.56})$$

We will use separation of variables; assume that the solution is of the form

$$p(r, t) = f(r)g(t)$$

and consequently

$$\frac{\partial^2 p}{\partial t^2} = \frac{\partial^2 g}{\partial t^2} f \quad \text{and} \quad \frac{\partial p}{\partial r} = \frac{\partial f}{\partial r} g.$$

Inserting these into Eq. A.56 gives

$$f \frac{\partial^2 g}{\partial t^2} = \frac{a^2}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial f}{\partial r} g \right)$$

and separating the variables yields

$$\frac{1}{g} \frac{\partial^2 g}{\partial t^2} = \frac{a^2}{r^2} \frac{1}{f} \frac{\partial}{\partial r} \left(r^2 \frac{\partial f}{\partial r} \right).$$

Expanding the right hand side with the product rule gives

$$\frac{1}{g} \frac{\partial^2 g}{\partial t^2} = \frac{a^2}{r^2} \frac{1}{f} \left(2r \frac{\partial f}{\partial r} + r^2 \frac{\partial^2 f}{\partial r^2} \right).$$

The left hand side is function of t only and the right hand side is a function of r only. This means that both sides must be equal to the same constant. With a little foresight, we'll call this constant $-\omega^2$ so that we now have two ordinary differential equations:

$$\frac{1}{g} \frac{\partial^2 g}{\partial t^2} = -\omega^2 \quad (\text{A.57})$$

and

$$\frac{1}{f} \frac{a^2}{r} \left(2 \frac{\partial f}{\partial r} + r \frac{\partial^2 f}{\partial r^2} \right) = -\omega^2. \quad (\text{A.58})$$

We'll begin with the ODE in time; it is a well known differential equation with solution

$$g(t) = A \sin(\omega t) + B \cos(\omega t) \quad (\text{A.59})$$

Without initial conditions specified, we can't go any further with the time dependence, however we don't need to. This is just the general form of an oscillation in time with frequency of oscillation ω . If we can use our second ODE to find an expression for ω , then we've obtained the natural frequencies of oscillation. Going back to Eq. A.58, we'll rewrite it as

$$a^2 r f'' + 2a^2 f' + \omega^2 r f = 0. \quad (\text{A.60})$$

Now we'll do a substitution to make this substantially easier to solve: let $f(r) = \frac{v(r)}{r}$. We'll now compute the derivatives:

$$f = \frac{v}{r}, \quad f' = \frac{v'}{r} - \frac{v}{r^2}, \quad f'' = \frac{2v}{r^3} + \frac{v''}{r} - \frac{2v'}{r^2}.$$

Plugging these into Eq. A.60 gives

$$a^2 r \left(\frac{v''}{r} - \frac{2v'}{r^2} + \frac{2v}{r^3} \right) + 2a^2 \left(\frac{v'}{r} - \frac{v}{r^2} \right) + \omega^2 v = 0$$

which conveniently simplifies to

$$a^2 v'' + \omega^2 v = 0. \quad (\text{A.61})$$

Now we'll let $v = e^{\lambda r}$ so that $v'' = \lambda^2 e^{\lambda r}$. Substituting this into Eq. A.61 gives

$$a^2 \lambda^2 e^{\lambda r} + \omega^2 e^{\lambda r} = 0$$

and dividing by $v = e^{\lambda r}$ gives

$$a^2 \lambda^2 + \omega^2 = 0.$$

Solving this for λ gives us our eigenvalues: $\lambda = \pm i\omega/a$. So $v(r)$ is a linear combination of both possible eigenvectors, given by

$$v(r) = c_1 e^{i\omega/a} + c_2 e^{-i\omega/a}.$$

We'll now invoke Euler's formula to convert this to sines and cosines, thus

$$v(r) = c_1 \left[\cos\left(\frac{\omega r}{a}\right) - i \sin\left(\frac{\omega r}{a}\right) \right] + c_2 \left[\cos\left(\frac{\omega r}{a}\right) + i \sin\left(\frac{\omega r}{a}\right) \right].$$

Expanding and rearranging gives

$$v(r) = (c_1 + c_2) \cos\left(\frac{\omega r}{a}\right) + i(c_2 - c_1) \sin\left(\frac{\omega r}{a}\right).$$

Since c_1 and c_2 are just arbitrary constants, we'll define two more constants: $c_3 = c_1 + c_2$ and $c_4 = i(c_2 - c_1)$. Therefore,

$$v(r) = c_3 \cos\left(\frac{\omega r}{a}\right) + c_4 \sin\left(\frac{\omega r}{a}\right)$$

and since $f(r) = v(r)/r$,

$$f(r) = \frac{c_3 \cos\left(\frac{\omega r}{a}\right)}{r} + \frac{c_4 \sin\left(\frac{\omega r}{a}\right)}{r}.$$

Now we'll try to eliminate one of these terms. At $r = 0$,

$$f(0) = \frac{c_3 \cos(0)}{0} + \frac{c_4 \sin(0)}{0}.$$

Obviously the cosine term blows up because of the 0 in the denominator. The sine term is all right because the zero in the numerator keeps it under control. Obviously, the wave is finite at $r = 0$ (the center of the sphere) so we must conclude that $c_3 = 0$. Thus

$$f(r) = \frac{c_4 \sin\left(\frac{\omega r}{a}\right)}{r}. \quad (\text{A.62})$$

Now we'll consider what happens at the boundary; at $r = L$ no fluid can be moving into or out of the rigid sphere, thus u_r , the radial component of fluid velocity must be zero. We'll go back to Euler's Equation; it tells us that

$$\frac{\partial u_r}{\partial t} = -\nabla p,$$

but the spatial part of p is just f , so

$$\frac{\partial u_r}{\partial t} = -\nabla f.$$

If $u_r = 0$ at the boundary, then clearly $\partial u_r / \partial t = 0$ so we have

$$0 = \frac{\partial f}{\partial r}.$$

Differentiating Eq. A.62 (using the product rule) gives us

$$0 = \frac{\partial f}{\partial r} = -\frac{c_4}{r^2} \sin\left(\frac{\omega r}{a}\right) + \frac{c_4 \omega}{r a} \cos\left(\frac{\omega r}{a}\right),$$

which when evaluated at the boundary $r = L$ becomes

$$0 = \frac{c_4}{L^2} \sin\left(\frac{\omega L}{a}\right) - \frac{c_4}{L} \frac{\omega}{a} \cos\left(\frac{\omega L}{a}\right).$$

This can be simplified:

$$\frac{1}{L} \sin\left(\frac{\omega L}{a}\right) = \frac{\omega}{a} \cos\left(\frac{\omega L}{a}\right)$$

and dividing both sides by $\cos(\omega L/a)$ gives

$$\frac{1}{L} \tan\left(\frac{\omega L}{a}\right) = \frac{\omega}{a}.$$

Thus the natural frequencies ω of the oscillating wave are given by

$$\tan\left(\frac{\omega L}{a}\right) = \frac{\omega L}{a}.$$

Problem 8.4

Problem 8.4

We'll look first in the region $x < 0$, $t < 0$. All of the fluid is present in this region at a height h_0 , thus $c(x, t) = c_0$, just like the dam problem. For characteristics starting in this quadrant, we know that

$$u \pm 2c = 0 \pm 2c = 2c_0 \quad \Rightarrow \quad c = c_0$$

is constant. Figure A.18a shows these characteristics. The characteristics extend into the

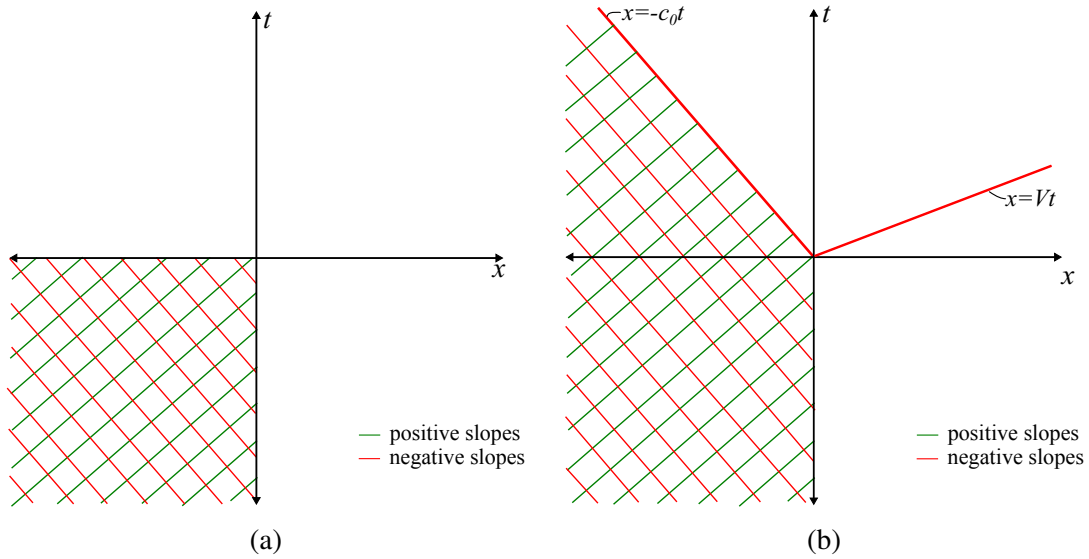


Figure A.18

second region $x < 0$, $t > 0$ but the last negative characteristic to start in the first region is the one given by $x(t) = -c_0 t$, thus it is the last one to have the property $c = c_0$, since no others past it would have originated under the same condition. The characteristics up to this point in the analysis are shown in Figure A.18b.

We will now turn to the region $x > 0$, $t > 0$. The plate itself resides in this region and is moving at speed V . Obviously no fluid can be to the right of the plate at any time, thus there exists a characteristic at $x = Vt$. This characteristic has the property $u + 2c = 2c_0$ (since the positively sloping characteristics intersecting with it must have this property as they originated in region 1), but at the plate, $u = V$, so solving for c gives

$$c = c_0 - \frac{1}{2}V. \quad (\text{A.63})$$

The characteristics coming off of this $x = Vt$ characteristic have slope

$$\frac{dx}{dt} = u - c = V - \left(c_0 - \frac{1}{2}V\right) = \frac{3}{2}V - c_0$$

so integrating gives

$$x(t) = \left(\frac{3}{2}V - c_0\right)t + D,$$

where D is the integration constant. Figure A.19 shows the addition of these character-

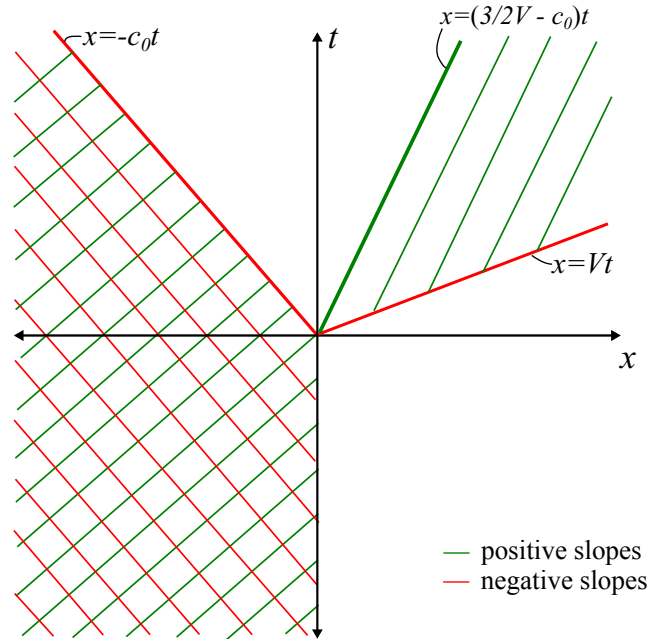


Figure A.19

istics. Clearly, the lowest possible value of the integration constant is zero, as anything less would take the curve off of the $x = Vt$ characteristic. Thus the lowest possible characteristic which follows this form is $x(t) = (3/2V - c_0)t$. Thus Eq. A.63 is valid for $(3/2V - c_0)t \leq x < Vt$.

The final step is to find c in the region bounded by $x = -c_0 t$ and $x = (3/2V - c_0)t$. At an arbitrary point within this region, the positively sloping characteristics (originating in the first region) have the property

$$u + 2c = 2c_0 \quad (\text{A.64})$$

We know that the negatively sloping characteristic curves pass through the origin; we can integrate their slope

$$\frac{dx}{dt} = u - c \quad \Rightarrow \quad \int dx = \int (u - c) dt$$

to obtain the equation of these lines:

$$x(t) = (u - c)t \quad (\text{A.65})$$

where the integration constant disappears because we know they pass through the origin. Solving Eq. A.65 for u and substituting into Eq. A.64 gives us the value of c in this region:

$$\frac{1}{3} \left(2c_0 - \frac{x}{t} \right).$$

Combining all of this information,

$$c = \begin{cases} c_0 & \text{in } x < -c_0 t \\ \frac{1}{3} (2c_0 - x/t) & \text{in } -c_0 t \leq x < \left(\frac{3}{2}V - c_0\right)t \\ c_0 - \frac{1}{2}V & \text{in } \left(\frac{3}{2}V - c_0\right)t \leq x < Vt. \end{cases}$$

$$\nabla \times \mathbf{B} = \mu_0 \left(\mathbf{J} + \epsilon_0 \frac{\partial \mathbf{E}}{\partial t} \right), \quad \nabla \times \mathbf{E} = -\frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0}, \quad \Phi = \oint \mathbf{E} \cdot d\mathbf{A}$$