

- CTP404 Results -



HU Linearity tolerance: 40

HU Linearity ROIs: Air: -1000.0, PMP: -193.0, LDPE: -97.0, Poly: -35.0, Acrylic: 132.0, Delrin: 376.0, Teflon: 1018.5

Geometric node spacing (mm): 50.03

Slice thickness (mm): 1.78

Low contrast visibility: 1.87

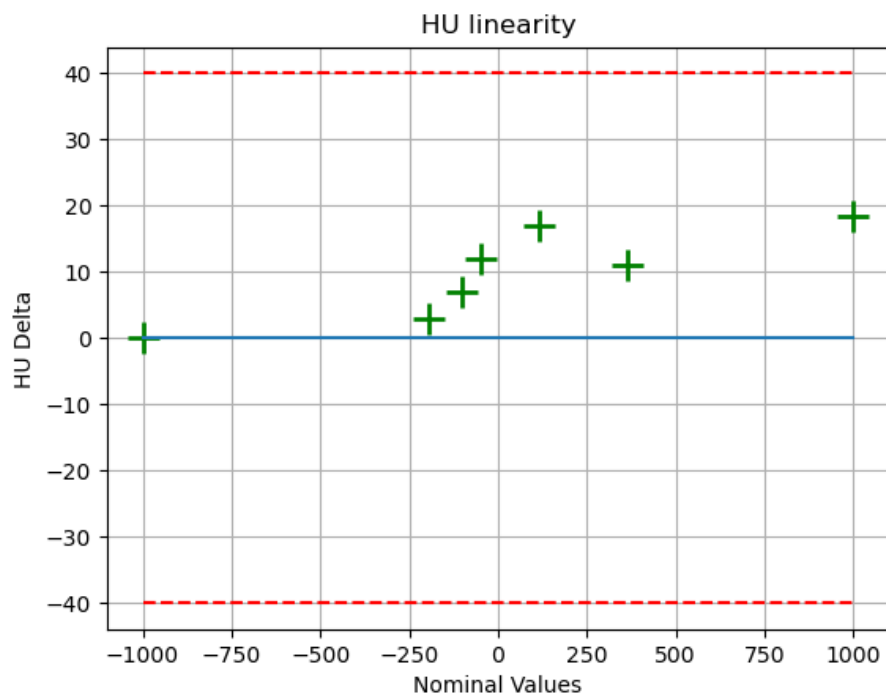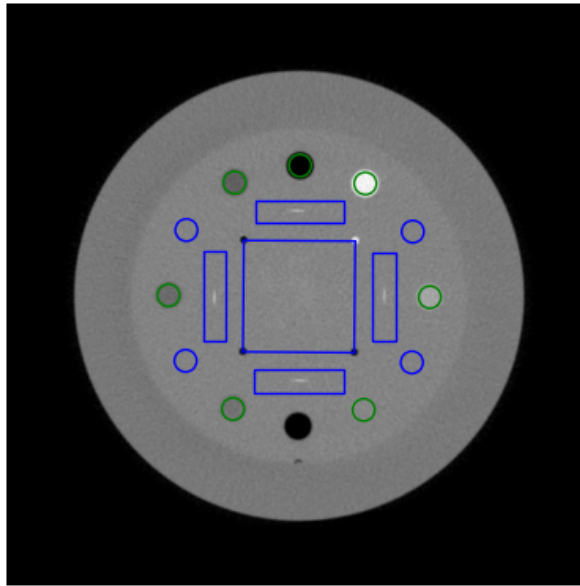



Notes:
testing

- CTP528 Results -

MTF 80% (lp/mm): 0.33

MTF 50% (lp/mm): 0.45

MTF 30% (lp/mm): 0.54

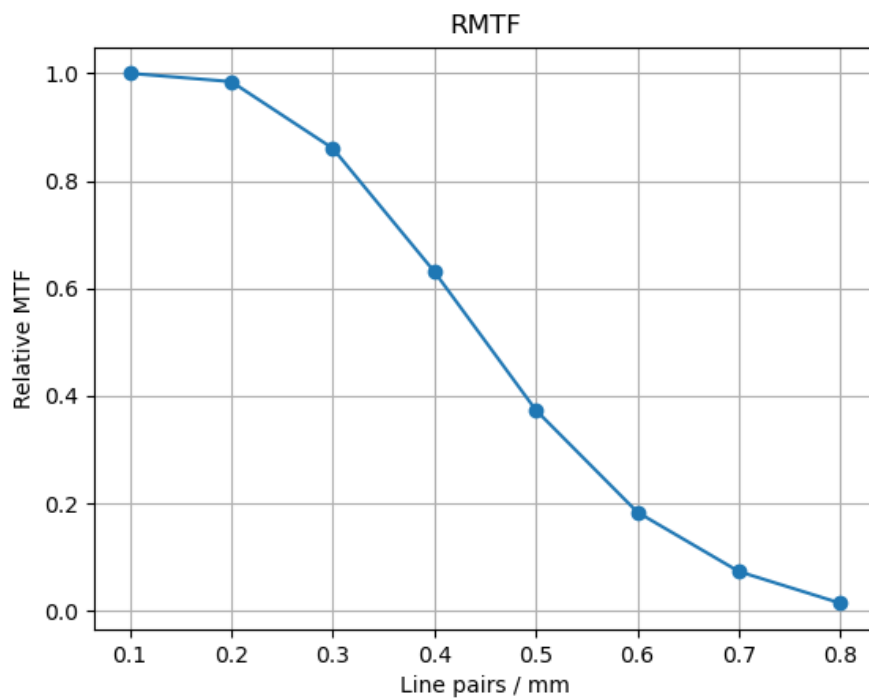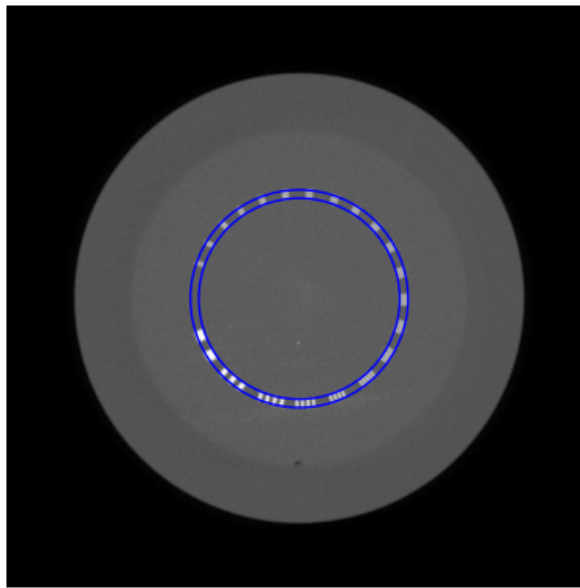



- CTP486 Results -

Uniformity tolerance: 40

Uniformity ROIs: Top: 13.0, Right: 14.0, Bottom: 14.0, Left: 12.0, Center: 26.0

Uniformity Index: -1.36

Integral non-uniformity: 0.0069

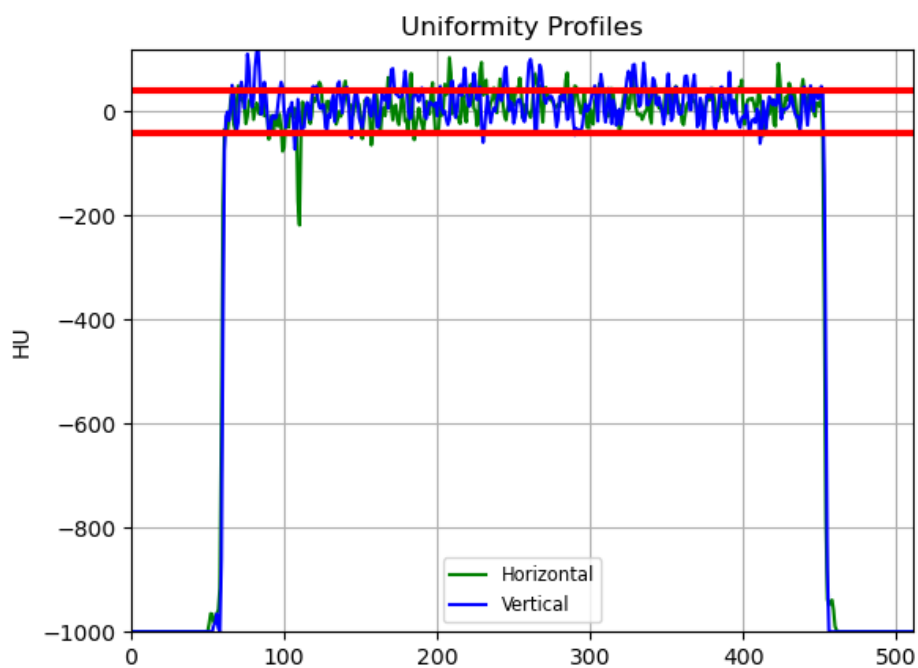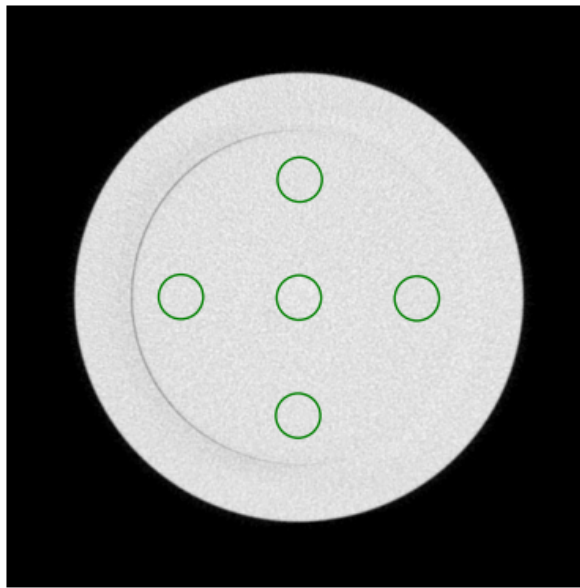

- CTP515 Results -
CNR threshold: 15
Low contrast ROIs "seen": 0

