



**AdaptUV™ System - Upper Room Solid
State Air Disinfection Fixture**
Product Data Sheet DS20 for Part Number L-4-6-00B



Upper Room is a compact, ceiling-mounted UVGI (ultraviolet germicidal irradiation) fixture engineered for safe, effective upper-room air disinfection in occupied spaces. Powered by high-power UVC LEDs, it provides mercury-free and ozone-free air treatment for a wide range of indoor environments.

Upper Room utilizes existing infrastructure, including 115 V AC wiring and controls, for simple installation. It shares the same ceiling mount and voltage converter as our “air & surface” downlighter.

How Air & Surface Works

The integrated UVGI system operates continuously, leveraging advanced 265 nm solid-state emitter technology—scientifically validated as the most effective wavelength against airborne pathogens—providing a robust layer of protection for occupants in addition to existing HEPA filters in healthcare settings. The patented light distribution system allows close to 80% of the LEDs’ UVC output to be utilized and redirected into safe directions, in contrast to less than 3% for traditional mercury-based upper room air fixtures, according to the US Department of Energy.





Features & Benefits

- Ceiling-mounted UVGI fixture designed for effective upper-room air disinfection
- Safe, continuous operation for use in occupied indoor environments
- Powered by BOLB’s advanced UVC LED technology for consistent, reliable performance
- Proven germicidal effectiveness against airborne bacteria, viruses, and fungal spores
- Independently tested by third-party laboratories with demonstrated high air disinfection efficacy

In a 240 sqft conference room equipped with 6 ACH HEPA filtration, adding two AdaptUV provides 10.4 eACH against MS-2 pathogen and 43.2 eACH when scaled to tuberculosis, supporting much higher equivalent clean air targets for the same space.

Key Specifications

- 4 high-power UVC LEDs S3535-H, 265 nm
- 600 mW total UVC Light Output Power (LOP)
- Irradiance: 10 $\mu\text{W}/\text{cm}^2$ with 3 meter diameter
- Optical shielding ensures safety: $< 0.1 \mu\text{W}/\text{cm}^2$ below 6 feet when mounted above 9 ft or higher ceiling per ETL & UL certification requirements
- Recommended installation ceiling height: ≥ 9 feet (2.74 m)
- Power consumption: 11 W max
- Includes 115 V AC $\rightarrow$ 12 V DC / 2A power adapter
- Includes remote for easy ON/OFF
- Mercury-free, ozone-free, environmentally safe disinfection

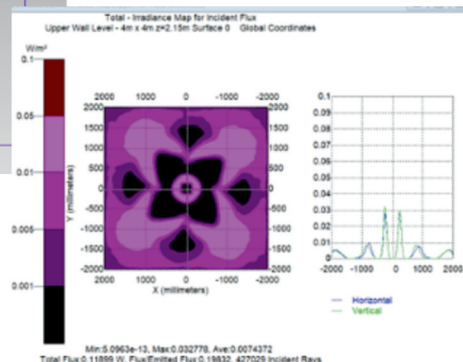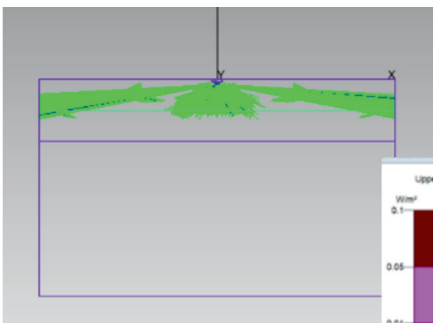

Visit Our Website:
AeroClenz.com
For Technical or Customer Support: info@AeroClenz.com



AdaptUV™ System - Upper Room Solid State Air Disinfection Fixture

Product Data Sheet DS20 for Part Number L-4-6-00B



Upper room disinfection applications include, but are not limited to:

- Patient Care Areas
- Senior Living Facilities
- Rehab Centers
- Hotels & Venues
- Cruise Ships
- Airports & Lounges
- Schools & Daycare
- Offices & Workplaces
- Government Facilities
- Restaurants & Homes



Technical Specifications

Parameter	Specification
Product Type	ADAPTUV UVGI Fixture
LEDs	4 × S3535-H UVC LEDs
Wavelength	265 nm
UVC Power (LOP)	600 mW
Irradiance	10 µW/cm² at 3 m diameter
Safety Limit	< 0.1 µW/cm² below 6 feet
Installation Height	Min. 9 feet (2.74 m)
Total Power Consumption	11 W max
Power Supply	115 V AC → 12 V DC / 2A included
Mechanical Dimensions	Ø120 mm × 90 mm
Lifetime (L70)	15,000+ hrs (at room temperature)
Ingress Protection	IP20

Use Requirements


Parameter	Unit	Typical
Maximum Ambient Temperature	°C	30
Maximum Input Power	W	11
Maximum Single Unit Disinfection Area	ft²	15
Maximum Input Voltage via DC 5525	V DC	12

Hardware Details



Diameter, mm	Weight, g	Radar Sensor
Ø120 x 90	374	2.4 GHz and PIR

Installation Density

Coverage is about 200 sqft per unit, in order to reach >5 eACH for MS2 or >30.5 eACH scaled to TB or equivalents, even with HVAC off. Any added air circulation will help increase the effective air exchange rate. With background 6 ACH provided by HVAC and HEPA, the eACH can be boosted to 10.4 for MS2 and 43.2 for TB or equivalents.

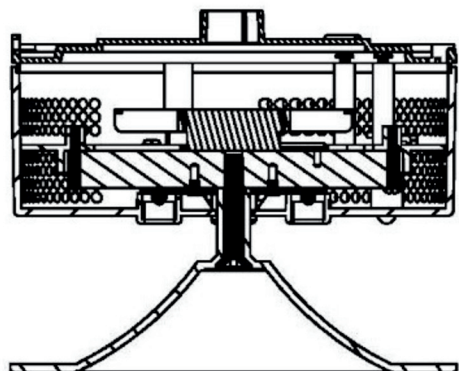

XSEC0005-XSEC0005

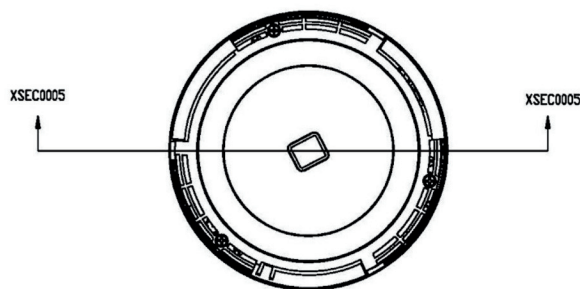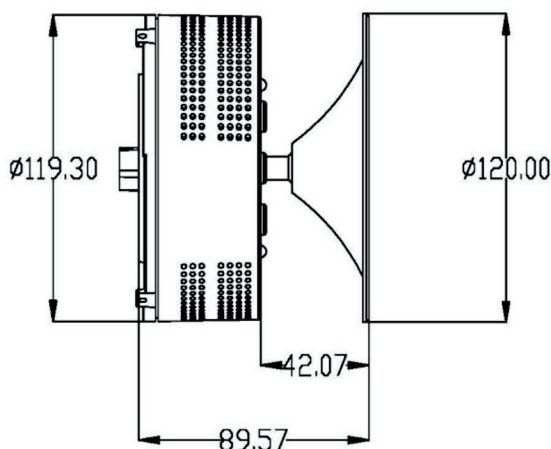

AVERTISSEMENT UV émis par ce produit. Éviter l'exposition des yeux et de la peau à un produit non protégé.

ADVERTENCIA Emisión de rayos ultravioleta por este producto. Evite la exposición de los ojos y la piel al producto sin protección.

警告 この製品から放出される紫外線。シールドされていない製品への目や皮膚の露出を避ける。

The following test reports for AdaptUV devices or UVC LEDs are available upon request:

