




Features

- Standard Industry Packaging
- 5 VDC Versions Operate Directly from DTL or TTL Circuits

D51A05P

General Purpose DIP (Dual In-Line Package) DC Reed Relays.

DC OPERATED									
NTE Type No.	Nom. Voltage VDC	Contact Arr.	Coil Res. Ohms (typ)	Max Pickup VDC	Min. Drop Out VDC	Max. Curr. Amps	Times		Diag No.
							Max. Separate	Max. Release	
D51A05P	5	SPST-NO	100	3.8	0.5	0.50	330µs	75µs	D27C

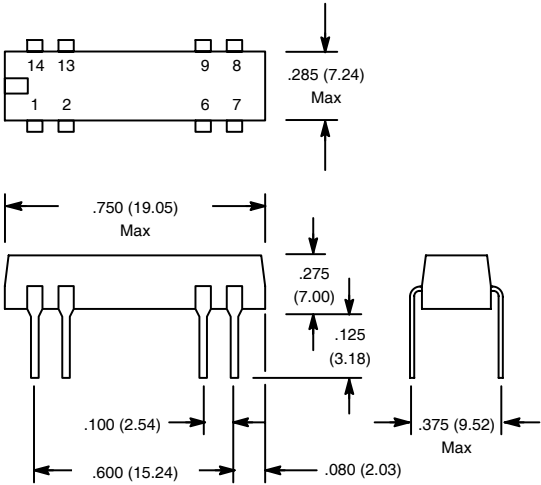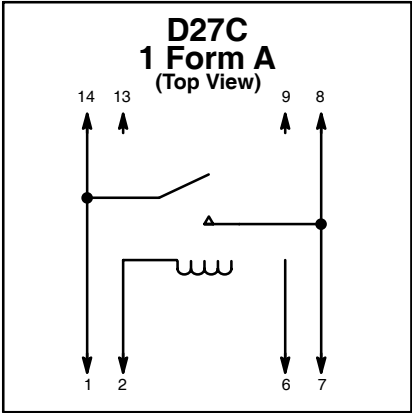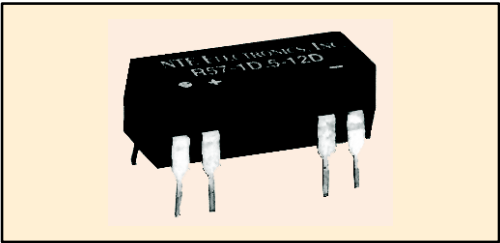

Outlines For R56 & R57 Series

|

