SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT VOLTAGE	5	Vrms
MAX INPUT POWER	16	Vp-p
MINIMUM OUTPUT SPL @ 5Vrms/10CM (AT 1.0, 1.5, 2.0, 2.5 kHz)	80	dBA
RESONANT FREQUENCY	800 ± 12.5%	Hz
FREQUENCY RANGE	300 ~ 20,000	Hz
HOUSING MATERIAL	STAINLESS STEEL	-
OPERATING TEMPERATURE	-20 ~ +70	°C
WEIGHT	2.5	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	1/17/2012	

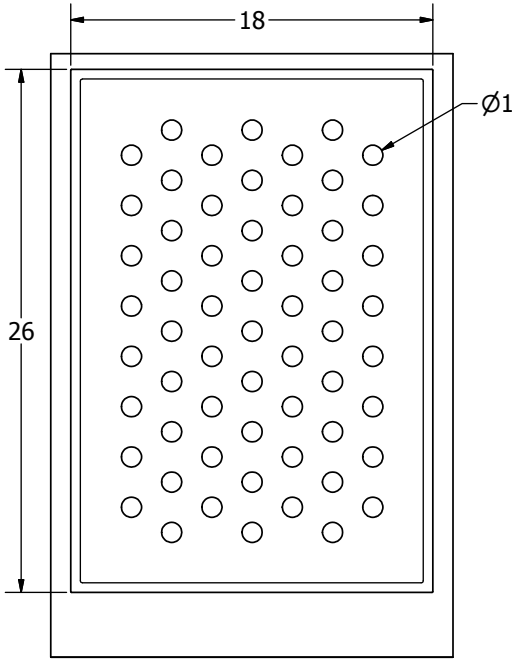

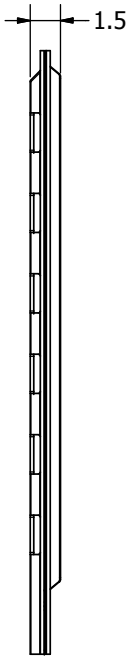

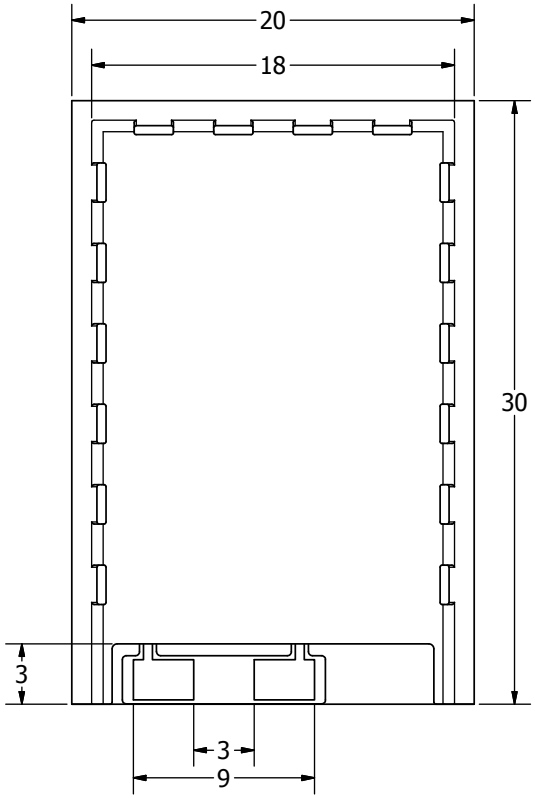

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS,
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.

SIZE A3

APS3008S-R.idw

Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
J.D.	1/17/2012	M.L.	1/18/2012	B.R.	1/18/2012	1/17/2012

pui audio inc
a projects unlimited company

APS3008S-R

Speaker

Edition: -

Sheet: 1 / 1