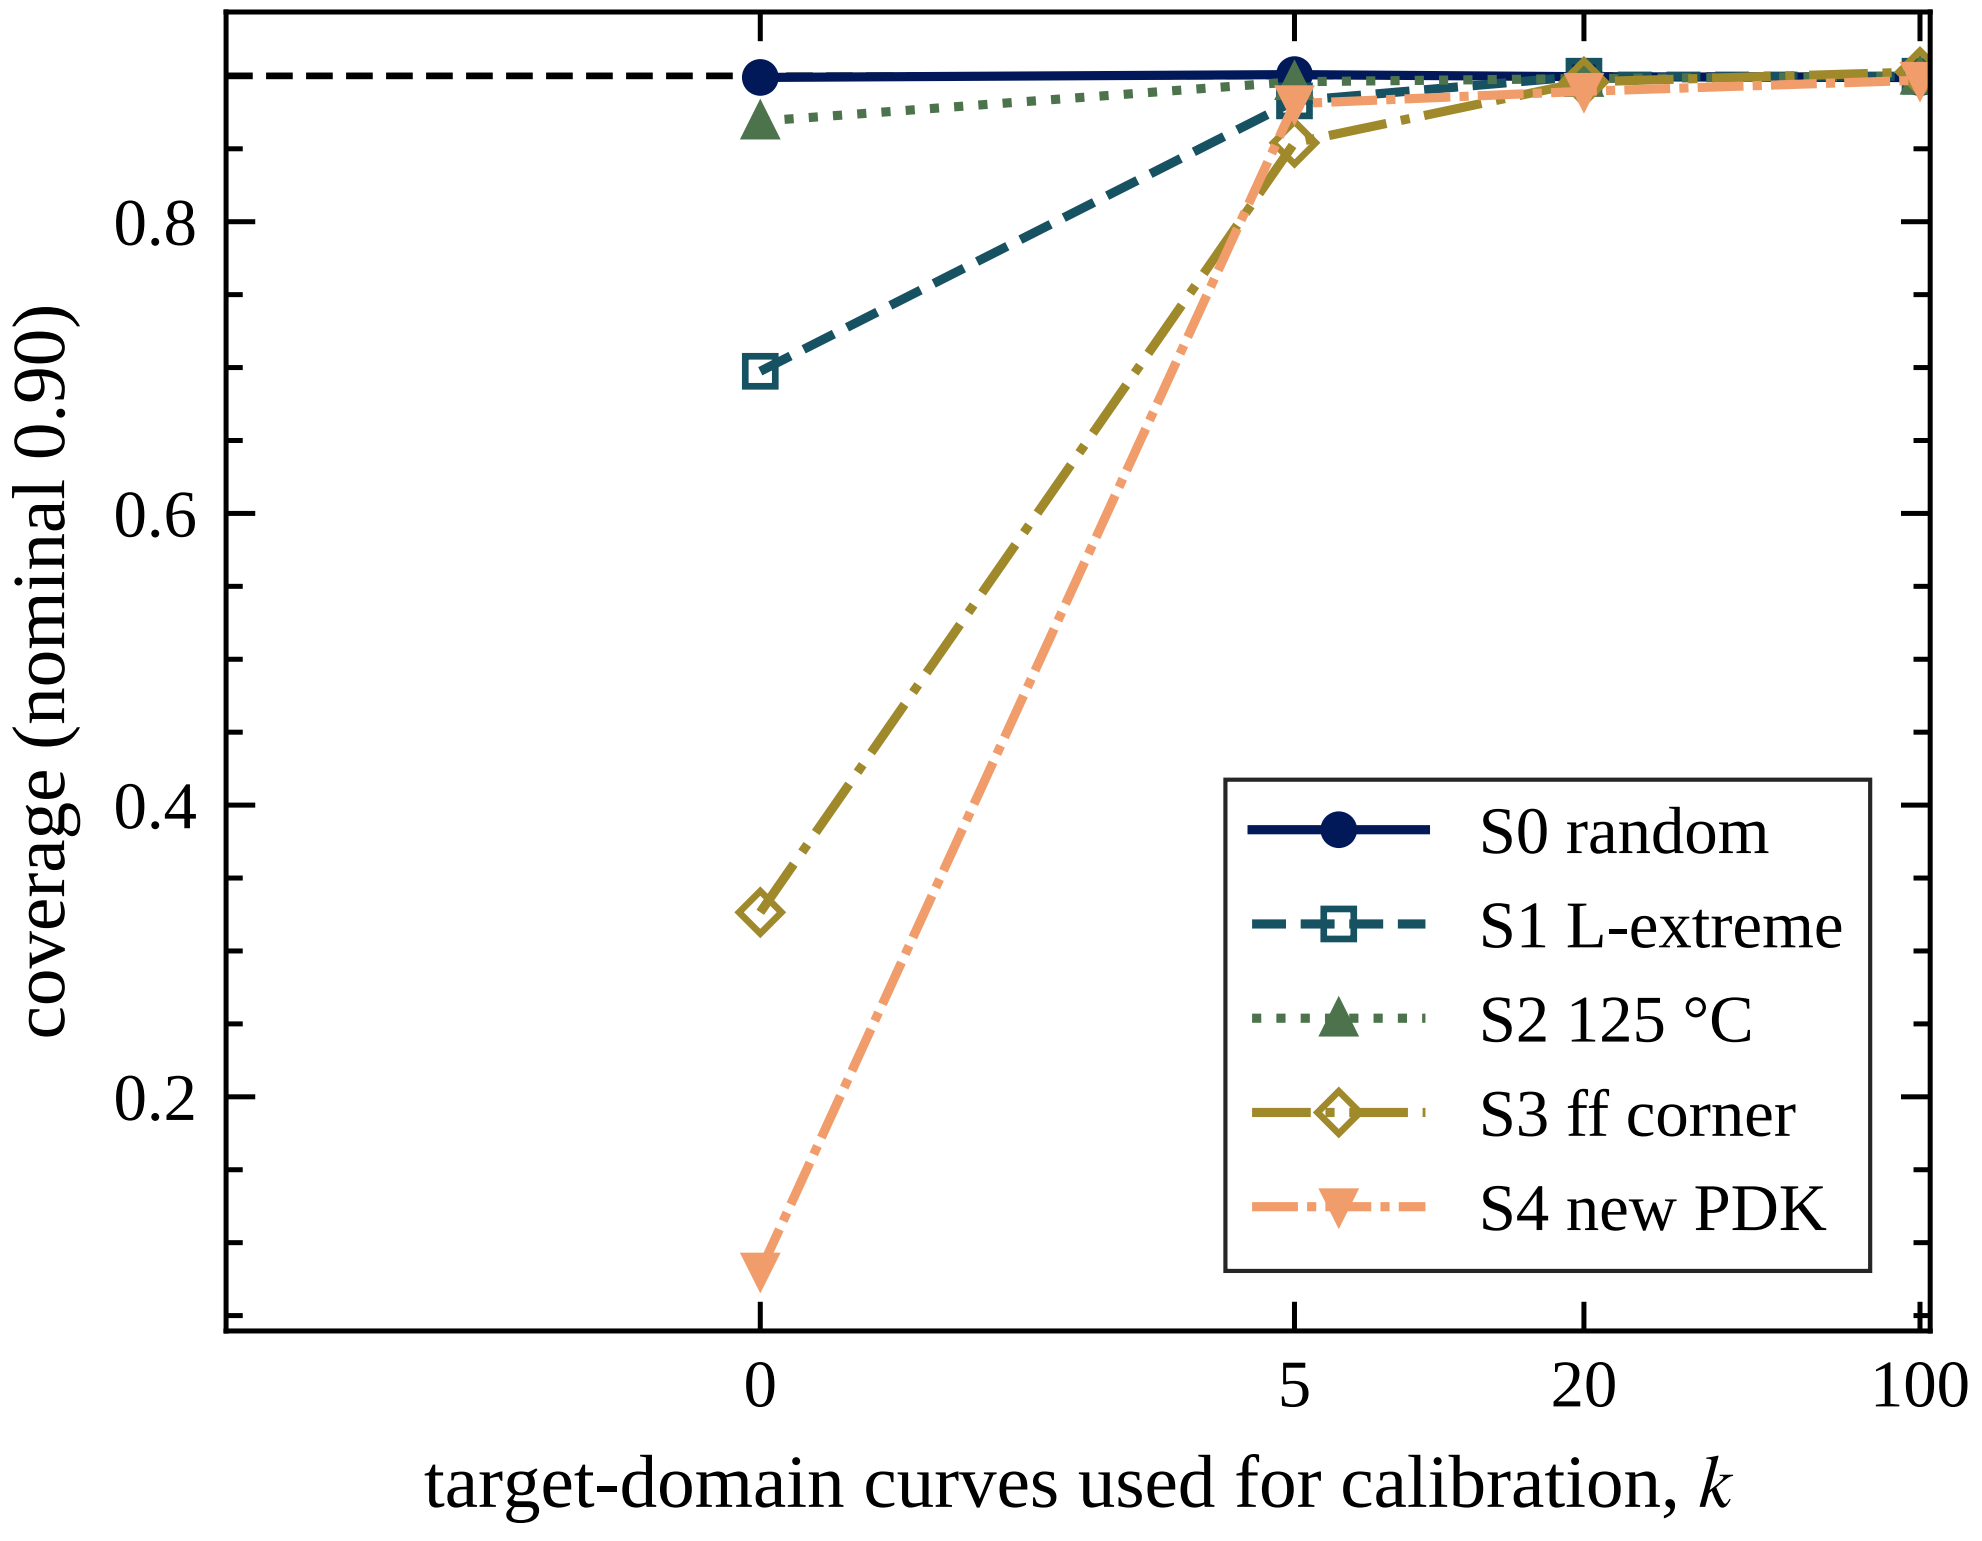
coverage (nominal 0.90)
0.2
0.4
0.6
0.8
0
5
20
100
target-domain curves used for calibration, k
S0 random
S1 L-extreme
S2 125 °C
S3 ff corner
S4 new PDK