SIEMENS

Installation Instructions
Models CAB2-XBD / CAB3-XBD / CAB2-XRD / CAB3-XRD

Medium and Large Transponder Doors

INTRODUCTION

The Models CAB2-XBD / CAB2-XRD and CAB3-XBD / CAB3-XRD Transponder Doors from Siemens Industry, Inc., are outer doors for CAB2-BB/-RB and CAB3-BB/-RB Enclosure Backboxes respectively. (Refer Figure 1.) CAB2-XBD and CAB3-XBD doors are black; CAB2-XRD and CAB3-XRD doors are red. Use the Transponder Doors with louvered vents when visual indication of the system is not required. They attach to the backbox by hinge pins. CAB2-XBD and CAB2-XRD doors secure to the backbox with one keyed latch; CAB3-XBD and CAB3-XRD doors secure to the backbox with two keyed latches.

NOTE

CAB2-XBD / CAB2-XRD and CAB3-XBD / CAB3-XRD Transponder Doors are for indoor use only in dry environments.

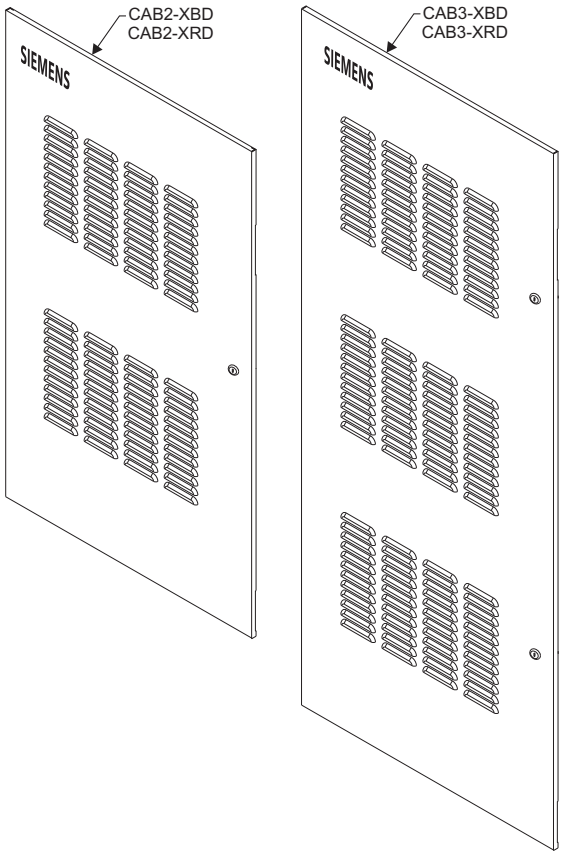


Figure 1
CAB2-XBD/-XRD And CAB3-XBD/-XRD Transponder Doors

P/N 315-033768-5

Siemens Industry, Inc.
Building Technologies Division

INSTALLATION

1. Insert the hinge pins on the door in the hinges on the backbox. (Refer to Figure 2.)
2. Install the ground strap by fastening it to the door and the backbox. (Refer to Figure 3.)
3. Close the door and secure with the key latch.

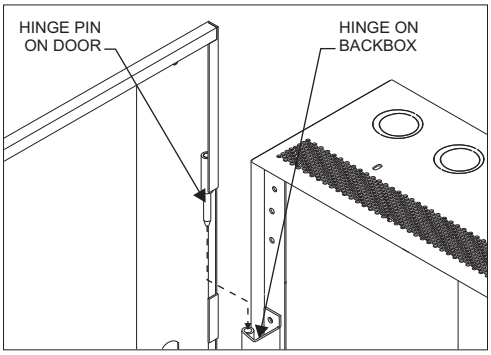


Figure 2
Installing The Door On The Hinge

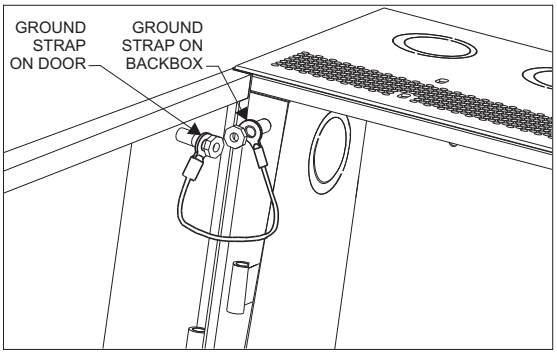


Figure 3
Installing The Ground Strap

COMPATIBILITY

The CAB2-XBD / CAB2-XRD can be used on CAB2-BB/-RB backboxes only.

The CAB3-XBD / CAB3-XRD can be used on CAB3-BB/-RB backboxes only.

SPECIFICATIONS

CAB2-XBD: 26-1/8 W x 1 D x 44-3/4 L
CAB3-XBD: 26-1/8 W x 1 D x 62-1/2 L

Siemens Industry, Inc.
Building Technologies Division
Florham Park, NJ

Siemens Building Technologies, Ltd.
Fire Safety & Security Products
2 Kenview Boulevard
Brampton, Ontario L6T 5E4 Canada