SIEMENS

INSTALLATION INSTRUCTIONS
Model FHA2043–U1/R1
Trim Kit for Model FHB2005-U1/R1 Backboxes

The Model FHA2043-U1/R1 trim kits from Siemens Industry, Inc., are used in the Desigo FV2025/2050 and Cerberus PRO FV922/924 systems to complete the semi-flush mounting of the FHB2005-U1/R1 backboxes.

NOTES:

1. The FHA2043-U1/R1 trim kit is designed for indoor use, only, in dry, protected environments.
2. The "U1" or "R1" extension to the Desigo PRO part numbers identifies the paint color and sales channel through which the part is marketed. A "U" in the extension designates that the part is painted black; an "R" designates that the part is painted red to meet local code requirements.
3. The numeral following the color designation identifies the sales channels for the part, as follows:
    a. 1: All channels
    b. 2: Desigo
    c. 3: Cerberus PRO
4. For semi-flush mounted backboxes, all electrical wiring is run in the wall.

As illustrated in Figure 1, the FHA2043-U1/R1 trim kit is mounted on the outside of the backbox and secured in place using #6-32 x ⅜" screws provided with the kit.

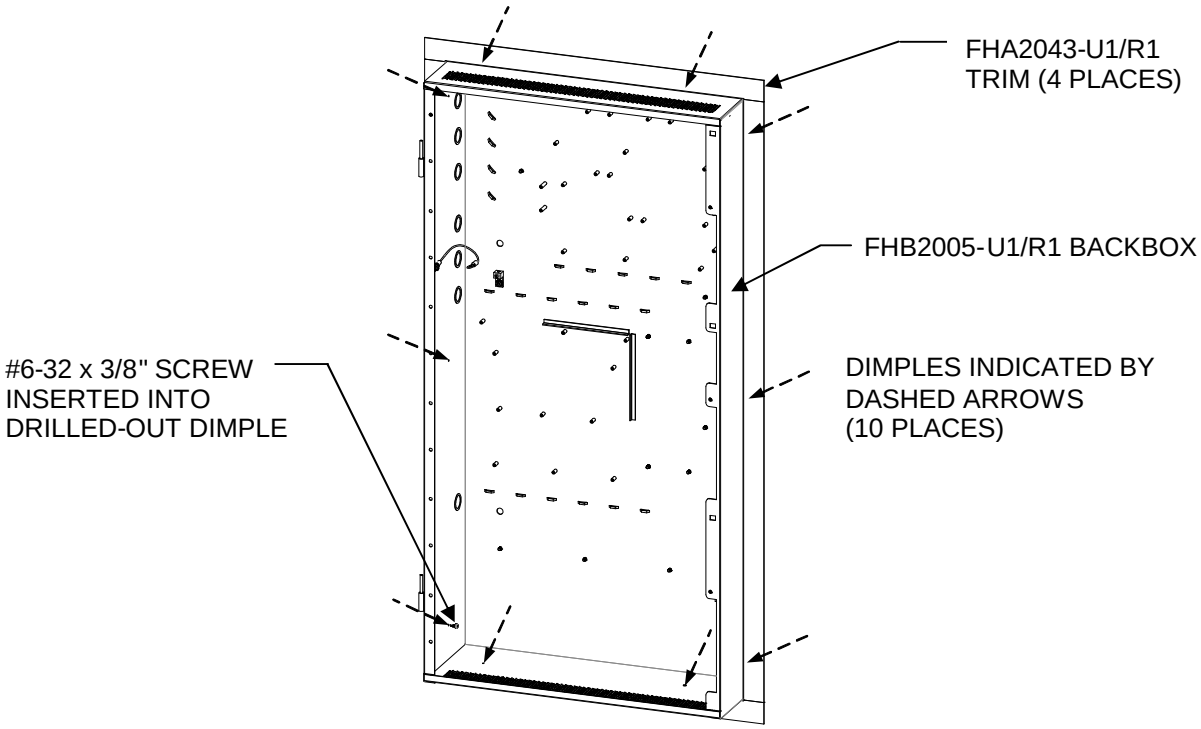


Figure 1
Typical Trim Kit Installation

Siemens Industry, Inc.
Building Technologies Division
Florham Park, NJ

A6V10370379_en--_a

INSTALLATION

Please refer to Siemens Industry, Inc, Building Technology, Division document number: A6V10359788, titled "Installation Instructions for the Model FHB2005-U1/R1 3HU Black/Red Backbox" for the backbox installation procedures. The backbox and trim kit must be installed and secured in place before any electronic equipment is installed in the backbox.

1. Please refer to Figure 1. Drilling inward from outside the backbox, drill ten $^{3}/_{16}$" diameter holes through the backbox top, bottom and each side at the dimples indicated by the arrows in Figure 1:

   Top: 2 holes

   Bottom: 2 holes

   Sides: 3 holes (each side)

2. Using the #6-32 x ⅜" screws provided, fasten each trim piece to the backbox so that the screw heads are on the inside of the backbox, as illustrated in Figure 1.
3. After the trim kit has been fastened to the backbox, install the backbox and trim kit assembly into the recessed hole in the wall, using the procedures provided in Siemens document A6V10359788. When the assembly has been mounted, the backbox trim will be surface-mounted on the wall.

COMPATIBILITY

The FHB2043-U1 and FHB2043-R1 trim kits can be used with the FHB2005-U1 and FHB2005-R1 backboxes, only.

SUPPLIED WITH PART

(Qty 10) #6-32 x ⅜" round-head screws

SPECIFICATIONS

Physical dimensions:	Two pieces, 24" L x 1½" H x ½"D (top and bottom)
	Two pieces, 42" L x 1½" H x ½"D (left and right)

Siemens Industry, Inc.
Building Technologies Division
Florham Park, NJ

Siemens Canada Limited
Building Technologies Division
2 Kenview Boulevard
Brampton, Ontario L6T 5E4 Canada

Document ID A6V10370379_en--_a
P/N A5Q00058008