


2DMPL - Two Door Controller

Expandable up to 4 doors with integrated lock power

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader

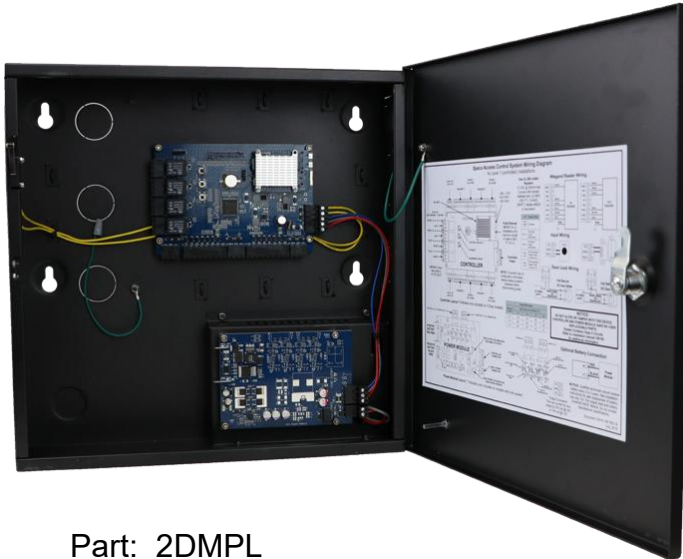

Part: 2DMPL

Optional Accessory



2 Door Expansion Board

Part: ACM-2D

UL 294 Ed. 8 / CAN/ULC 60839-11-1:2022 Ed.2



Feature

- Each module functions as a Server, Expansion panel or Elevator
- Configured for 32 Doors | 64 Panels
- Out of the box ready browser managed
- Embedded Linux operating system
- 2 Doors - 4 Readers (In/Out)
- 4 Relays (Lock/Aux)
- 6 Inputs (REX, DPS, Aux) Global
- 5-year warranty

Lock Power

- IEC Cord 5' Included
- 4 Auto Resetting Fused Outputs
- Selectable 12 or 24 VDC per output
- 750ml 12VDC or 350ml for 24 VDC
- LED status for voltage and short
- Isolated power for readers & controller
- Fire Drop Input
- Power supervision - log and action
- Battery Back (Battery not included)
- Battery backup for 12 and 24 volts.

Technical Specification

Model	2DMPL
Processor	Quad Core , 1.5 GHz
Memory	1GB DDR3 & 8GB eMMC
Operating System	Embedded Linux
Transactions	> 60 per second
System Power Requirements	115VAC @ 1.5A
Operating Temperature	50°F to 95°F (10°C to 35°C)
Enclosure Size (W x H x D)	14.25 x 14.25 x 3.75in (362 x 362 x 95mm)
Internal Power Supply	Controller, Readers & 12V and 24V DC for Door Locks
List Lock out put power	12 VDC 700 MLS, 24VDC 350 MLS
Battery Backup	Controllers, Readers, & Door Lock
Recommended Battery Type (battery is not included)	12V, 7AH, Sealed Lead Acid with 0.187 inch terminals
Standby Power Requirement	450mA @ 12V
Readers (Wiegand)	4 Total, One In & One Out Reader for Each Door
Reader Power	300mA @ 12V Max per Reader 1000mA @ 12V Max per System
Request to Exit (REX) Inputs	2 Total, One for Each Door
Door Position (status) Inputs	2 Total, One for Each Door
Auxiliary Input	2 Total, General Purpose
Tamper	Yes
Power Fault Monitoring	Yes
Door Lock Outputs Rating	2 Form C Relay, 24V @ 2.0A
Auxiliary Outputs	2 Form C Relay, 24V @ 2.0A

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader