


1DC Single Door Panel

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader



Part: 1DC

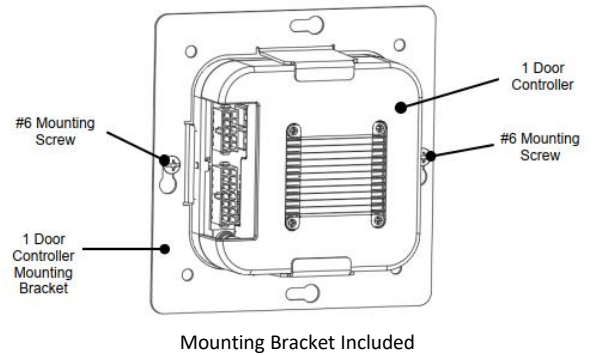

Features

- Each module functions as a Server, Expansion panel or Elevator
- Out of the box ready - browser managed
- Embedded Linux operating system
- 2 Readers (In/Out)
- 2 Relays (Lock/Aux)
- 3 Inputs (REX, DPS, Aux) Global
- UL 294 Ed. 8 / CAN/ULC 60839-11-1:2022 Ed.2
- Double Gang Mounting Bracket included
- 5-year warranty

Technical Specification

Processor	Quad Core Cortex, 1.5 GHz
Memory	1GB DDR3 & 8GB eMMC
Operating System	Embedded Linux
Transactions	> 45 per second
Power Requirements	Regulated 12VDC @ 2A, Class 2 (not supplied)
Operating Temperature	50°F to 95°F (10°C to 35°C)
Enclosure Size (W x H x D)	3.2 x 3.0 x 1.3in (81 x 78 x 32mm)
Standby Power Requirements	350mA @ 12V
Number of Doors	2 Total, One In & One Reader
Readers (Wiegand & OSDP 2.2)	2 Total, One In & One Out Reader
Reader Power	300mA @ 12V Max per Reader 600mA @ 12V Max per System
Request to Exit (REX) Input	1
Door Position (status) Input	1
Auxiliary Input	1
Tamper Digital Input	NA
Power Fault Digital Input	NA
Door Lock Output	1 Form C Relay, 24V @ 1.0A
Auxiliary Output	1 Form C Relay, 24V @ 1.0A

Optional Accessory



Part: POE-1DC



CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader