

Sicunet 2 in1 Access Control Reader

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader



Included in all units.

Sicunet's smart card reader offers a modern aesthetic and a state-of-the-art feature set. Designed to operate in the harshest of environmental applications. OSDP mode adds communication encryption and while lowering the wiring cost by allowing REX and DSP to be wired into the reader. The OSDP bus communicates card data and input status of the other devices.

KEY FEATURES

- Unit functions as a mullion and single gang mounted product
- Wiegand and OSDP 2.0
- MIFARE DESFire® EV1 , EV2 and EV3 support
- Red and Green LED with Sounder control
- Designed to meet the harshest indoor and outdoor installation environments.

Model	2 in1-RD-S
Style	Mullion / Single gang
Environment	In / Outdoor - IP55 Rated
RF Technologies	13.56MHz
Voltage	35mA average, 65mA peek
Current	5-16 V DC
Temp Range	-35° to 66°C and EN -40° to 70°C and 95% humidity
Dimensions Mullion	W 2.0" X H 4.2" X D .95"
Dimensions Singlegang	W 3.0" X H 5.1" X D 1.16"
Read Ranges	EV1: 1.0", EV2: 1.5", EV3: 1.5"
Input	REX and DSP (OSDP mode)
Output	N/A
Output	Wiegand, OSDP 2.0
Warranty	Lifetime
Certifications	FCC, UL 294 Pending

*Custom Branding Available


CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader

Mifare EV3 Credentials

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader

Part # EV-ISO-CRD-25

Features

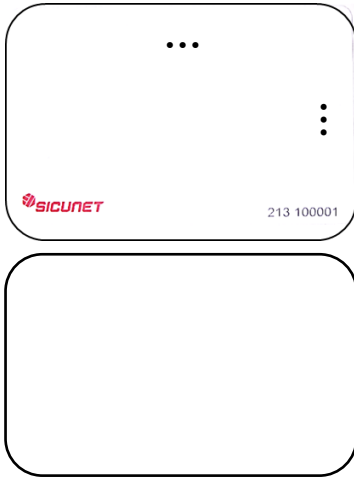

*Black outline is Die-cut line

**Back side is blank

*** Dots for Lanyard punch Alignment

- Mifare **EV3** ISO Prox card (Printable)
- Sicunet Branded (Custom Branding Option)
- Laser printed FC and Card Number
- ISO Thickness – Blank printable back
- Works with 2 in 1 Readers and Farpointe Mobile credential readers
- Pack of 25 in sequential order

Specification

Quantity per pack	25 white cards
Frequency	13.56 MHz
Type	Card
Bit type	32 byte credential

Part # EV-FOB-25

Features



- Mifare **EV3** Fob
- Sicunet Branded (Custom Branding Option)
- Laser printed FC and Card Number on back of each FOB
- Works with 2 in 1 Readers and Farpointe Mobile credential readers
- Pack of 25 in sequential order

Specification

Quantity per pack	25 blue key fobs with key ring
Frequency	13.56 MHz
Type	Fob
Bit type	32 byte credential

CCTV | Security System | Elevator Control | Intercom | Multi Site | Mobile Credentials | Facility Automation | Mobile App | On-Premise | Cloud | Video Directory Intercom | QR Code Reader