





Part #: Tenant8

All your services in one interface


- One User Interface
- Video and VOIP App
- Door control
- Elevator Control

Features

- Video calling with two-way voice
 - Remote Unlock
 - When calling visitor sees them selves
- Screen Display:
 - Customize location information
 - Directory Icon – keyboard search
 - Operator / Reception / Help Icon
 - Keypad for PIN Entry
 - Visitor sees themselves
- Email Enrollment – system sends invitation for directory enrolment.
- Credential issuance for visitors from app.
- DSP Background noise cancelling
- SSL with AES 256 encryption
- Interfaces to all Sicunet hardware*
- On premise and or cloud management
- Capacitive multi-touch IPS screen
- Adaptive light compensation
- Integrated Reader: Mifare, Keypad, QR code
- Wall or Pedestal mount
- Thumb drive video event storage.
- Indoor / Outdoor IP66

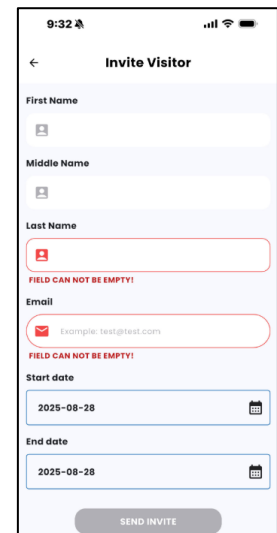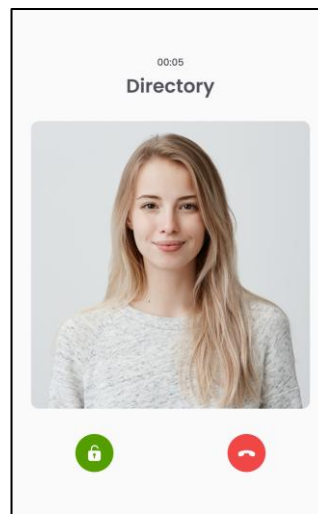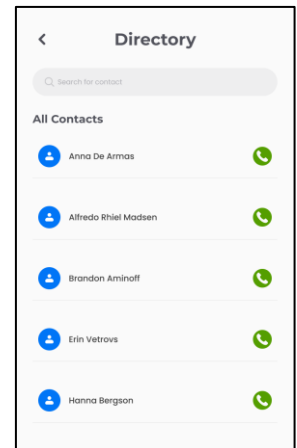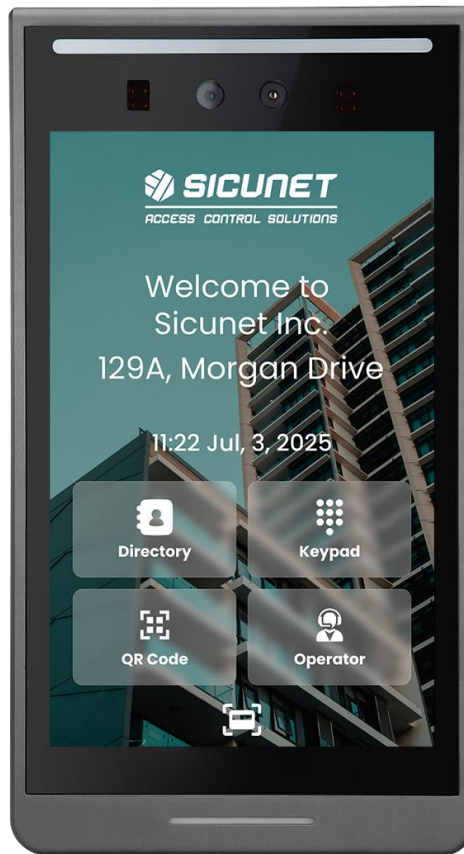

Access system sends resident enrollment invitation

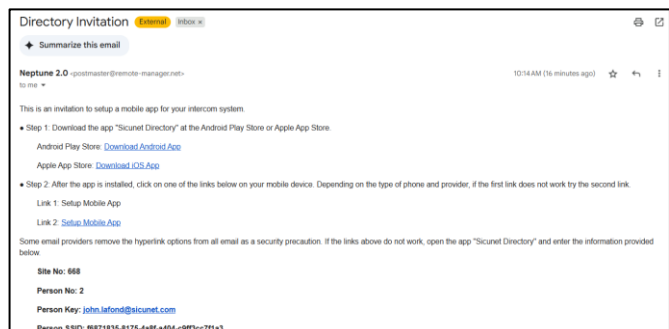

Technical Specification

Tenant units connect to Neptune 2.0 via secure ethernet communications.

The product functions as an integrated reader door controller.

User Interface allows you to manage the entire system via one interface.

All data is stored at the edge if the network is off-line credentials and unlocks will still work.

Hardware	
Processor	Dual Core ARM Cortex-A7
Operating system	Linux Operating system
Memory	1GB+ 8GB eMMC
Camera	Dual camera, 2MP, 1920*1080
Sensor	1/2.8" Progressive Scan CMOS
Lens	4.5mm
Card Reader module (optional)	13. 56MHz, support Mifare S50, S70 card, ultralight card, NTAG card, DESFire D21, D41, D81
QR code Scanning (optional)	640 (horizontal) X 480 (vertical) CMOS, horizontal viewing angle 31°, support QR code, PDF417, EAN13, EAN8, UPC-A and other one-dimensional codes, two-dimensional codes
Touch screen module	Multi-touch capacitive touch screen / Works with Gloves
Speaker	Voice playback content can be customized
Power input	12VDC / 2A
Network Interface	RJ45 10/100 base Auto sensing
Wiegand Input	1
Camera Data	
Camera	Dual cameras, G+P lens, visible light and near infrared, support living detection
Effective pixels	2MP, 1920*1080
Min illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db
Video coding	H.265 Main Profile/ H.264 BP/MP/HP /MJPEG
Resolution	Main stream
	Sub stream
Reader	
Operating temperature	-20F to 140F
Working humidity	0~90% relative humidity, no condensation
Equipment power	20W(MAX)
Salt spray	Level Rp6 or above
Antistatic	Contact ±6KV, air ±8KV
Power	DC12V/2A
Waterproof	IP66
Screen size	8-inch IPS HD screen
Equipment size	9.5" (L) * 5.25" (W) * .86" (D)