


5V logic driver required

SYS_VOUT = 5V0



Notes:
- Einsy VddIO needs to be modified for 3v3 source.
- Einsy Thermistors need to be modified for 1v8 operation.

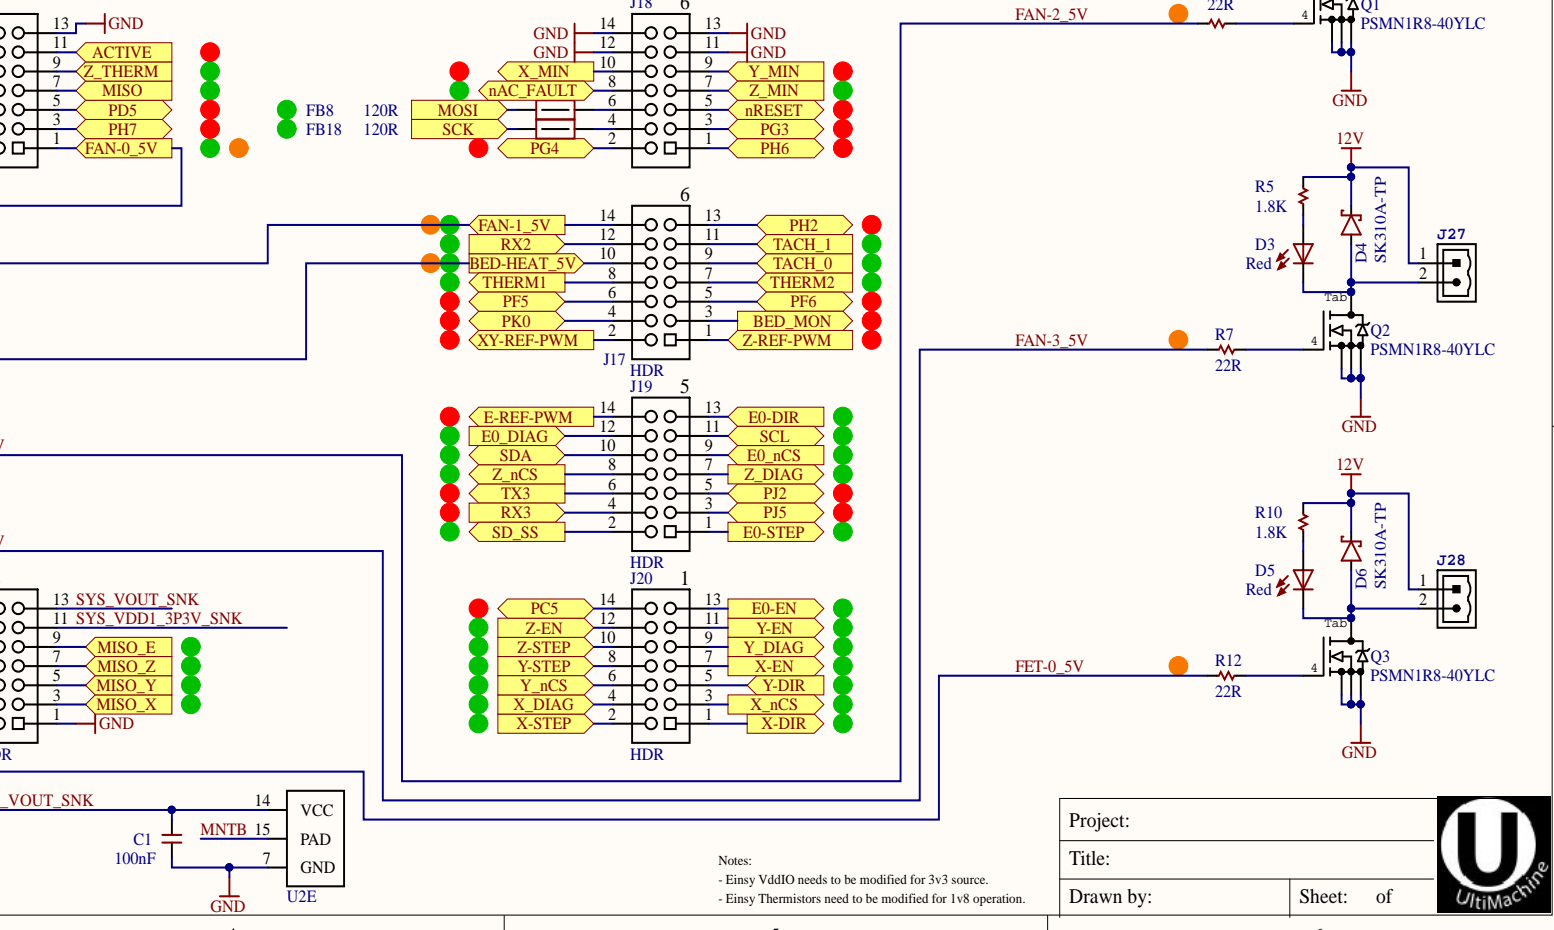

