Rotary Potentiometer

P160 Series




Features:

- 16 mm
- Conductive plastic element
- 100,000 cycle life
- Metal shaft/bushing
- Multi-ganged available
- RoHS compliant



Model Styles

•	
Side Adjust , Solder Lugs	P160KNP
Side Adjust , PC pins	P160KN
Side Adjust , PC Pins, Long pins	P160KN2
Rear Adjust, PC pins	P160KNPD

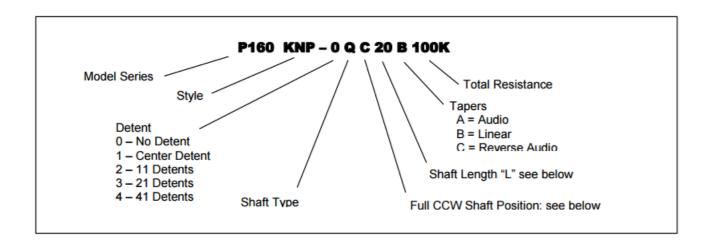

Issue A 10/2016 Page 1

Rotary Potentiometer

P160 Series



Flectrical	Specifications
LICCUICA	3pecilications

Resistance Range, Ohms	500-1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Power rating Input Voltage, maximum	200 Vac max.
Power Rated, Watts	0.2W- B taper, 0.1W-others
Dielectric Strength	500Vac, I minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Actual Electrical Travel, Nominal	260°

Mechanical Specifications

Total Mechanical Travel	300°± 10°
Static Stop Strength	90 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental Specifications

Operating Temperature Range	-20°C to +70°C
Rotational Life	100,000 cycles


Issue A 10/2016 Page 2

Rotary Potentiometer

P160 Series




Shaft Types

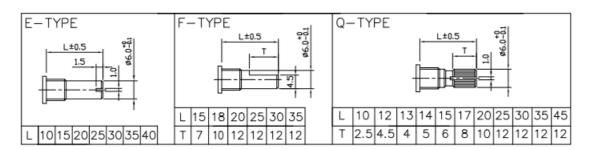

Shaft Position (F-Type Shaft)


Dashed lines on Type "C" and Type "A" shows position of adjustment slot for E-Type and Q-Type shafts

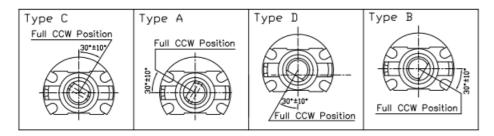

Standard Resistance Values, Ohms

100 200 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG


Circuit Diagram






Outline Drawings

Model P160KNP (Side Adjust, Solder Lugs)

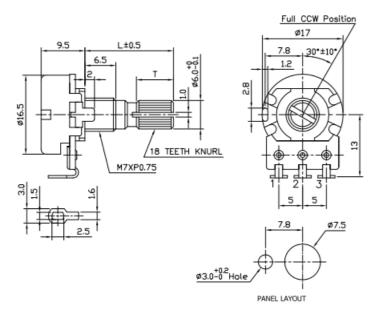


Model P160KN (Side Adjust, PC pins)

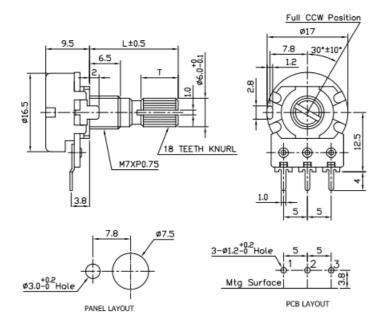




Outline Drawings

Model P160KN2 (Side Adjust, PC Pins, Long pins)

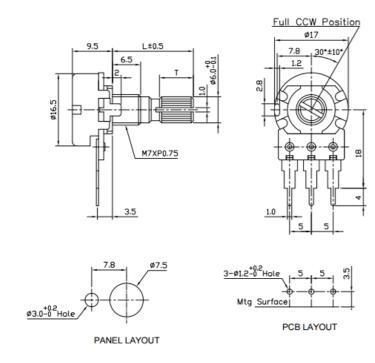

Model P160KNPD (Rear Adjust, PC Pins)

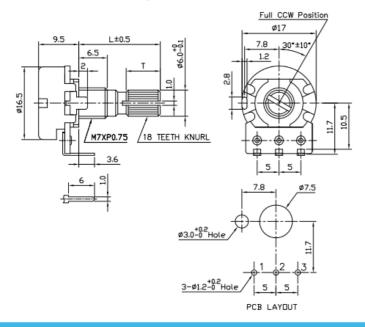

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

P160KNP-0QD20B100K P160KN2-0ECB1MEG P160KNP-0EB10B100K P160KNP-0QD20B50K P160KNP-0EC25B5K P160KN-0QC15B10K P160KN-0QC15A1M P160KN-0FC18C2K5 P160KN-0QC15C100K P160KNP-OQC15B200K P160KN-0EB10B100K P160KN-1EC20B20K P160KN2-4QC20B10K P160KN-0QC15B25K P160KN2-0QA25B1K P160KN-0QC15B500K P160KNP-0QC20B100K P160KNPD-4FC20B10K P160KN-0QC15B100K P160KNP-0Q20B50K P160KNP-02D20B100K P160KN2-0EC15B1MEG P160KN-0QC15B50K P160KNP-0QC20B10K P160KNPD-4QC15A5K P160KNP-0Q20B10K P160KNP-0QC20B50K P160KN-0QC15B20K P160KNP-0QD20B10K P160KN2-0ECB50K P160KN2-0EC15B50K P160KN2-0ECB100K P160KN-0QC15A500K P160KN2-0EB10B100K P160KNP-0Q20B100K P160KN-0EC15B100K P160KNP-0QC15B200K P160KN-0QC15B250K P160KN2-4QB20B10K P160KN2-0QA25B10K P160KN-0QC20A10K P160KNPD-4QA15A5K P160KN2-0EC15B100K P160KNP-0QC15B50K P160KN2-0EC15B10K P160KN2 0QC17B50K P160KNP-0FC25B5K P160KNPD-2QC25B2K P160KN-0QD15B10K P160KN-0QD15B1K P160KNP-0QC15B10K P160KN-0E15B25K P160KN-0EC15A500K P160KN-0EC15A5K P160KN-0EC15B1MEG P160KN-0Q15A100K P160KN-0Q15B1MEG P160KN-0QC20A1MEG P160KN-0QD15B1MEG P160KN2-0QC17B10 P160KN2-0QC17B100K P160KNP-0EA15A20K P160KNP-0EC15A100K P160KNP-0EC15A10K P160KNP-0EC15A1MEG P160KNP-0EC15A25K P160KNP-0EC15A500K P160KNP-0EC15B250K P160KNP-0EC15B25K P160KNP-0EC15B2K P160KNP-0EC15C100K P160KNP-0QC20A500K P160KNP-1FD15B10K P160KNP-4FB20B10K P160KNP-4FC15B100K P160KNPD-0EC25C20K P160KN-0QC15A100K P160KNP-0EC15B10K P160KNP-0EC15A250K P160KN-0Q15B100K P160KN-0EA15B10K P160KNP-0EC15B100K P160KN-1QC15B10K P160KNP-0QC20A100K P160KNP-0QC20B4K7 P160KNP-0QC20A250K P160KNP-0FC25C10K P160KNPD-0FB25B100K P160KNP-0FC25B10K P160KN-0EC20B1MEG P160KNP-0QC10B10K P160KNP-1EC20B10K P160KNP-0QC15B100K P160KN-0QC15A250K P160KNP-0EC15B500K P160KNP-0FC20B10K P160KNP-0QC20C500K P160KN-0QC15C250K P160KNP-0E15C500K P160KNPD-0EC25C500K