




Zephyr Networking Part 2

- Use HTTP APIs to control hardware remotely from a web page.
- Stream live sensor and ADC data to a browser in real time.
- Combine multiple Zephyr subsystems behind a single network interface.

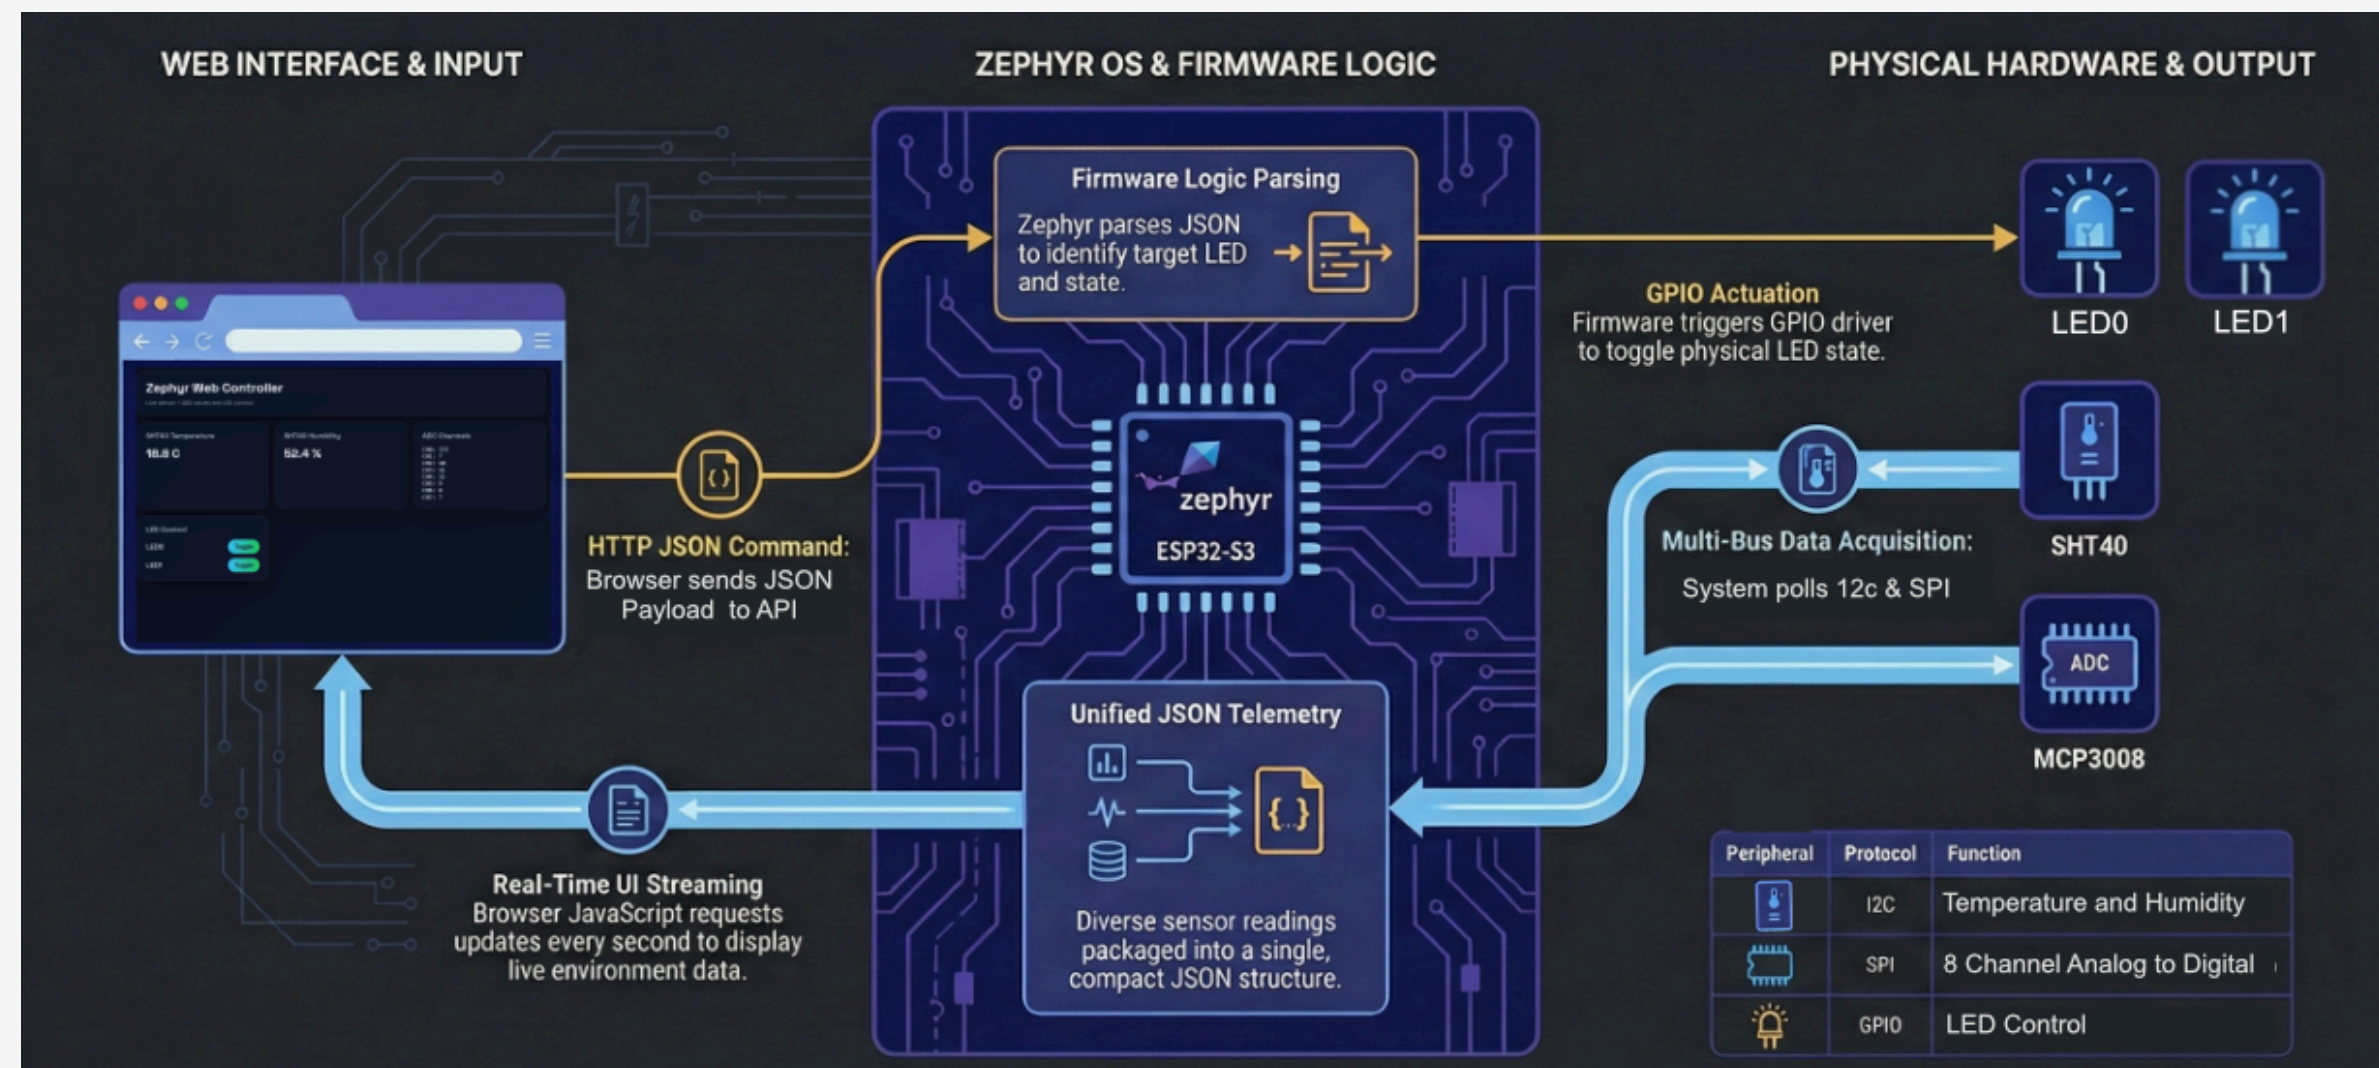

Key idea: Embedded devices can be monitored and controlled through a web interface.