


Using OpenOCD for Zephyr Debugging

- Configure and start OpenOCD with the ESP32-S3 built-in JTAG interface.
- Connect Zephyr's Xtensa GDB to OpenOCD and verify target control.
- Use a single USB cable for flashing, logging, and interactive debugging.

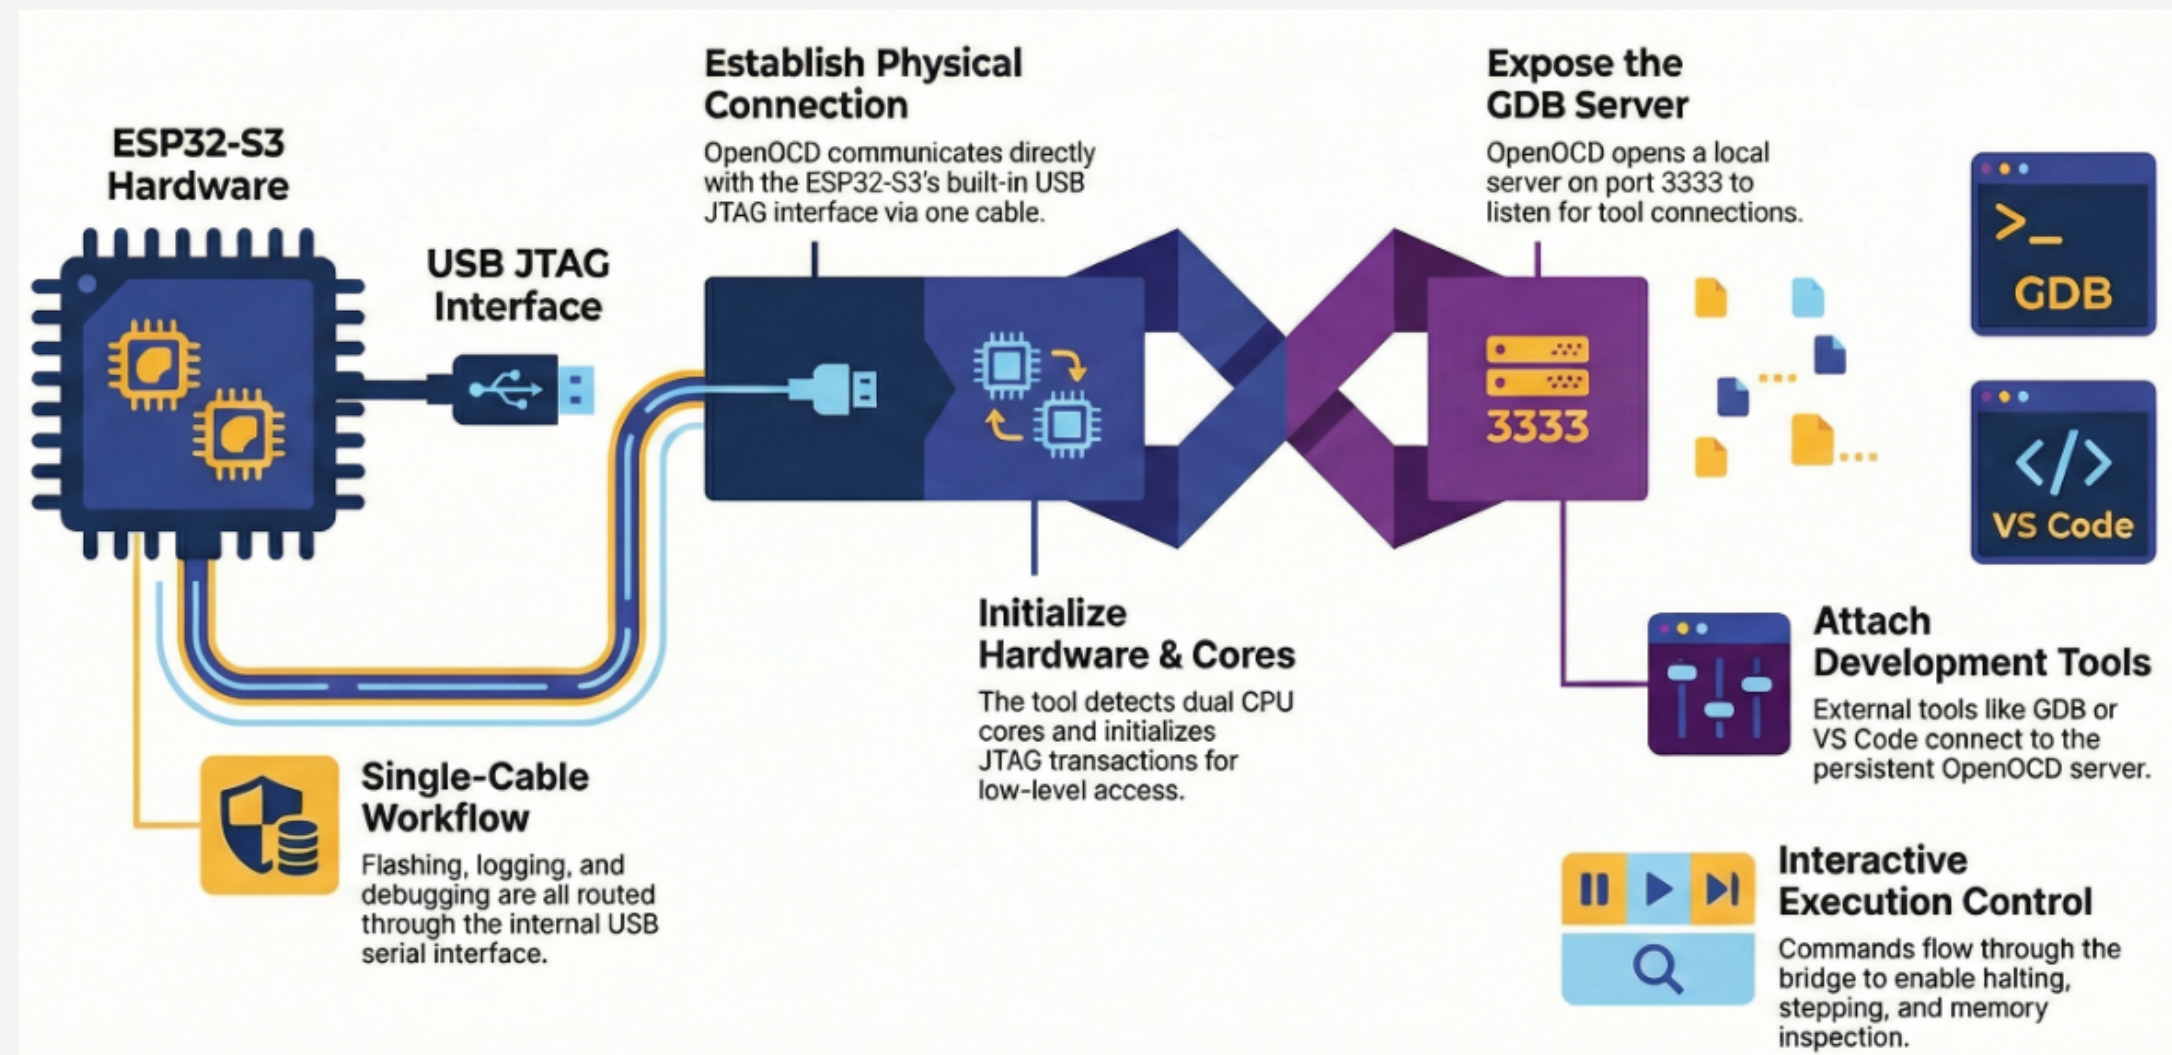

Key idea: Debug tools like openocd allow Zephyr provide low-level debug access.