



*Tablets
Capsules
LCT's
Softgels*

Up to 60,000 PPH

VIP UV Laser

One or Two-Sided UV Laser Marking
Single-Lane Carrier Link Feed System

VIP UV Laser

UV Laser Marking for Tablets & Capsules

Precision non-contact laser marking machine engraves indelible logos into the outer coating of pharmaceutical and confectionary products for identification, counterfeit protection, and brand recognition. Features a single-lane carrier timing belt feed system that exposes both sides of product for inspection and laser processing. Effortless continuous operation with minimal user interaction or downtime. Requires only compressed air and power for operation.

Features

- Single-lane carrier link system
- Safety enclosure with interlocked doors & enclosed beam path
- Servo based motion with optical encoder position feedback
- Carrier timing belt with precision machined pockets
- Tool-free installation of carrier links
- Adjustable hopper assembly for quick changeover between products
- Patented hopper air-assist feature & clean air filtration system
- Articulated swing arm with 17" touchscreen HMI
- User friendly interface
- Programmable settings for up to 50 products
- Portable with a small footprint
- Low maintenance cost
- Worldwide customer support
- Fume extraction unit & toolkit

Capabilities


- Output Up to 60,000 / Hour
- Single or Double Sided Marking with independent graphics for each side
- Mark alpha-numeric text, vector graphics, logos and bar codes
- Graphics editing software provided
- Adjustable parameters to control logo size, line width and etch depth
- Mark Bi-Color products with logo oriented on selected color side

Options

- Vision inspection with vacuum-based single product rejection
- OPC-UA Server Gateway
- HMI screen text translated and displayed in language of choice
- Secure remote support capabilities
- Auto-backup of product settings

Safety & Regulatory Compliance

- | | |
|-----------------------------------|--------------------|
| • cGMP for Pharmaceuticals: | • NFPA 79 |
| FDA 21 CFR Compliance: | • IEC 60825-1 |
| - Part 210 | • IEC / EN 60204-1 |
| - Part 211 | • ISO 13849-1 |
| - Part 11 | • CRC, c 870 |
| - Part 1040: Class 1 Laser System | • CDRH Compliant |
| • CE Compliant | |

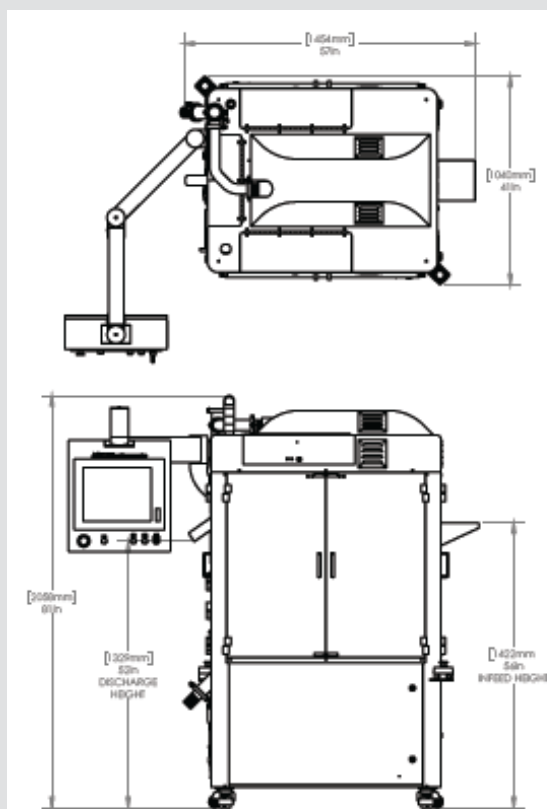

Machine Dimensions:
 Height 81" (2057 mm) x Width 58"
 (1473 mm) x Depth 41" (1041 mm)
 Infeed Height: 56" (1422 mm)
 Discharge Height: 52.4" (1331 mm)
 Weight: 2050 Lbs. (930 kg)
 Power Requirement:
 208-240 VAC / 50-60 Hz /
 1 Phase, 25 Amp
 Compressed Air:
 85 PSI (6 Bar) @ 45 sCFM (76.5 m3/hr.)



Made in the USA