

Shake Machine: Carpigiani K3

Card No. SS141h

Stripdown/Clean

Frequency

Weekly

Models

Carpigiani K3

Estimated Time to Complete

120 Minutes

Health & Safety Hazards



Chemicals



Slippery Floors / Tripping

Food Safety



Critical Control Point



Ensure nuts, bolts & screws are tight




Inspect equipment. Do not use if damaged



Wash & dry hands **after** performing task

Equipment

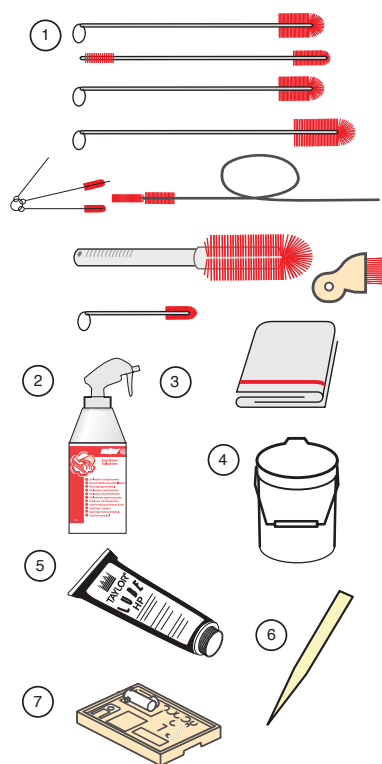

- 1 Set of Shake Brushes
- 2 KAY Surface Sanitiser
- 3 Red Border Cloth
- 4 Shake Mix Buckets
- 5 Heat Treat Lube
- 6 O-ring Removal Tool
- 7 Parts Tray



NB

Wash hands thoroughly up to elbows.

Check the condition of all O-rings and parts for wear and tear, nicks or damage and replace as needed.

Always handle shake machine parts over a surface and avoid dropping from a height.

Replace all O-rings **quarterly**.

1



Press the STOP Button.

2



Press the PAST button let the machine run 3-4 minutes.


3



Press the STOP Button.

4

Connect the Drain Hose to the Dispensing Spout and place the end of the Drain Hose into a Shake mix bucket.



5

Shake side



Remove T-Bar by disconnecting it from the Pump Body. Turn it 90° and lift the Pump Feed Tube from the Hopper.

6

Shake side



Press the OPEN Button, then press the WHITE Button and drain Shake Mix.

7



Press the STOP Button once the Shake Mix has completely drained out.

8

Shake side



Discard the mix and record as waste.

9


Shake side



Fill the Hopper with 9.5 litres of hand hot water containing APSC Solution.

10

Shake Side

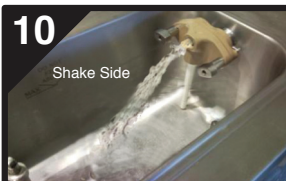

Press the AGIT Button and let the Beater run for 30 seconds allowing a steady stream of APSC Solution to flow out of Pump Body.

11

Shake side



Press the STOP Button.

12

Shake side



Scrub the Hopper Walls and Mix Level Sensor using the Cleaning brushes.
NB Remove all milkstone/scale build-up.

13

Shake side



Press the OPEN Button and then the WHITE button to drain the APSC Solution from the Hopper.

14

Shake side



Fill the Hopper with 9.5 litres of clean hand hot water using a Shake Mix bucket.

15

Shake Side



Press the **AGIT** Button and let the machine run for **30 seconds** allowing a steady stream of water to flow out of the pump body.

16

Shake side



Press the STOP Button to turn the machine OFF.

17

Shake side



Press the OPEN Button and then the WHITE Button to drain the water from the Hopper.

18

Shake side




Press the STOP Button to turn the machine OFF.

19 Shake side




Turn the Pump Body 45 Degrees clockwise, releasing it from the locking bolt and pull it out from the Hopper wall.

20 Shake side




Turn the Pump Body upside down and turn the Feed Tube anticlockwise and pull it from the Pump Body.

21 Shake side




Carefully remove the Spring and Back Flow valve from the pump body.

22 Shake side




Using the O-ring removal tool, **carefully** remove the O-ring from the Feed Tube.

23 Shake side




Unscrew the two knobs and separate the cover from the Pump Body.

24

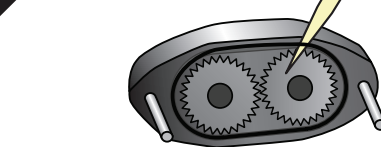

Using the O-ring removal tool, **carefully** remove the Pump Body O-ring

25 Shake side



Remove the Pump Body Cogs by tapping the Pump Body onto the palm of the hand. **NB** Check that the teeth on both cogs are not excessively worn and ensure there is not excessive movement.

26



Separate components of the pressure bar.

27 Shake side



Using the O-ring removal Tool, **carefully** remove both Pressure Pipe O-rings.

28 Shake side




Remove the Agitator from the Hopper by pulling it upwards.

29




Remove spout cap and ease Spinner out slowly.
Take care not to drop the Spinner whilst sliding out.

30 Shake side




NB Door cannot be removed until plug is disconnected to isolate power at the main socket.

31 Shake side




Unscrew the 4 door retaining knobs diagonally and remove the dispensing head by pulling it forwards, sliding it off the four front panel studs.

32 Shake side




Remove the O-ring from the inside of the door.

33 Shake side




Holding the Dispensing Head vertical, pull the Piston upwards and remove.

34 Shake side



Using the O-ring removal tool, **carefully** remove the Piston O-ring and the 2 O-rings from inside the Dispenser head.

35 Shake side

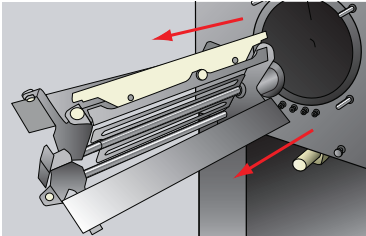

Remove the Beater Assembly by pulling it forwards out of the cylinder.

36

Shake side

NB SAFETY CHECK


Reconnect plug and check display which must read Spig Open. If display shows this, disconnect plug and continue. If display does not show this, disconnect plug and complete cleaning, but DO NOT reassemble and contact your [Service Company](#).



37

Shake side


Slide the Beater Seal from the Beater Shaft.

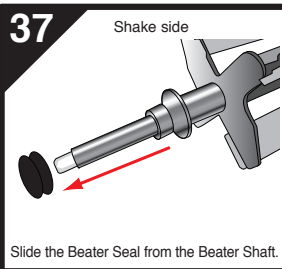

38

Shake side


Remove the Idler from the Beater Frame and check thoroughly for signs of wear and tear.

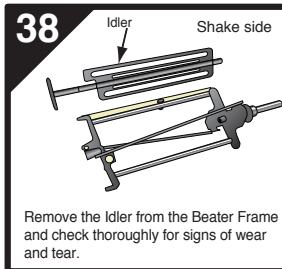

39

Shake side


Remove the Beater Blade Pin by pulling it out of its fitting. Remove the blade.

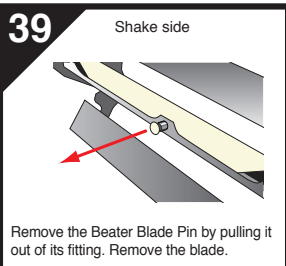

40

Shake side


Using the O-ring Removal Tool, **carefully** remove the Pin O-ring.

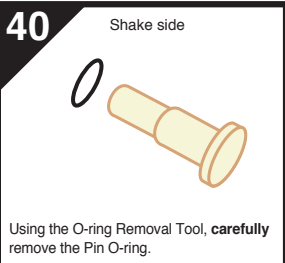

41


Shake side

Remove Syrup block assembly.

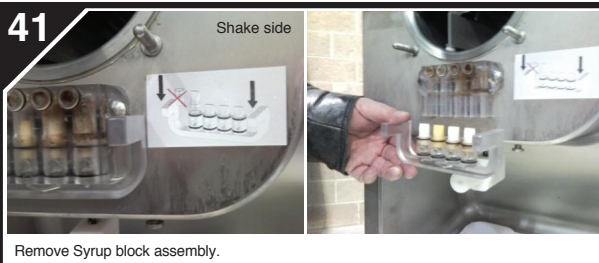


42

Shake side

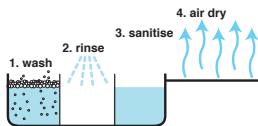

Take parts to the backroom sink and clean using the 4-step cleaning method. All parts should be returned to the Shake Parts Trays to Air Dry.



43

Soft Serve side



Push the STOP Button.

44

Soft Serve side




Push PAST and let the machine run 3-4 minutes.

45

Soft Serve side


Place a Shake Bucket under the Dispenser.

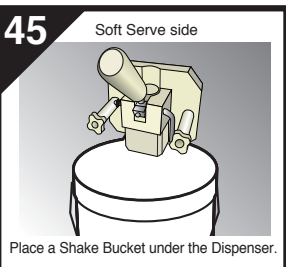

46

Soft Serve side

Pull the handle down to drain the mix.

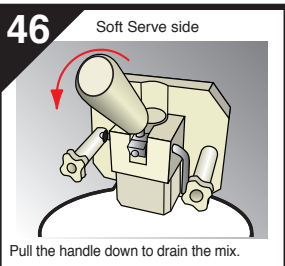

47

Soft Serve side




When the liquid starts to flow press the STOP button.

48

Soft Serve side

Remove the Pressure Pipe by disconnecting it from the Pump Body. Turn it 45°c and lift the Pressure Pipe from the Hopper.

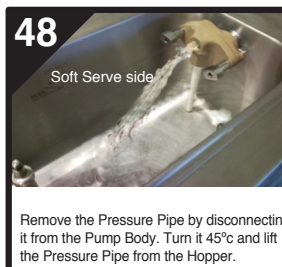

49

Soft Serve side



Press AGIT and let the Sundae Mix drain out.



50

Soft Serve side




Push the STOP Button once the Sundae Mix has completely drained out.



51

Soft Serve side


Push the dispenser handle back to the up position.

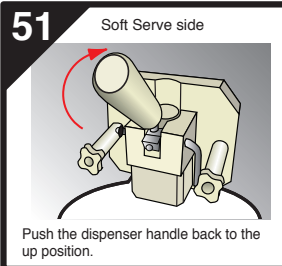

52

Soft Serve side


Discard the mix and record as waste.

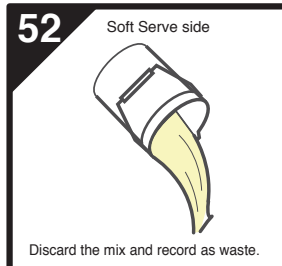

53

Soft Serve side


Fill the Hopper with 9.5 litres hand hot water containing APSC Solution.

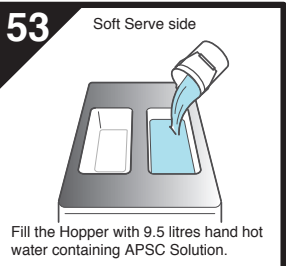

54

Soft Serve side


Scrub the Hopper walls and Mix Level Sensor. **NB Remove all signs of milkstone/scale.**

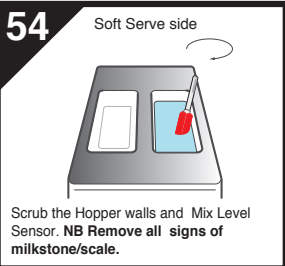

55

Soft Serve side


Pull the Dispenser handle down allow the APSC Solution to drain into the bucket. Once the APSC Solution has completely drained push the Dispenser Handle back up into the closed position

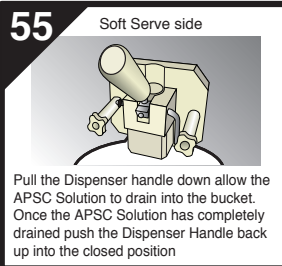

56

Soft Serve side

Fill the Hopper with clean hand hot water using a Shake Mix bucket.

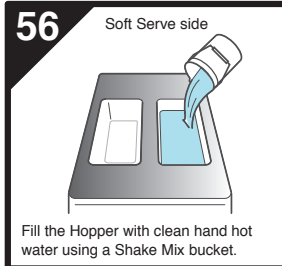


57 Soft Serve side

Press the AGIT Button let the machine run for 30 seconds.

58 Soft Serve side

Press the STOP Button to turn the machine off.

59 Soft Serve side

Place bucket under the Dispenser and pull handle down and let the water drain completely from the Hopper.

60 Soft Serve side


Repeat Steps 19-26 Shake Side Disassembly.

61 Soft Serve side


Pull Connection Tube from the Pressure Pipe and using the O-ring removal tool **carefully** remove the connection tube O-rings.

62 Soft Serve side

Remove the Agitator from the Hopper by pulling it upwards.

63 Soft Serve side


Unscrew the two retraining knobs and pull the Dispenser Assembly forward, sliding it off the two front panel studs.

64 Soft Serve side


Remove the O-Ring from the inside of the door.

65&66

Soft Serve side

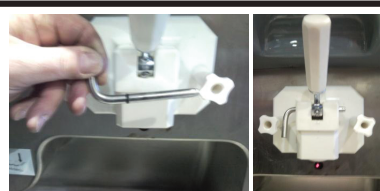


Place the Dispenser Assembly on a level stable surface and pull down the dispense handle so the Piston rises in its housing. Using the O-ring removal tool **carefully** remove the Pivot O-ring and pull out the Pin to release the dispensing handle.

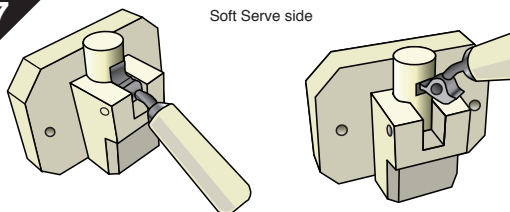67 Soft Serve side


Using the Dispenser handle as a lever pull the Piston out fully.

68 Soft Serve side

Using the O-ring removal tool, **carefully** remove the two Piston O-rings.

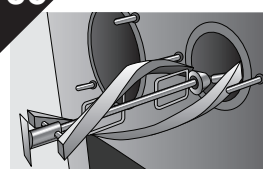69 Soft Serve side


Remove the Beater Assembly from the cylinder.

70 Soft Serve side

Soft Serve side

NB: SAFETY CHECK



Reconnect plug and check display which must read Spig Open. If display shows this, disconnect plug and continue. If display does not show this, disconnect plug and complete cleaning, but **DO NOT** reassemble and contact your [Service Company](#).

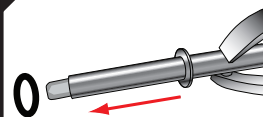71 Soft Serve side


Using the O-ring removal tool, **carefully** remove the Beater Seal.

72 Soft Serve side

Pull the Idler slightly to the front of the Beater Assembly until the groove in the shaft of the Idler lines up with the slot in the Beater Frame and pull out. Thoroughly check idler for signs of wear and tear.

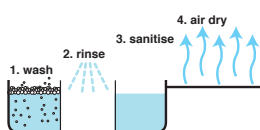73 Soft Serve side

Take parts to the backroom sink and clean using the 4-step cleaning method. All parts should be returned to the Shake Parts Trays to Air Dry.

74 Soft Serve side

Clean Hopper lids using the 4-step cleaning method. Check for signs of milk-stone and scale build up.