

Shake Machine: All Models

Check Condition/Clean Air Filters

Frequency

Monthly

Models

All Models

Estimated Time to Complete

10 - 15 Minutes

Health & Safety Hazards



Slippery Floors / Tripping

Food Safety



Critical Control Point



Ensure nuts, bolts & screws are tight




Inspect equipment. Do not use if damaged




Wash & dry hands **before and after** performing task


Carpigiani coss 3840

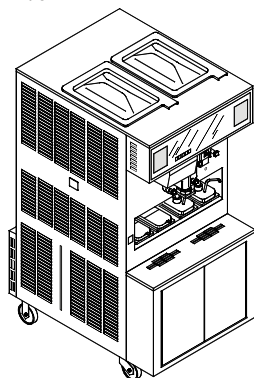


Taylor 8664

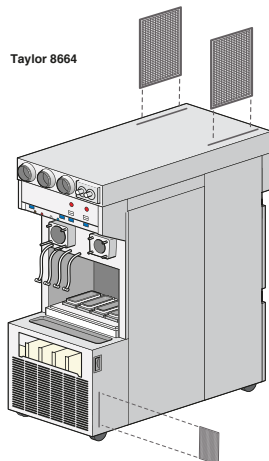

Taylor HT 8634 or C602

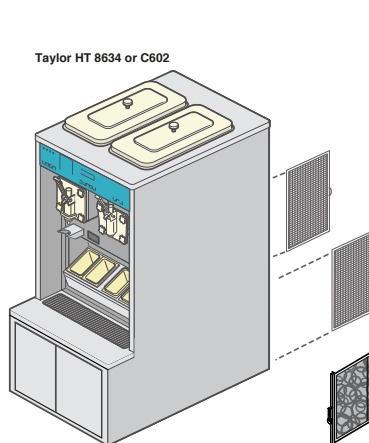

Carpigiani K3

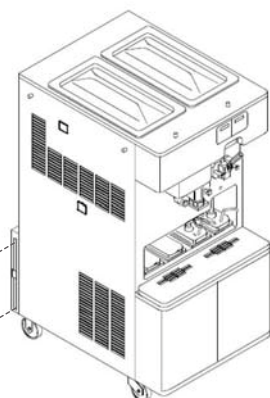


1


Remove Air Filters from shake machine.
NB Reference main image.

2


Taylor 8664




Carpigiani



Taylor C602



Carpigiani K3




Check condition of Air Filters: Metal frame
and mesh guard is intact and not damaged.

(For C602 check the filter is not
ripped or damaged).

3


Take Air Filter(s) to backroom sinks and
soak in hand hot APSC solution for 10-15
minutes to remove any dust/debris build-up

4



Once soaked spray the air filters clean
using the spray hose

5



Drain away excess water. Wipe over Air
Filter with Blue Border Cloth to remove
any remaining moisture.

6

Return Air Filter(s) to Shake Machine.
NB Reference main image.