

Temperature Validation Procedure

Card No. **PR64-DP**

Rail heaters are suspected to be improperly performing

Frequency

As needed during slow period

Models

High Capacity Heated Surface Prep and UHC Tables

Estimated Time to Complete

6 minutes

Health and Safety Hazards



Hot surfaces can cause burns. Take care around hot surfaces and wear personal protective equipment (PPE) as directed by the procedure.

Food Safety



Wash and dry hands **before and after** performing this task



Ensure nuts, bolts & screws are tight



Inspect equipment. Do not use if damaged

Equipment

1




1. Pyrometer with grill surface probe.

Procedure:

- Turn on prep rail heaters for one hour prior to testing
- Perform published pyrometer calibration check
- Place probe only on the red shaded area defined in the drawing below
- Check temperature in 4 random places on the surface
- If a measurement is out of temperature range, repeat the test on a nearby section of the prep rail
- If the repeat measurement is outside of the temperature range, call an authorised service agent
- Record reading when temperature stabilises (typically 3-5 seconds)
- The recorded values should be on or between 39C (102F) and 59C (138F)



UHC Tables

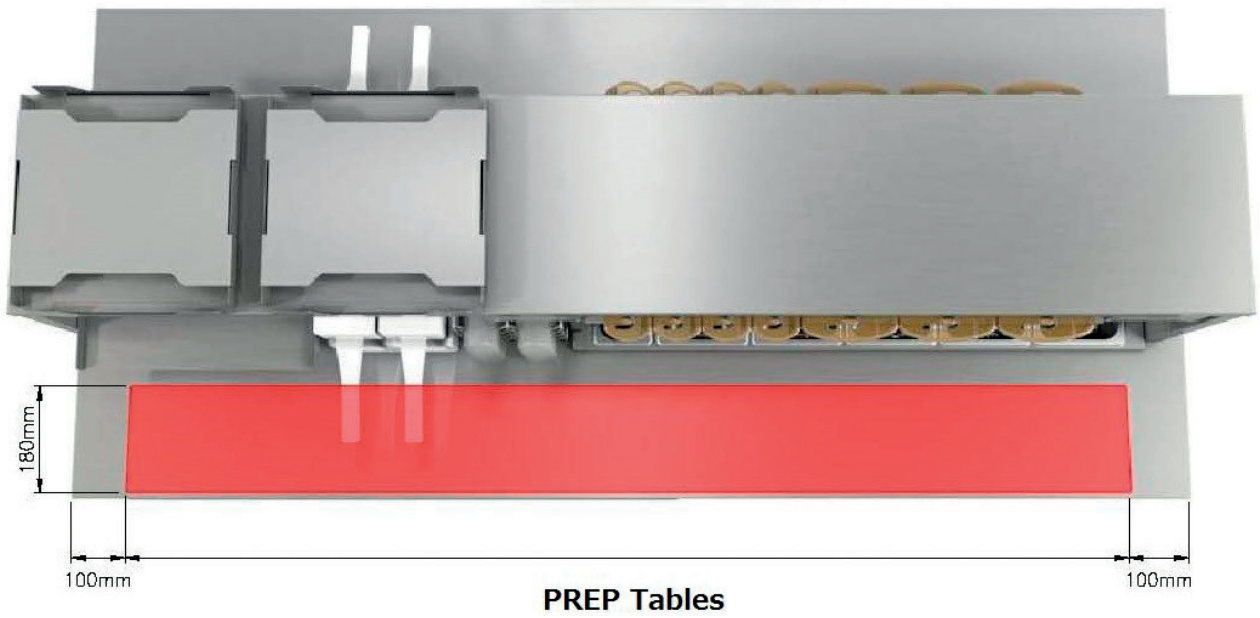

- 1) There is no temperature adjustment for the heated rails.
- 2) The heaters are attached under the prep rail and can only be accessed by qualified service agents.