

Self Filter System

Detail Clean

Frequency

Daily

Models

Frymaster, Henny Penny, Pitco

Estimated Time to Complete

20 minutes

Health & Safety Hazards



Slippery Floors



Chemicals



Hot Liquids

Food Safety



Wash & dry hands **after** performing task



Inspect equipment - do not use if damaged

Equipment




SolidSense™ All Purpose Super Concentrate (APSC)




Red Dive Brush




Blue Bucket



Gauntlets



Kitchen Roll

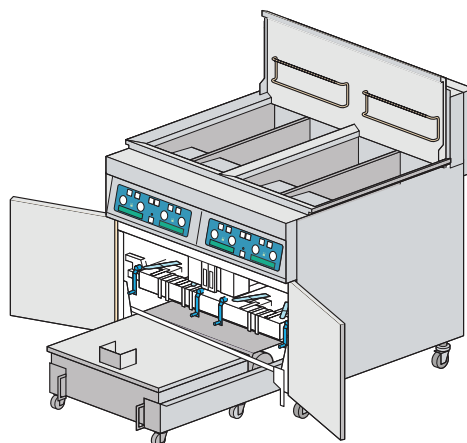


Caution filter pan may be hot –
Use gauntlets if required.




Report any leaks or equipment
problems to a manager.

1




Remove filter pan from the fryer
cabinet. Ensure pan is empty of oil.

2




Remove the crumb tray / hold down
ring and screen.

3




Place parts in dive sink with
SolidSense APSC. Remove filter
paper and discard. Never re-use.

4




Wash parts thoroughly.

5




Rinse parts thoroughly.

6




Allow parts to dry.

7



Remove any oil left with kitchen roll.
Remove inner pan and dive using
3-step method. Allow to dry.

8



Reassemble filtering pan and return
to fryer ready to re-use. Ensure pan
is clean and dry.