

Ceiling Light Diffusers

Detail Clean

Frequency

Monthly / As Needed

Models

LAMP, IBL, Aurora LED, Twin Standard, 2ft Square Fittings.

Estimated Time to Complete

15 Minutes

Health & Safety Hazards



Fall from Height



Slippery Floors / Tripping



Chemicals



Electricity

Food Safety



Wash and dry hands **after** performing this task



Ensure nuts, bolts & screws are tight



Inspect equipment. Do not use if damaged



Remove or cover all food and packaging

Equipment



KAY® Multi-Surface & Glass Cleaner



Step Ladder



Cone(s)



Blue Microfibre Cloth



Flat head Screw Driver
(for LAMP fitting only)

Warning – Do not use sprays or damp cloths near electrical power supplies.




All LED light fittings
(incl. IBL and Aurora)



LAMP J1 and J1E



2ft Square Fluorescent

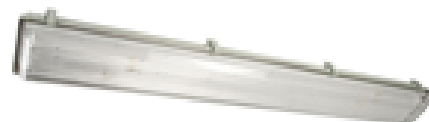

Twin Standard Fluorescent

Prepare the Area

1.



Ensure step ladders are in good condition and treads are clean.

Ensure ladder is fully opened and locked into position.

Do not stand on top 2 steps.

2.



Cone(s)

Place 'caution' signs on all approaches to area.

Verbally caution anyone in the immediate area.

Always get assistance if required.

3.

Identify the diffuser / fitting model specification:

- IBL / Aurora – LED
- LAMP
- 2ft Square
- Twin Standard

Remove Diffuser

IBL , Aurora - LED

Do not attempt to remove these diffusers from the light fitting.



Clean whilst in position

LAMP J1 and J1E

1. Insert thin flat head screw driver into slots to release the two spring clips inside the diffuser.
2. Gently lower the diffuser from the light fitting. Disconnect the nylon tag.




2ft Square Fitting

Gently lower the diffuser from the fitting. Unclip the 4 sprung wires of diffuser allowing the diffuser to be removed from the fitting.



Twin Standard Fitting

1. Whilst stabilising the diffuser, unclip all retaining clips from the diffuser.
2. Gently lower the diffuser from the light fitting taking care to ensure all elements of the fitting remain stable.

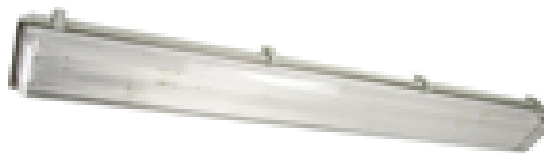


Clean Diffuser

1. Spray Multi-Surface & Glass Cleaner onto clean blue Microfibre cloth.



2. Wipe diffuser glass / Perspex with cloth to remove all debris.




Caution - Take care to avoid loose debris falling from inside the diffuser.

Refit Diffuser

LAMP J1 / J1E

Re-fit nylon tag and push the 4 spring clips into place.

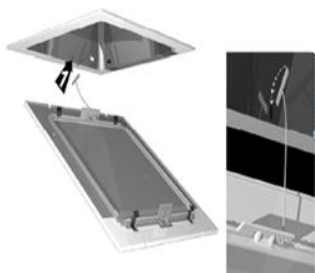

2ft Square Fitting

Return the wire clips to fitting. Gently push the diffuser back into position until secure on all sides.



Twin Standard Fitting

Ensure all clips are present, in good condition and secure to both diffuser and fitting.



**Do not refit diffuser if any part is missing or damaged.
Order replacement parts from approved supplier.**

