

Shake Machines: Carpigiani K3

Syrup Calibration/Draw Temperature

Frequency

Weekly

Models

Carpigiani K3

Estimated Time to Complete

15mins

Health and Safety Hazards

Food Safety



Wash and dry hands **after** performing this task



Ensure nuts, bolts & screws are tight




Inspect equipment. Do not use if damaged

Equipment

1




2



3



- 1 Pyrometer & Needle Probe
- 2 Ratio Cup
- 3 White Bucket

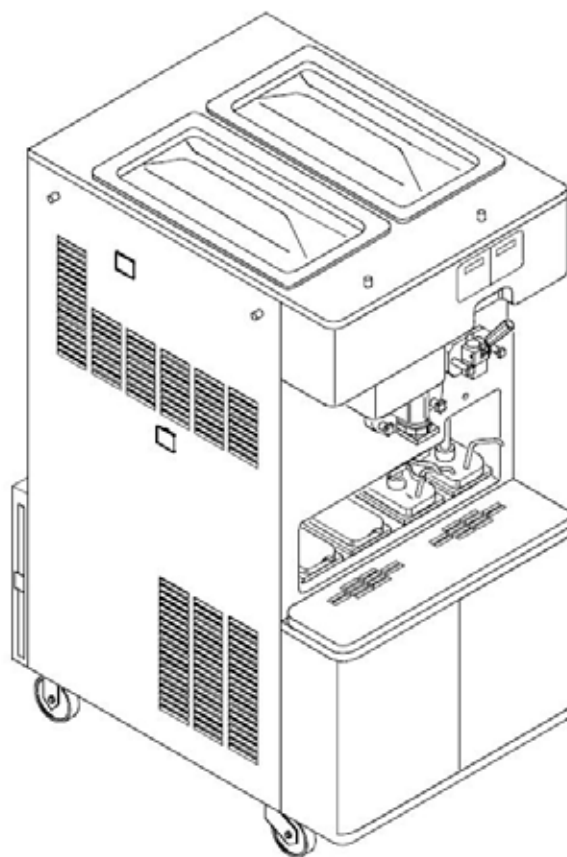

1

With the machine in normal production mode, press and hold the STOP button for 3 seconds until the machine stops and the date is displayed.

2

Place the measuring cup under the nozzle outlet.

3

Press the syrup flavour to be calibrated and the syrup will run for 5 seconds.

4

The display will show a number setting for the syrup flavour selected.

5

Syrup should be 30ml or 1oz.

6

If more syrup is required press the '+' button. If less syrup is required press the '-' button. A good starting point is 80 on the display.

7

Repeat Steps 2 to 6 for each syrup flavour.

8

When all four syrups have been calibrated put the machine back into production mode by pressing the green 'PROD' button.

9

Hold a cup or container under the shake nozzle.

10

Quickly press the open button 'on' and 'off' to dispense a small amount of shake. This will flush the syrups from the shake nozzle.

11

Draw Temperature

12

Place a 0.4l cold cup into the cup holder. Select a flavour button and draw a shake.

13

Insert the needle probe into the cup and allow the temperature reading to stabilise. The temperature reading should be between -3.2 to -3.7c.

14

Draw a sundae into the flurry cup, repeat **step 11**. The temperature reading should be between -8 to -9c.

15

If the Syrup calibration or the draw temperature is out of specification contact your [Service Company](#).