

Shake Machines: Taylor HT C602

Card No. SS141f

Strip Down/Brush Clean

Frequency

Weekly

Models

Taylor HT C602

Estimated Time to Complete

120 Minutes

Health & Safety Hazards



Chemicals



Slippery Floors / Tripping

Food Safety



Critical Control Point





Ensure nuts, bolts & screws are tight



Inspect equipment. Do not use if damaged



Wash & dry hands **before** performing task





















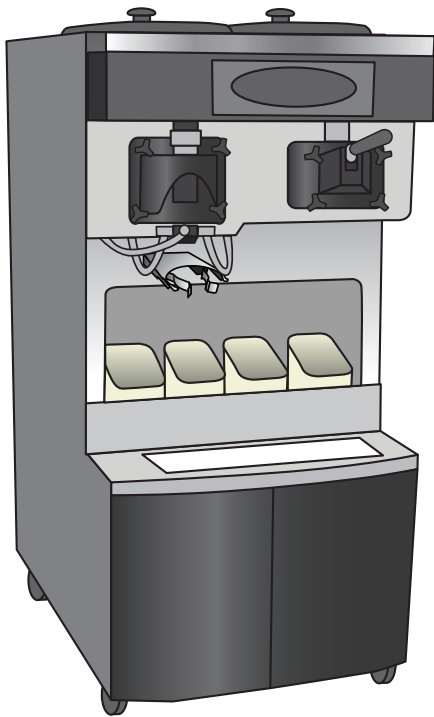
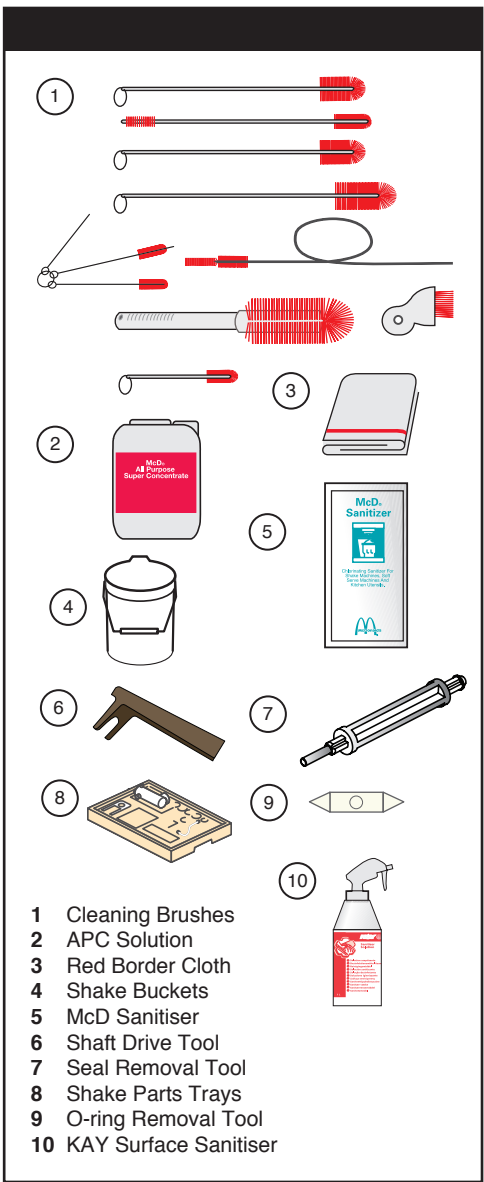


NB

Check the condition of all O-rings and parts for wear and tear, nicks or damage and replace as needed.

Always handle shake machine parts over a surface and avoid dropping from a height.

Replace all O-rings **quarterly**.

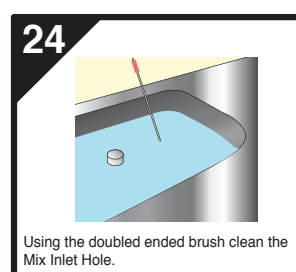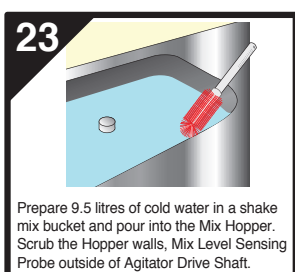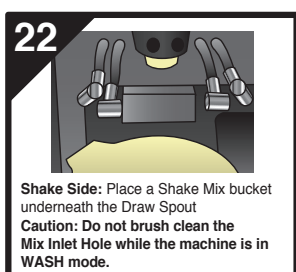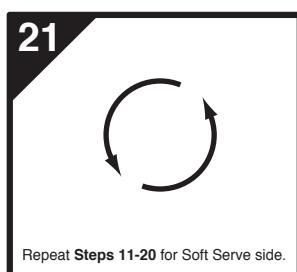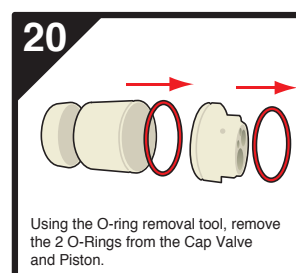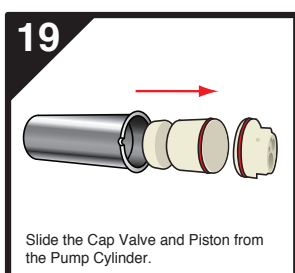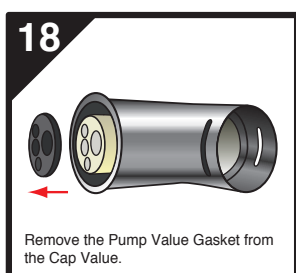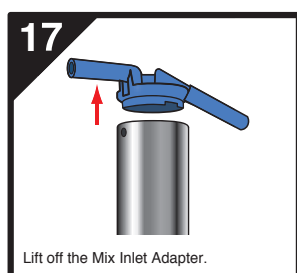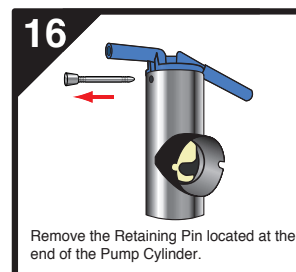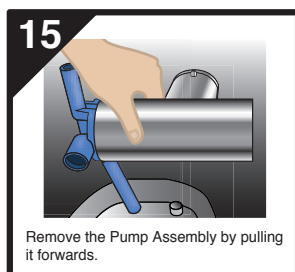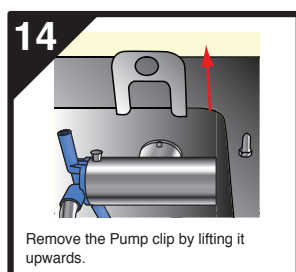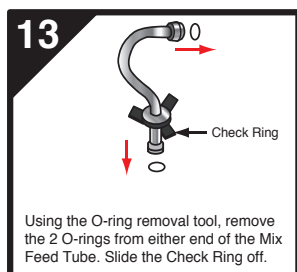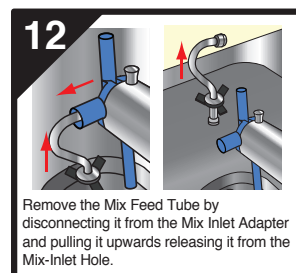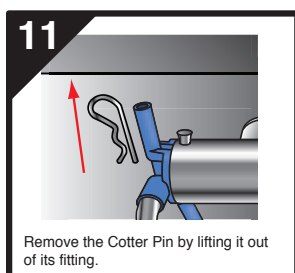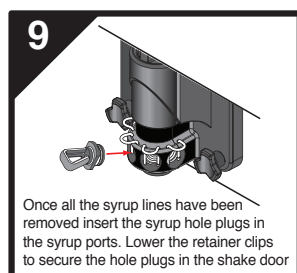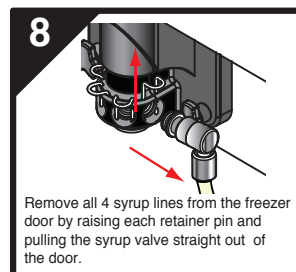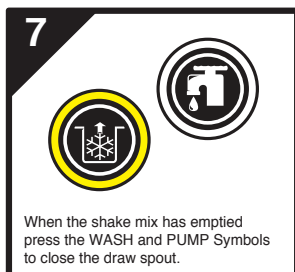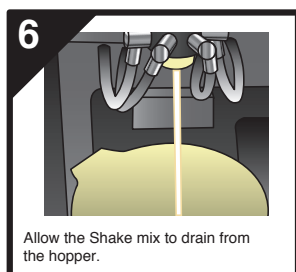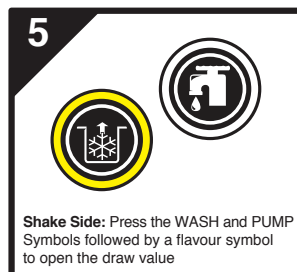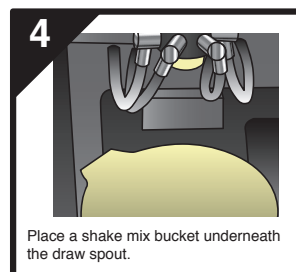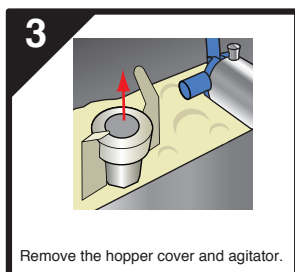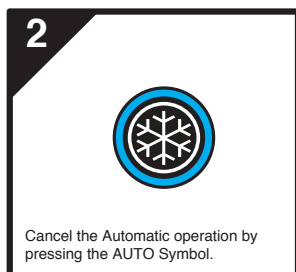


25



Press the WASH symbol. Allow the cold water to drain out completely. Press the WASH Symbol again: This will automatically close the draw valve.

26




Repeat **step 23 - 25**. This time using luke warm water.

27



Using a shake mix bucket, prepare 9.5 litres of APSC solution and pour into the Mix Hopper.

28



Scrub the Hopper walls, Mix Level Sensing Probe outside of Agitator Drive Shaft and the Mix Inlet Hole again.

NB Remove all milkstone/scale build-up.

29



Press the WASH symbol. Allow the APSC solution to drain out completely. Press the WASH Symbol again: This will automatically close the Draw Valve.

30



Wearing clear gloves, using a Shake mix bucket prepare (9.5 litres) of lukewarm water mixed with one packet of McD Sanitiser.

31



Pour the sanitizer solution into the Mix Hopper and repeat **steps 28 - 29**.


32

Soft Serve Side

Place a Shake Mix bucket underneath the Draw Spout.

Caution: Do not brush clean the Mix Inlet Hole while the machine is in WASH mode.

33




NB The Soft Serve Dispensing Handle will need to be pulled down to open the Draw Valve after pressing the WASH symbol. When the liquid has drained completely after each cycle. Press the WASH symbol then pull up the Dispensing Handle to close the Draw Valve again.

34




Repeat **Steps 23-31**.

35





Before continuing with the disassembly procedures turn the power switch to the OFF position.

36




Shake Side: Remove the syrup hole plugs from the syrup ports and restrictor cap from the bottom of the draw spout. **NB Place the Retainer Pins back into position on the freezer door.**

37




Remove the Spinner Blade from the bottom of the door spout by lifting up the Locking Collar on the Spinner Coupling and pulling down on the Blade.

38




Unscrew all 4 hand screws to the freezer door. Remove the freezer door.

39





Remove the freezer door O-ring.

40




Remove the Front Bearing from the beater assembly.

41




Pull the Beater Assembly out of the freezing cylinder and remove the Scraper Blades.

42




Remove the Drive Shaft from the rear of the freezing cylinder.

43




Remove the Drive Shaft Seal.

44




Slide the Draw Valve Spinner assembly out by pushing upwards from the draw spout end.

45

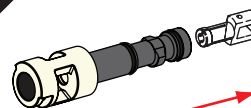


Remove the Driven Spinner by pulling it away from the Draw Valve Assembly.

46




Remove the Seal Spinner by grasping the Draw Valve at one end and inserting the Seal Removal Tool until it engages with the Seal Spinner. Then pull the Seal Removal Tool out.

47




Using the O-ring Removal Tool, remove the 2 O-rings from the Draw Valve.

48



Turn the Pump drive shaft so the knob is at 3 o'clock. Remove the Pump Drive Shaft from the drive hub in the rear wall of the Mix Hopper using the Shaft Drive Tool.

49

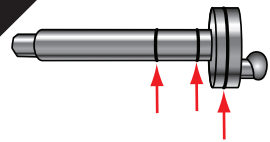


Using the O-ring Removal Tool. Remove the 2 small O-rings and one large O-ring from the Pump Drive Shaft.

50




Soft Serve Side: Repeat Steps 48-49 to remove the Pump Drive Shaft and O-rings.

51




Unscrew all 4 hand screws to the freezer door. Remove the Freezer Door.

52




Remove the Freezer Door O-ring and Front Bearing.

53




Pull the Beater Assembly forward out of the freezer cylinder remove the Beater Shoes. (Disassemble Beater Assembly ensuring the clips and blade are taken apart).

54




Remove the Drive Shaft from the rear of the freezing cylinder.

55




Remove the Drive Shaft Seal.

56




Turn the Pivot Pin on the Freezer Door into an upright position and remove it releasing the Draw Handle.

57




Slide the Draw Valve out of the Freezer Door.

58




Using the O-ring removal tool, remove the 3 O-Rings from the draw valve.

59



Remove the long Drip Pan from the front panel.

60




Remove the two short Drip Pans from the rear panel. The two notched Drip Pans from the left and right side panels.

61


NB If the Drip Pans are filled with an excessive amount of mix, it is an indication that the Drive Shaft Seal(s) or O-rings should be replaced or require proper lubrication.

62



Remove the front Drip Tray and splash shield under the draw spouts.

63




Take parts to the backroom sinks and clean using the 4-step cleaning method. Check Hopper Lids for signs of Milk-stone and scale build up.
NB All parts should be returned to the Shake Parts Trays to air dry.

64




Return to the machine with APSC Solution and clean the Shell Bearings at the rear of both freezing cylinders.

65



Brush clean the drive hub openings on the rear wall of both mix hoppers.

66



Brush clean the syrup line ports.

67



Wipe all outside surfaces and inside the Syrup Tank Compartment of the machine with KAY Surface Sanitiser and a Red Border Cloth.