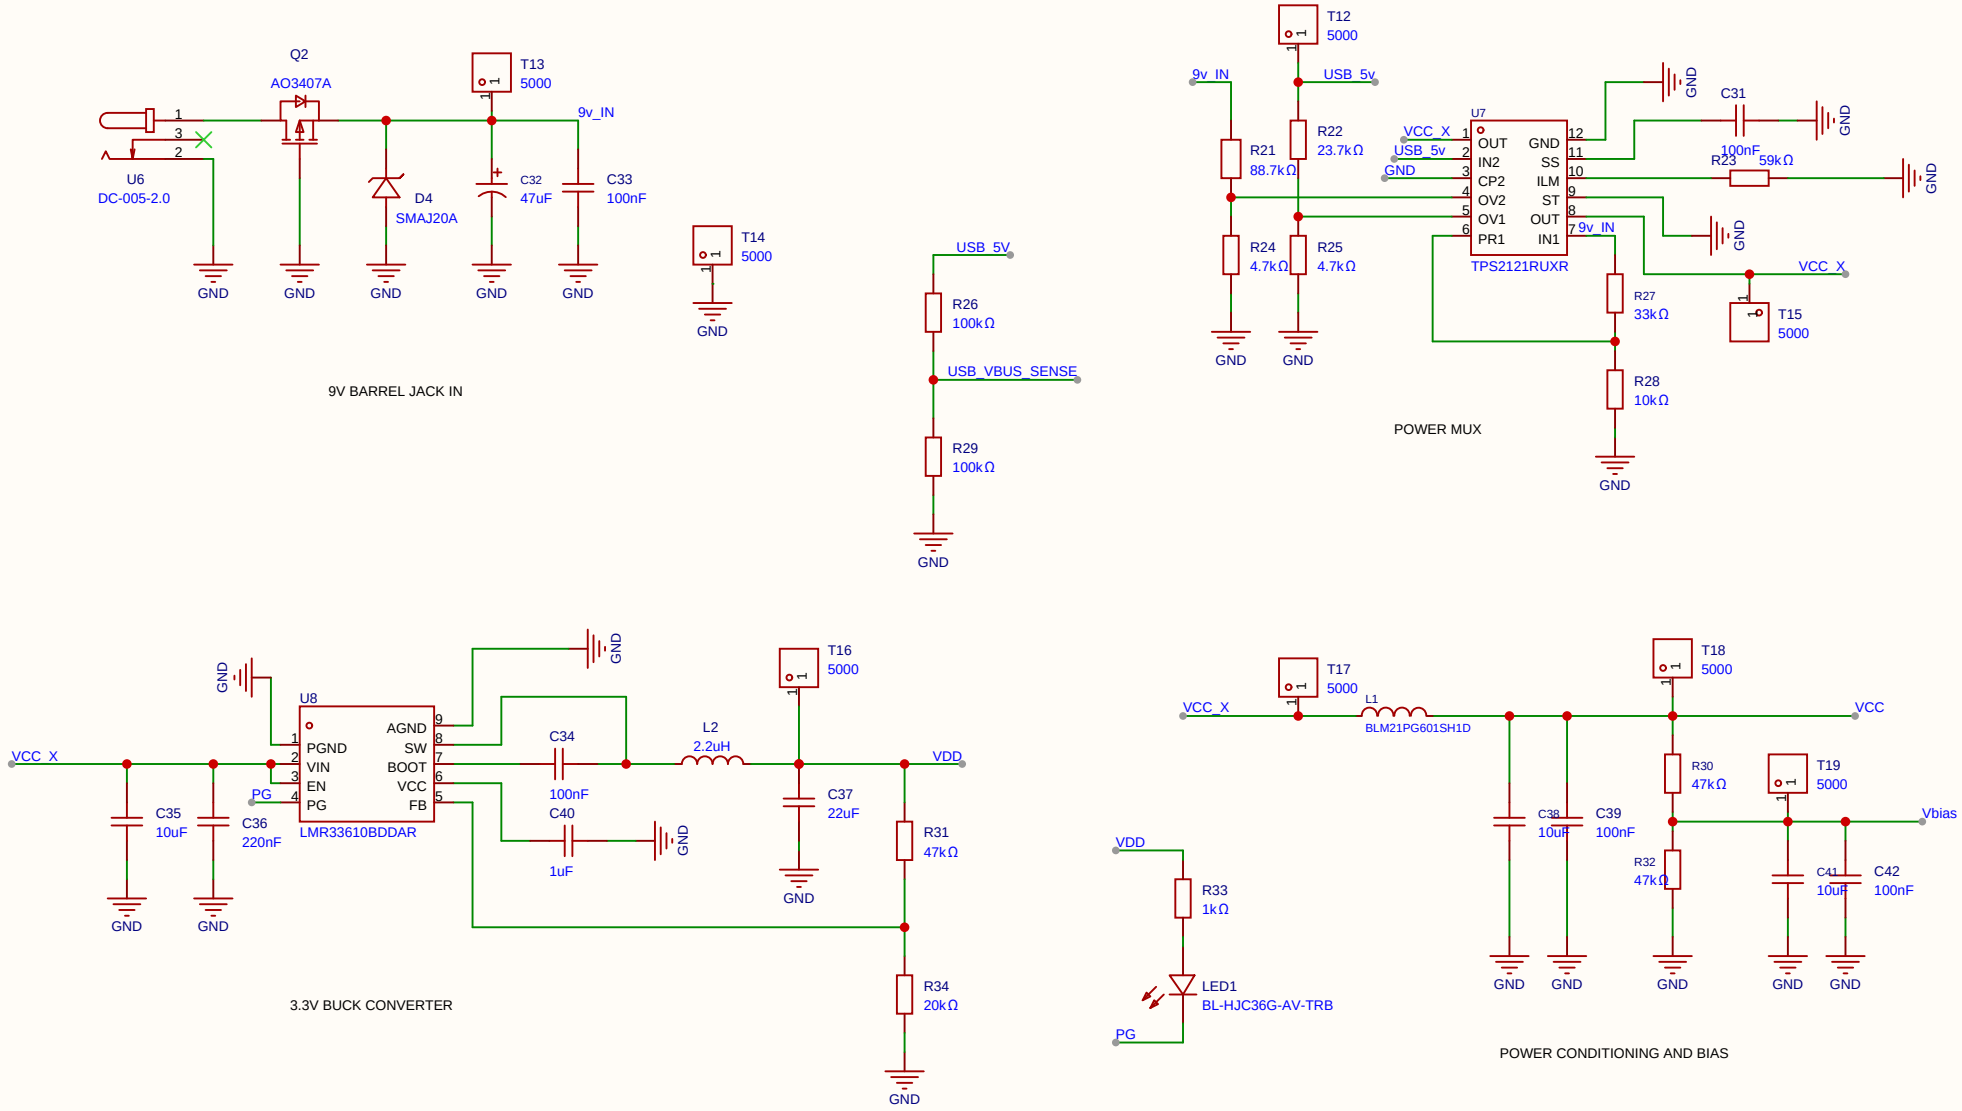


1. All resistor values are in ohms unless otherwise specified.
2. All capacitor values are in farads as indicated \(pF, nF, µF\).
3. Resistors are 1%, 0603, ≥0.1 W unless otherwise specified.
4. Ceramic capacitors are X7R, 0603, with voltage rating 25V unless otherwise specified.
5. Decoupling capacitors shall be placed as close as practical to their associated IC supply pins.
6. Unused IC inputs shall not be left floating unless permitted by the device datasheet.
7. Component values and ratings shown on individual components supersede these general notes.
8. Refer to BOM for manufacturer part numbers and approved component substitutions.

Schematic	Schematic1	Create at	2026-09-15	
		Update at	2026-09-21	
Board	Board1	Page	Power	
Drawn		AudioDevBoard		
Reviewed				
		Version	Size	Page 4 Total 6
EasyEDA		V1.0	A4	EasyEDA.com