
TOP LH STRINGER · SPLICE REVIEW

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

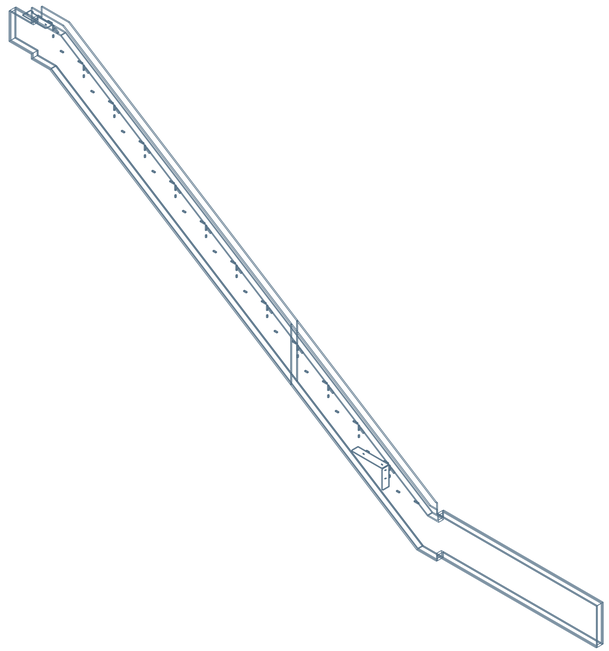

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B001-P01	stringer plates LHT horiz	1	230-7/8"
02 / 2606-B001-P02	stair asm body 10	1	120-29/32"
03 / 2606-B001-P03	stair asm body 11	1	119-3/16"
04 / 2606-B001-P04	stair asm body 12	1	120-29/32"
05 / 2606-B001-P05	stair asm body 13	1	119-3/16"
06 / 2606-B001-P06	treadplate carriers horiz LH	12	11-11/32"
07 / 2606-B001-P07	treadplate carriers vert LH	12	7-3/32"
08 / 2606-B001-P08	treadplate carriers horiz top LH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.


Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

stringer plates LHT horiz / COMPLETE PROFILE

body-0008 / QTY 1 / THICKNESS 1-3/4" / INCHES

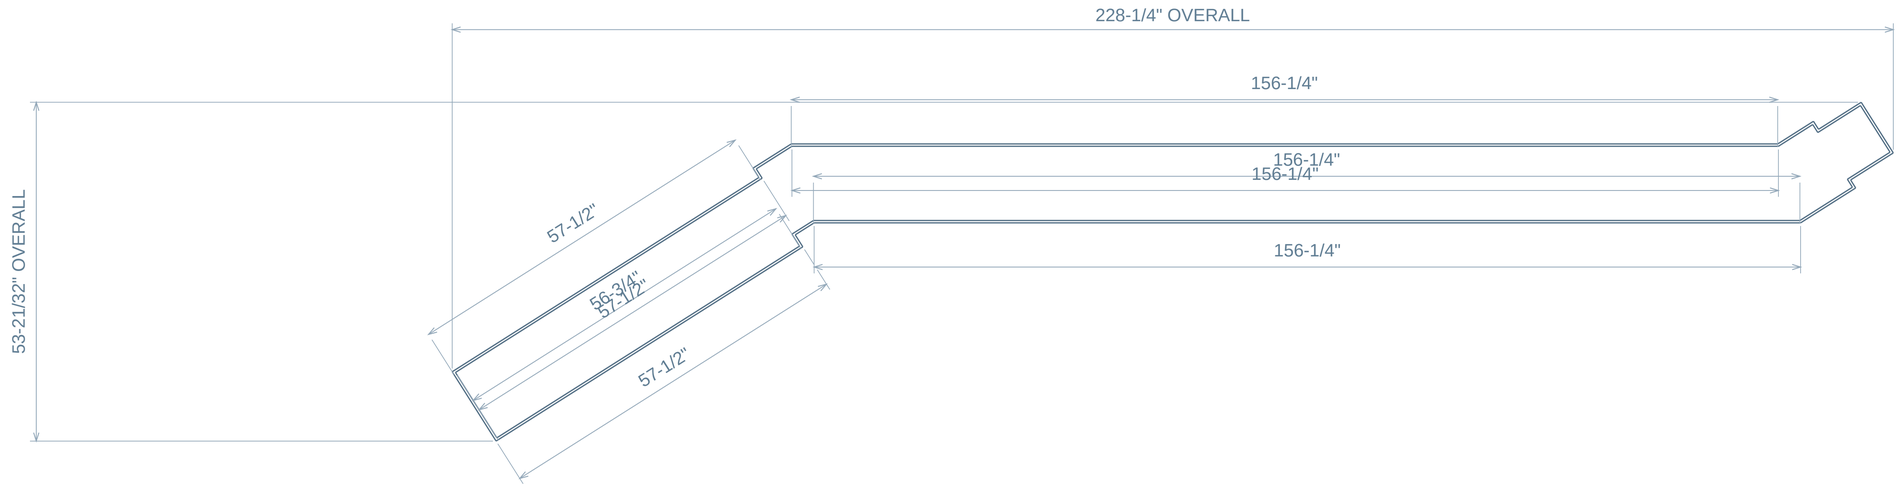

END A / U = 0 AT LEFTMOST MATERIAL


END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / THICKNESS 1-3/4" / INCHES


DETAIL 1 / OUTER / 1:3

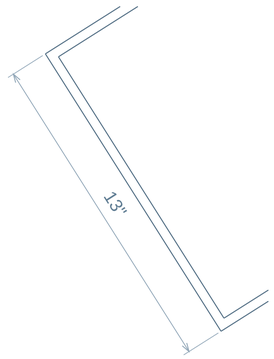


DETAIL 2 / INNER / 1:2

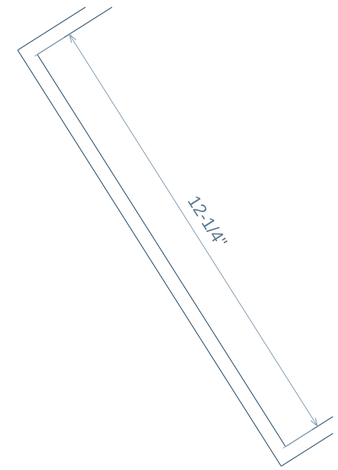



DETAIL 3 / OUTER / 1:4





DETAIL 4 / INNER / 1:3






FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ACTUAL ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / THICKNESS 1-3/4" / INCHES

DETAIL 5 / INNER / 1:4

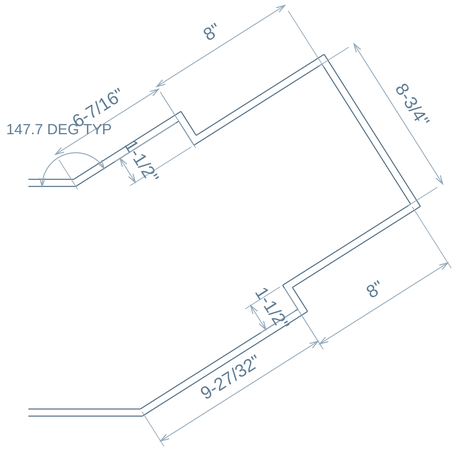

DETAIL 6 / OUTER / 1:4

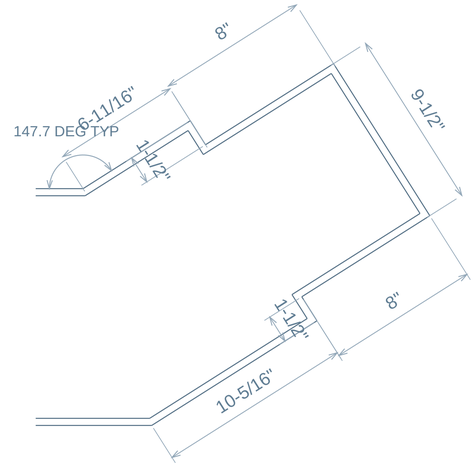

stair asm body 10

body-0009 / QTY 1 / 3/8" PLATE / NO HOLES IN THIS BODY / INCHES

01 / TOP - FACE A / COMPLETE BODY / SCALE 1:5

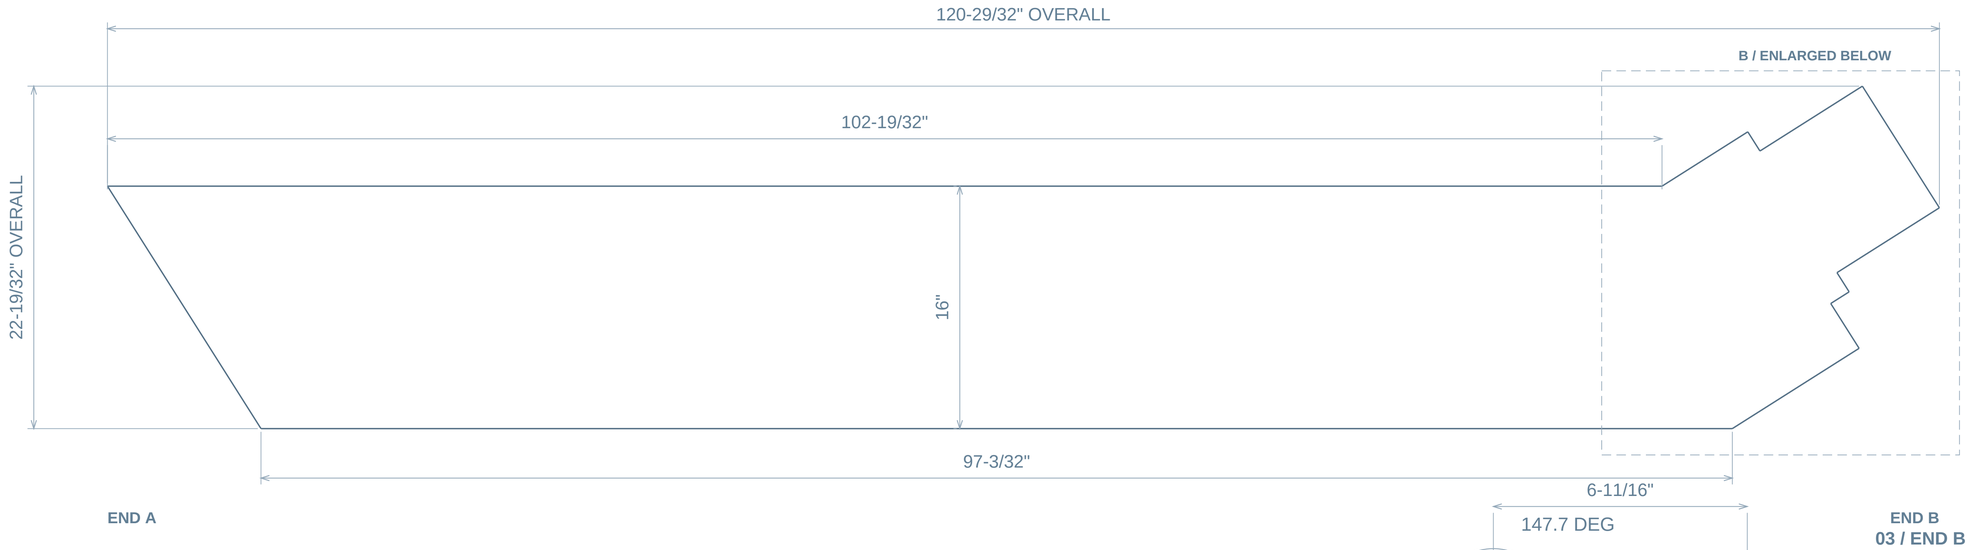


PLATE THICKNESS

3/8"


TRUE FACE VIEWS

Angles in the plate plane

End B rotated for clarity

Same source outline


02 / END A / CONNECTED FACE DETAIL / SCALE 1:3

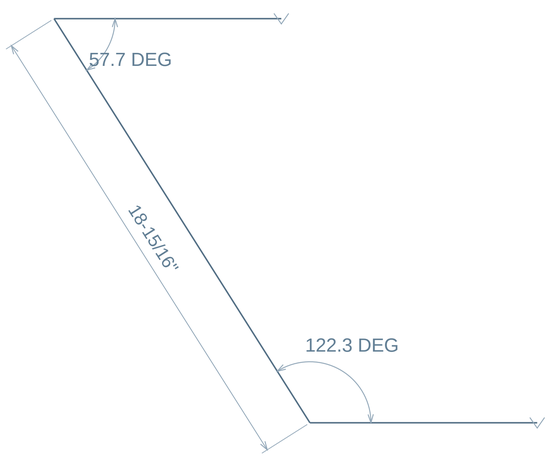

Actual adjacent edges
continue to the right.

Included cut angles shown
on the actual outline.

03 / END B / SCALE 1:2

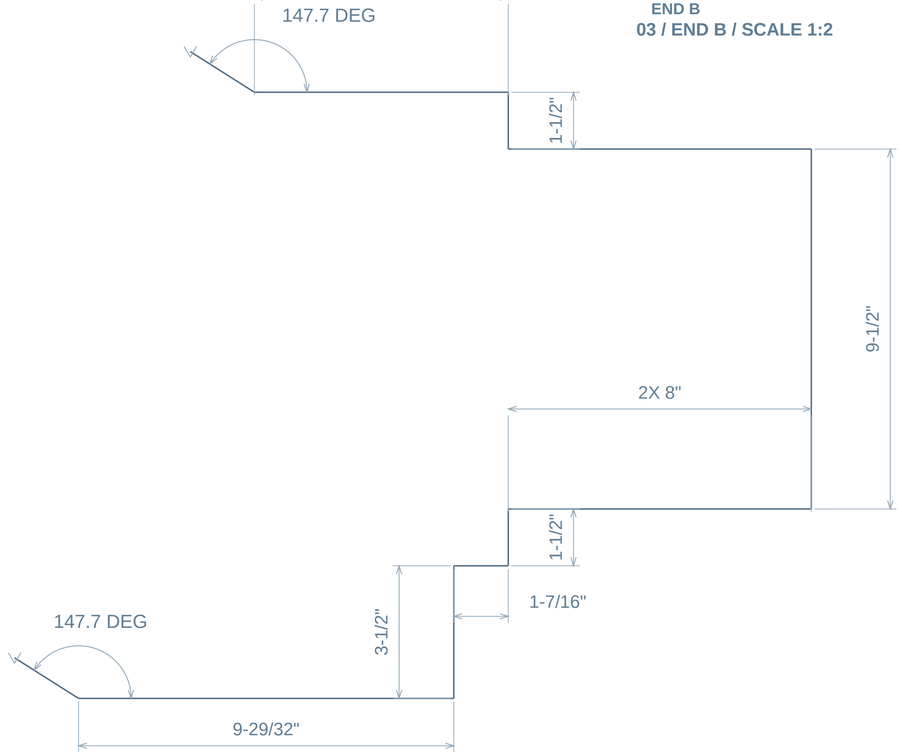

8 UNMARKED END-B CORNERS ARE 90.0 DEG / ALL PROFILE LENGTHS MEASURED IN THE TRUE FACE PLANE.

Break marks indicate view continuation only. They do not indicate a fabrication cut or splice.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / MODEL REVIEW / DO NOT SCALE

CALIPER / 2606


TOP LH STRINGER · SPLICE REVIEW

2606-B001-P03-R06 / 1

REVIEW 06 / 2026-10-20

stair asm body 11 / COMPLETE PROFILE


body-0010 / QTY 1 / THICKNESS 3/8" / INCHES

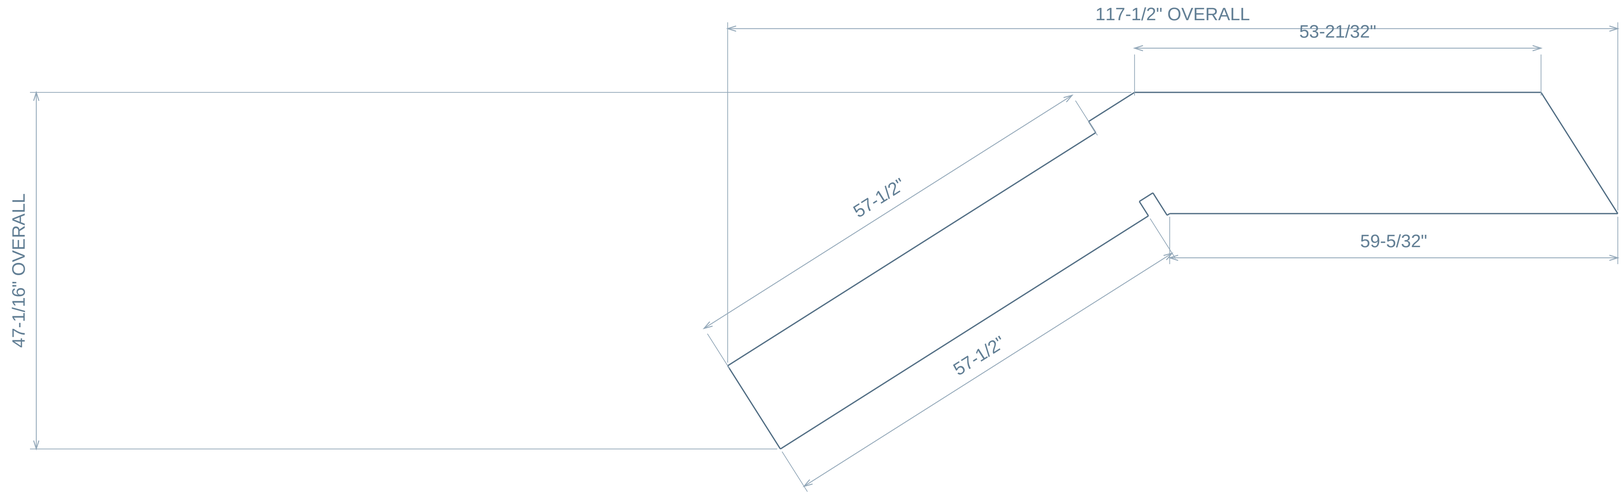


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

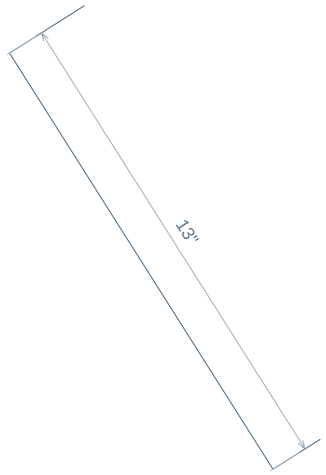

DETAIL 2 / CONNECTED OUTLINE / 1:3

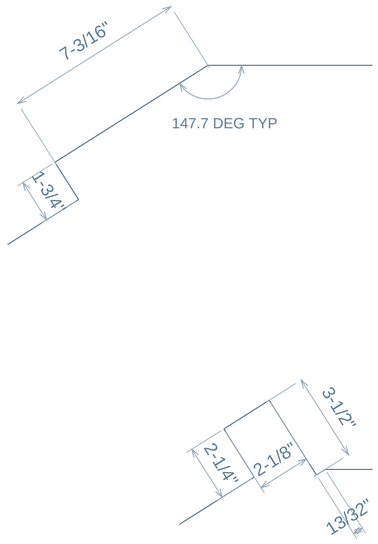

DETAIL 3 / CONNECTED OUTLINE / 1:3

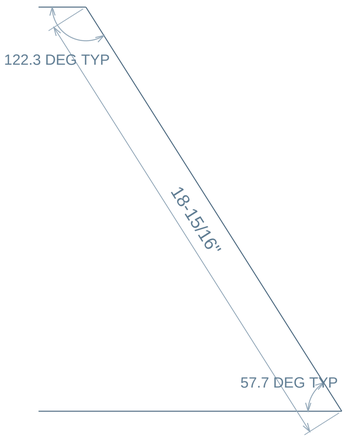

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ACTUAL ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 12

body-0011 / QTY 1 / 3/8" PLATE / OUTER PROFILE / SLOT LAYOUT ON SHEET 2 / INCHES

01 / TOP - FACE A / COMPLETE BODY / SCALE 1:5

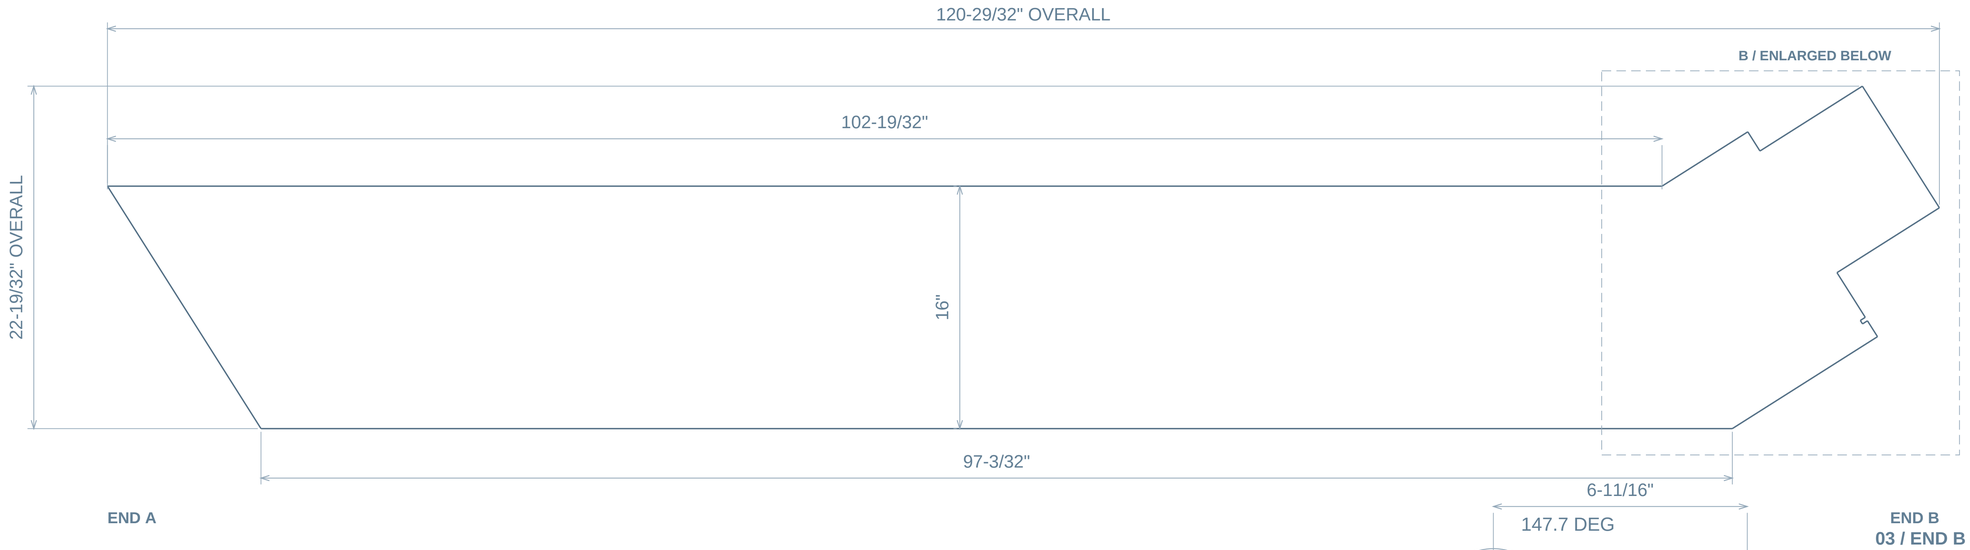


PLATE THICKNESS

3/8"


TRUE FACE VIEWS

Angles in the plate plane

End B rotated for clarity

Same source outline


02 / END A / CONNECTED FACE DETAIL / SCALE 1:3

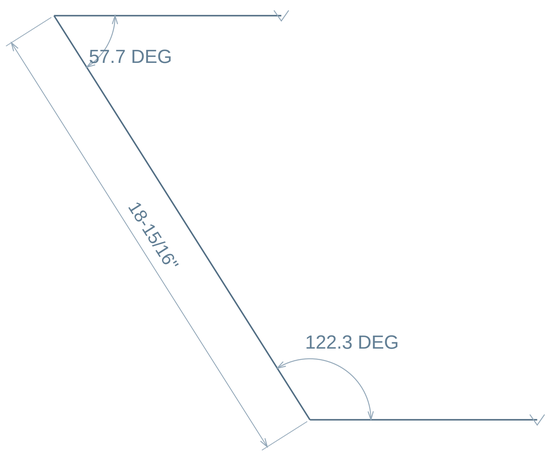

Actual adjacent edges
continue to the right.

Included cut angles shown
on the actual outline.

03 / END B / SCALE 1:2

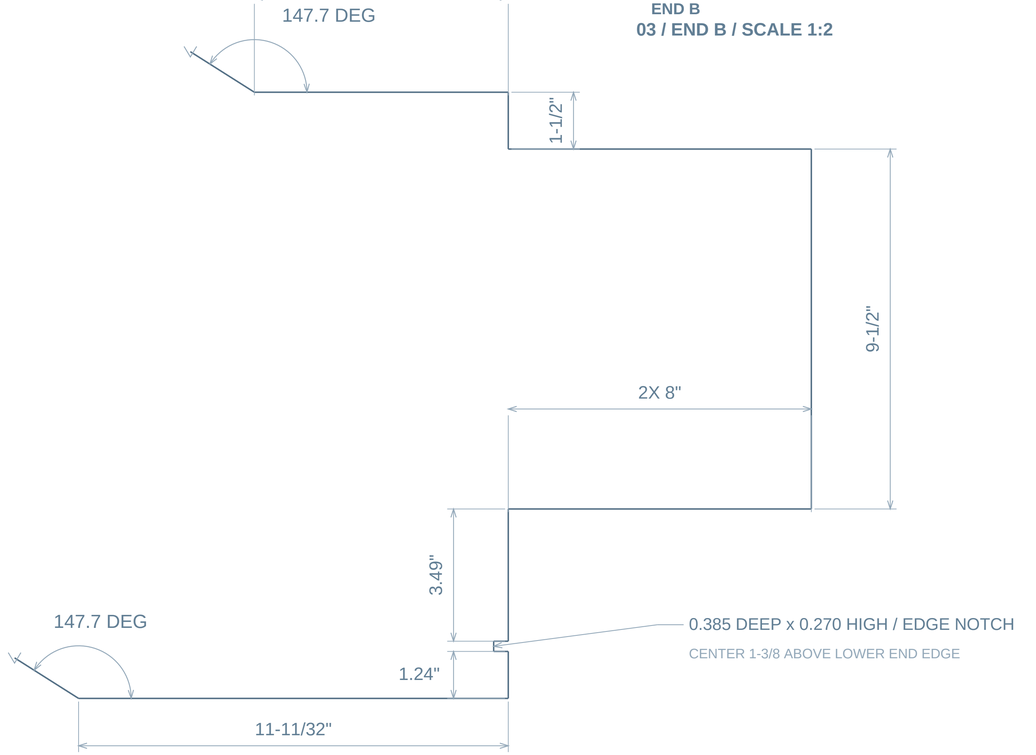

10 UNMARKED END-B CORNERS ARE 90.0 DEG / ALL PROFILE LENGTHS MEASURED IN THE TRUE FACE PLANE.

Break marks indicate view continuation only. They do not indicate a fabrication cut or splice.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / MODEL REVIEW / DO NOT SCALE

stair asm body 12 / SLOT LAYOUT

40 RECTANGULAR SLOTS / 5 TYPES x 8 INSTANCES / ALL THRU 3/8 PLATE / SEE SHEET 1 FOR THE EDGE NOTCH

VERIFIED REPEAT

8 bays / 5 slots per bay

U runs parallel to the long straight edges.


Datum A: U = 0 at the leftmost material.

Edge C: actual lower long edge, V = 0.

First instances are dimensioned below.


Pitch is decimal to preserve all stations.


01 / ALL 40 SLOTS / TRUE FACE / SCALE 1:6

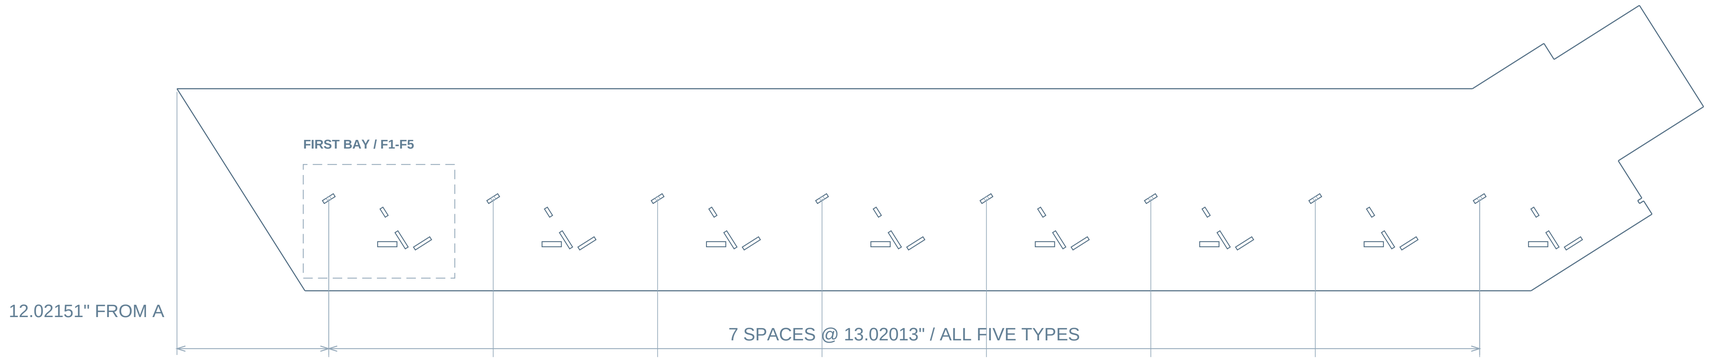

F1 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 12.02151" / V 7.29678" / LOCATION VIEW 1:8

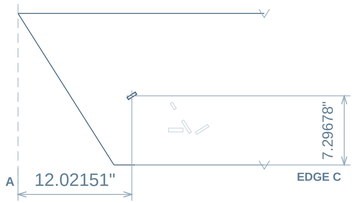





LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

F2 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.40043" / V 6.22294" / LOCATION VIEW 1:8

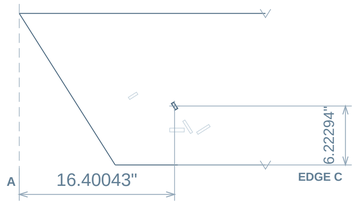




LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F3 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.65543" / V 3.68750" / LOCATION VIEW 1:8

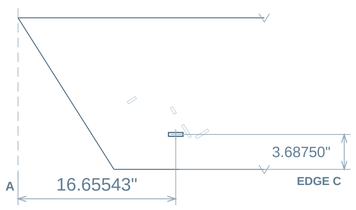





LONG AXIS 0.0 DEG CCW FROM +U / SIZE VIEW 1:1

F4 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 17.78660" / V 4.03402" / LOCATION VIEW 1:8

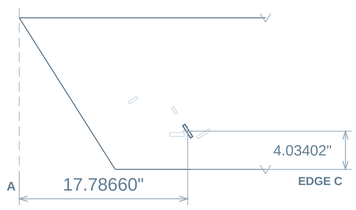


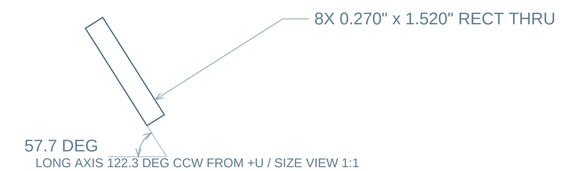


LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F5 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 19.44454" / V 3.75233" / LOCATION VIEW 1:8

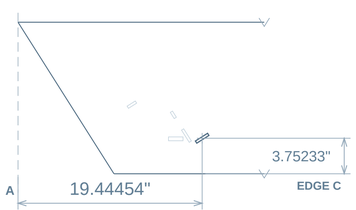




LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

PROFILE FRACTIONS NEAREST 1/32 / SLOT CENTERS AND REPEAT PITCH RETAINED AS DECIMALS / ANGLES 0.1 DEG

COMMON U/V DATUMS ON EVERY VIEW / ARCS SHOW ACUTE LINE INCLINATION / CCW LONG-AXIS ORIENTATION IS LABELED.

stair asm body 13 / COMPLETE PROFILE


body-0012 / QTY 1 / THICKNESS 3/8" / INCHES

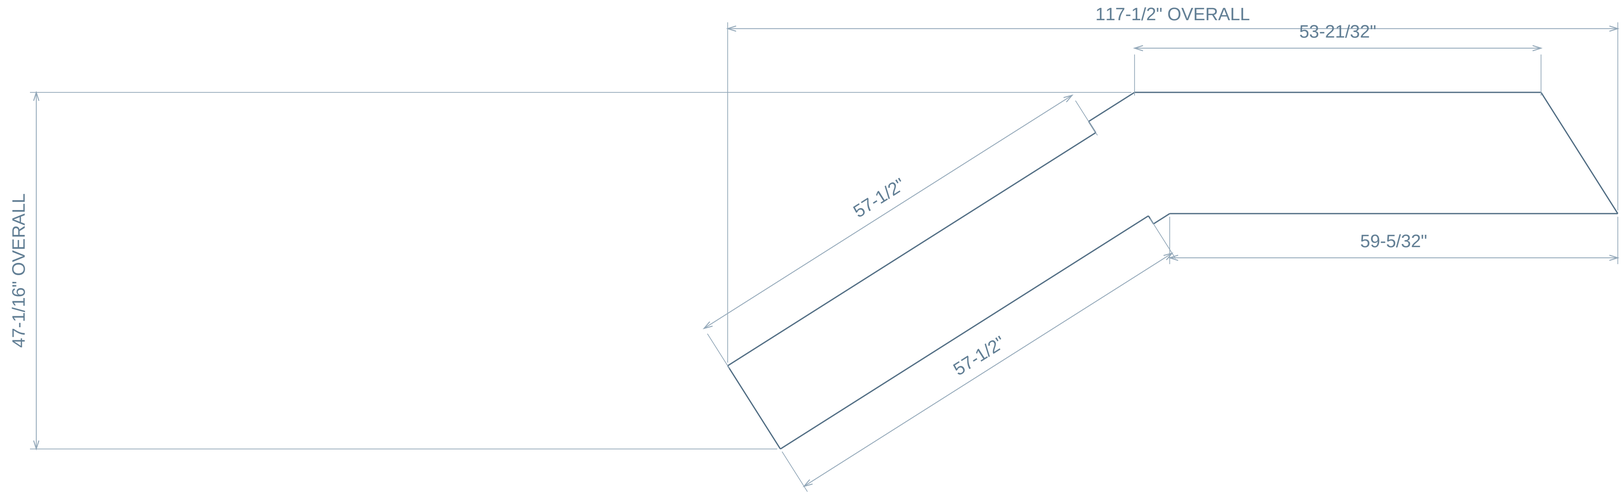


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

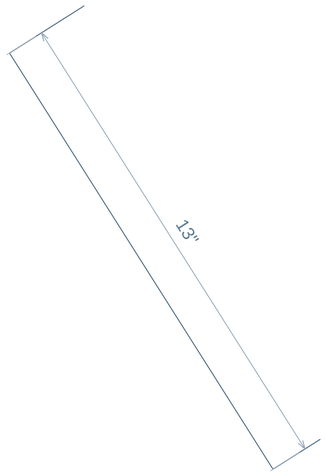

DETAIL 2 / CONNECTED OUTLINE / 1:3

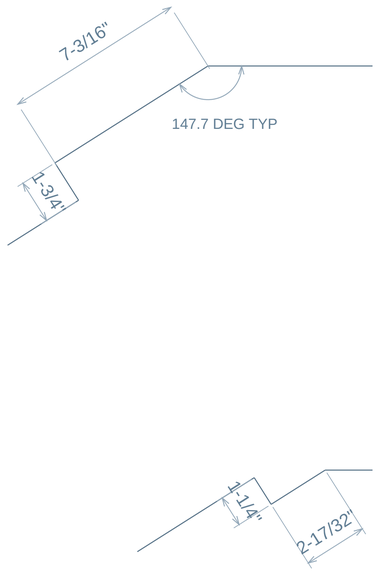

DETAIL 3 / CONNECTED OUTLINE / 1:3

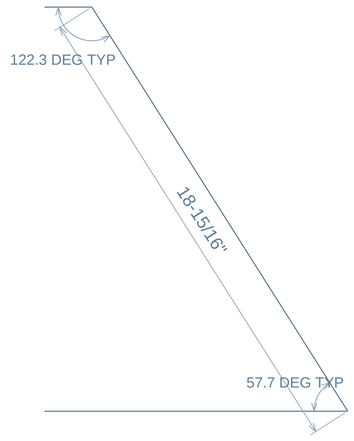


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ACTUAL ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 13 / SLOT PATTERNS

body-0012 / QTY 1 / THICKNESS 3/8" / INCHES

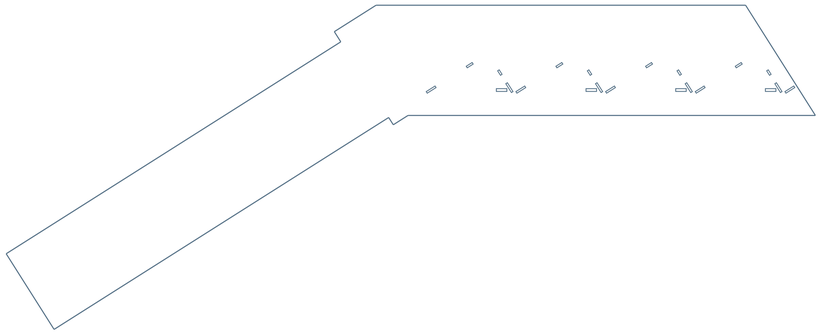

DATUM A: U=0 THROUGH LEFTMOST MATERIAL / C: ACTUAL UPPER STRAIGHT EDGE / DIMENSIONS DOWN FROM C


F1 / 5 RECTANGULAR THROUGH SLOTS

LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1.125

F2 / 4 RECTANGULAR THROUGH SLOTS


LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1.125

F3 / 4 RECTANGULAR THROUGH SLOTS

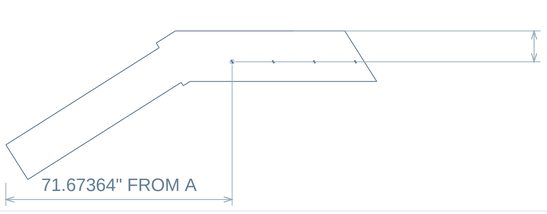


LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1.125

F4 / 4 RECTANGULAR THROUGH SLOTS

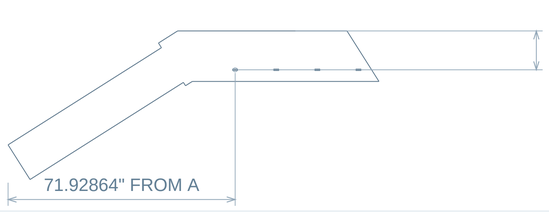

LONG AXIS 0.0 DEG CCW FROM +U / SIZE VIEW 1:1.125

F5 / 4 RECTANGULAR THROUGH SLOTS

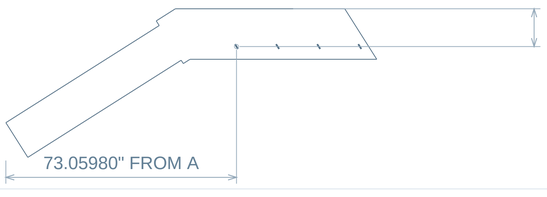

LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1.125


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ACTUAL ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz LH

body-0013 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

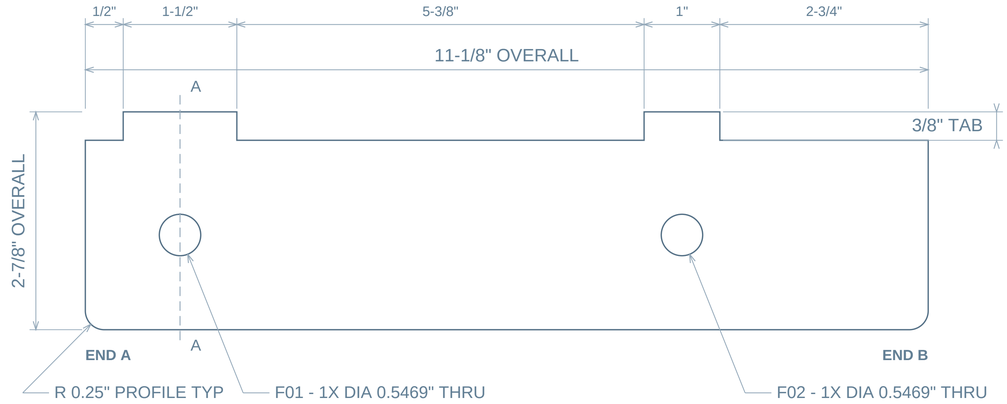

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

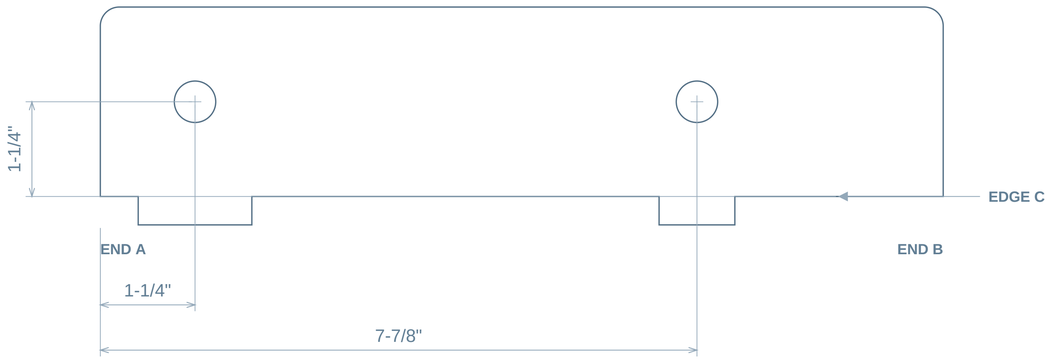


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

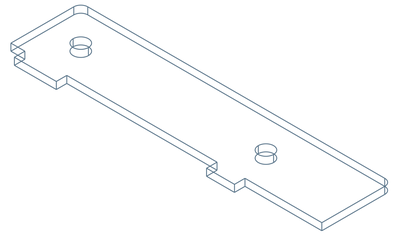

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert LH

body-0014 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

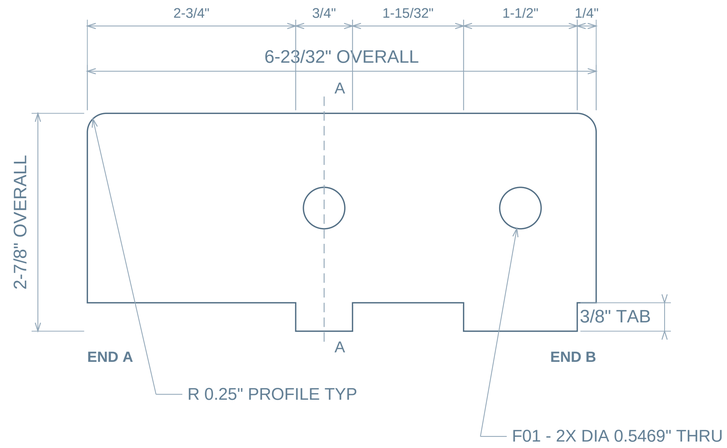

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

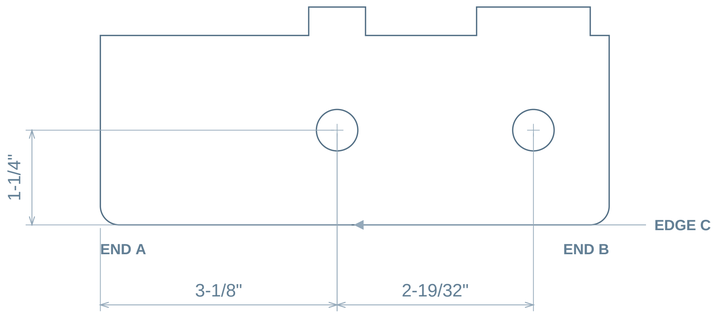


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

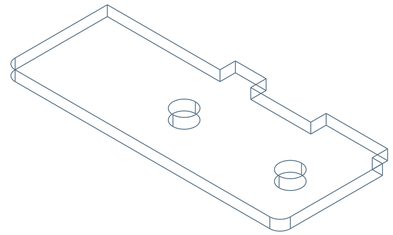

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top LH

body-0036 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

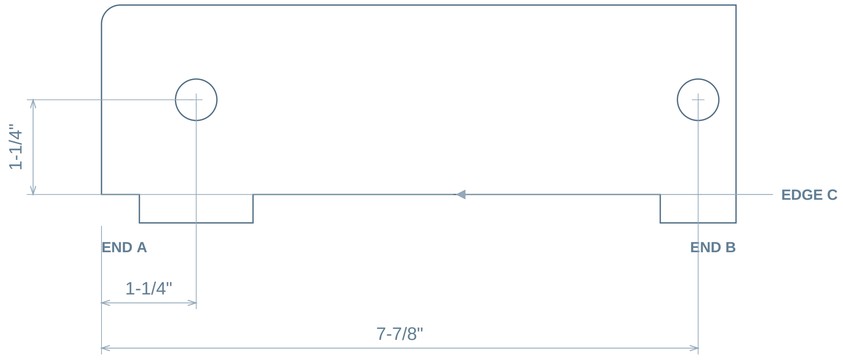


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

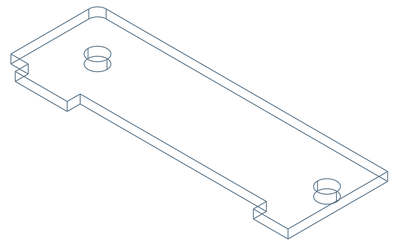

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.