CALIPER / 2606

TOP RH STRINGER

2606-B002-P02-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHT inside / COMPLETE PROFILE

body-0082 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

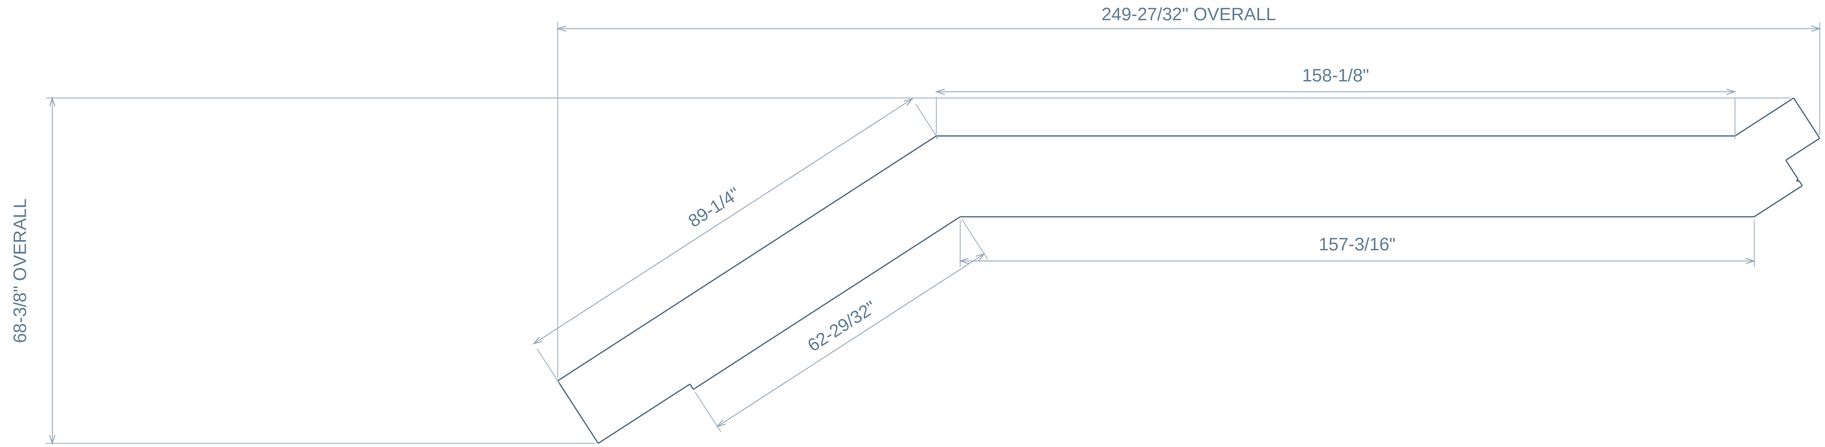

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:4

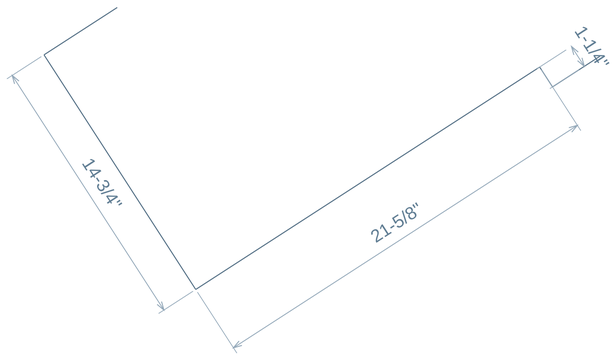

DETAIL 2 / CONNECTED OUTLINE / 1:4

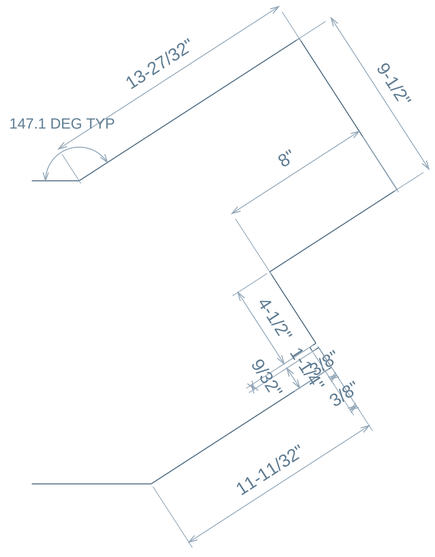

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stringer plates RHT inside / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0082 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=60.85838" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 13 RECTANGULAR THROUGH SLOTS

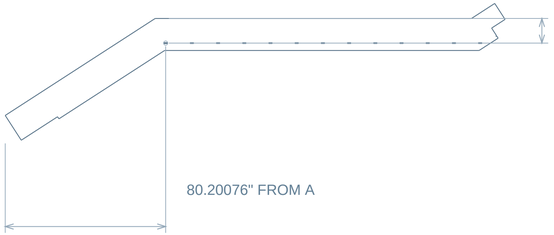

12 SPACES @ 13.09976" ALONG +U

LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.31250" FROM C

F2 / 13 RECTANGULAR THROUGH SLOTS

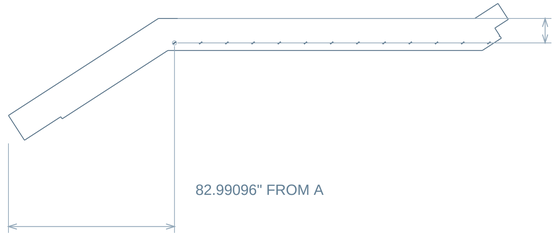

12 SPACES @ 13.09976" ALONG +U

LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.21962" FROM C

F3 / 12 RECTANGULAR THROUGH SLOTS

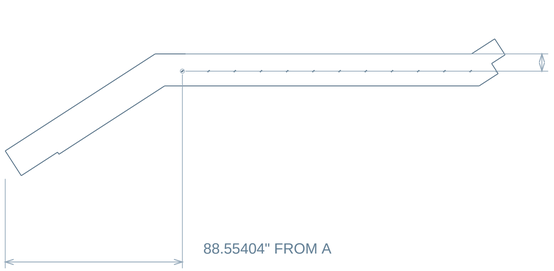

11 SPACES @ 13.09976" ALONG +U

LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

8.62201" FROM C

F4 / 12 RECTANGULAR THROUGH SLOTS

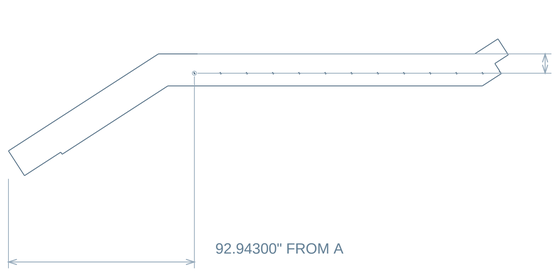

11 SPACES @ 13.09976" ALONG +U

LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

9.65408" FROM C

F5 / 12 RECTANGULAR THROUGH SLOTS

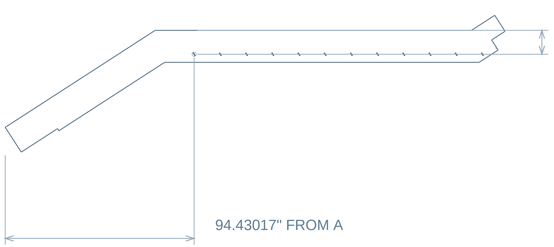

11 SPACES @ 13.09976" ALONG +U

LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

11.95374" FROM C

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG