CALIPER / 2606

BTM LH STRINGER

2606-B003-P03-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB inside / COMPLETE PROFILE

body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

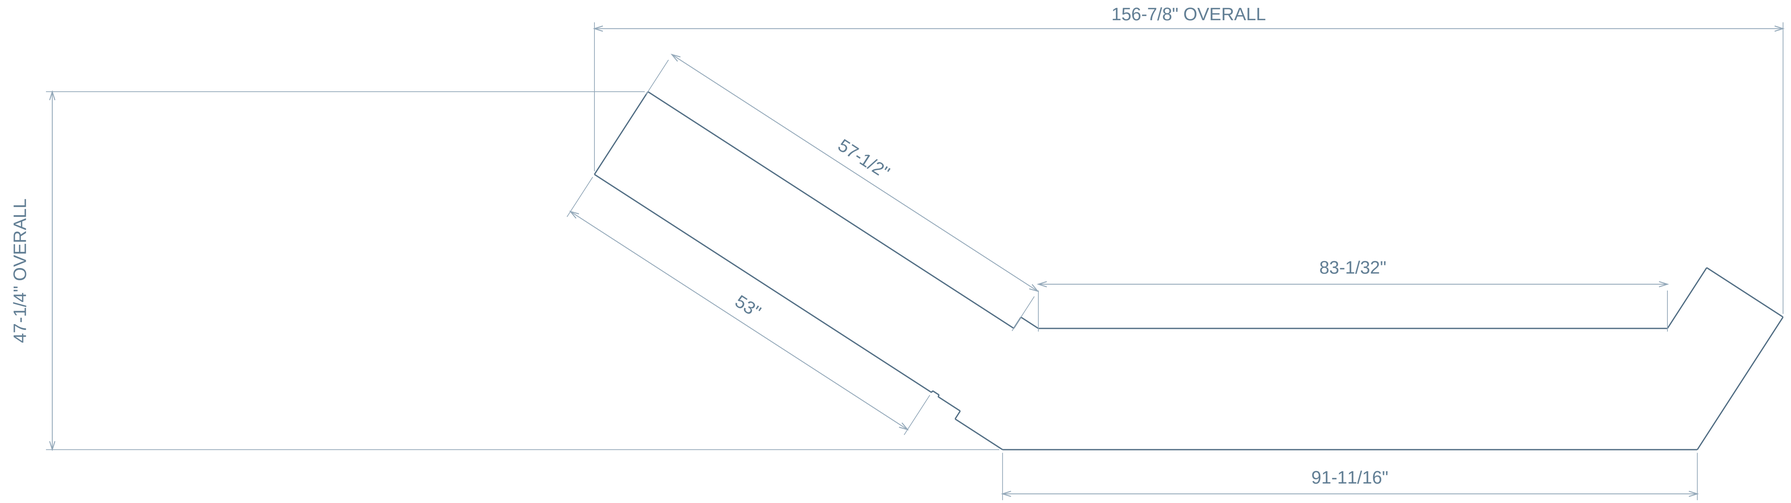

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

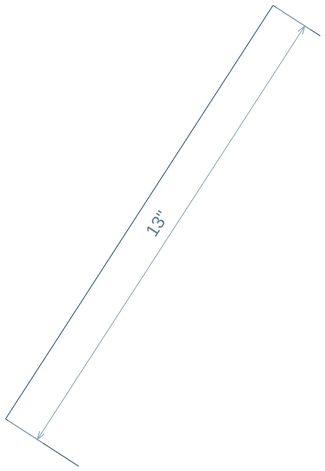

DETAIL 2 / CONNECTED OUTLINE / 1:3

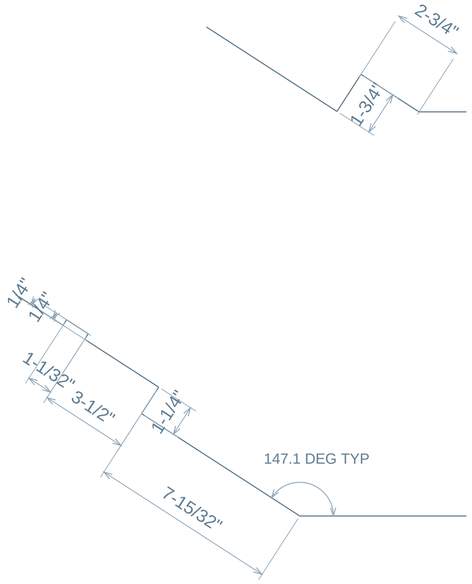

DETAIL 3 / CONNECTED OUTLINE / 1:4

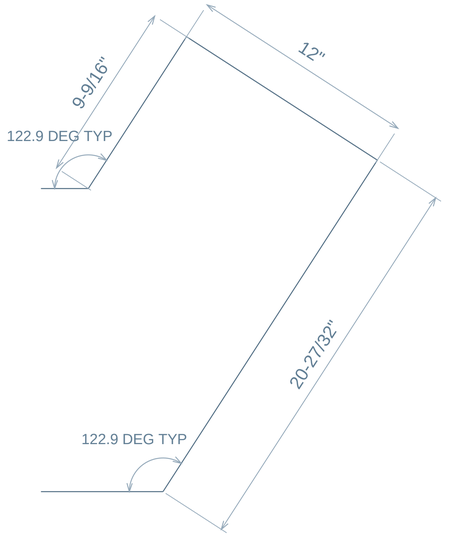

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stringer plates LHB inside / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=0.00000" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

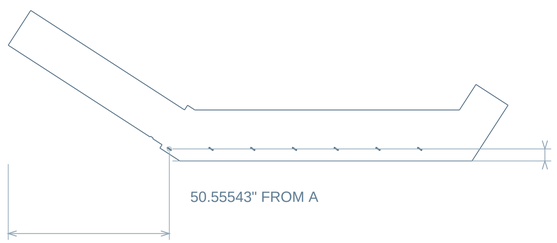

LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.78038" FROM C

F2 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

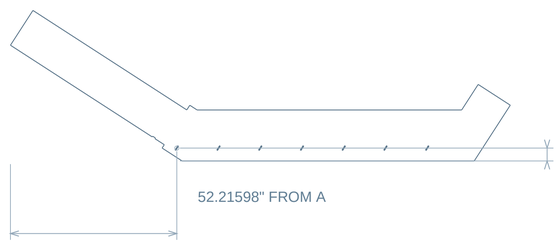



LONG AXIS 57.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

4.04626" FROM C

F3 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

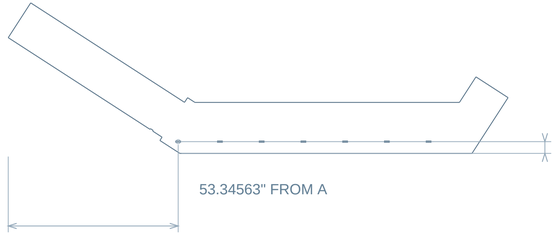



LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.68750" FROM C

F4 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

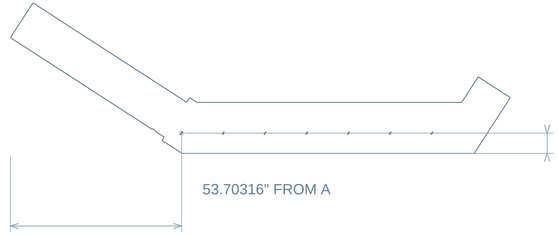

LONG AXIS 57.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

6.34592" FROM C

F5 / 6 RECTANGULAR THROUGH SLOTS

5 SPACES @ 13.09976" ALONG +U

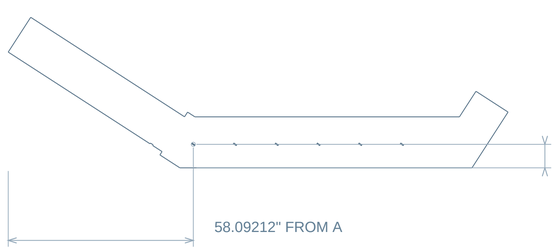

LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

7.37799" FROM C

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG