

HANDRAIL BRACKET MACHINING

80 bodies / 6 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

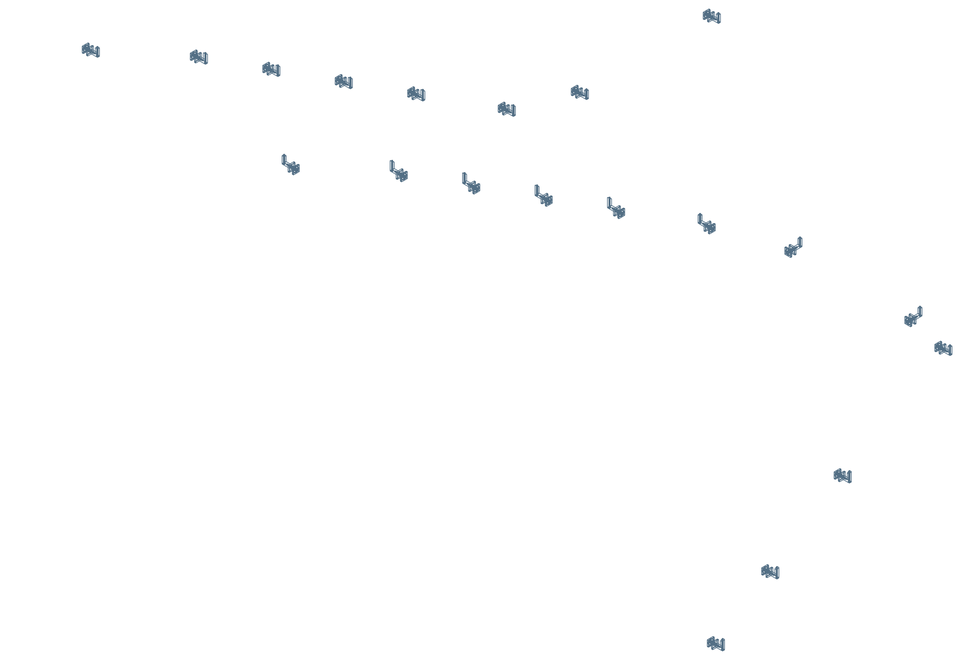

ASSEMBLY / TOP

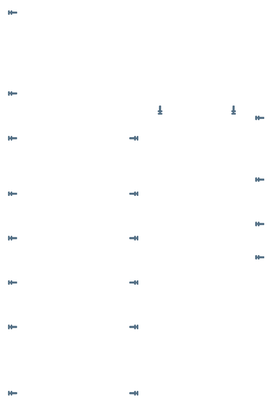

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B070-P01	handrail bracket inside puck	20	2-1/2"
02 / 2606-B070-P02	handrail bracket LH sloped stem [REF ONLY]	7	3-11/16"
03 / 2606-B070-P03	handrail bracket outside clamp disc	20	1-17/32"
04 / 2606-B070-P05	handrail bracket outside cover	20	2-1/2"
05 / 2606-B070-P08	handrail bracket flat stem	8	3-9/32"
06 / 2606-B070-P10	handrail bracket RH sloped stem [REF ONLY]	5	3-11/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

SHARED MACHINING STAGE / physical bracket part numbers and quantities are reused.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Sloped bracket stems retain explicit curved-intersection detailing limitations.

Each hole/slot includes size and two center-location dimensions.


Formed bodies retain inner source radii and actual sections.

Model-derived data. Existing dedicated drawings and prior annotations.


handrail bracket inside puck

body-0673 | QTY 20 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

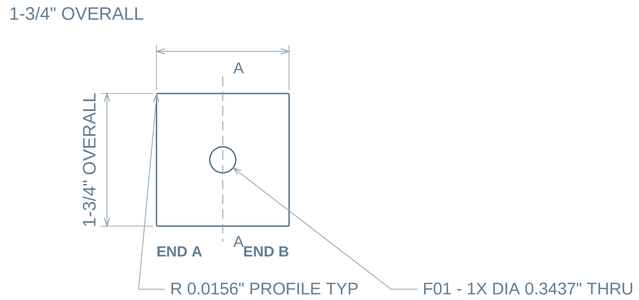

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 7/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

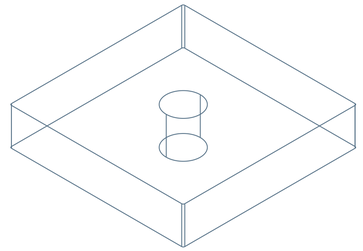

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


handrail bracket LH sloped stem

body-0674 / QTY 7 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

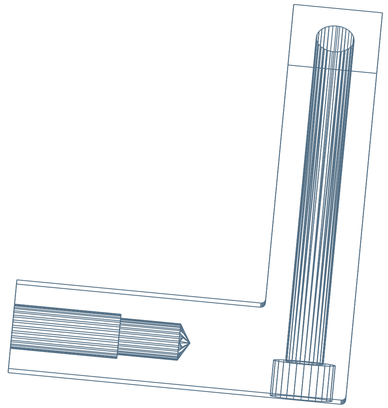


END REFERENCE



SIDE REFERENCE

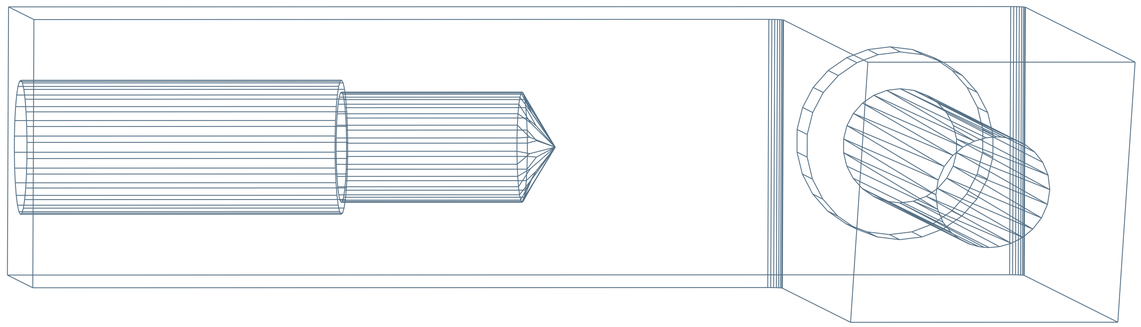

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


handrail bracket outside clamp disc

body-0675 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / CONCENTRIC BORES

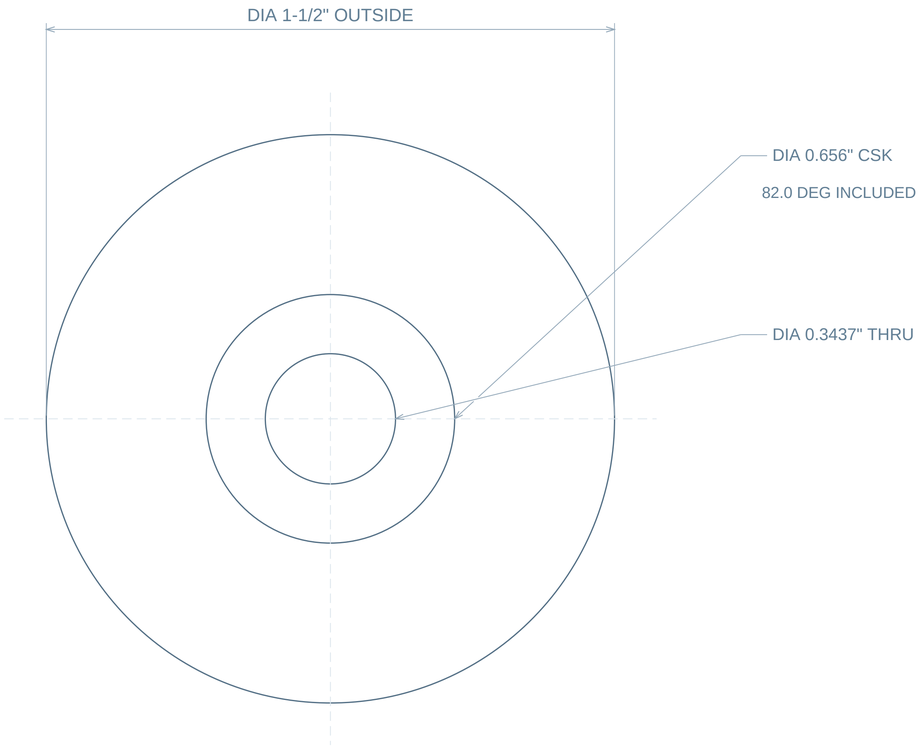

02 / DIAMETRAL SECTION A-A

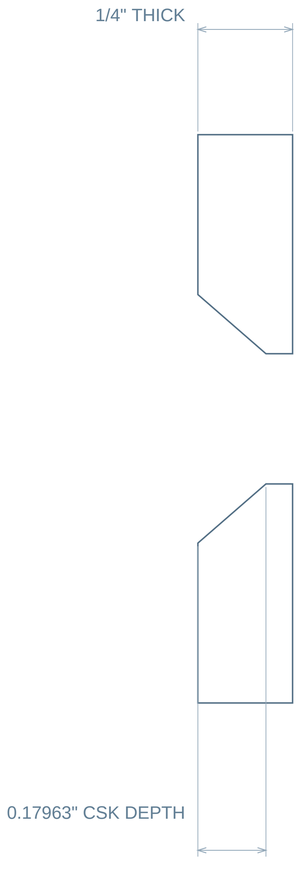


BORE AND COUNTERSINK ARE CONCENTRIC WITH OD

FRACTIONS NEAREST 1/32 / MEASURED DECIMAL BORES RETAINED / ANGLES 0.1 DEG / DO NOT SCALE


handrail bracket outside cover

body-0677 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / POCKET OPENING

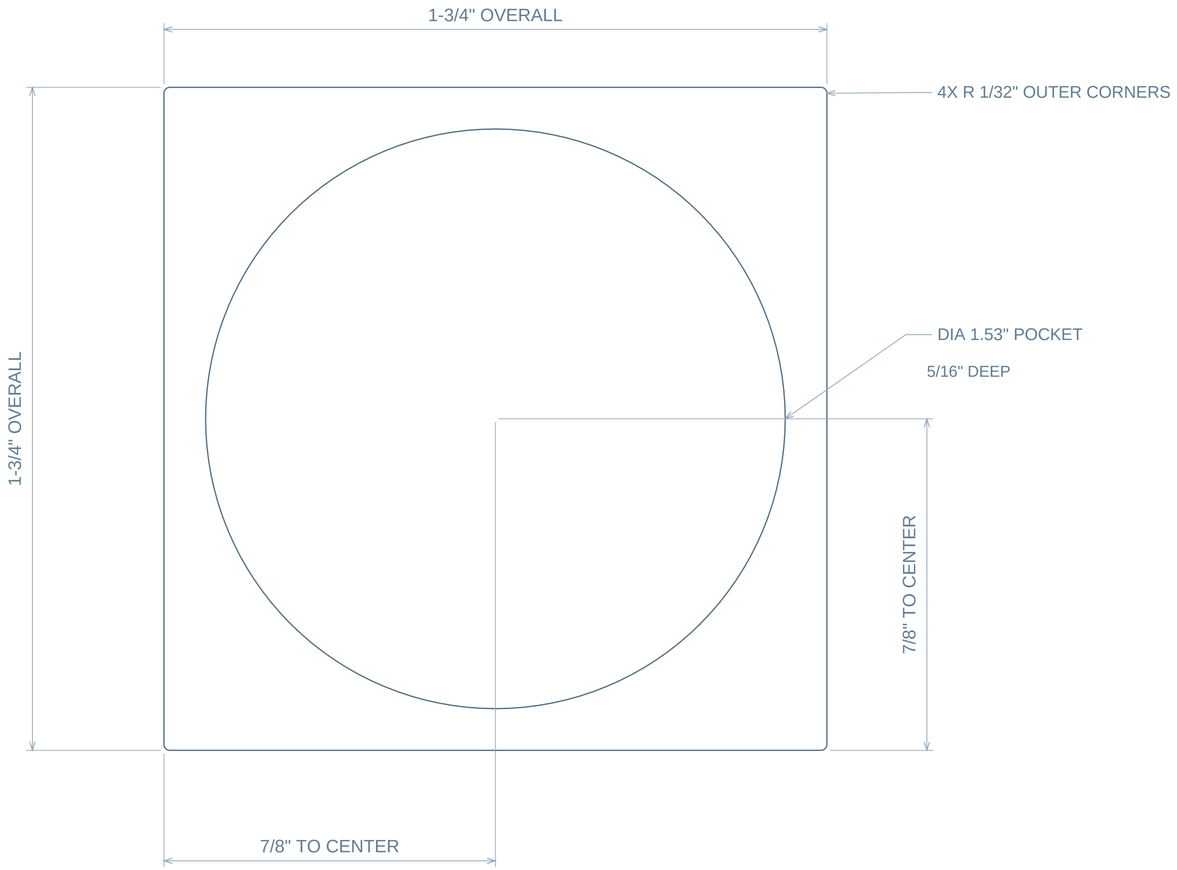


02 / CENTER SECTION A-A

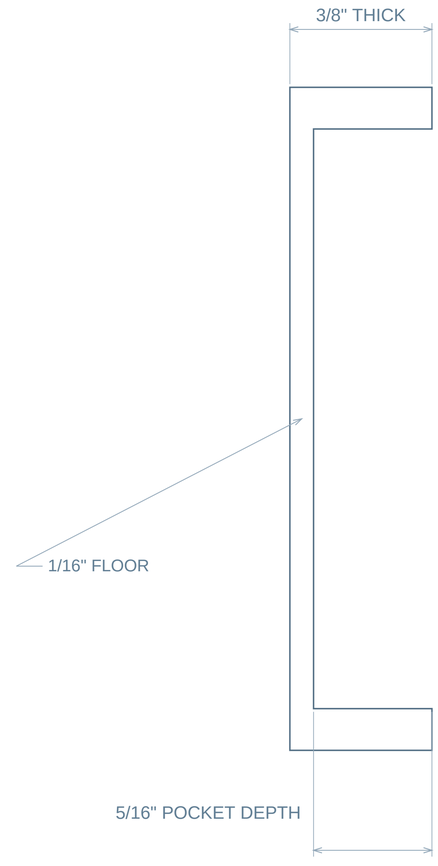


handrail bracket flat stem

body-0698 | QTY 8 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

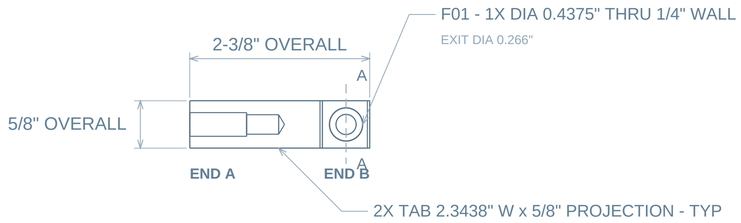

02 / FRONT - FORM PLAN

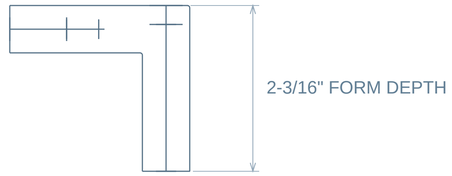

03 / BOTTOM - FACE B

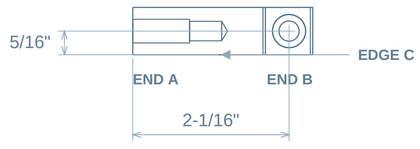

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 1-1/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 1-3/16"

1 SPACES @ 0" TYP

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


handrail bracket RH sloped stem

body-0778 / QTY 5 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

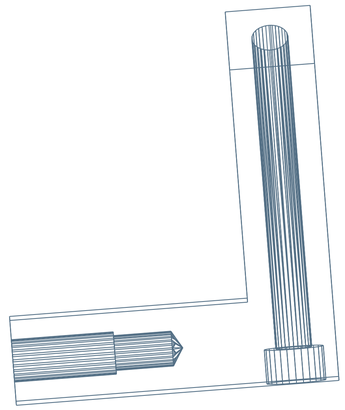


END REFERENCE



SIDE REFERENCE

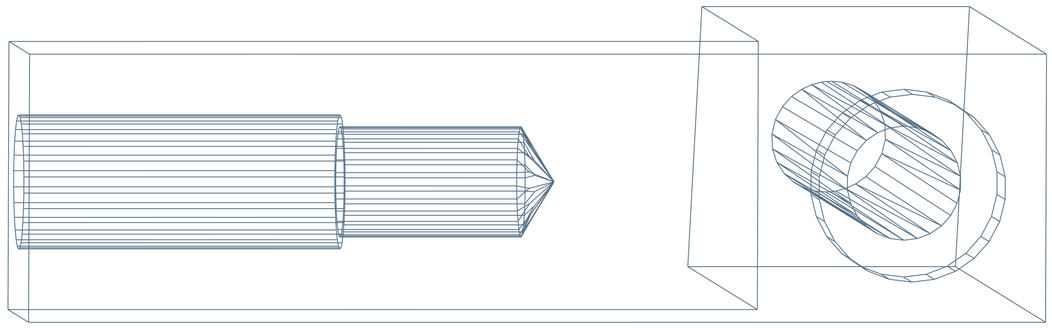

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.