

PLINTH ASSEMBLY

31 bodies / 29 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

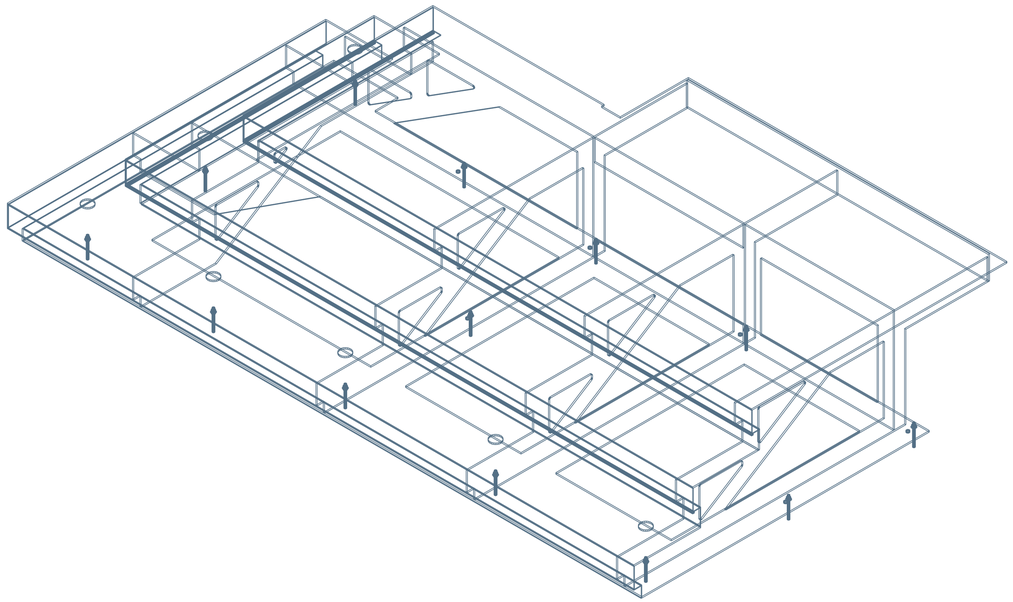

ASSEMBLY / TOP

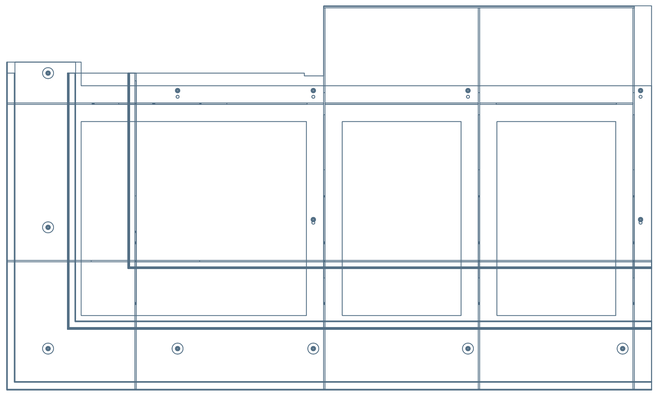

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B046-P01	plinth asm body 696	1	131-1/4"
02 / 2606-B046-P02	plinth asm body 697	1	59-15/32"
03 / 2606-B046-P03	plinth asm body 698	1	117-1/16"
04 / 2606-B046-P04	plinth asm body 699	1	129-1/4"
05 / 2606-B046-P05	plinth asm body 700	1	130-11/32"
06 / 2606-B046-P06	plinth asm body 701	1	128-17/32"
07 / 2606-B046-P07	plinth asm body 702	1	46-1/2"
08 / 2606-B046-P08	plinth asm body 703	1	106-1/16"
09 / 2606-B046-P09	plinth asm body 704	1	115-3/4"
10 / 2606-B046-P10	plinth asm body 705	1	115-3/4"
11 / 2606-B046-P11	plinth asm body 706	1	113-31/32"
12 / 2606-B046-P12	plinth asm body 707	1	35-9/16"
13 / 2606-B046-P13	plinth asm body 708	1	95-1/16"
14 / 2606-B046-P14	plinth asm body 709	1	101-13/32"
15 / 2606-B046-P15	plinth asm body 710	1	56-9/16"
16 / 2606-B046-P16	plinth asm body 711	1	106-5/16"
17 / 2606-B046-P17	platform stringer plates 2.0	3	71-3/8"
18 / 2606-B046-P18	platform stringer plates 02.1	1	57-21/32"
19 / 2606-B046-P19	platform stringer plates 03	1	117-23/32"
20 / 2606-B046-P20	plinth asm body 717	1	33-29/32"
21 / 2606-B046-P21	plinth asm body 718	1	28-3/32"
22 / 2606-B046-P22	plinth asm body 719	1	27-31/32"
23 / 2606-B046-P23	plinth asm body 720	1	60"
24 / 2606-B046-P27	plinth asm body 760	1	115-3/4"
25 / 2606-B046-P28	plinth asm body 761	1	115-3/4"
26 / 2606-B046-P29	plinth asm body 762	1	115-23/32"
27 / 2606-B046-P30	plinth asm body 763	1	101-13/32"
28 / 2606-B046-P31	plinth asm body 764	1	101-13/32"
29 / 2606-B046-P32	plinth asm body 765	1	101-13/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

plinth asm body 696

body-0856 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

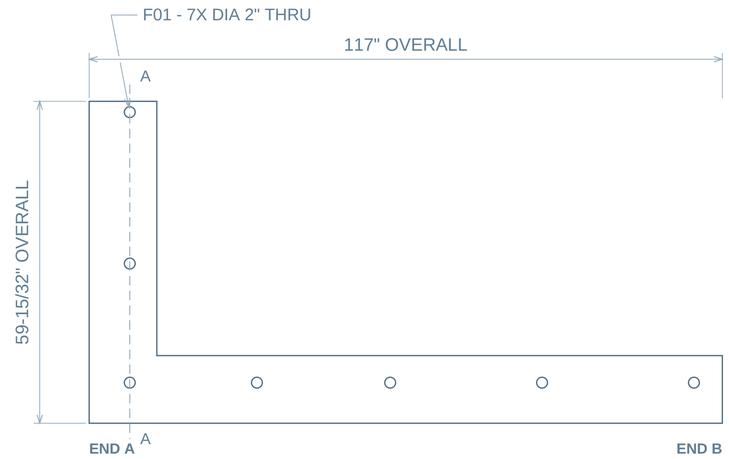

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

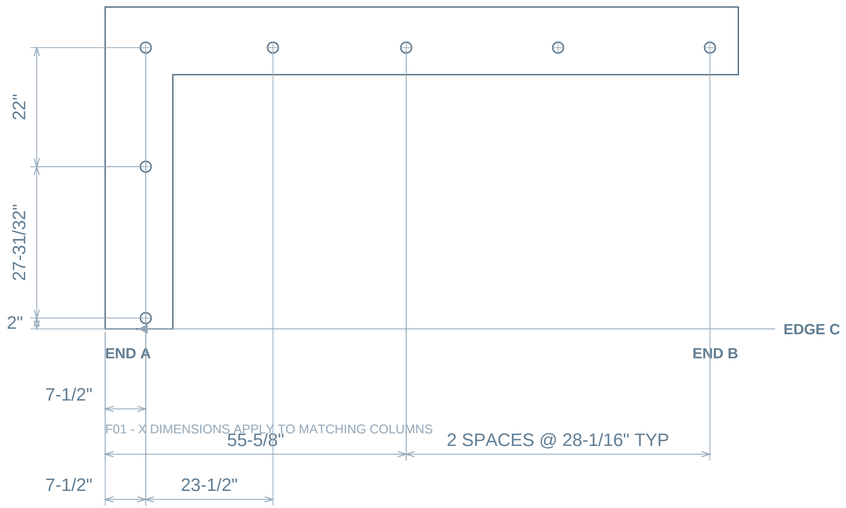


04 / SECTION A-A

X = 7-1/2" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC

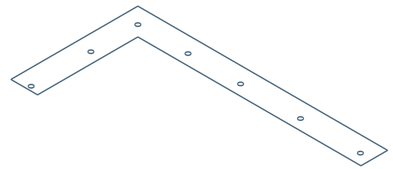

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 697

body-0857 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

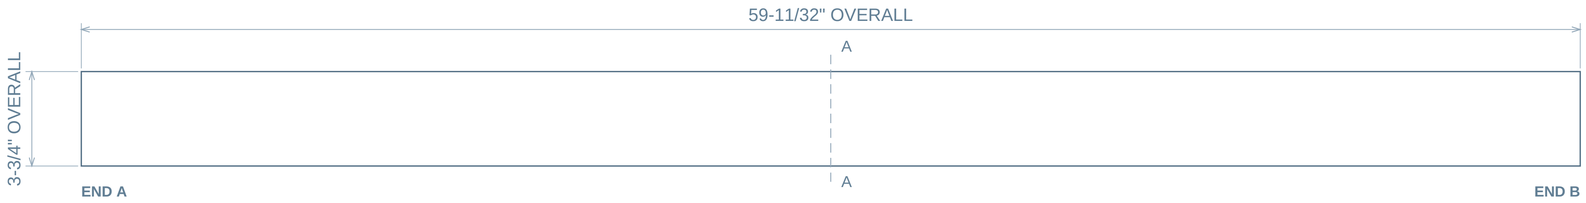


02 / FRONT - EDGE VIEW

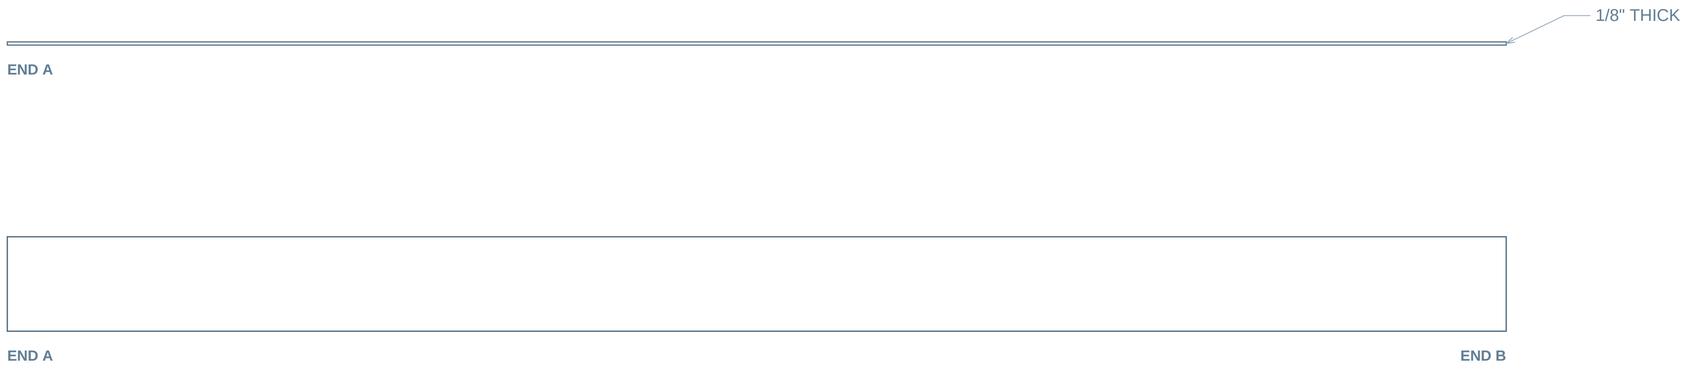

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 29-11/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

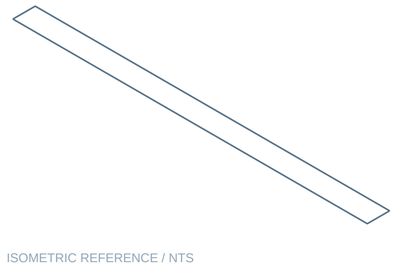

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-15/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 698

body-0248 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A




02 / FRONT - EDGE VIEW

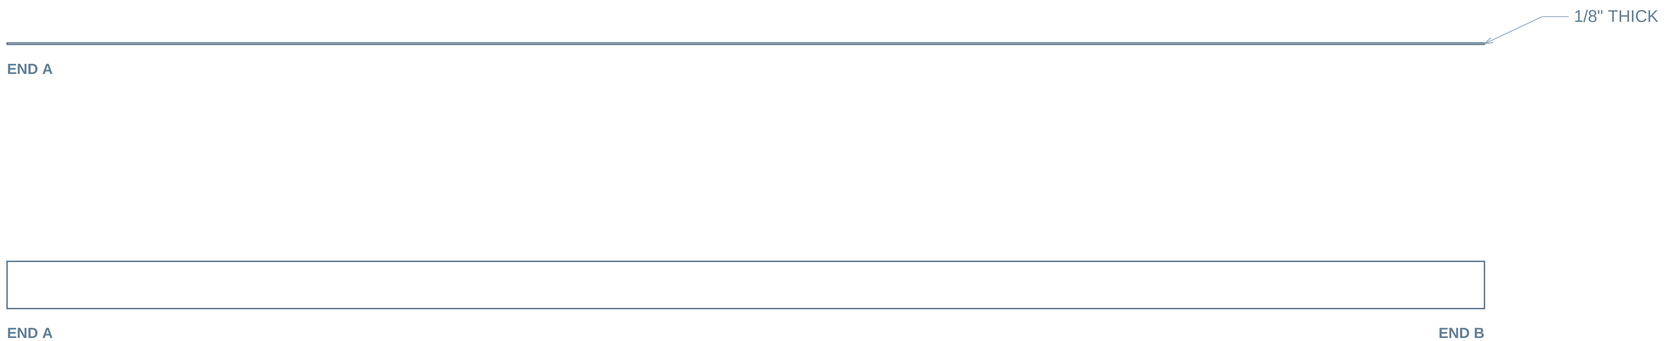

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 58-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

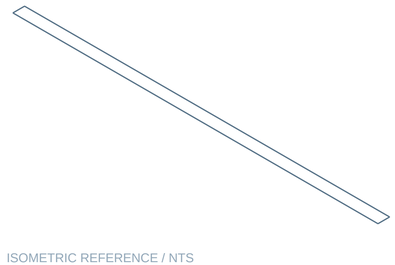

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 117-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 699

body-0858 / QTY 1 / INCHES / FACE SCALE 1:11


01 / TOP - FACE A

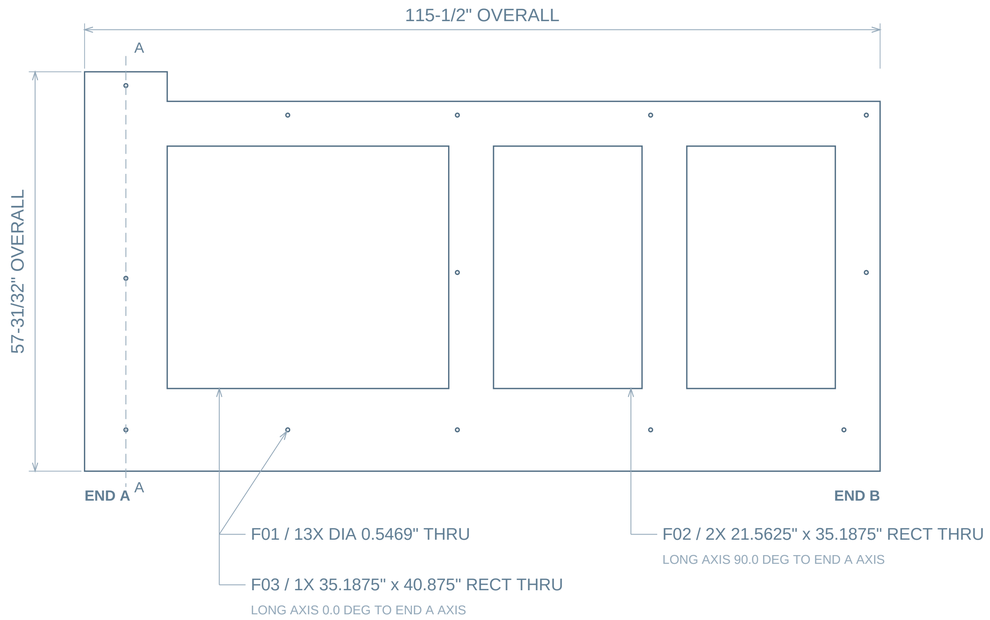

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B / FEATURE LOCATIONS

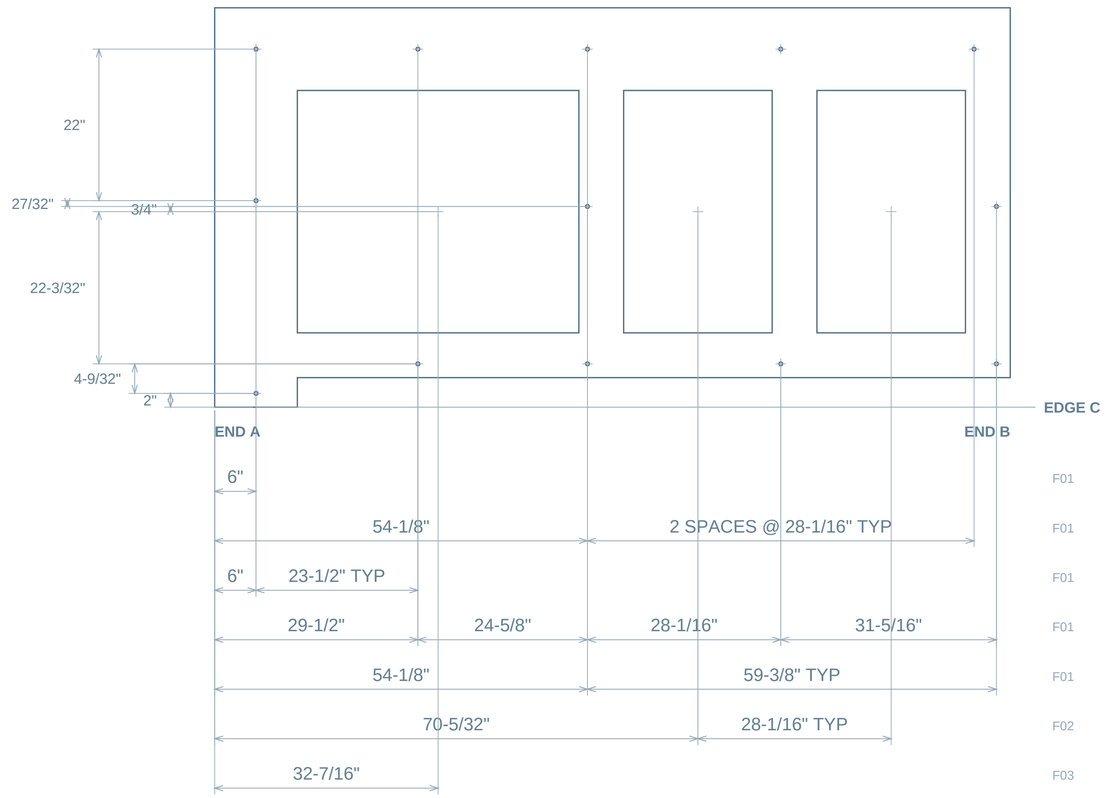


X CHAINS APPLY TO MATCHING COLUMNS ON THE INDICATED ROWS

04 / SECTION A-A

X = 6" FROM END A

1/4" PLATE / SECTION 1:10.436

05 / ISOMETRIC



FEATURE / DATUM NOTES


X from END A. Y from marked EDGE C. Dimensions locate feature centers.

Shared columns and equal pitches are consolidated; exceptions remain dimensioned.

plinth asm body 700

body-0859 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:14

01 / TOP - FACE A

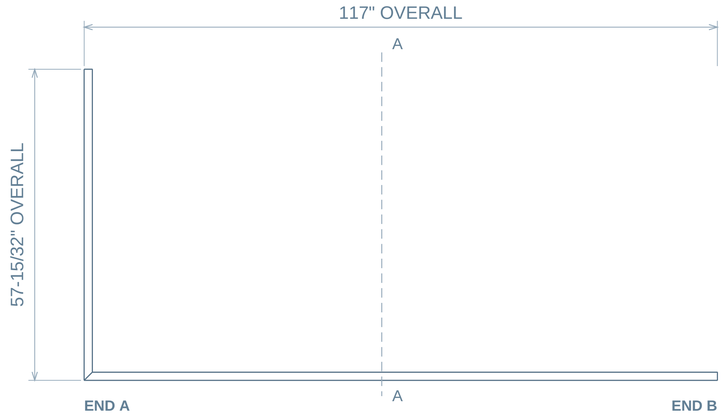

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 55" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

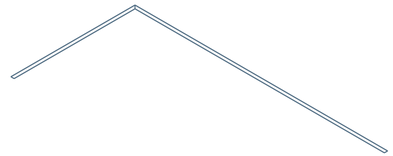

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 130-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 701

body-0249 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:21

01 / TOP - FACE A



02 / FRONT - FORM PLAN

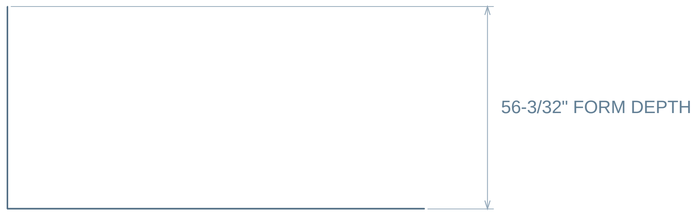

03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 54-11/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

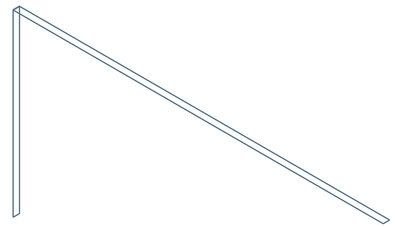

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 128-17/32”

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 702

body-0860 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

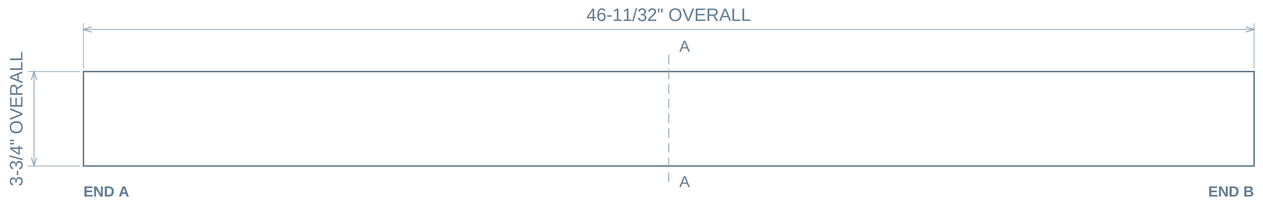

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 23-3/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

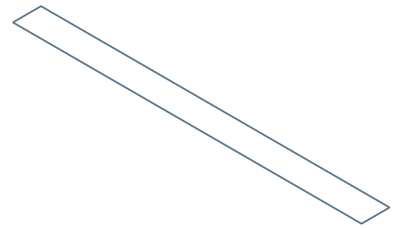

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 46-1/2"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 703

body-0253 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A

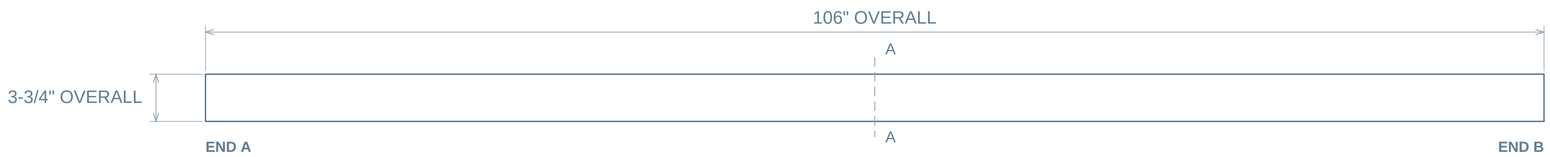

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 53" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

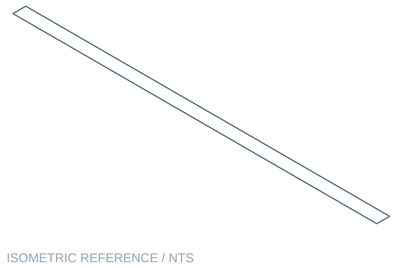

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 106-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 704

body-0861 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

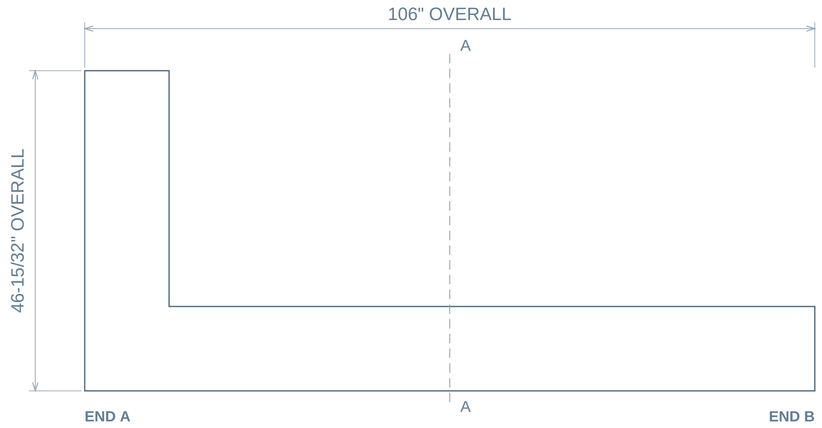

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

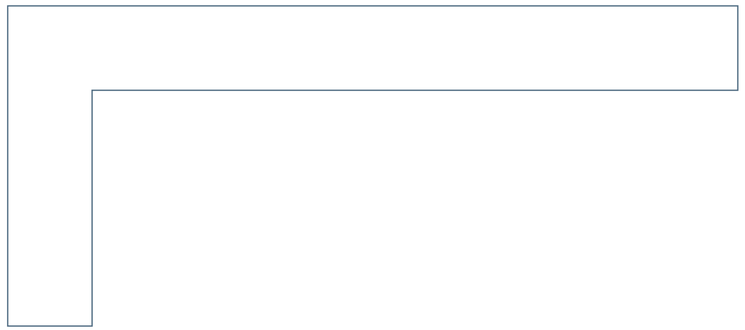


04 / SECTION A-A

X = 53" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC

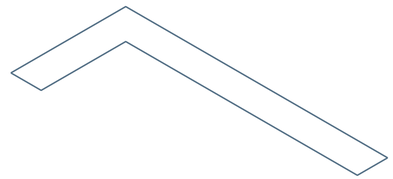

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 705

body-0862 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11

01 / TOP - FACE A

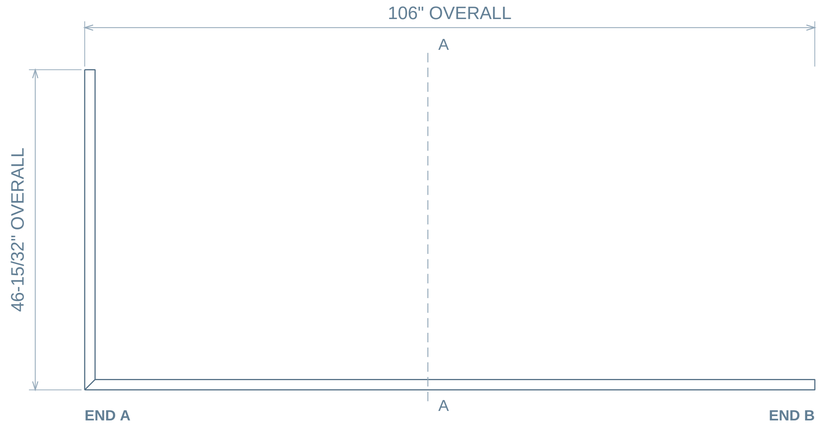

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

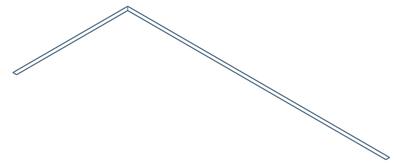

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 706

body-0863 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:17

01 / TOP - FACE A



02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-3/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

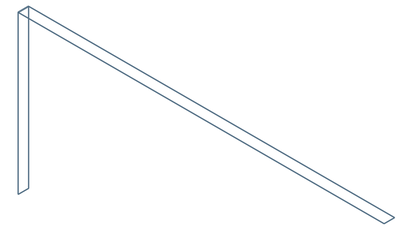

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 113-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 707

body-0864 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

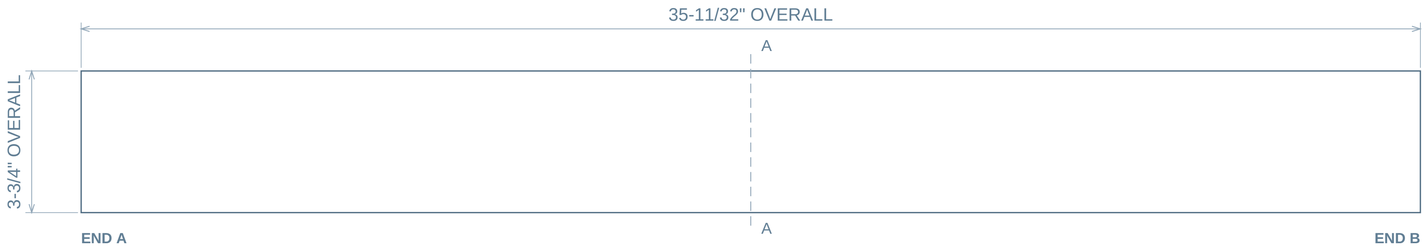

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 17-11/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

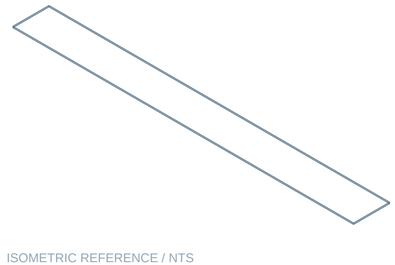

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 35-9/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 708

body-0258 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:5

01 / TOP - FACE A

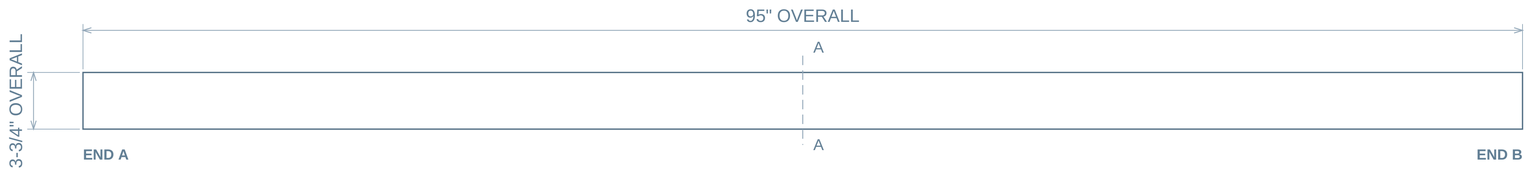

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 47-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

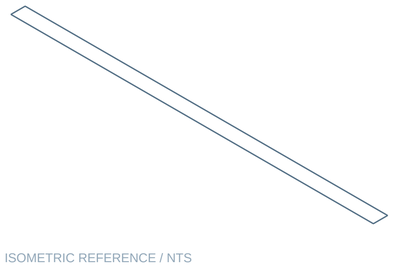

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 95-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 709

body-0261 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

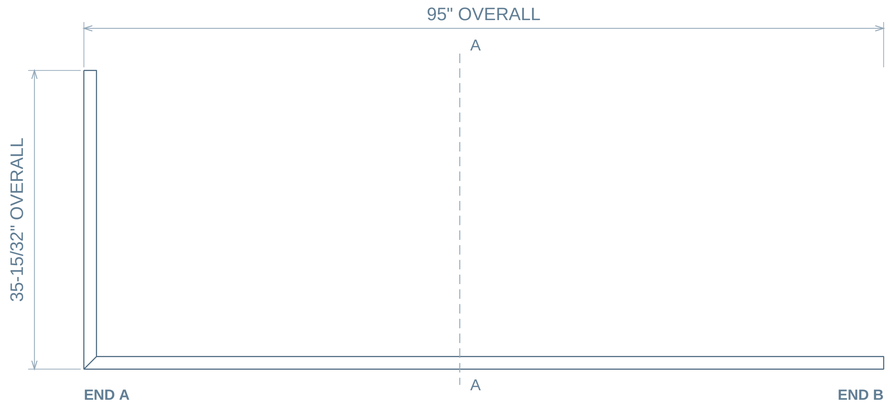

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

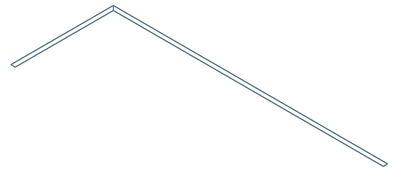

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 710

body-0260 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

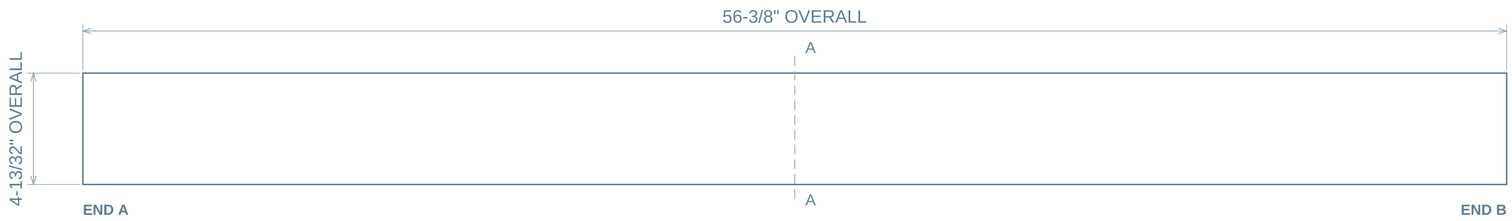

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

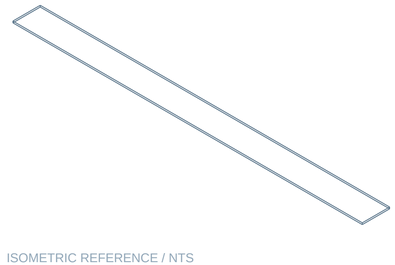

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 56-9/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 711

body-0865 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:12


01 / TOP - FACE A

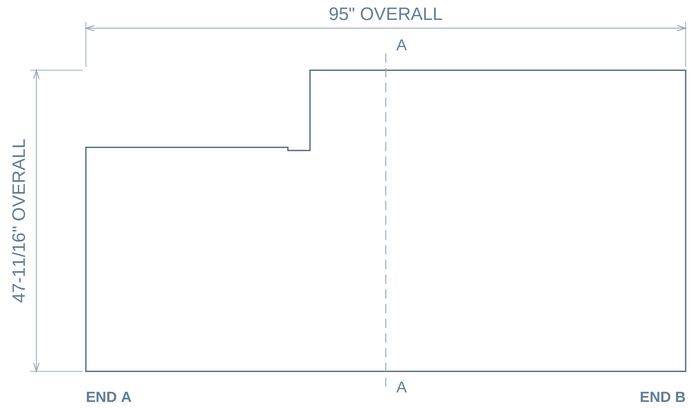

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

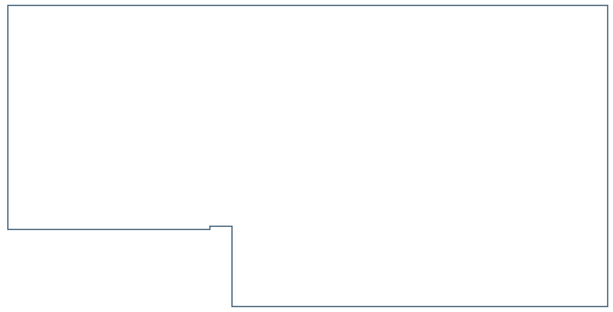


04 / SECTION A-A

X = 47-1/2" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC

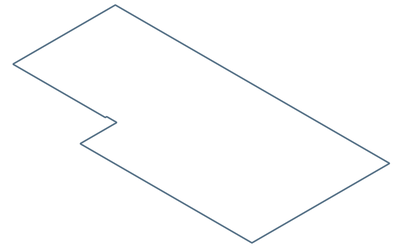

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 106-5/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


platform stringer plates 2.0 / COMPLETE FACE / OPENING LOCATIONS

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

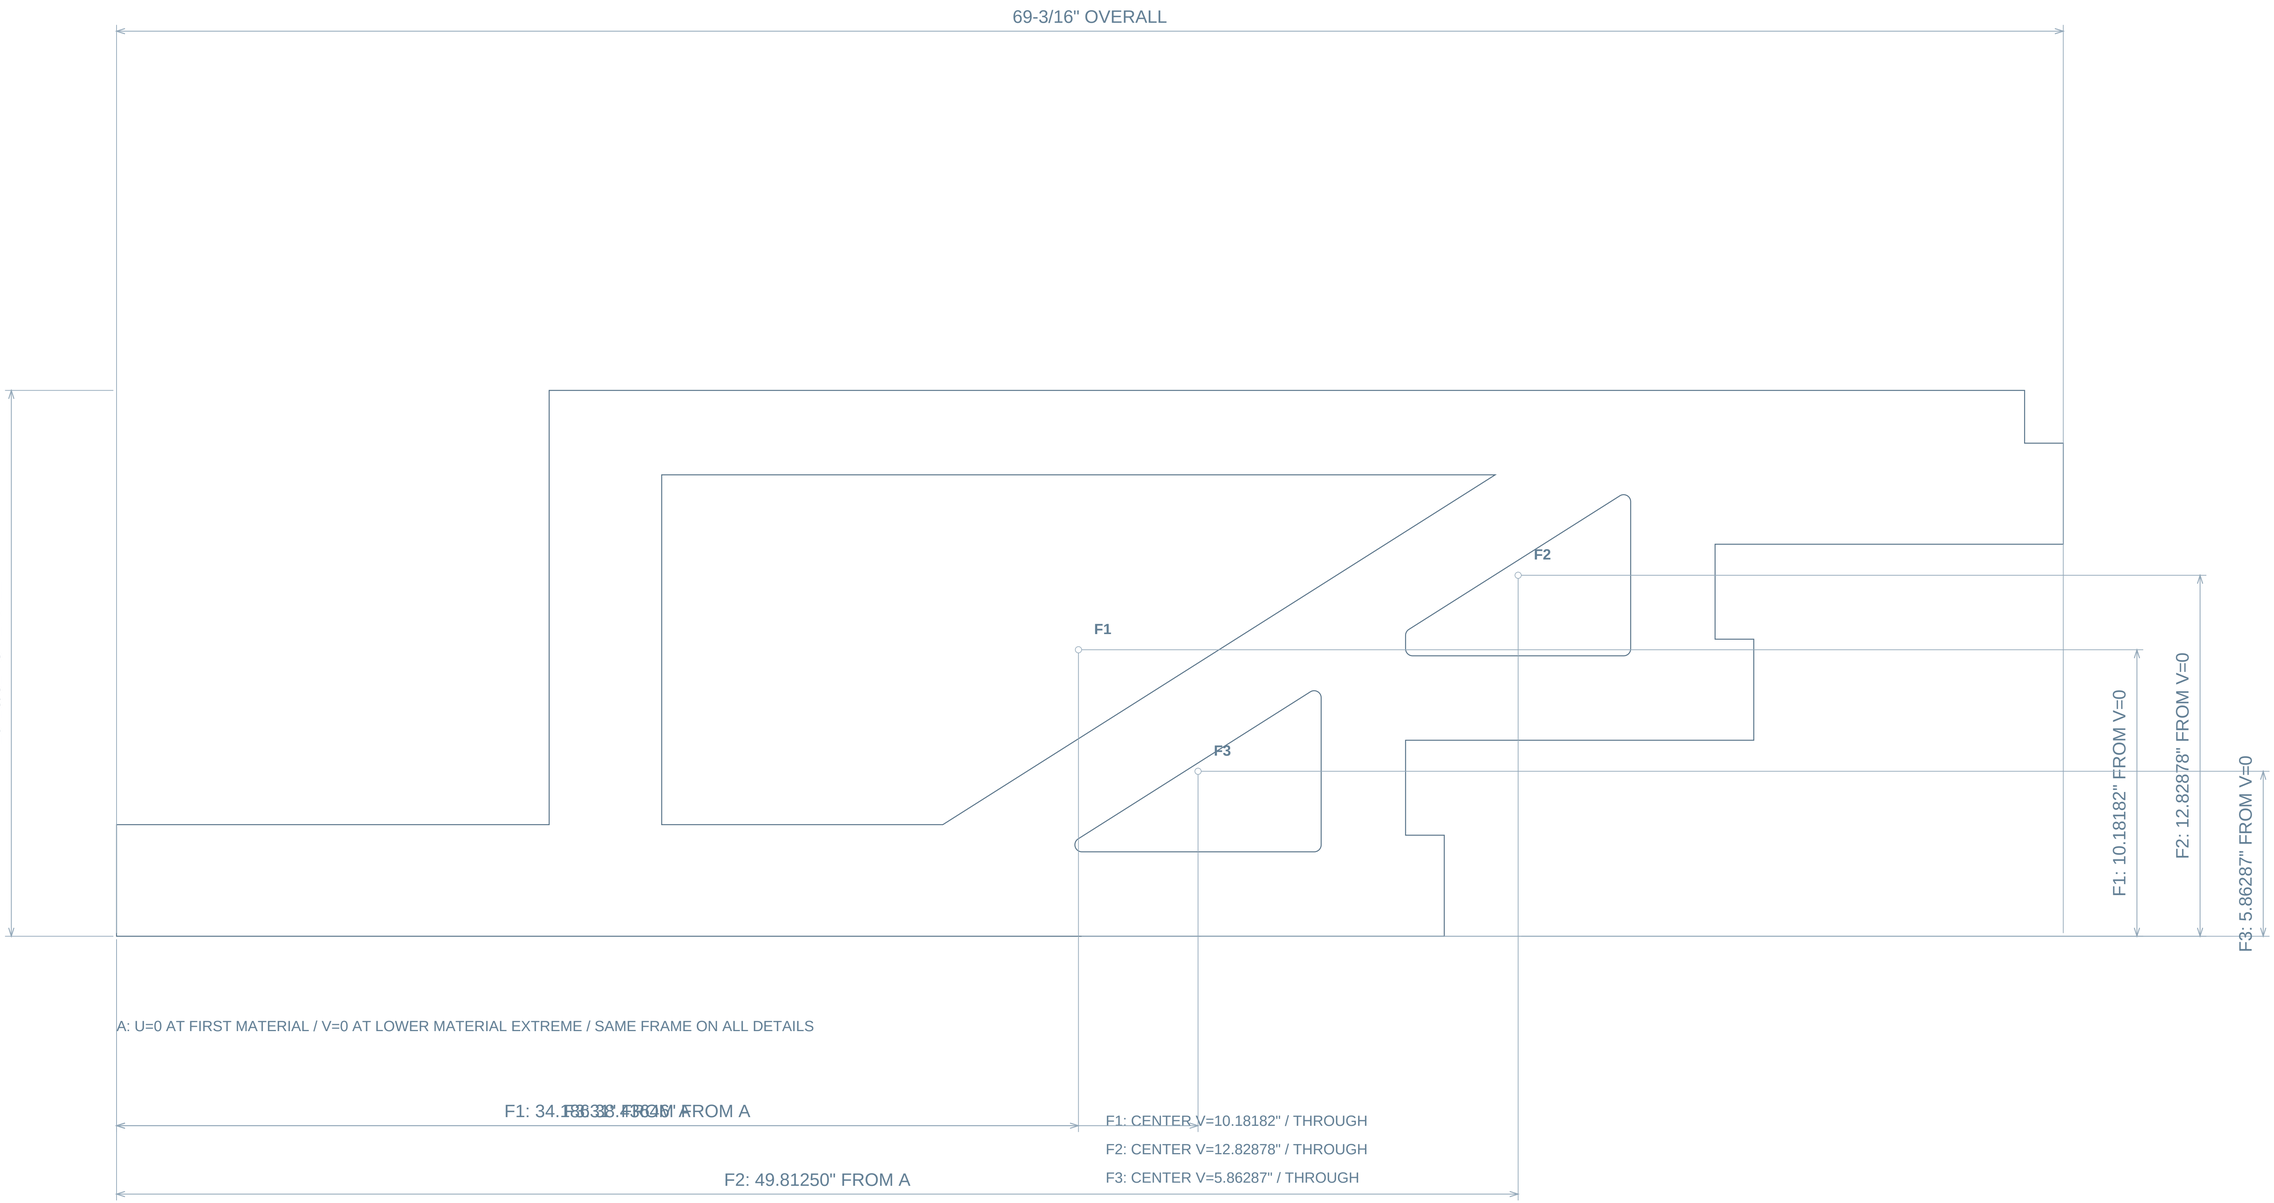

platform stringer plates 2.0 / OPENING F0 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

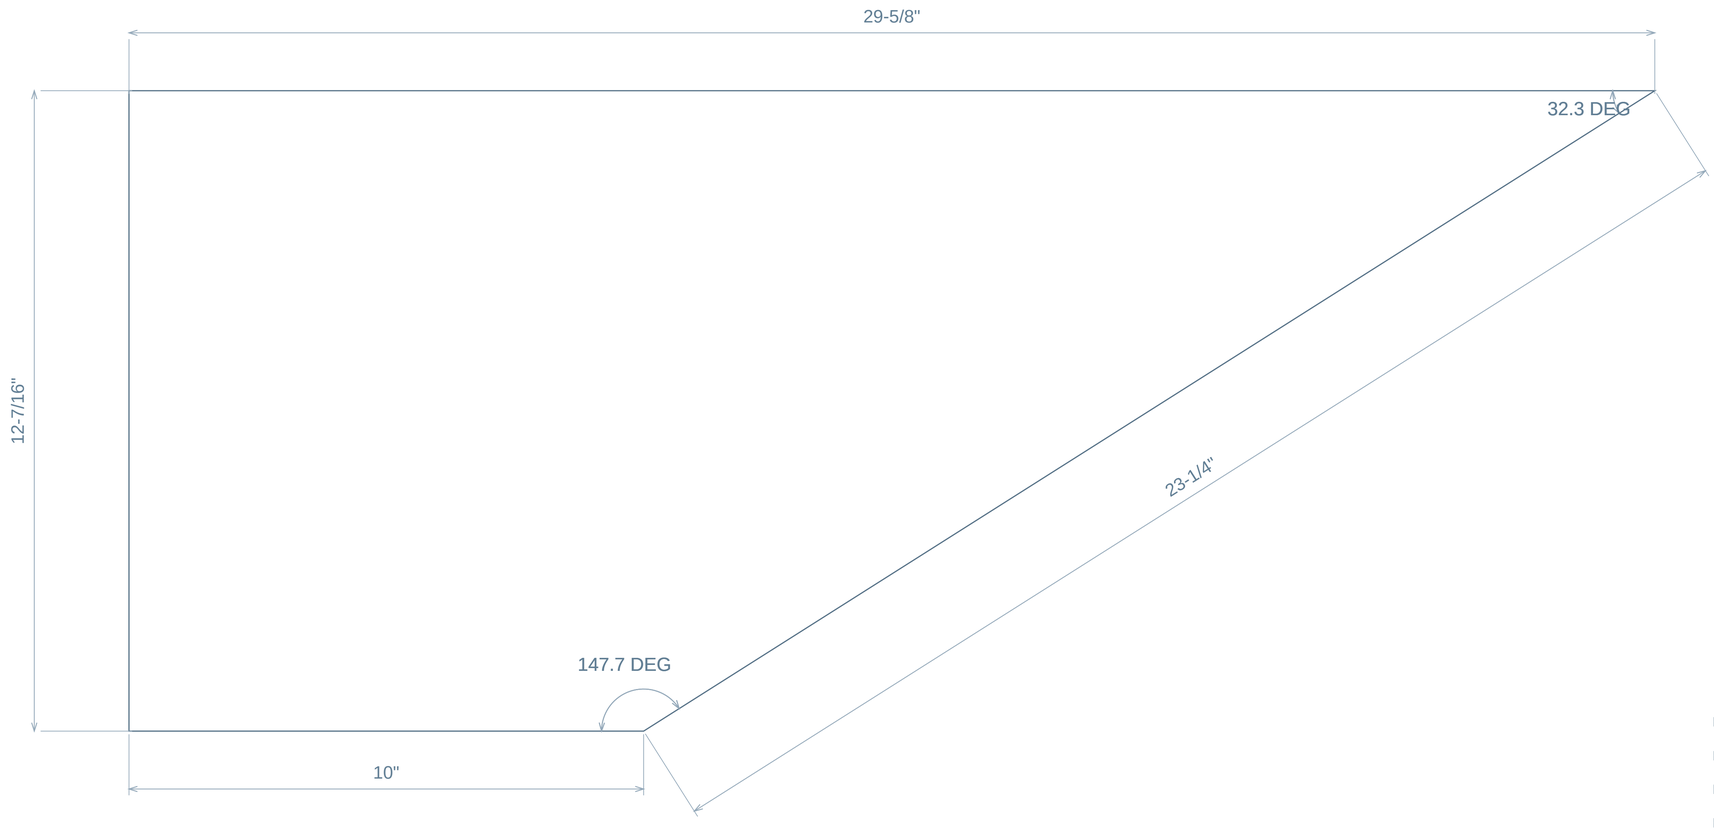

EDGE 41157 / LINE

EDGE 54288 / LINE

EDGE 42727 / LINE


EDGE 31758 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F1 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

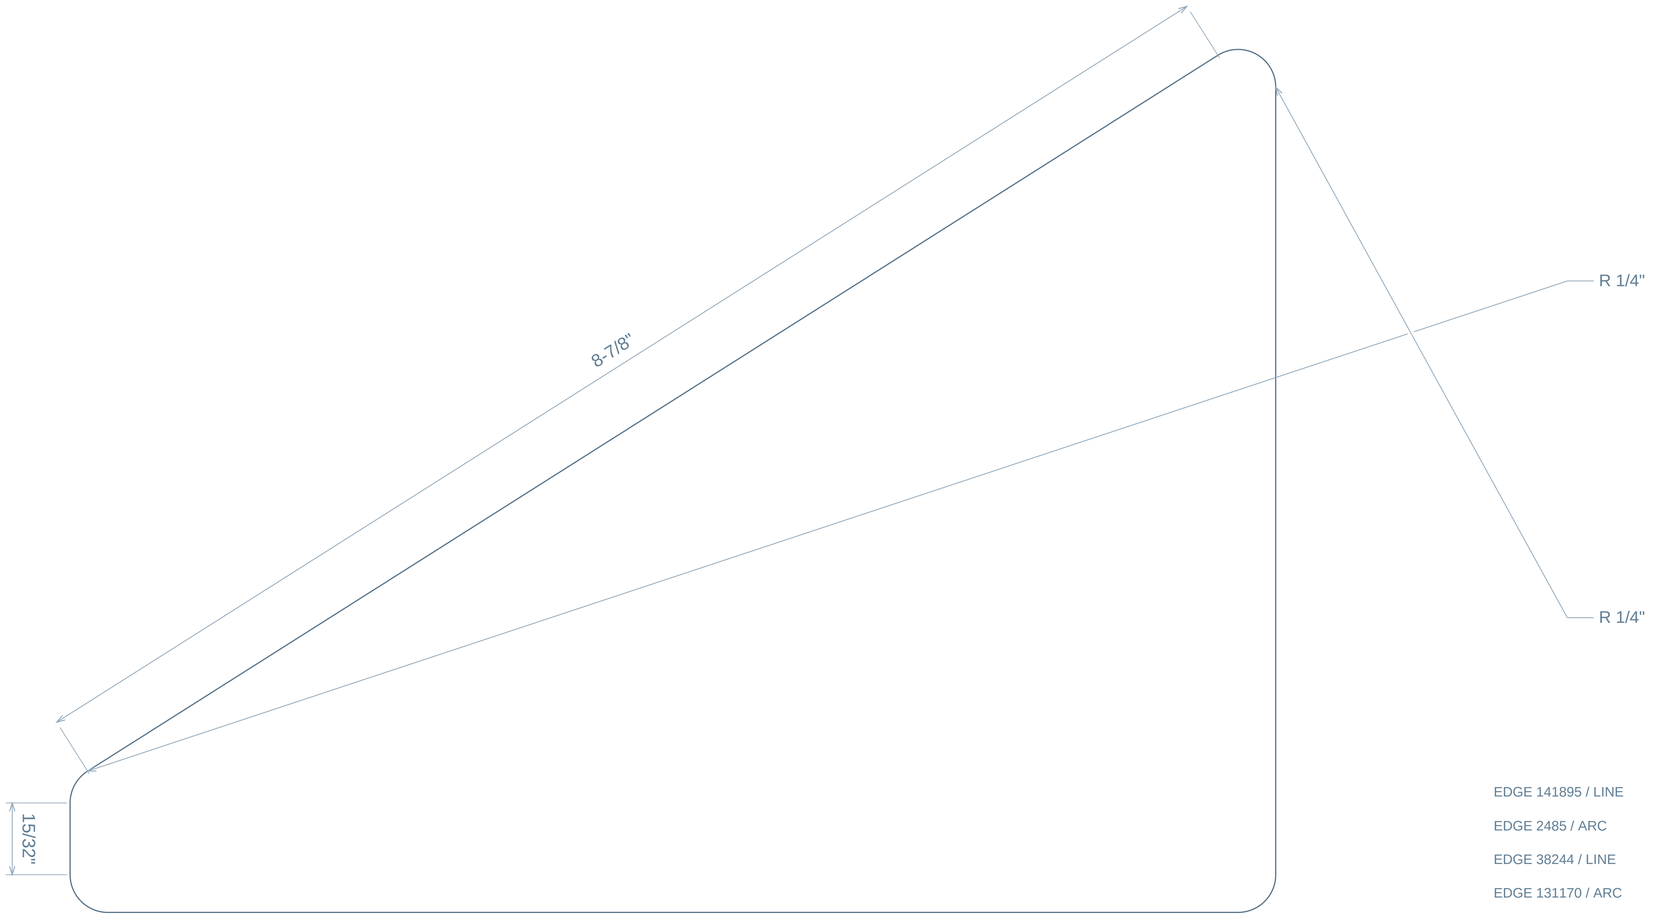

EDGE 141895 / LINE

EDGE 2485 / ARC

EDGE 38244 / LINE


EDGE 131170 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F1 / EDGES 5-8

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

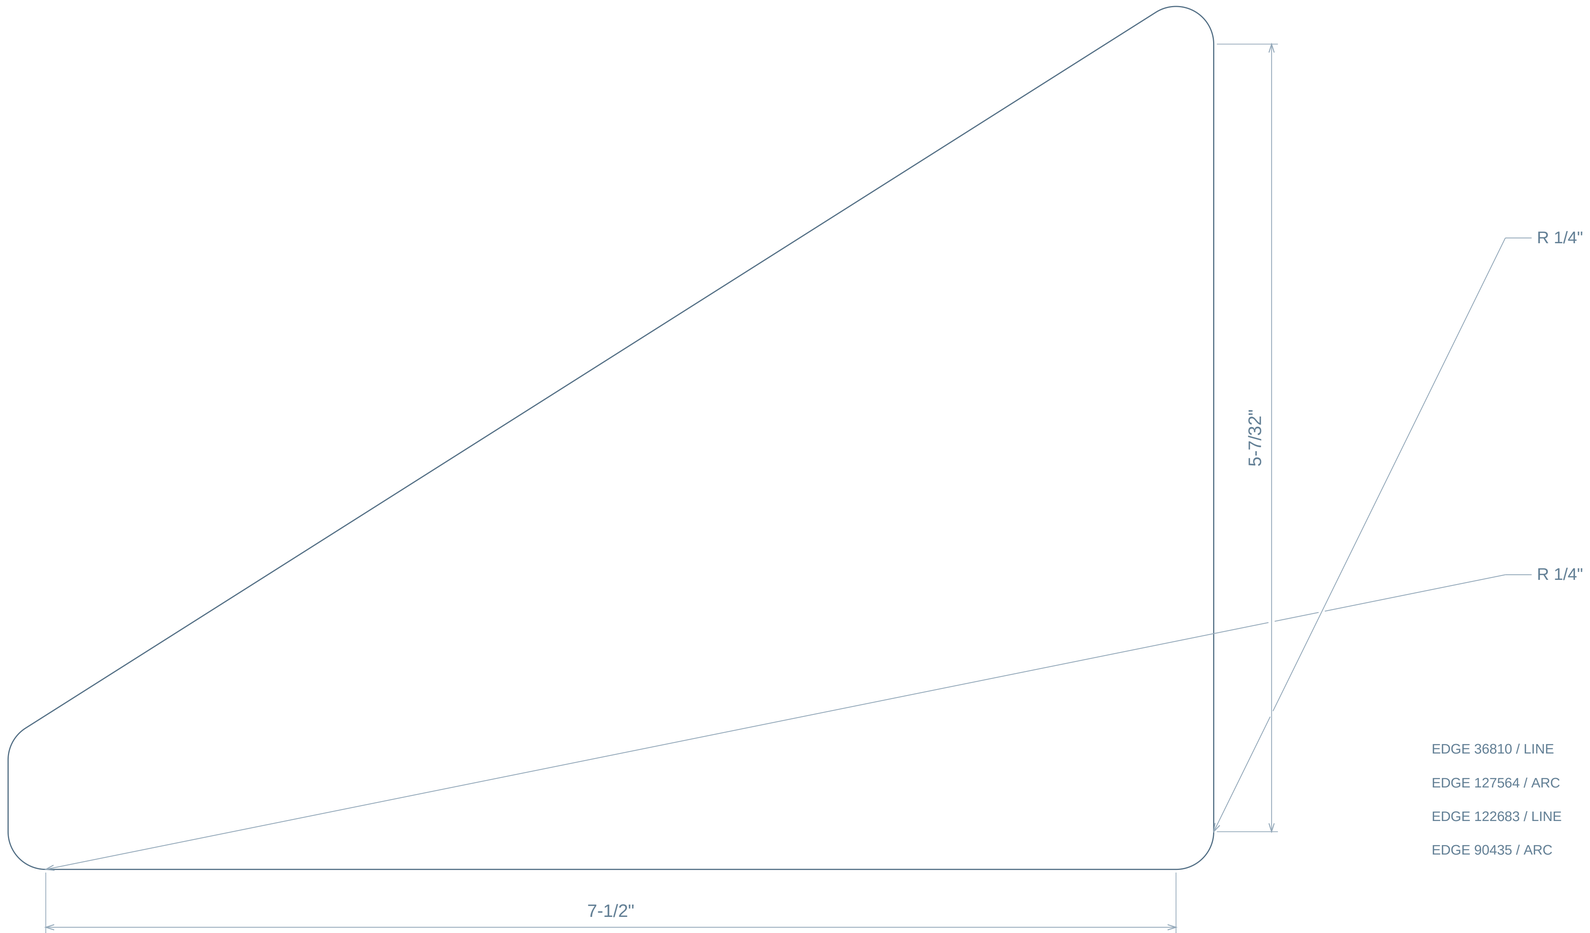

EDGE 36810 / LINE

EDGE 127564 / ARC


EDGE 122683 / LINE

EDGE 90435 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OPENING F2 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

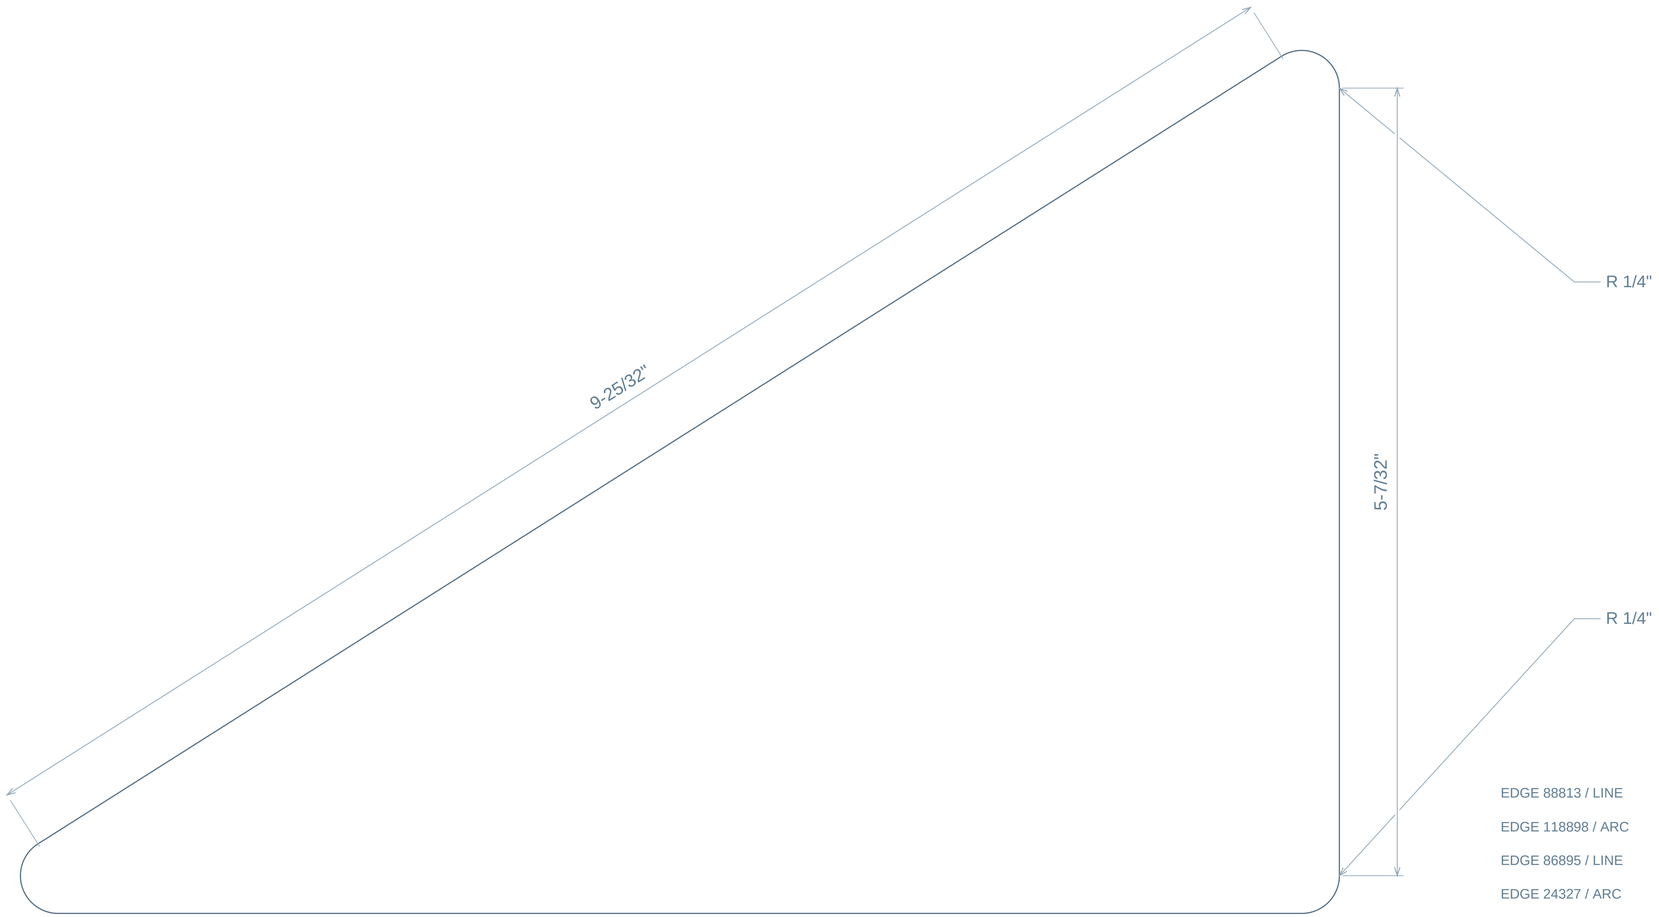


UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F2 / EDGES 5-7

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

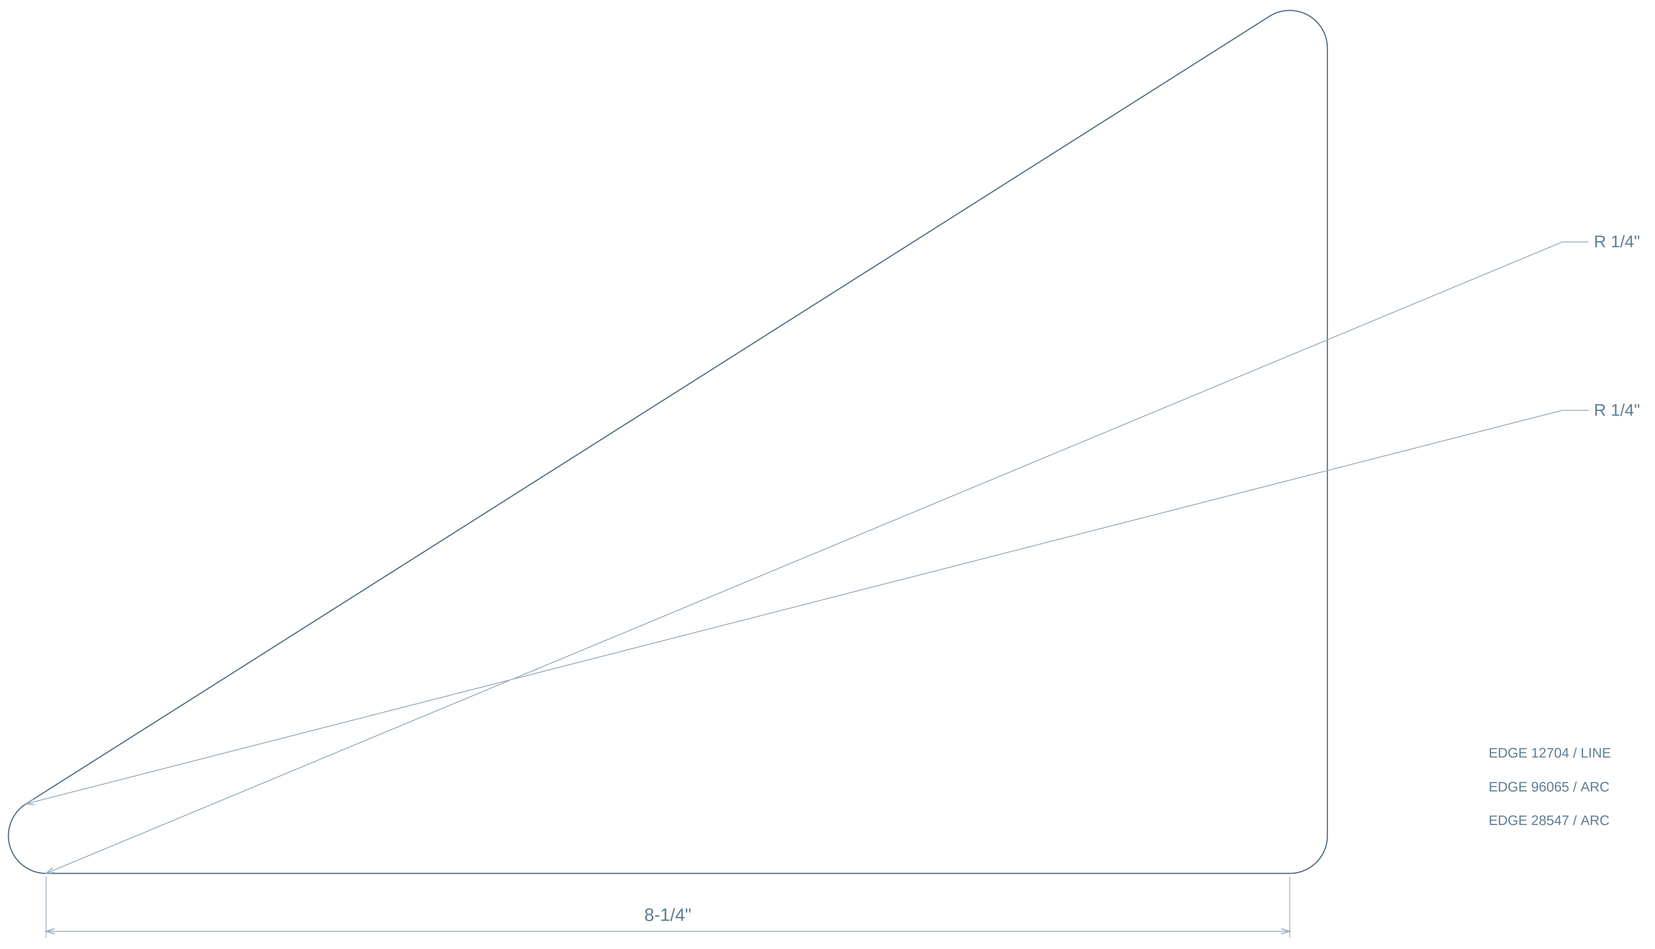

EDGE 12704 / LINE


EDGE 96065 / ARC

EDGE 28547 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OUTER PROFILE / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

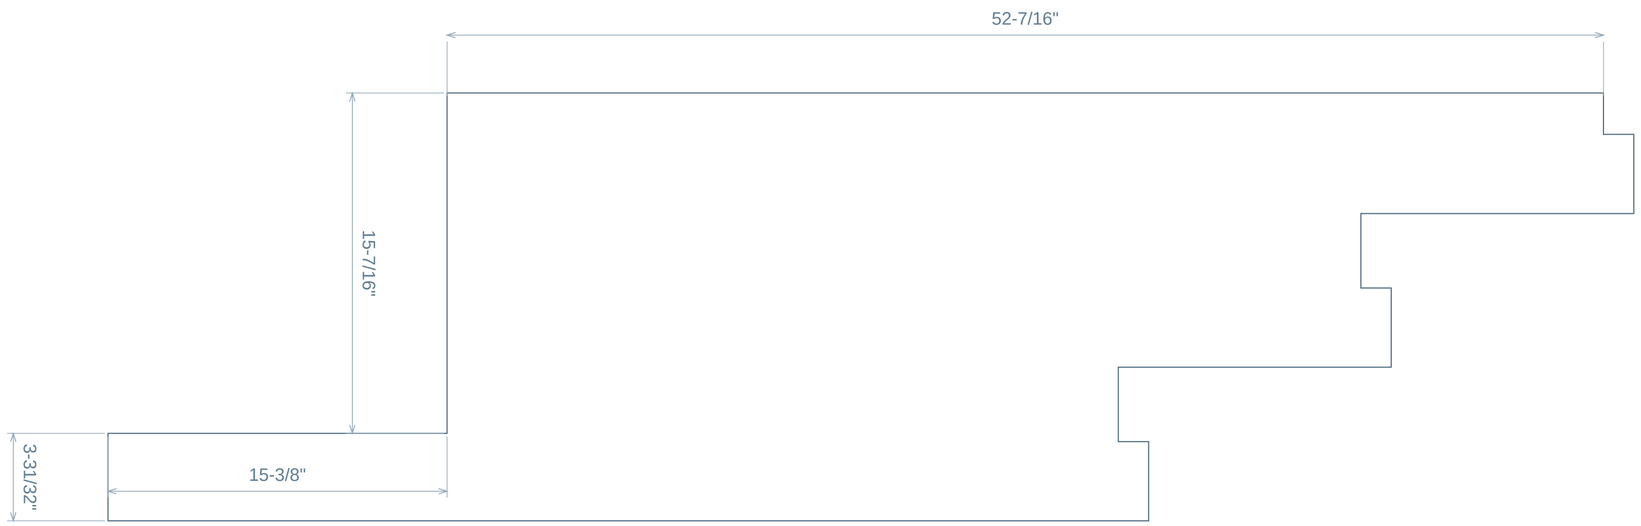

EDGE 138006 / LINE

EDGE 70453 / LINE

EDGE 21534 / LINE


EDGE 29550 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OUTER PROFILE / EDGES 5-8

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

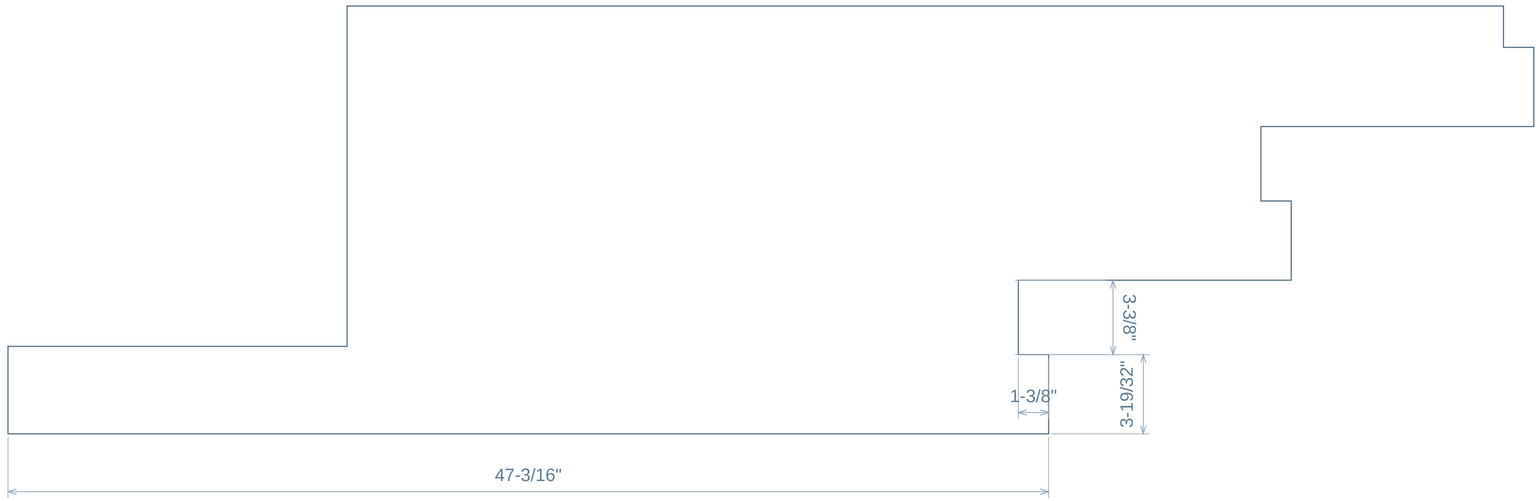

EDGE 45261 / LINE

EDGE 113857 / LINE

EDGE 8488 / LINE

EDGE 100361 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OUTER PROFILE / EDGES 9-12

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES



EDGE 63523 / LINE

EDGE 61073 / LINE

EDGE 28284 / LINE


EDGE 147137 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OUTER PROFILE / EDGES 13-16

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

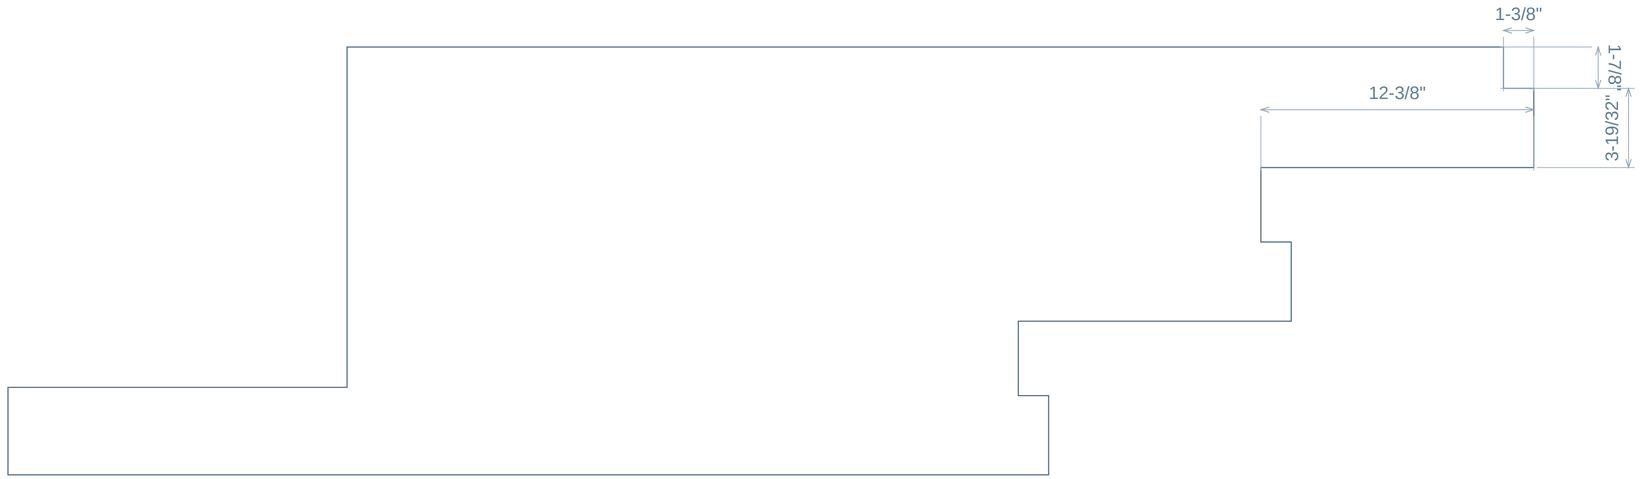

EDGE 44515 / LINE

EDGE 118842 / LINE


EDGE 57872 / LINE

EDGE 10231 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / COMPLETE FACE / OPENING LOCATIONS


body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

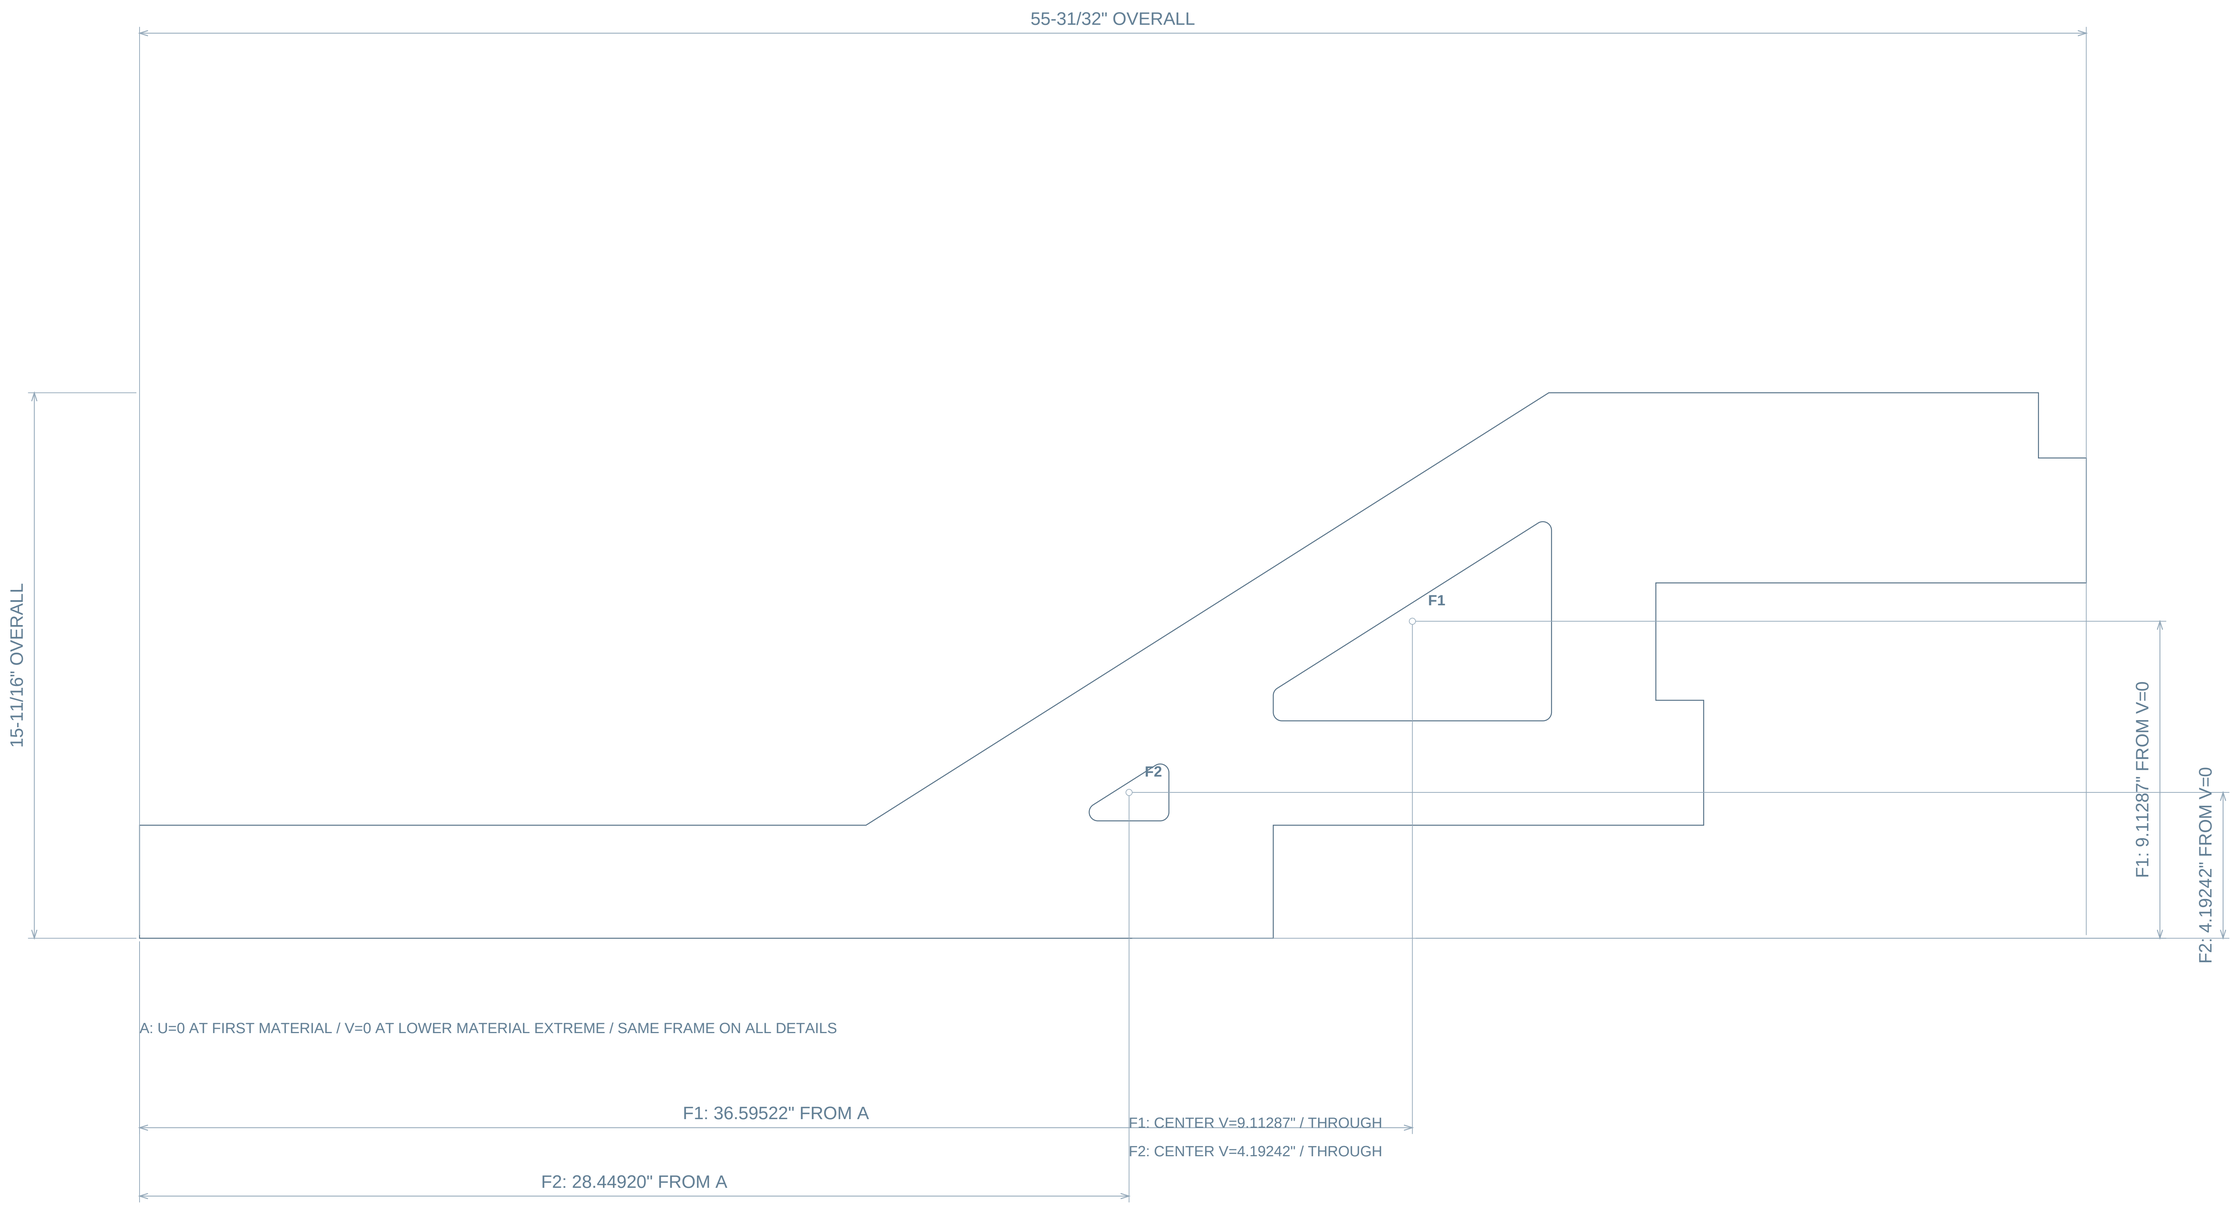

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F0 / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

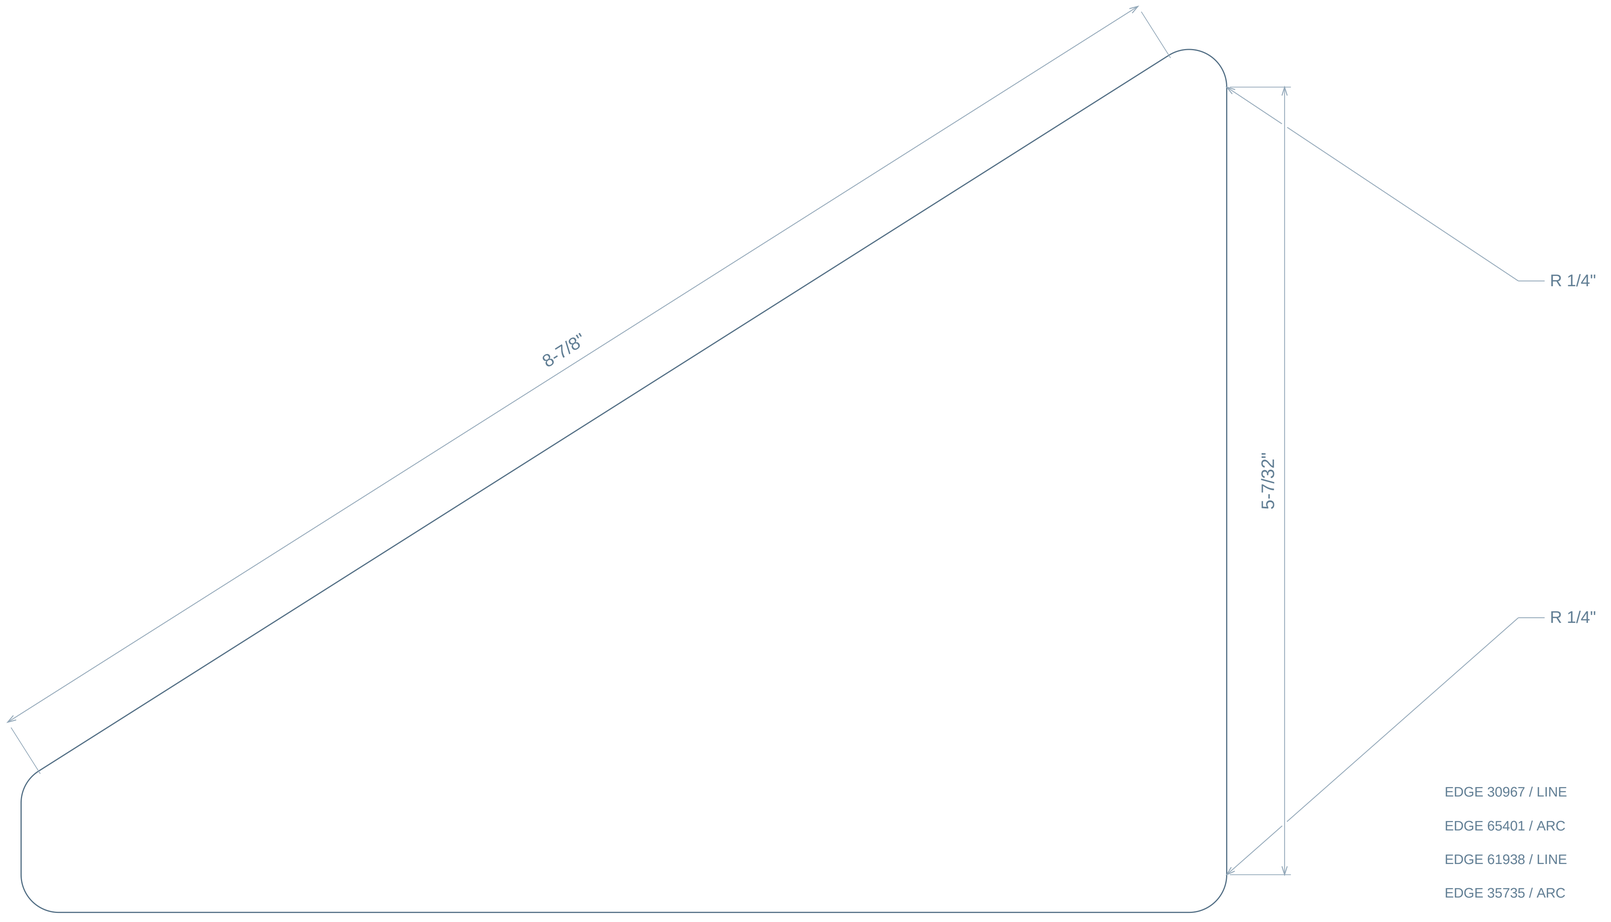

EDGE 30967 / LINE

EDGE 65401 / ARC

EDGE 61938 / LINE

EDGE 35735 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

CALIPER / 2606


PLINTH ASSEMBLY

2606-B046-P18-R08 / 3

REVIEW 08 / 2026-10-26

platform stringer plates 02.1 / OPENING F0 / EDGES 5-8

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

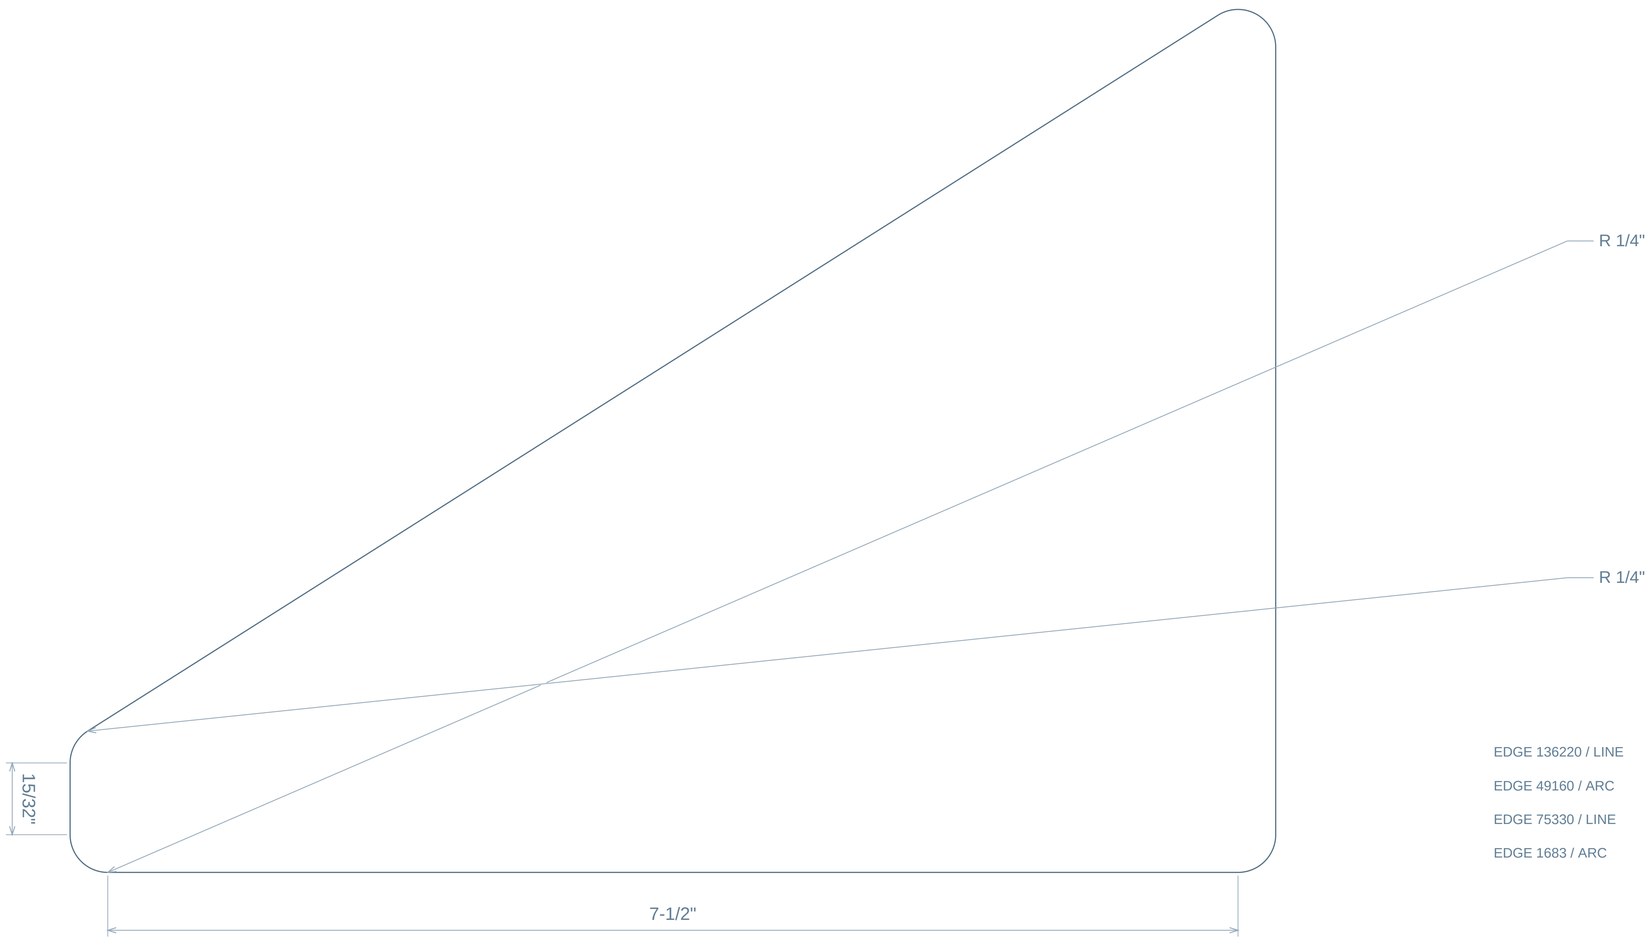

EDGE 136220 / LINE

EDGE 49160 / ARC

EDGE 75330 / LINE


EDGE 1683 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F1 / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

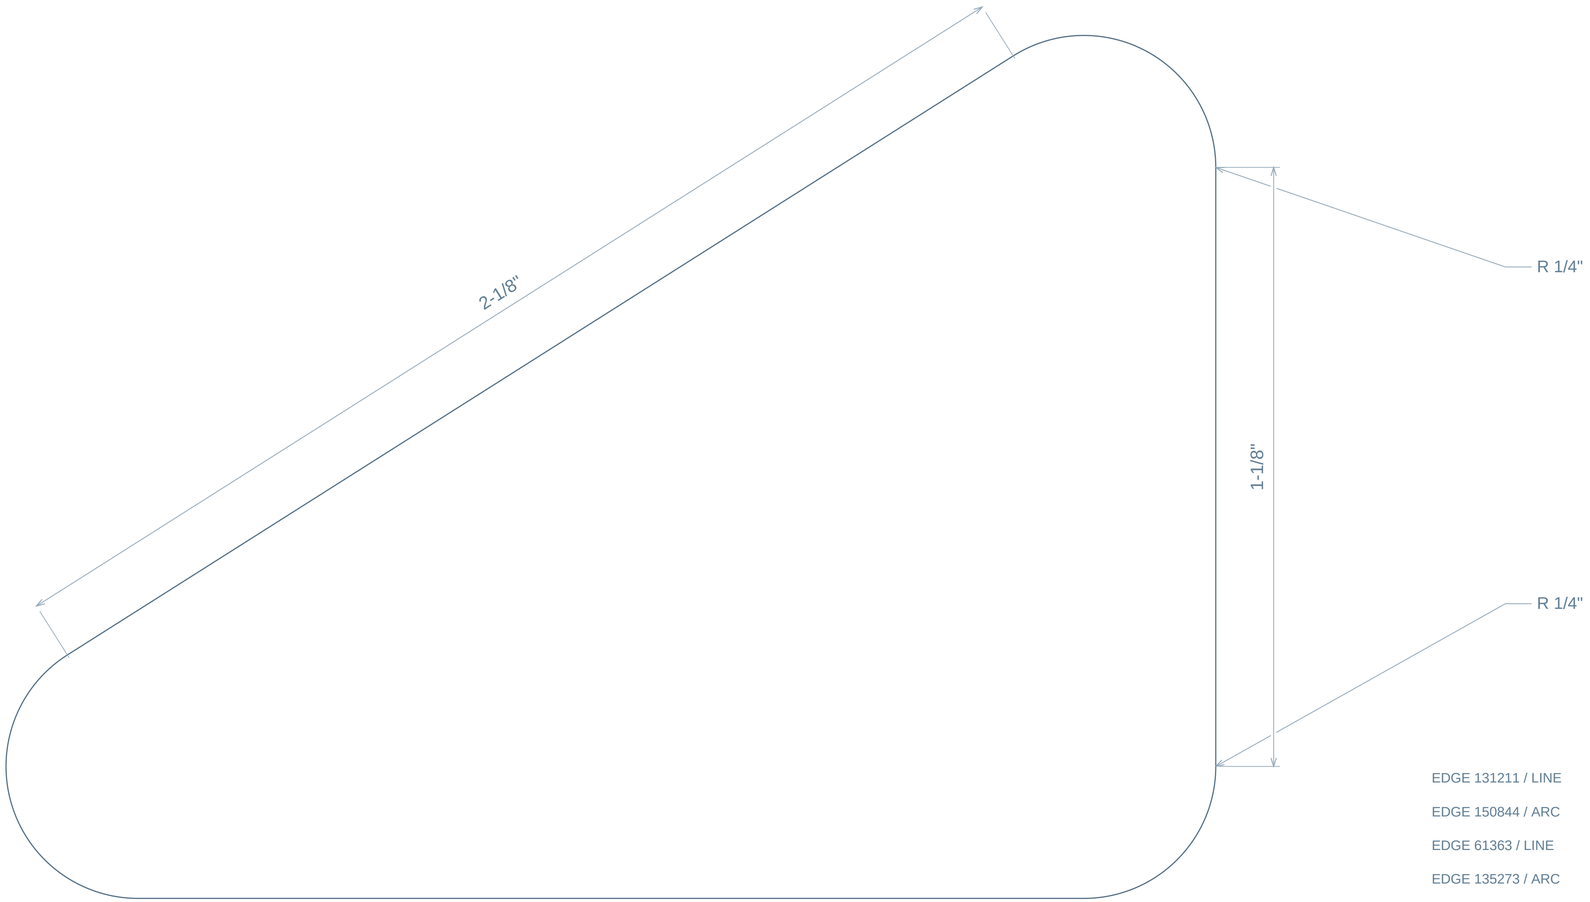

EDGE 131211 / LINE

EDGE 150844 / ARC

EDGE 61363 / LINE


EDGE 135273 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F1 / EDGES 5-7

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

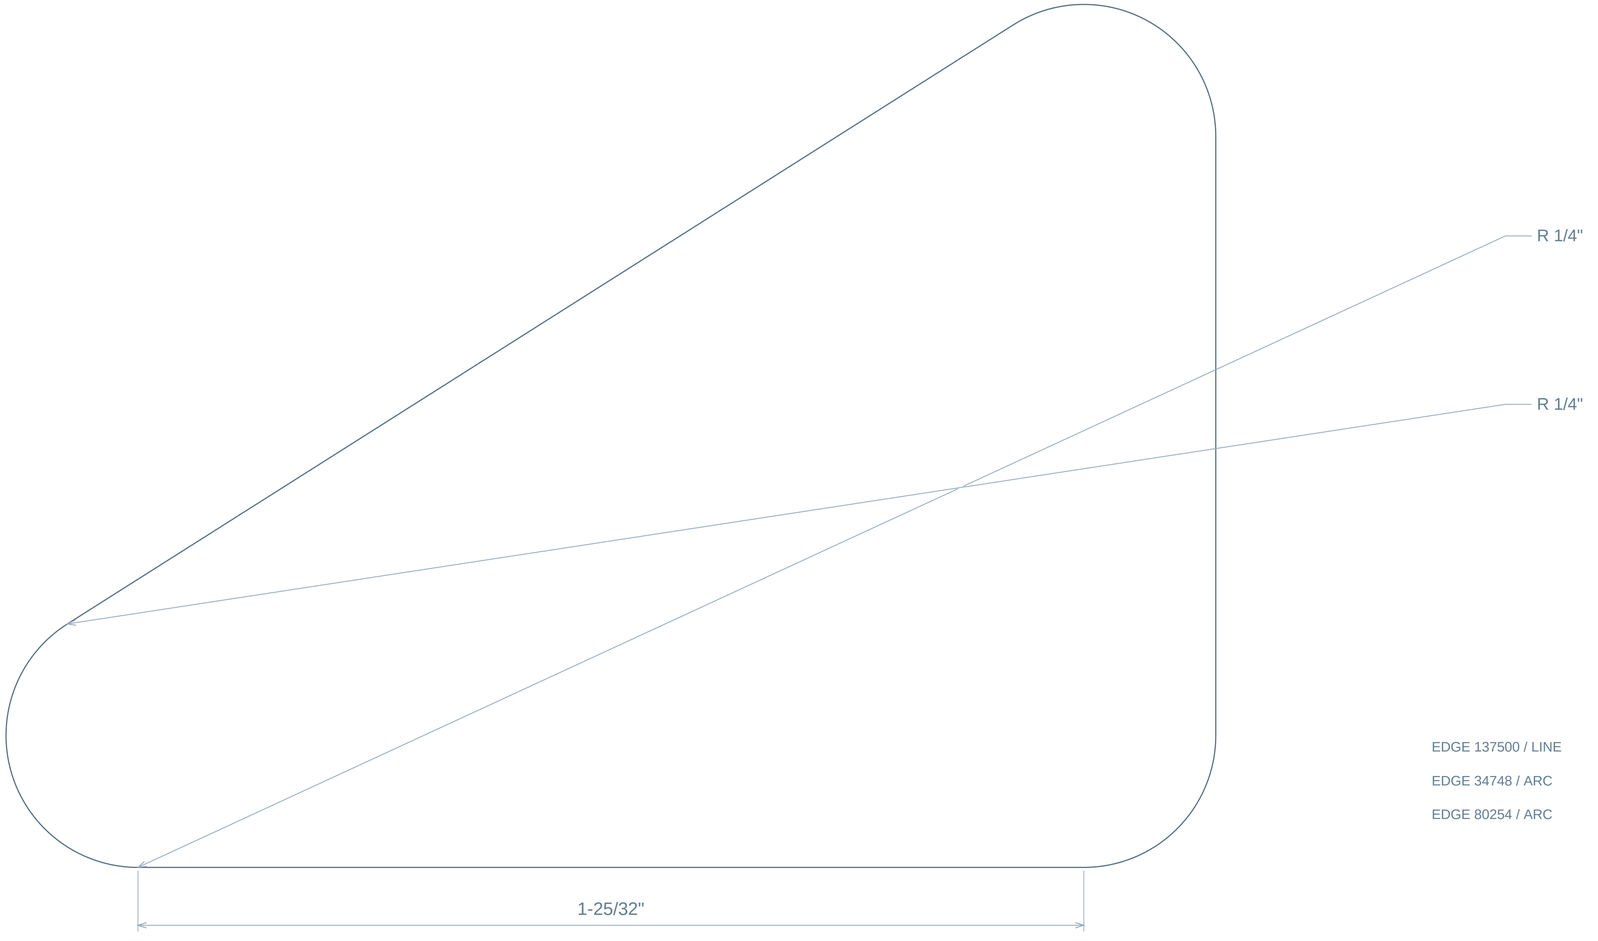

EDGE 137500 / LINE


EDGE 34748 / ARC

EDGE 80254 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / OUTER PROFILE / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

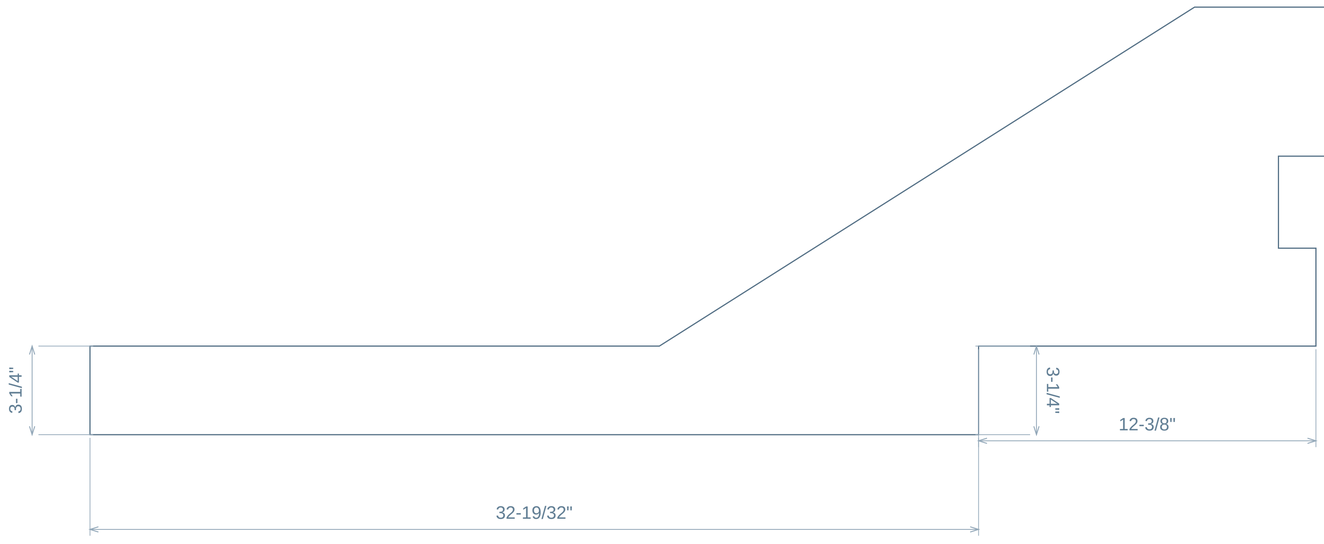

EDGE 127185 / LINE

EDGE 1039 / LINE


EDGE 47469 / LINE

EDGE 73653 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / OUTER PROFILE / EDGES 5-8

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

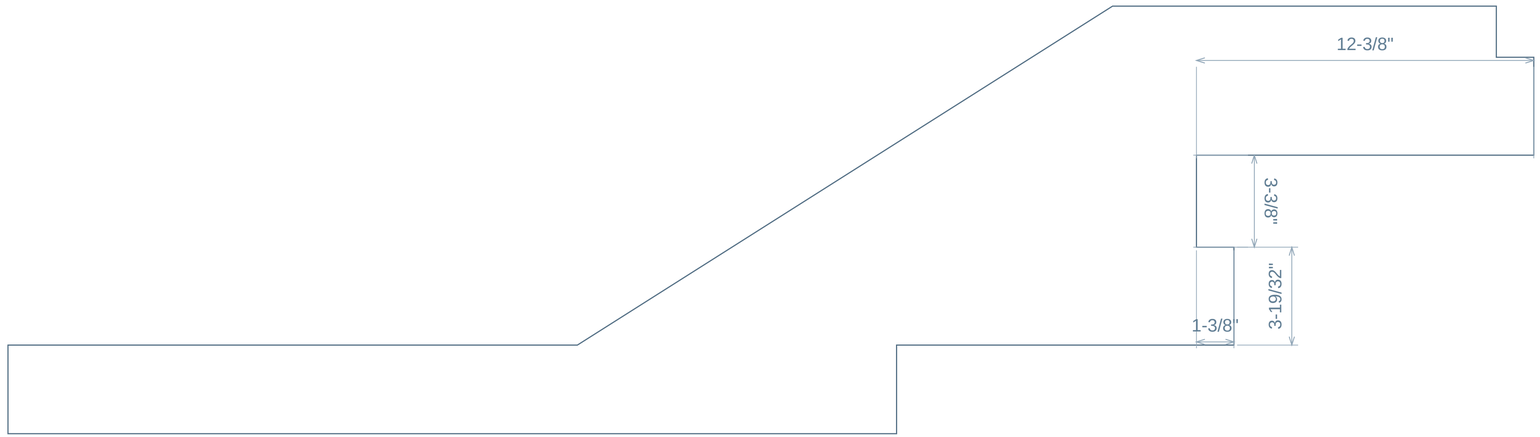

EDGE 106325 / LINE

EDGE 131083 / LINE

EDGE 127906 / LINE


EDGE 40665 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OUTER PROFILE / EDGES 9-12

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

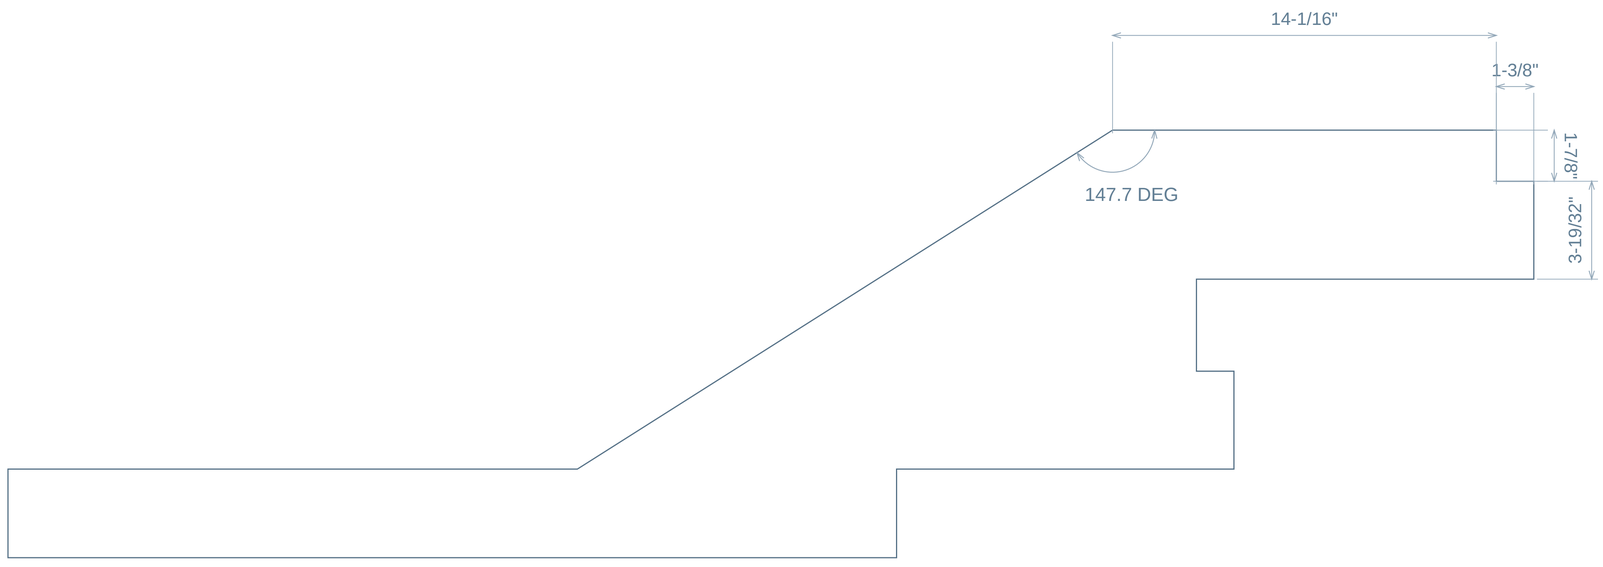

EDGE 131028 / LINE

EDGE 16106 / LINE

EDGE 104037 / LINE


EDGE 86205 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OUTER PROFILE / EDGES 13-14

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

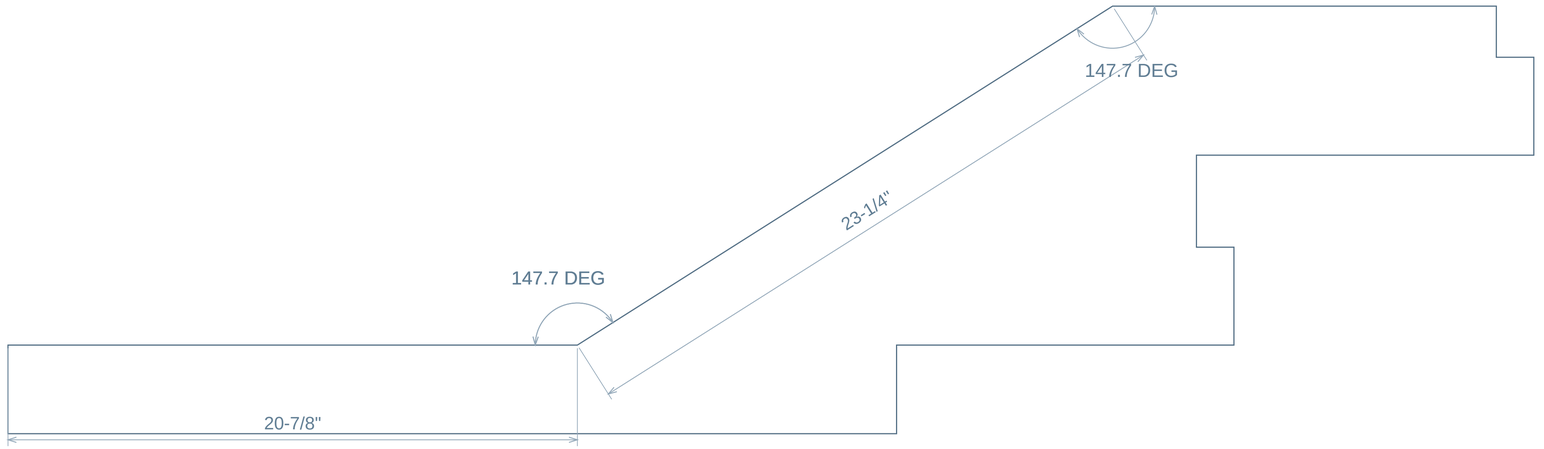


EDGE 125642 / LINE

EDGE 115249 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 03 / COMPLETE PROFILE


body-0266 / QTY 1 / NORMAL DEPTH 1/4" / INCHES

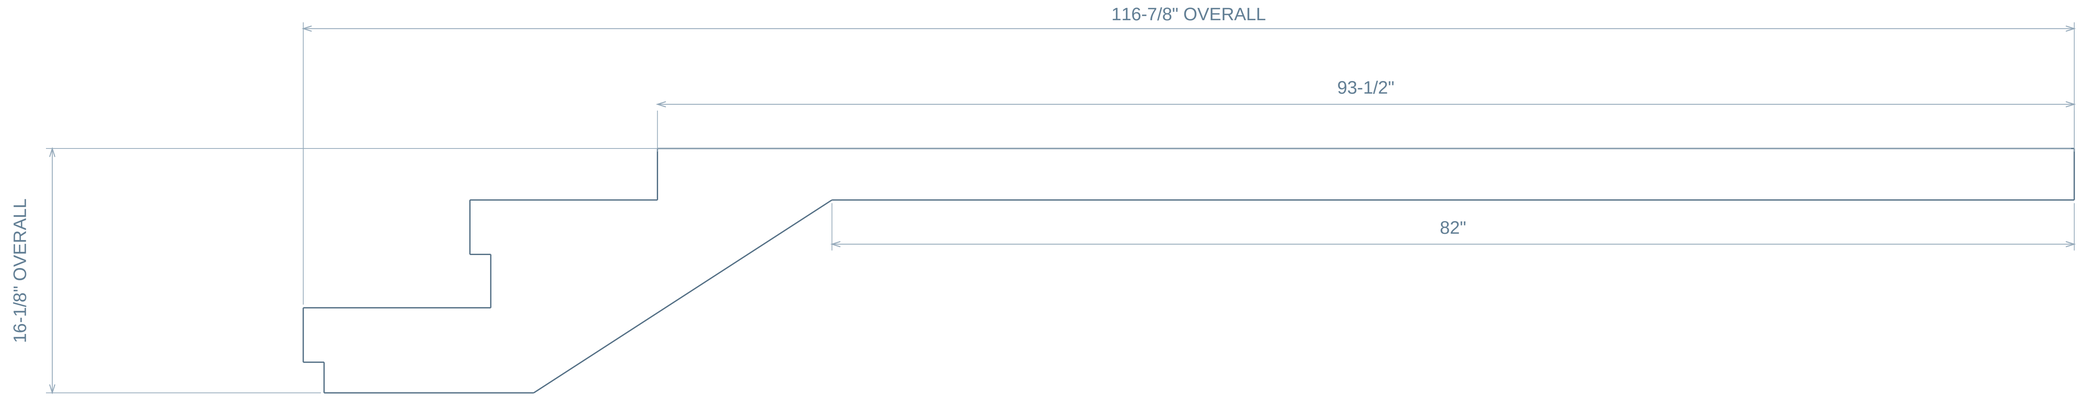

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:5

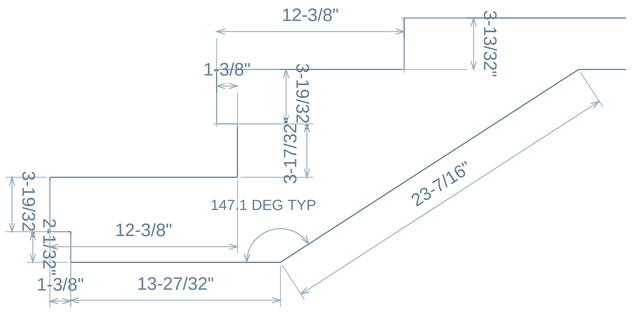

DETAIL 2 / CONNECTED OUTLINE / 1:1




FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

plinth asm body 717

body-0267 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:5


01 / TOP - FACE A

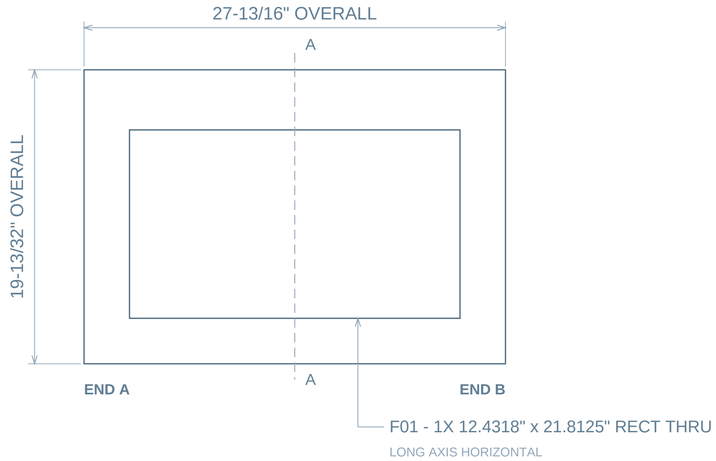

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

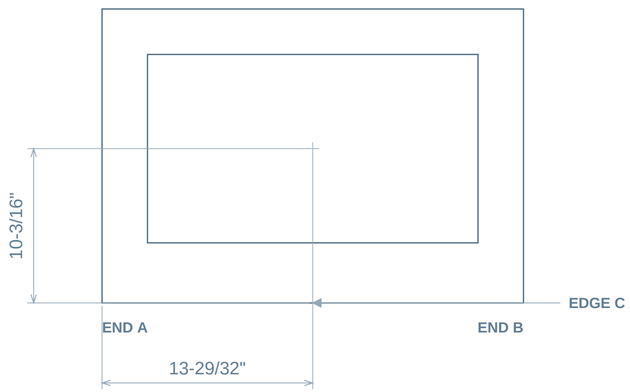


04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

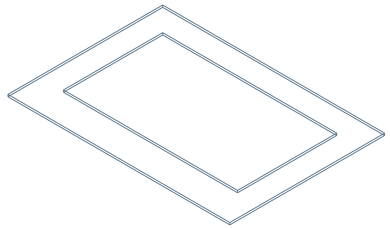

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 718

body-0268 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

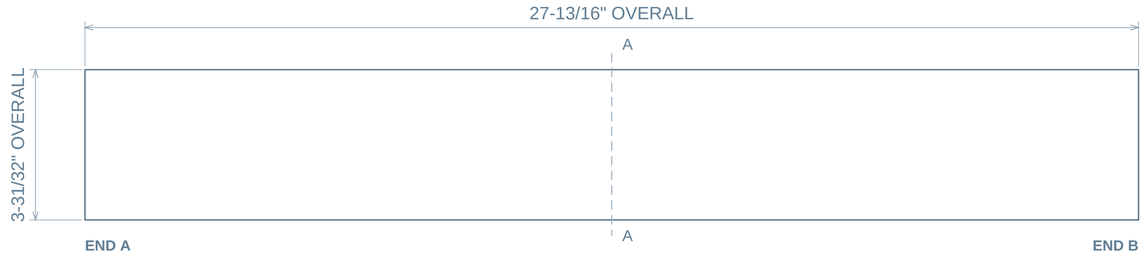

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

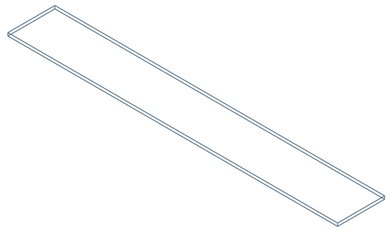

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 28-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 719

body-0269 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

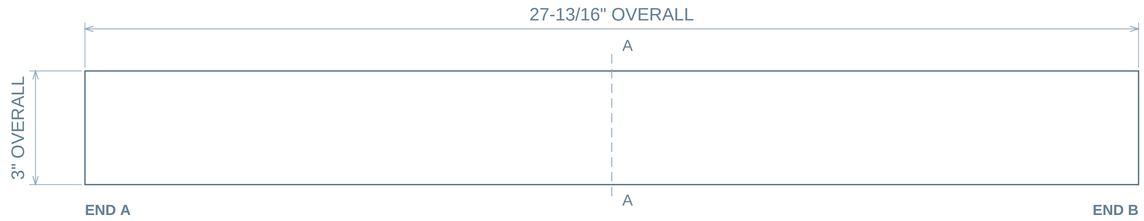

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

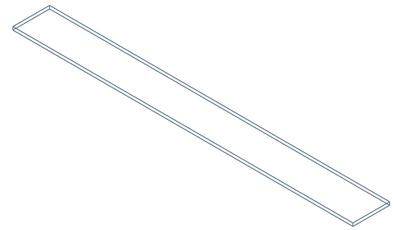

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 27-31/32"

No internal holes in the broad face.

DATUM / REVIEW


END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 720 / COMPLETE FACE / OPENING LOCATIONS

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

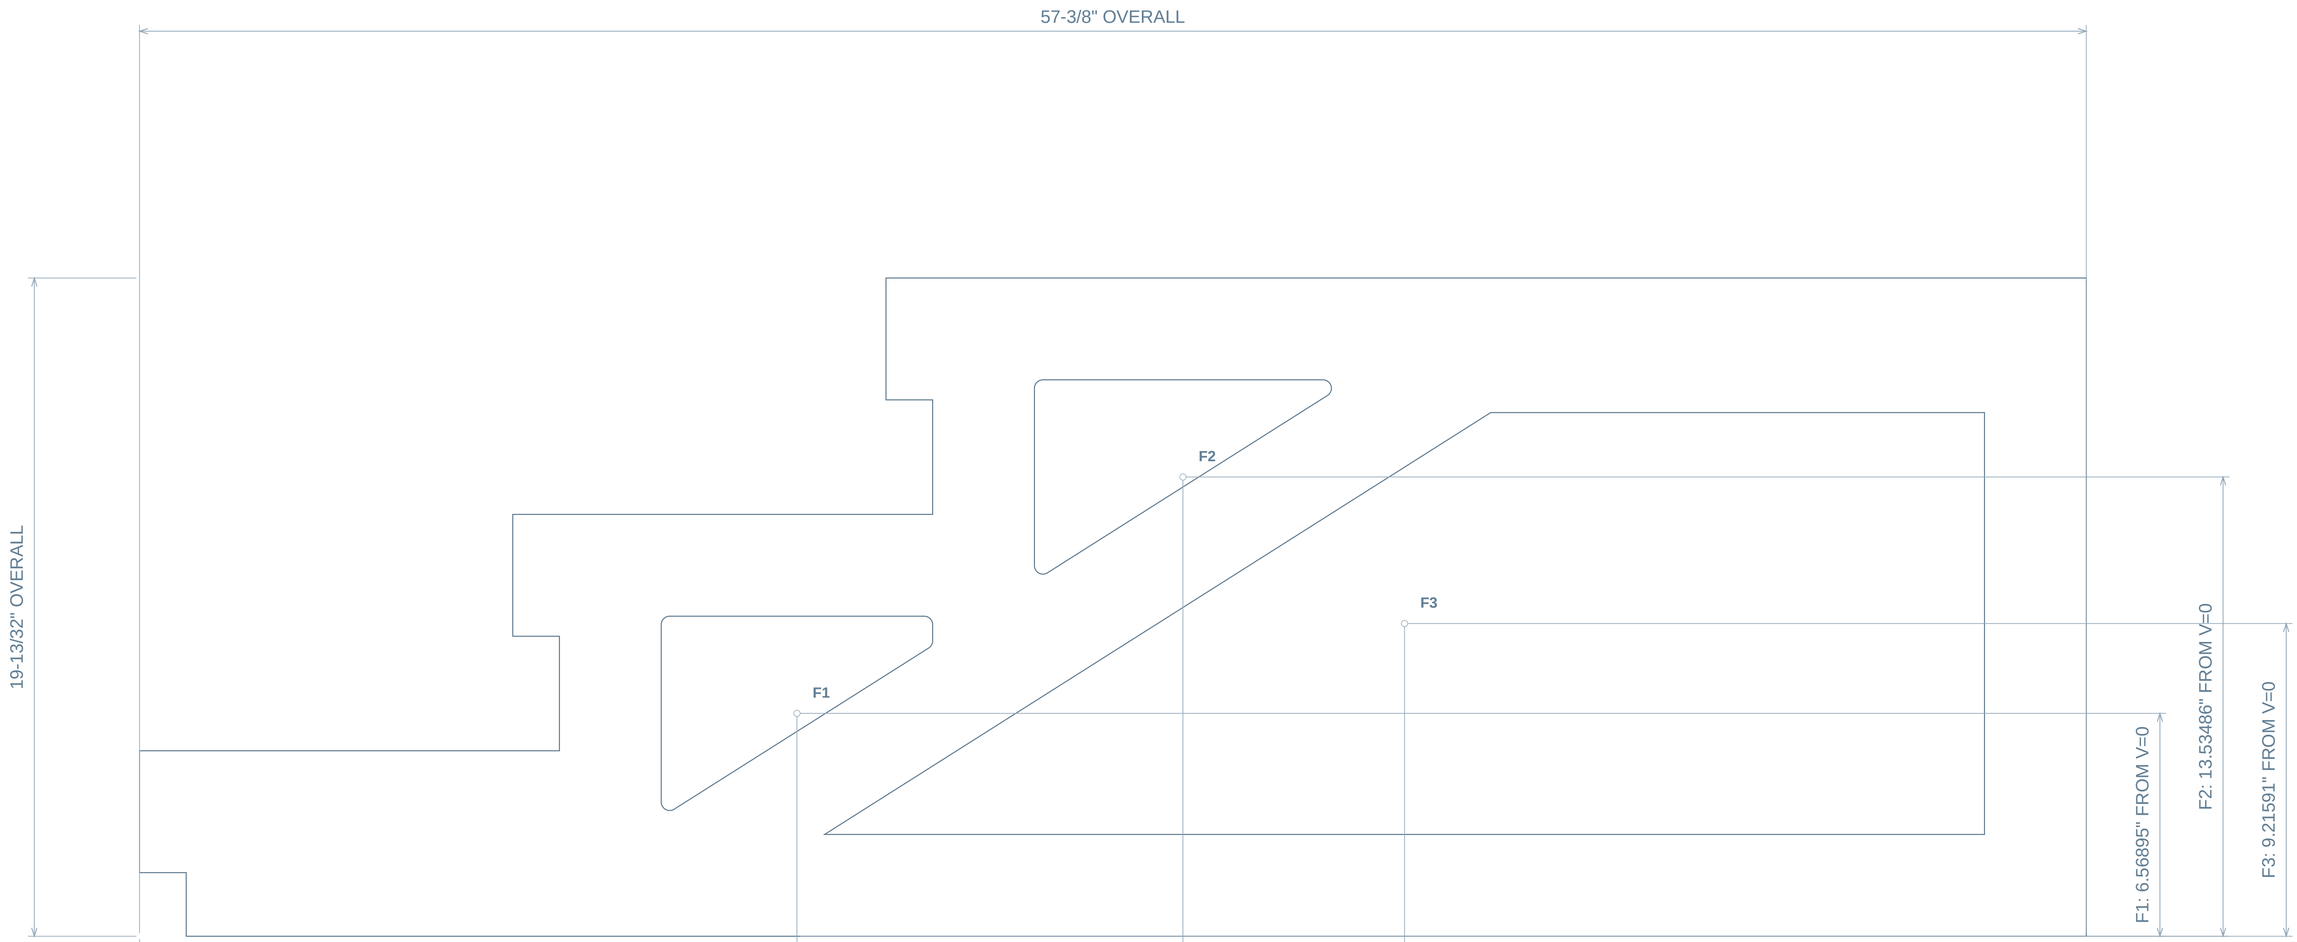

A: U=0 AT FIRST MATERIAL / V=0 AT LOWER MATERIAL EXTREME / SAME FRAME ON ALL DETAILS

F1: 19.37500" FROM A

F3: 37.28244" FROM A

F2: 30.75104" FROM A

F1: CENTER V=6.56895" / THROUGH


F2: CENTER V=13.53486" / THROUGH

F3: CENTER V=9.21591" / THROUGH

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F0 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

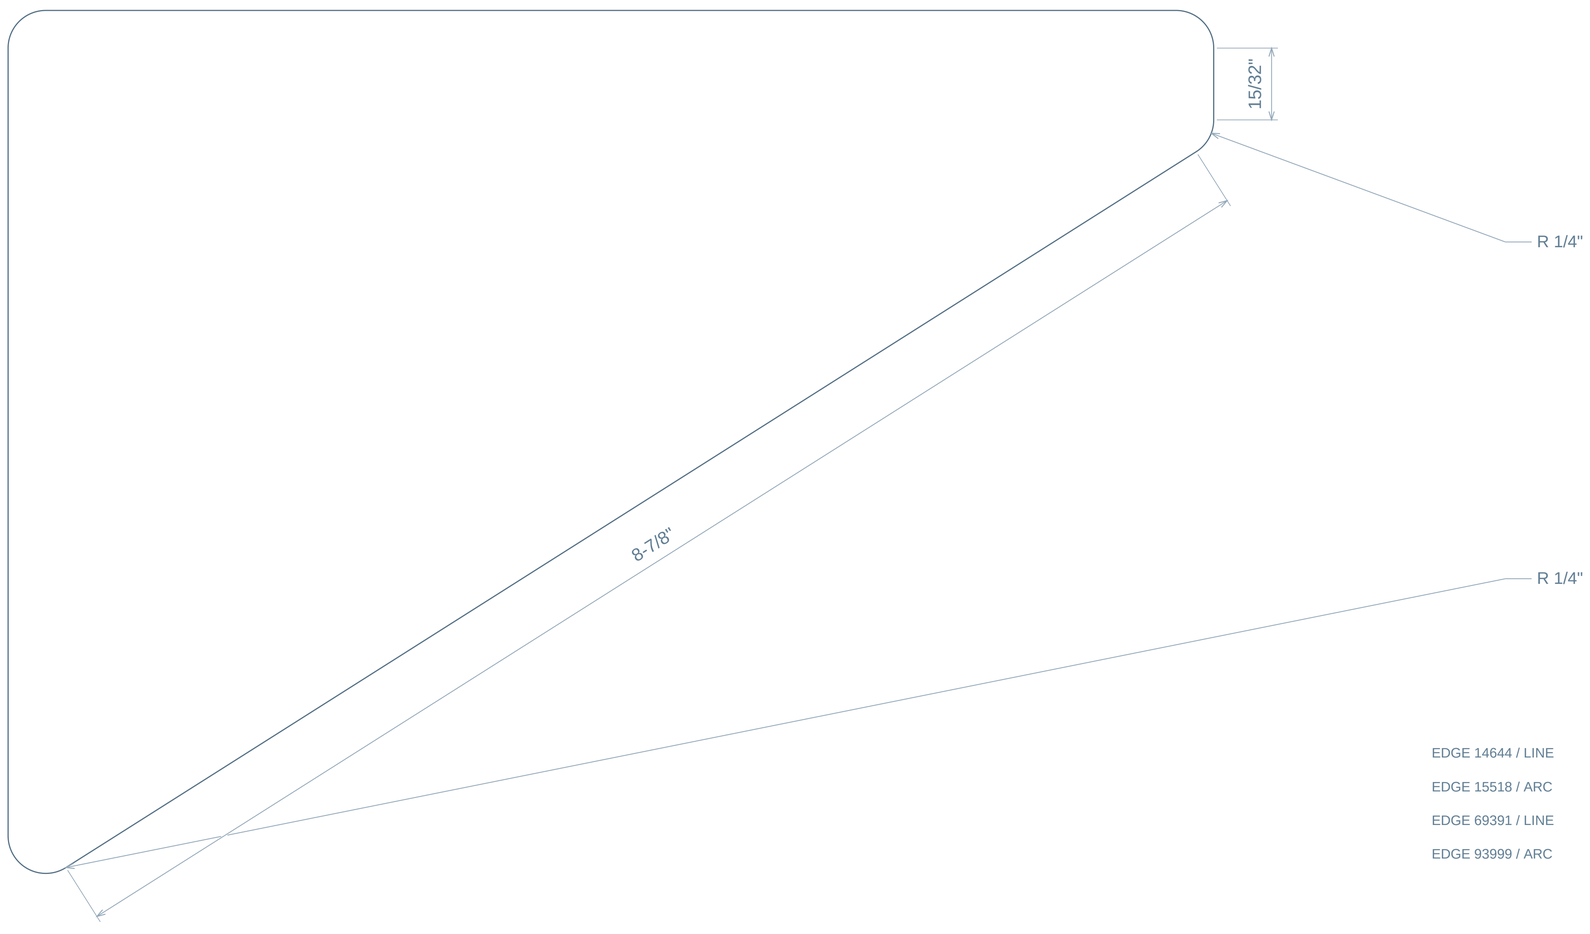

EDGE 14644 / LINE

EDGE 15518 / ARC

EDGE 69391 / LINE


EDGE 93999 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F0 / EDGES 5-8

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

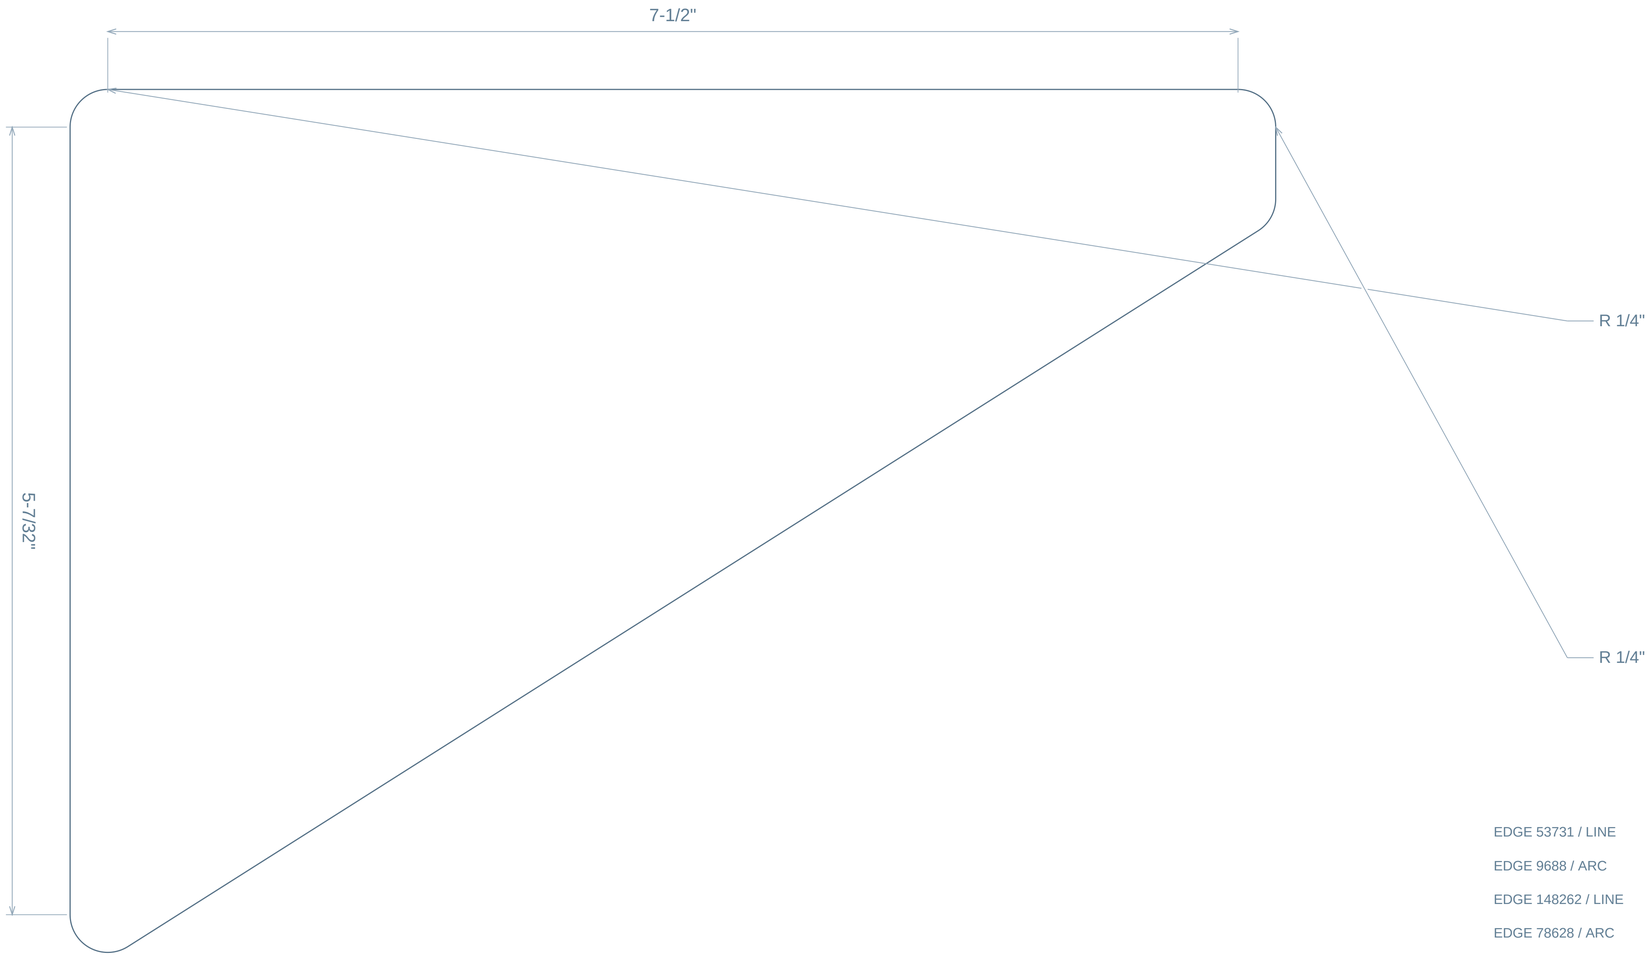

EDGE 53731 / LINE

EDGE 9688 / ARC

EDGE 148262 / LINE


EDGE 78628 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F1 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

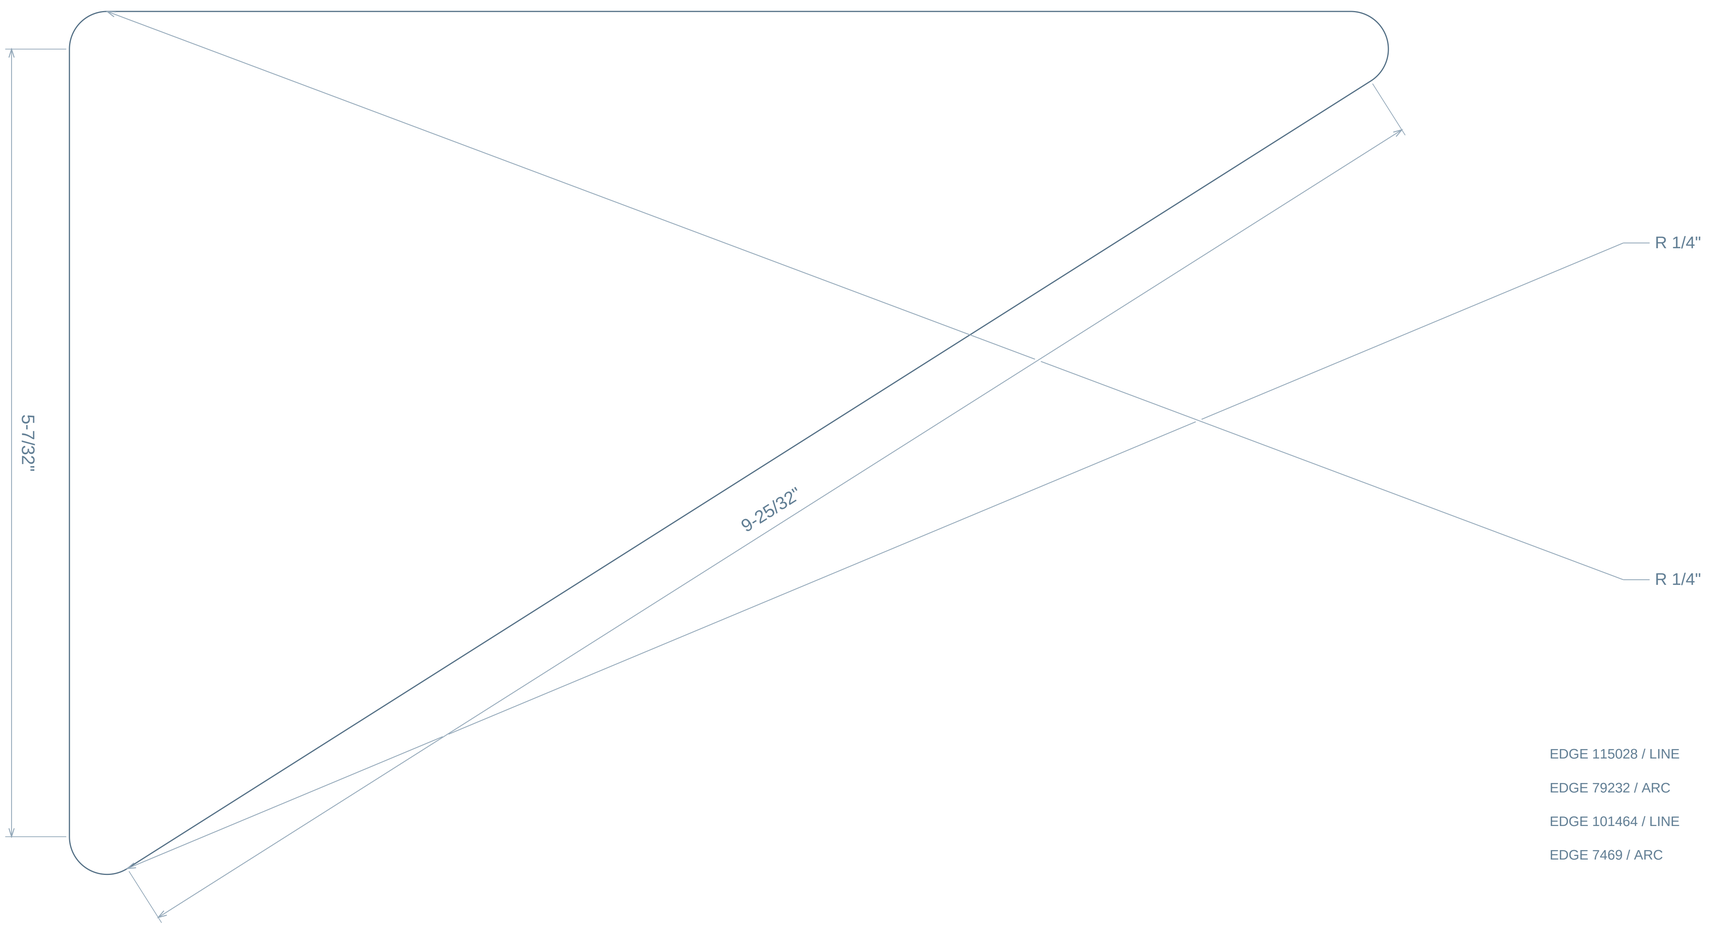

EDGE 115028 / LINE

EDGE 79232 / ARC

EDGE 101464 / LINE


EDGE 7469 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F1 / EDGES 5-7

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

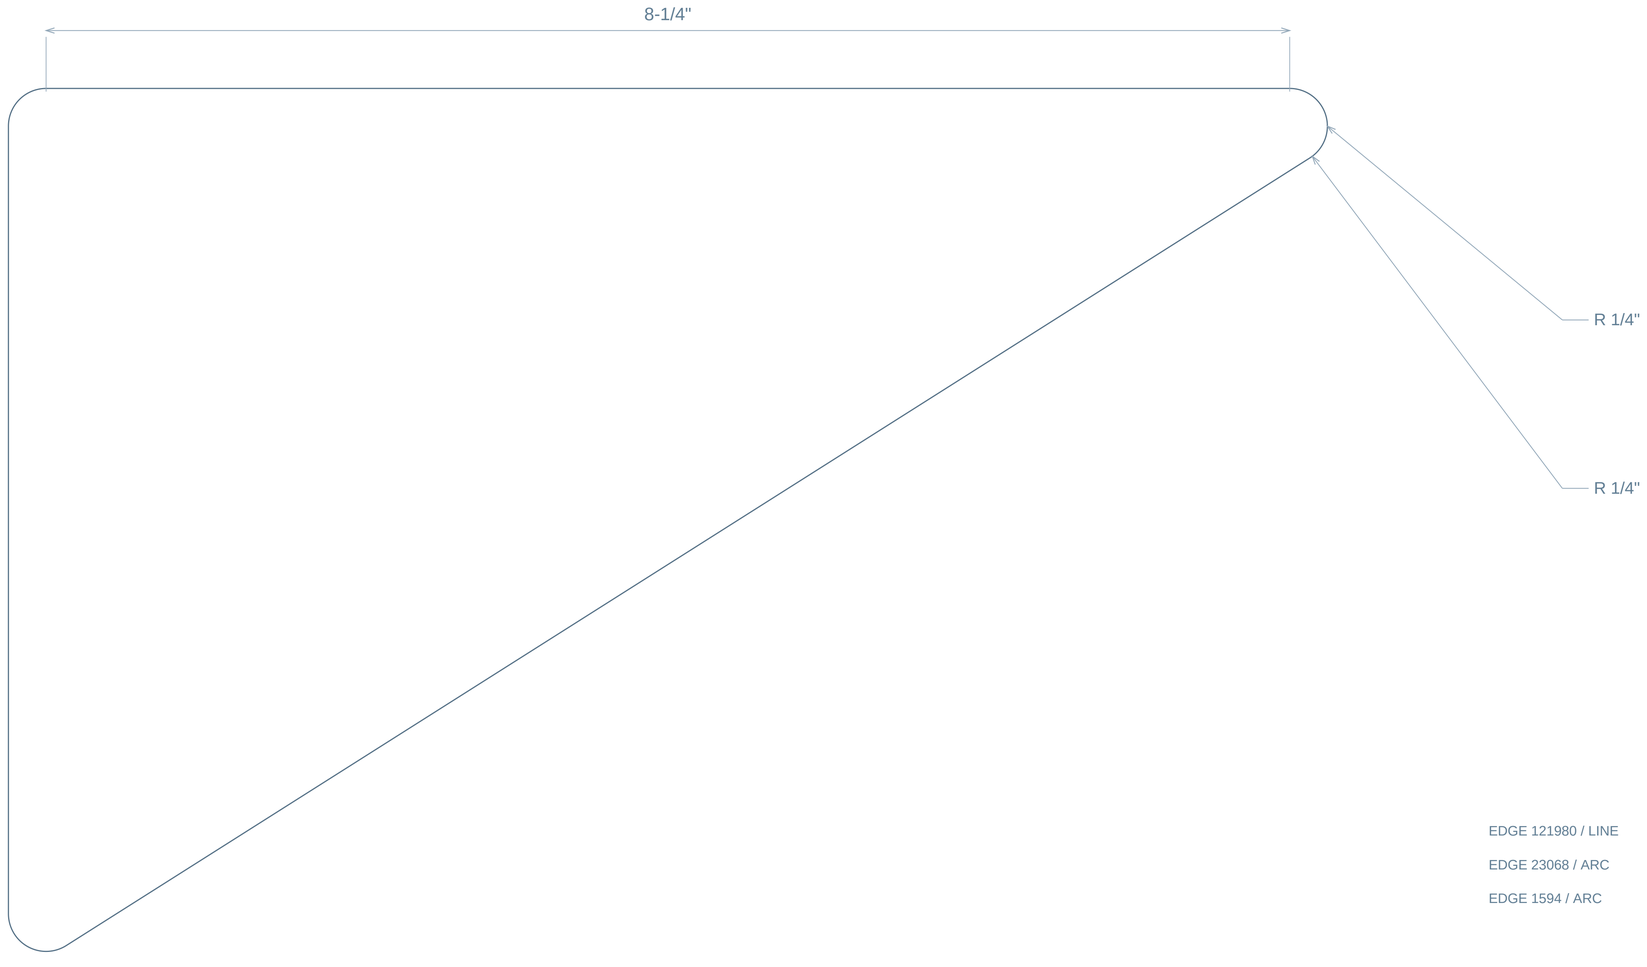

EDGE 121980 / LINE

EDGE 23068 / ARC


EDGE 1594 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F2 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

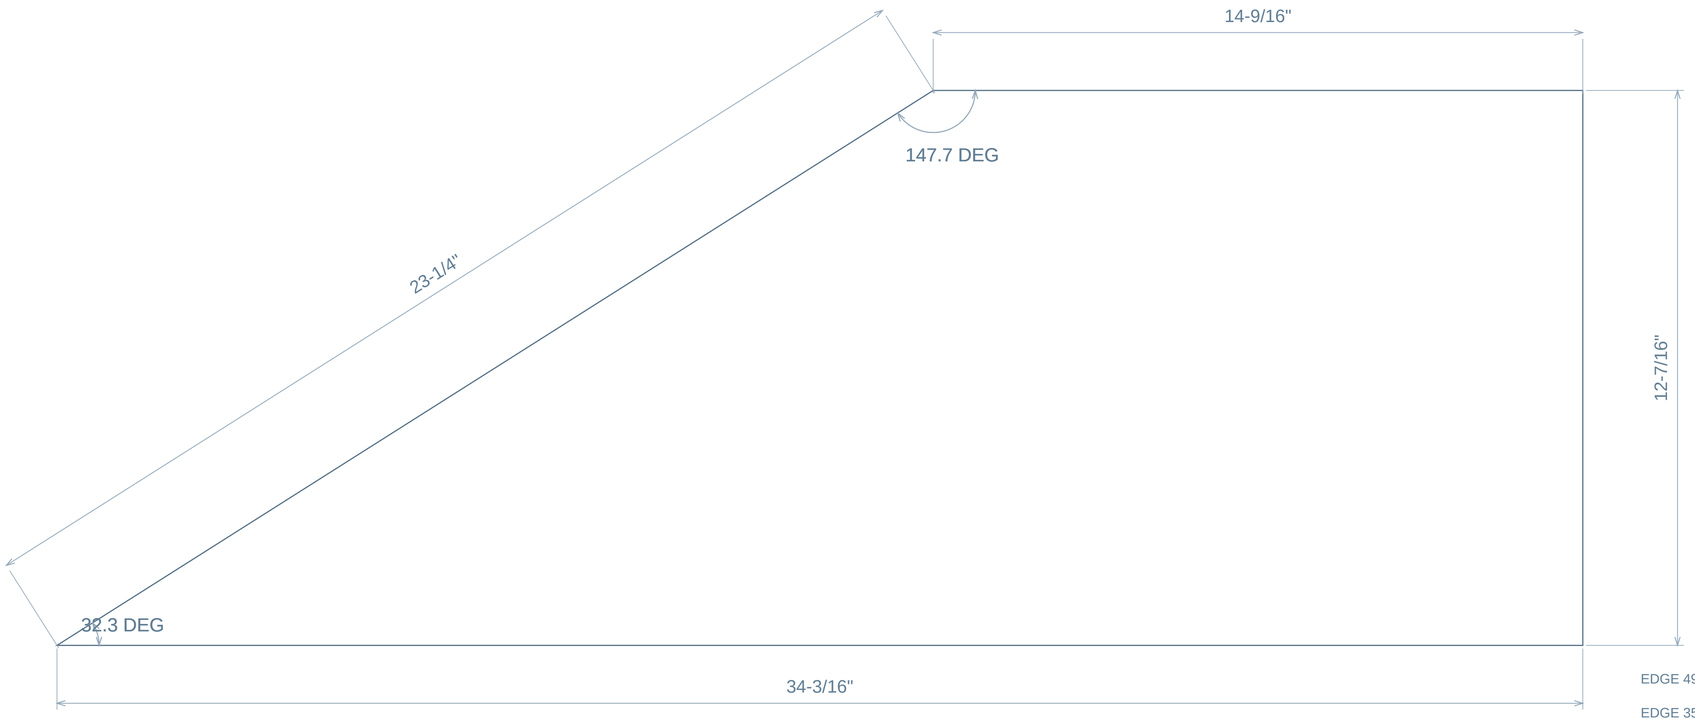

EDGE 49499 / LINE

EDGE 35235 / LINE


EDGE 111253 / LINE

EDGE 136987 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

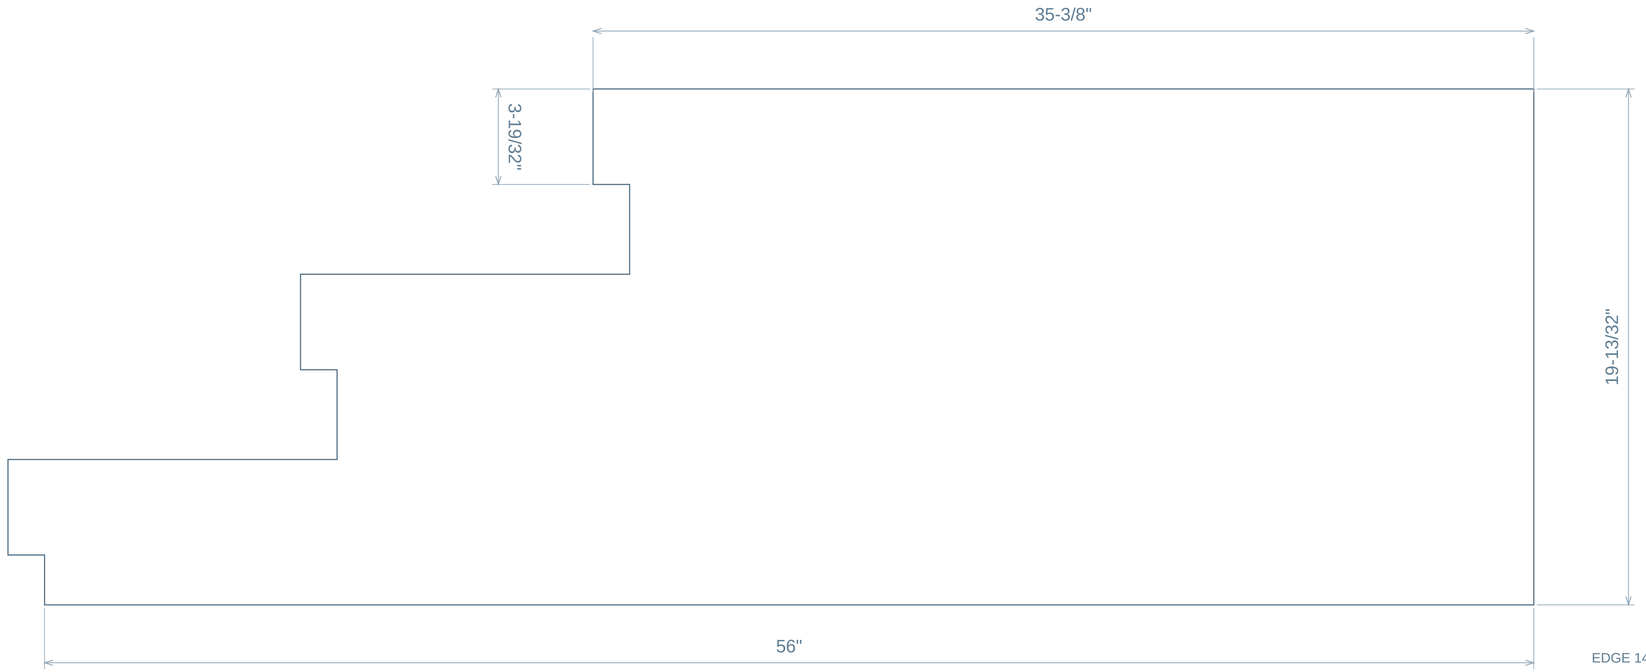

EDGE 142765 / LINE

EDGE 92454 / LINE


EDGE 115116 / LINE

EDGE 125334 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 5-8

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

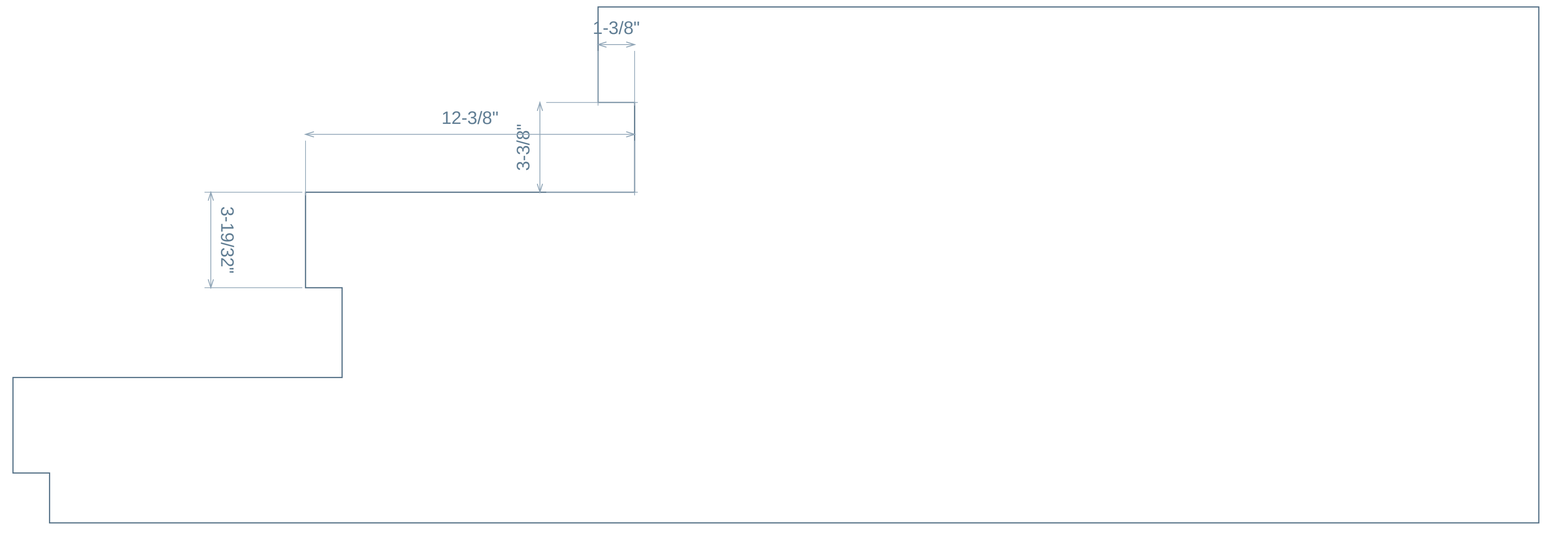

EDGE 115092 / LINE

EDGE 111645 / LINE

EDGE 55865 / LINE


EDGE 33200 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OUTER PROFILE / EDGES 9-12

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

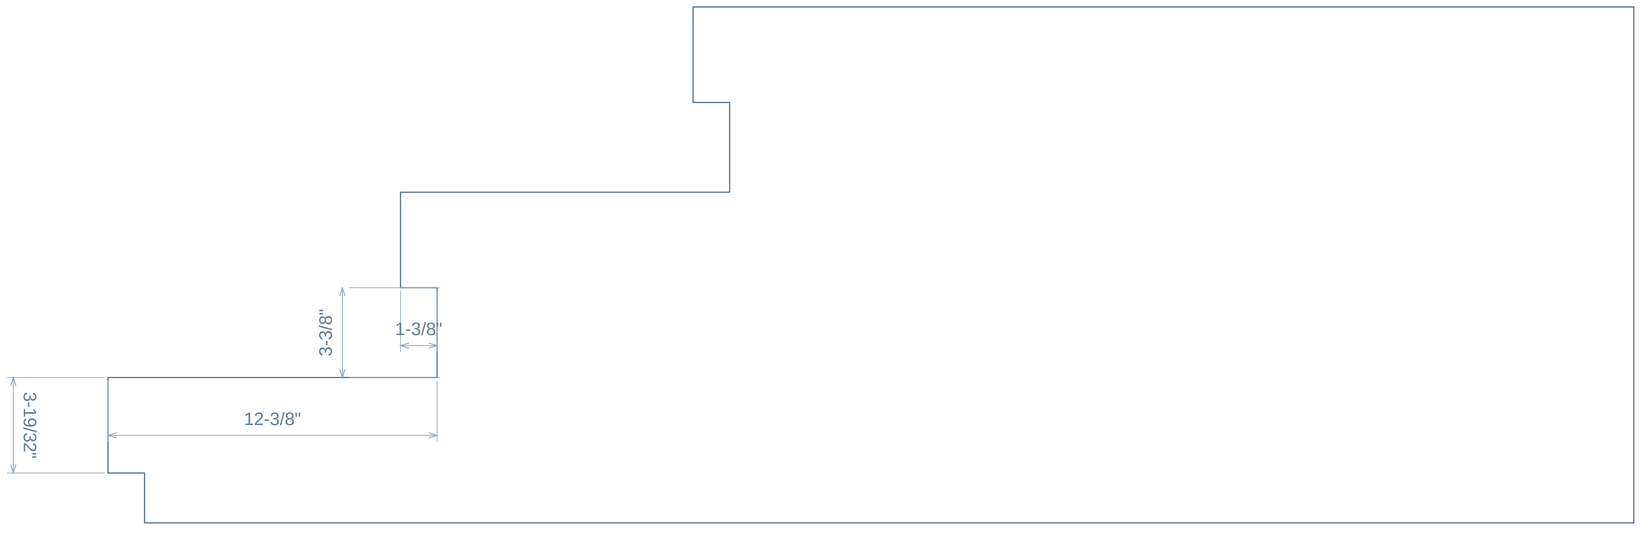

EDGE 40633 / LINE

EDGE 20089 / LINE

EDGE 48895 / LINE

EDGE 86550 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 13-14

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES



EDGE 45011 / LINE


EDGE 1987 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 760

body-0893 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

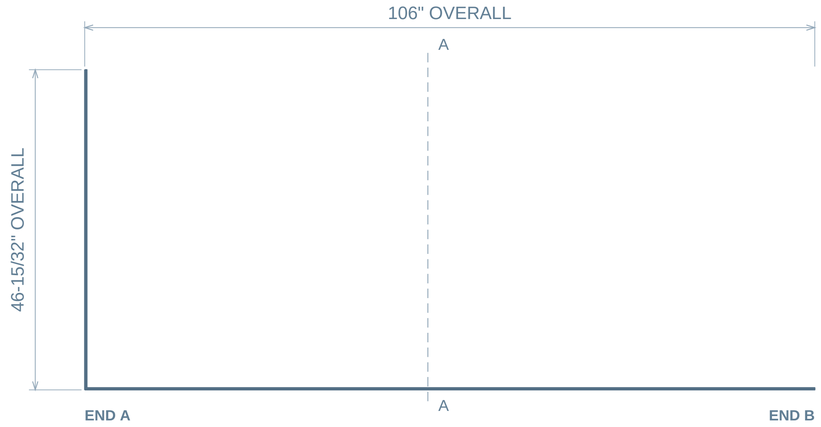

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

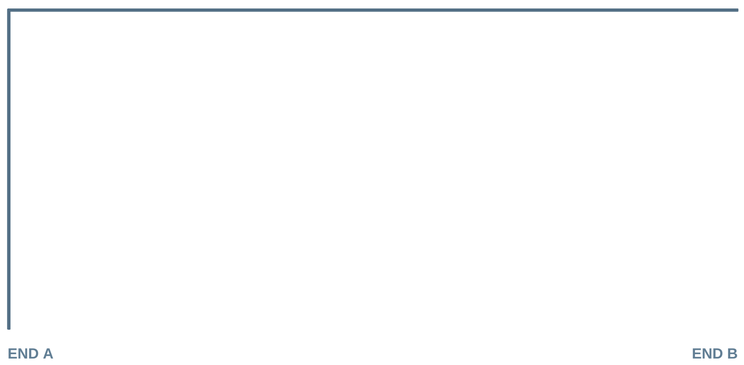

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

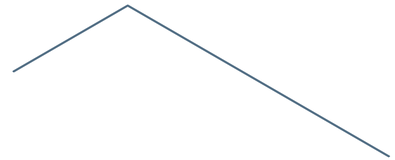

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 761

body-0894 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

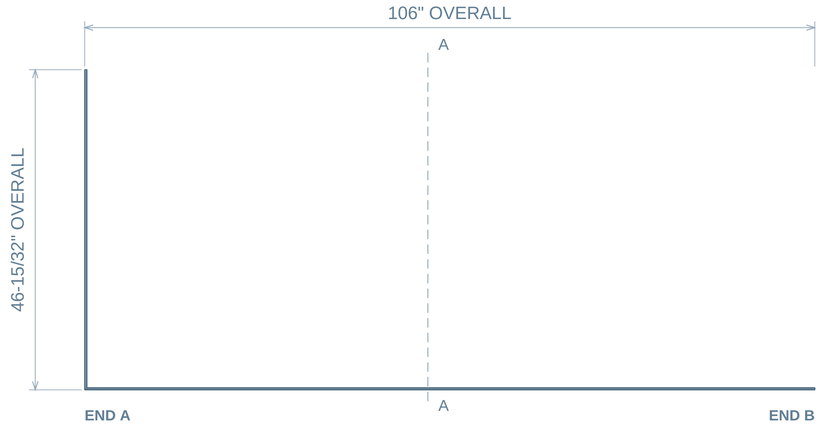

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

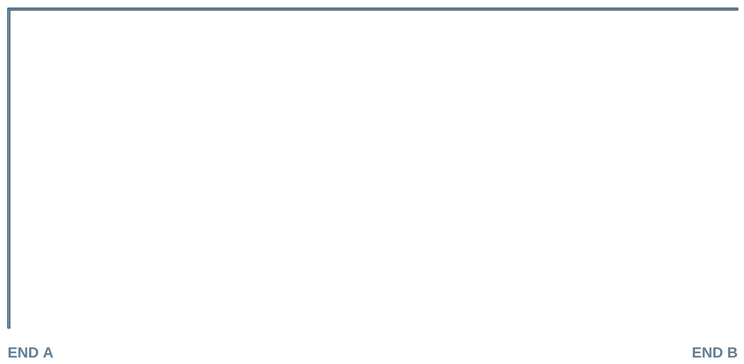


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

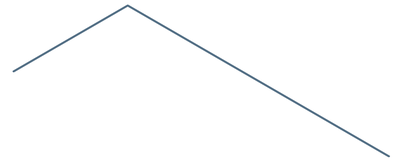

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 762

body-0895 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

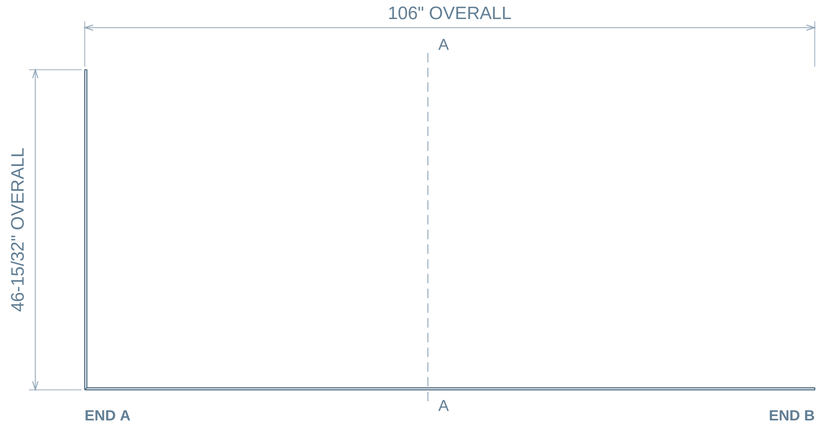

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

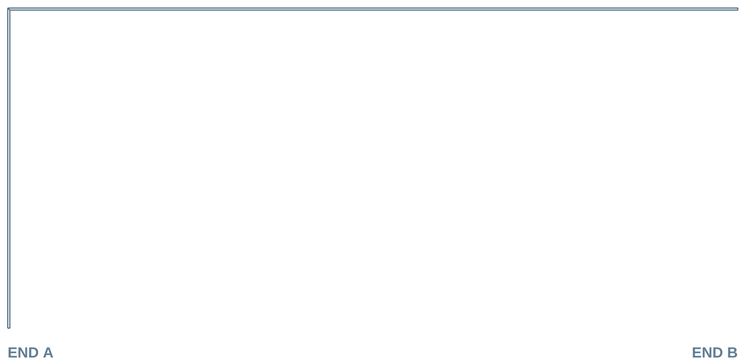


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

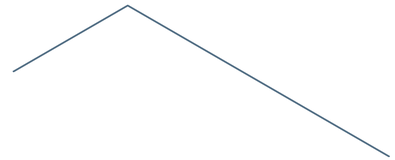

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-23/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 763

body-0896 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

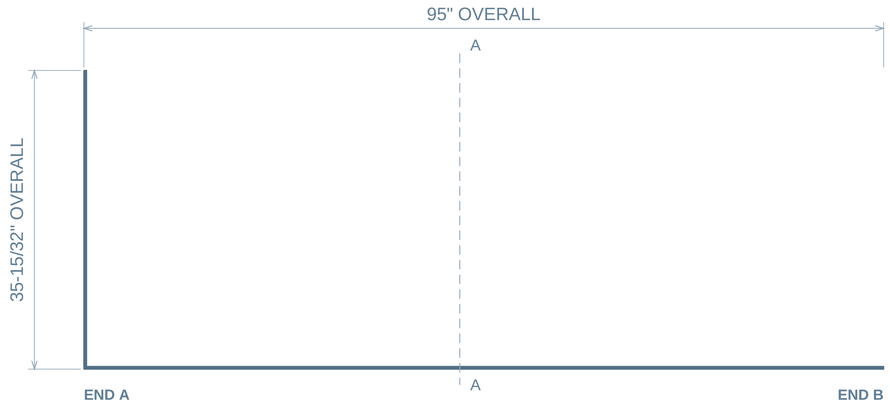

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

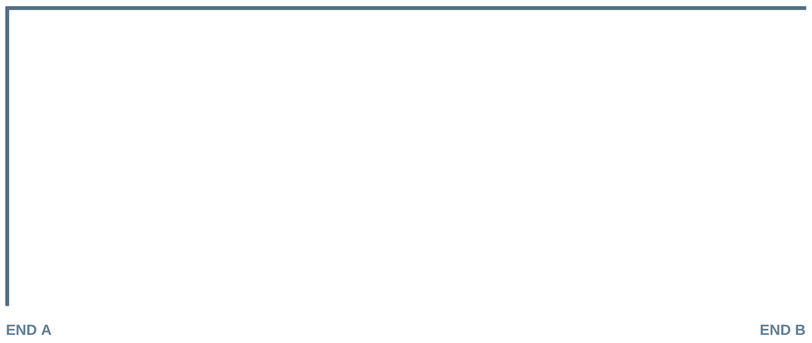

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

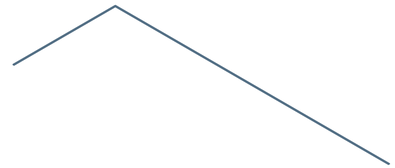

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 764

body-0897 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

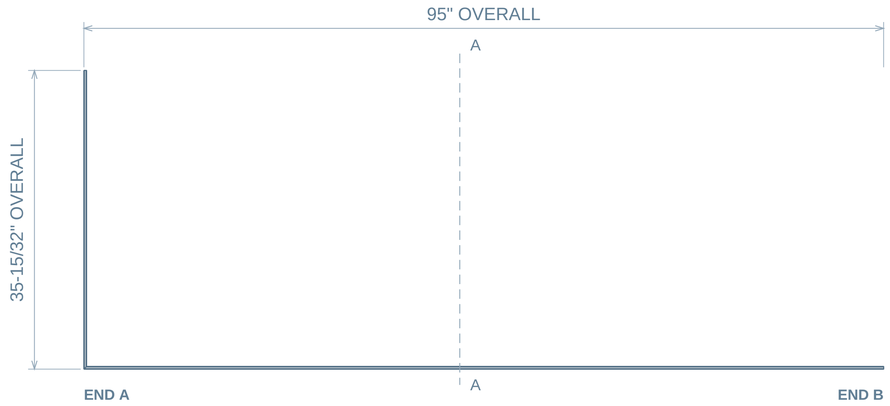

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

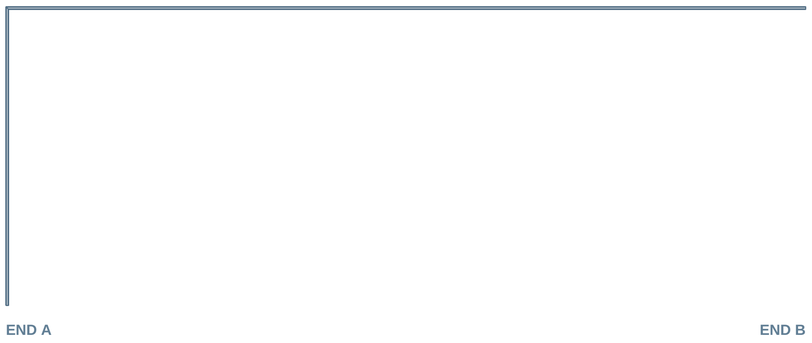


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

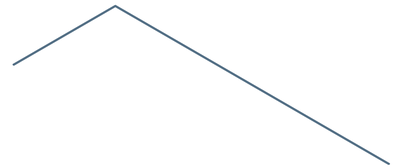

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 765

body-0898 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

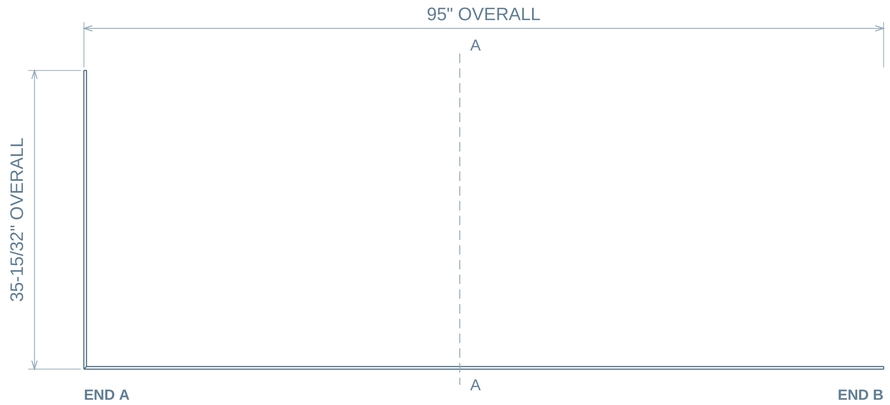

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

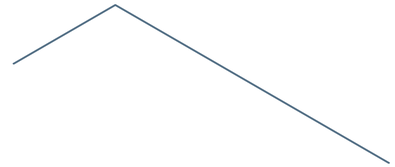

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.