RH STAIR HANDRAIL + SUBRAIL

13 bodies / 13 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

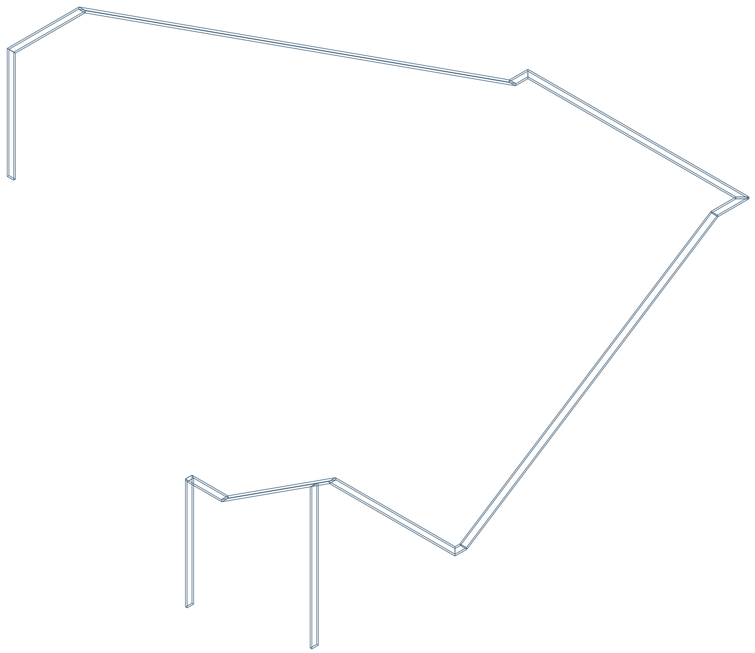

ASSEMBLY / TOP

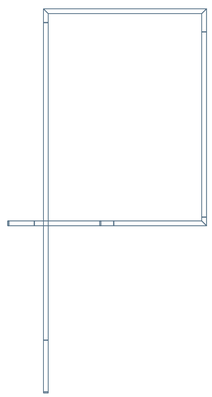

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B073-P01	stair asm body 438	1	34-1/16"
02 / 2606-B073-P02	stair asm body 439	1	11-11/32"
03 / 2606-B073-P03	stair asm body 440	1	38-23/32"
04 / 2606-B073-P04	stair asm body 441	1	4-3/16"
05 / 2606-B073-P05	stair asm body 442	1	91-7/8"
06 / 2606-B073-P06	stair asm body 443	1	9-7/8"
07 / 2606-B073-P07	stair asm body 444	1	67-13/16"
08 / 2606-B073-P08	stair asm body 445	1	6-5/32"
09 / 2606-B073-P09	stair asm body 446	1	157-11/32"
10 / 2606-B073-P10	stair asm body 447	1	22-3/32"
11 / 2606-B073-P11	stair asm body 448	1	34-1/16"
12 / 2606-B073-P12	stair asm body 449	1	39-1/2"
13 / 2606-B073-P13	stair asm body 450	1	43-3/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each rail slot includes size and XYZ center-location dimensions.

Formed bodies retain their source-stair arc actual solutions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

stair asm body 438

body-0656 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

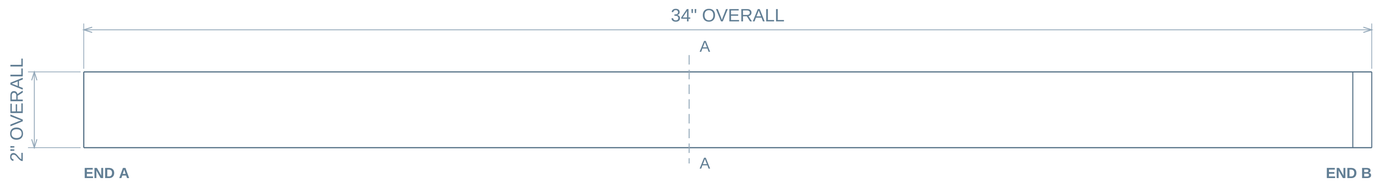

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 15-31/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

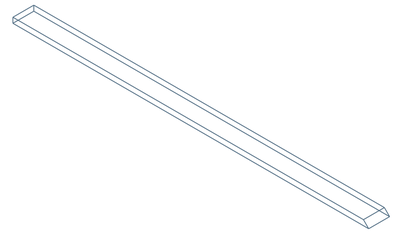

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 34-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 439

body-0657 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

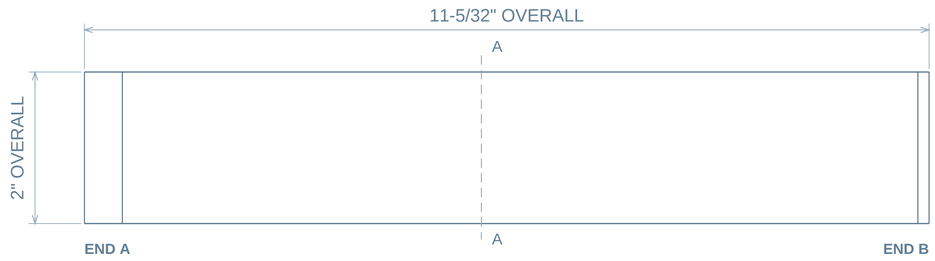

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 5-1/4" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

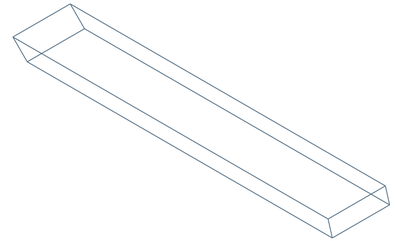

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 11-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

CALIPER / 2606

RH STAIR HANDRAIL + SUBRAIL

2606-B073-P03-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 440 / COMPLETE PROFILE

body-0658 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

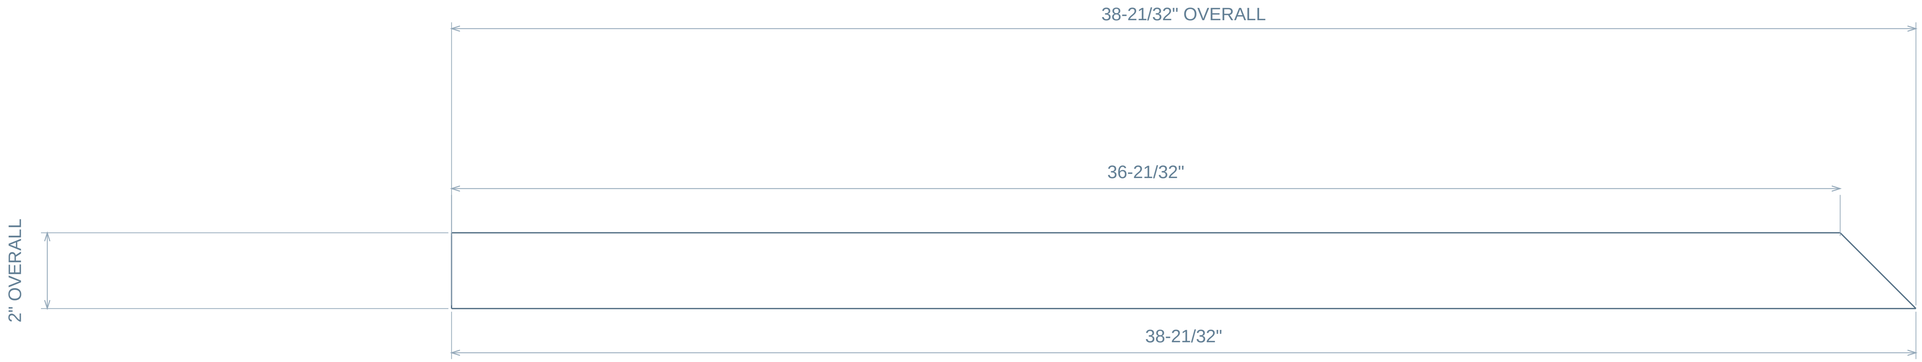

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

DETAIL 2 / CONNECTED OUTLINE / 1:1



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606

RH STAIR HANDRAIL + SUBRAIL

2606-B073-P04-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 441 / COMPLETE PROFILE

body-0659 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

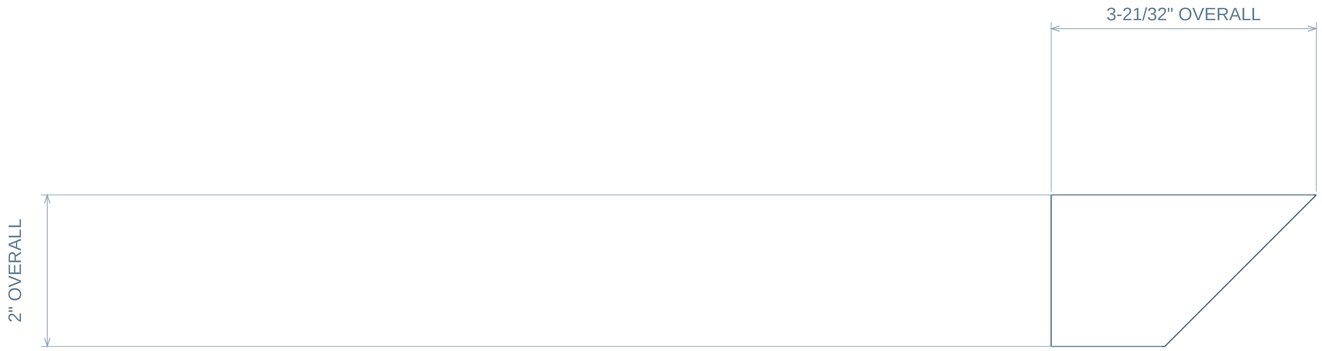

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

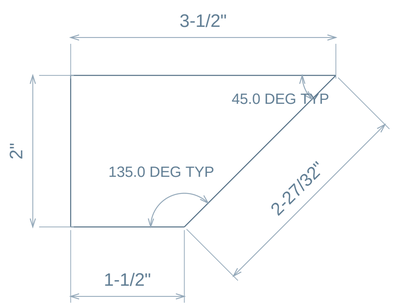

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 442

body-0660 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:5

01 / TOP - FACE A

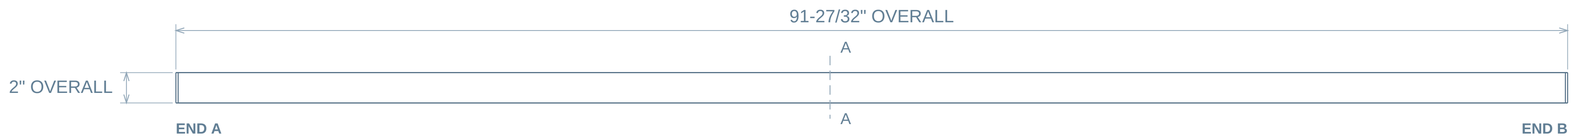

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 43-5/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

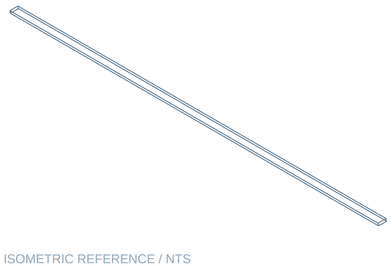

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 91-7/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

CALIPER / 2606

RH STAIR HANDRAIL + SUBRAIL

2606-B073-P06-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 443 / COMPLETE PROFILE

body-0661 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

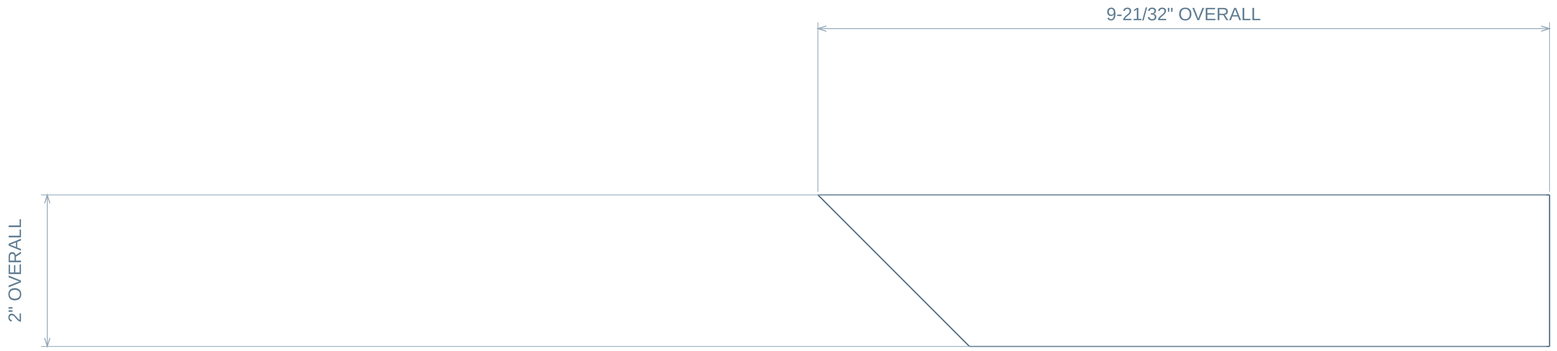

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606

RH STAIR HANDRAIL + SUBRAIL

2606-B073-P07-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 444 / COMPLETE PROFILE

body-0662 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

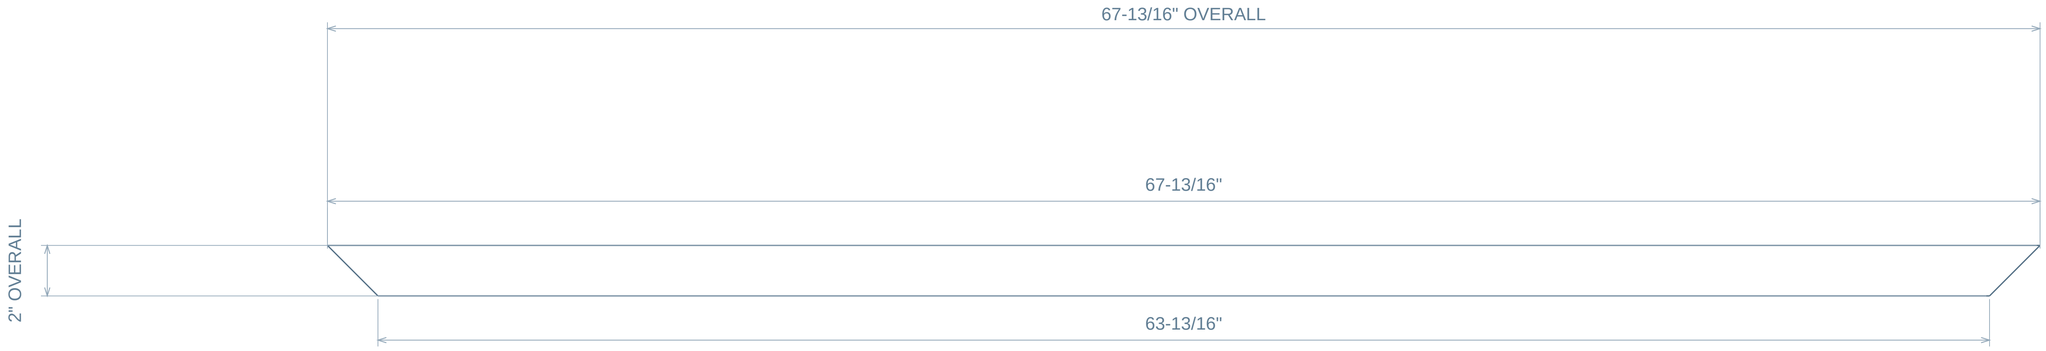

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1



DETAIL 2 / CONNECTED OUTLINE / 1:1



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606

RH STAIR HANDRAIL + SUBRAIL

2606-B073-P08-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 445 / COMPLETE PROFILE

body-0663 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

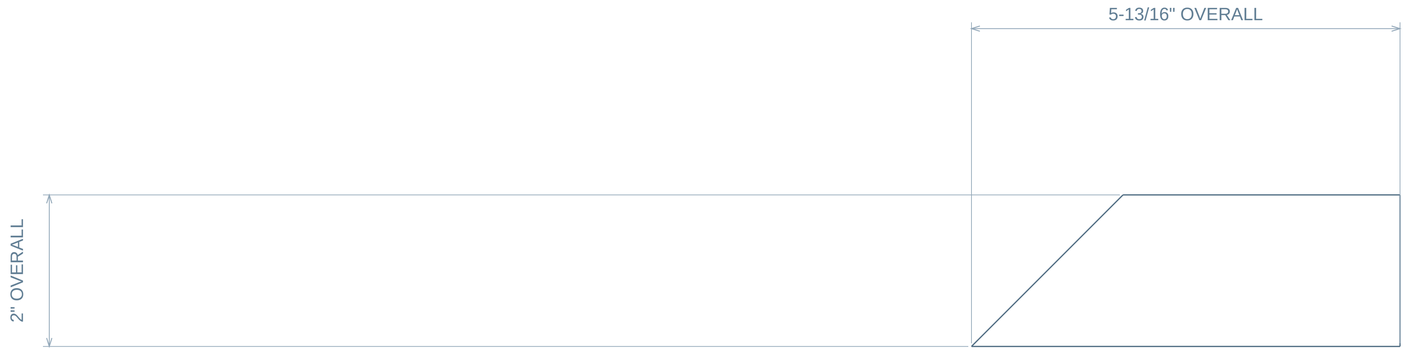

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

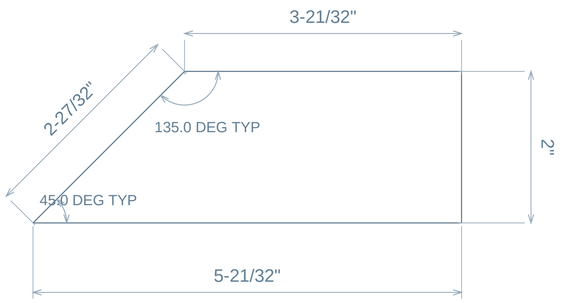

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 446

body-0664 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:8

01 / TOP - FACE A

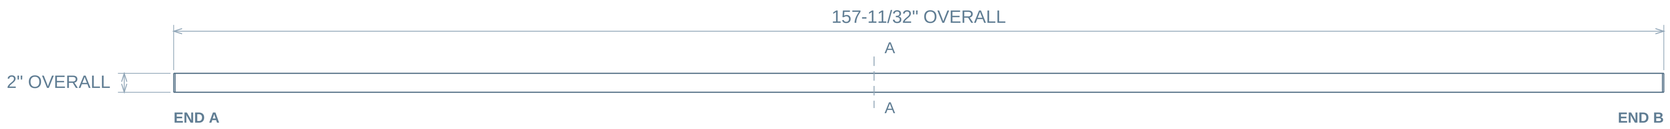

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 73-15/16" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

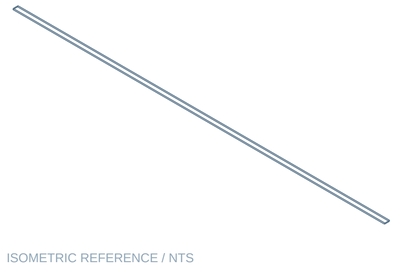

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 157-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 447

body-0665 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

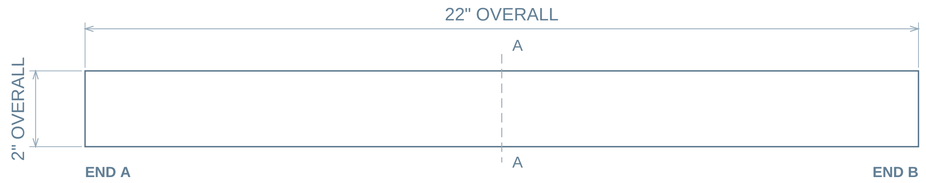

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

X = 11" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

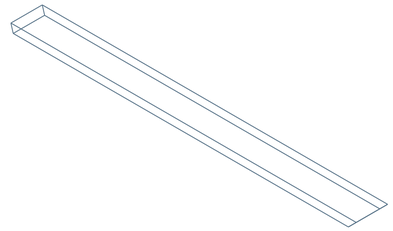

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 22-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 448

body-0666 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

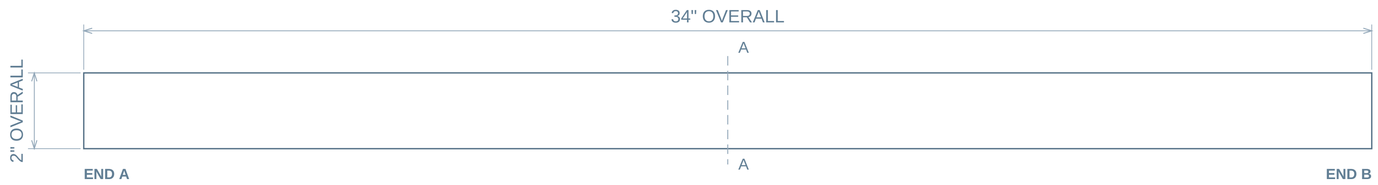

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

X = 17" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

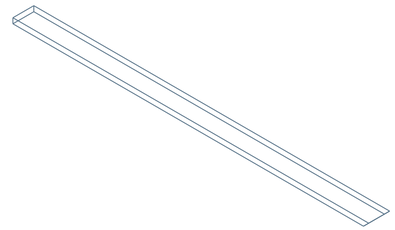

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 34-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 449

body-0667 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

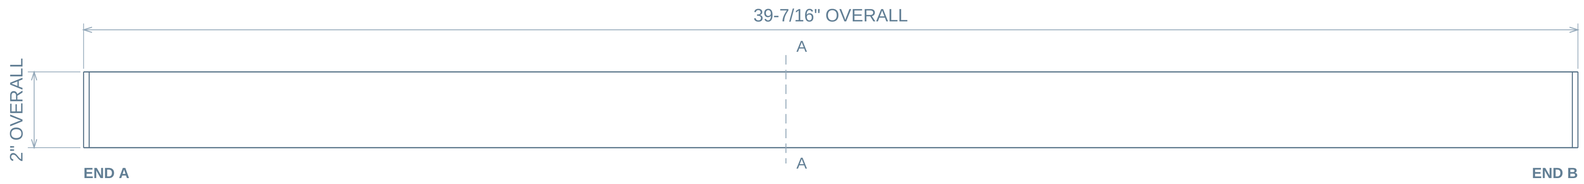

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 18-17/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

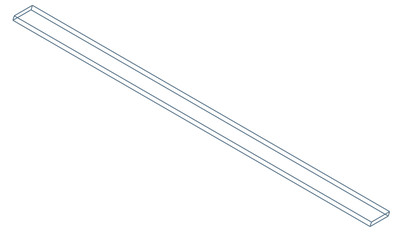

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 39-1/2"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 450

body-0668 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

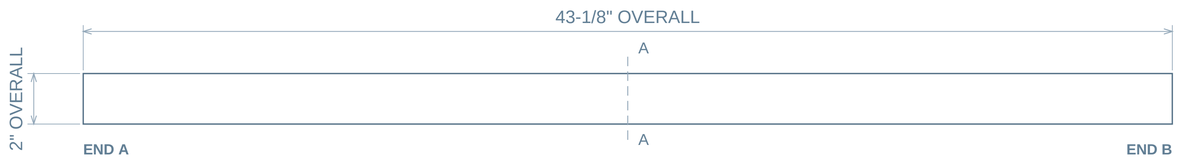

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

04 / SECTION A-A

X = 21-9/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

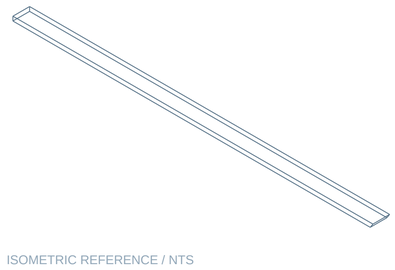

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 43-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.