
TOP LH STRINGER

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

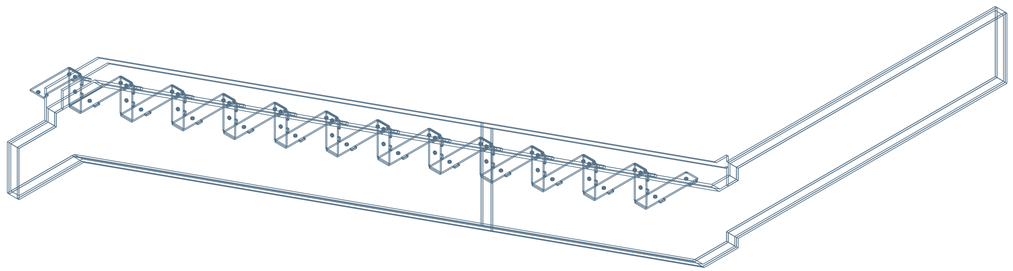

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B001-P01	stringer plates LHT horiz	1	231-3/16"
02 / 2606-B001-P02	stair asm body 24	1	121-1/32"
03 / 2606-B001-P03	stair asm body 25	1	119-7/16"
04 / 2606-B001-P04	stair asm body 26	1	121-1/32"
05 / 2606-B001-P05	stair asm body 27	1	119-7/16"
06 / 2606-B001-P06	treadplate carriers horiz LH	12	11-11/32"
07 / 2606-B001-P07	treadplate carriers vert LH	12	7-1/4"
08 / 2606-B001-P08	treadplate carriers horiz top LH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


TOP LH STRINGER

2606-B001-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHT horiz / COMPLETE PROFILE

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

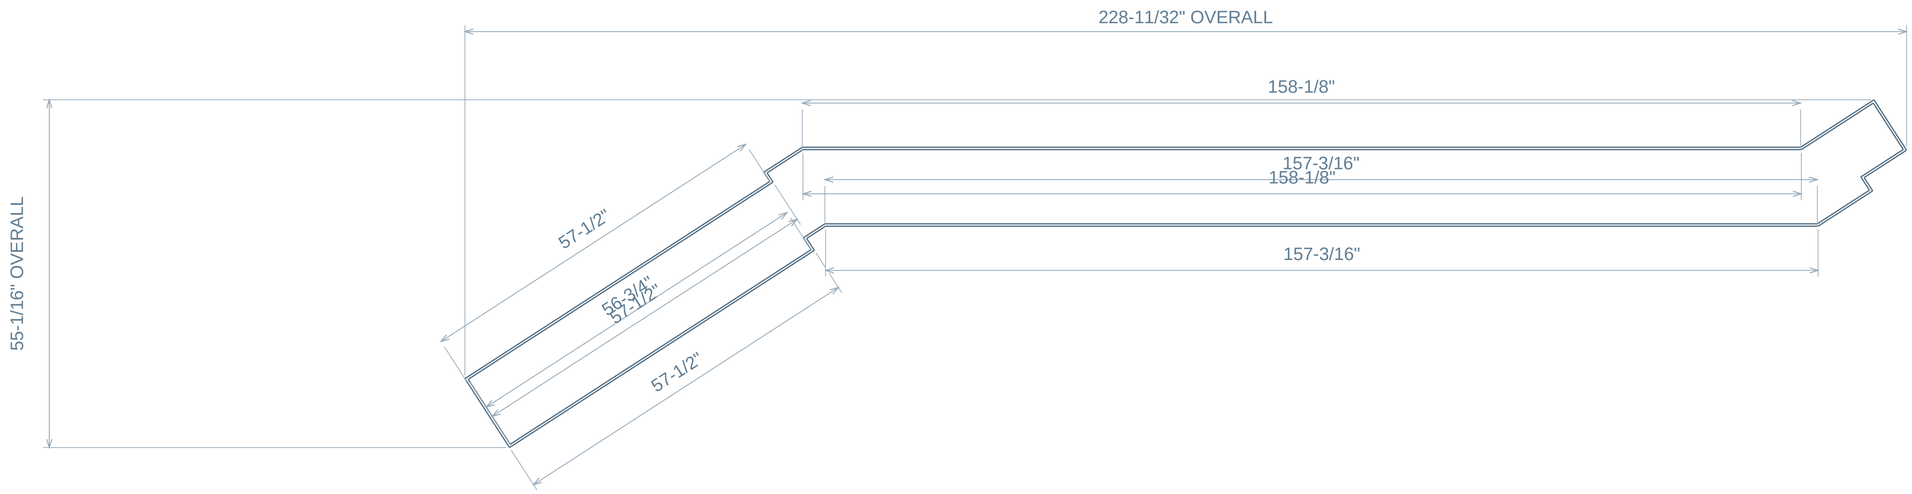

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES


DETAIL 1 / OUTER / 1:3




DETAIL 2 / INNER / 1:2

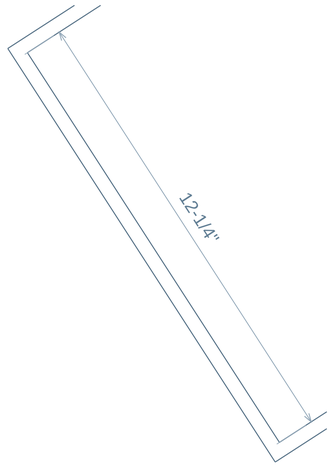



DETAIL 3 / OUTER / 1:4





DETAIL 4 / INNER / 1:4






FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

DETAIL 5 / INNER / 1:4

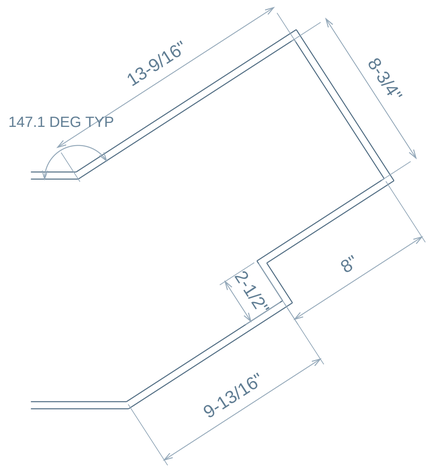

DETAIL 6 / OUTER / 1:4

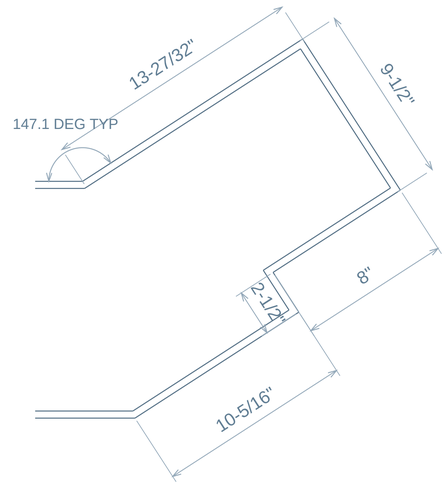

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606

TOP LH STRINGER

2606-B001-P02-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 24 / COMPLETE PROFILE


body-0009 / QTY 1 / NORMAL DEPTH 3/8" / INCHES




END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3

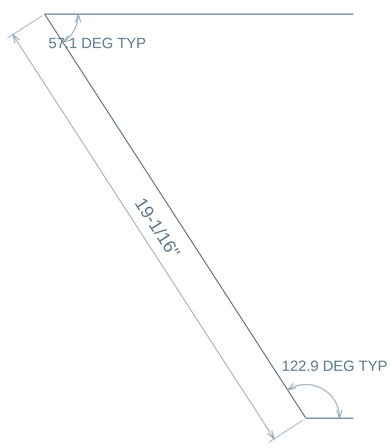

DETAIL 2 / CONNECTED OUTLINE / 1:4

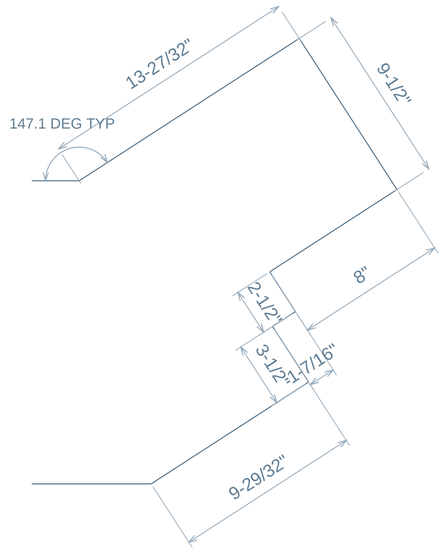

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P03-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 25 / COMPLETE PROFILE


body-0010 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

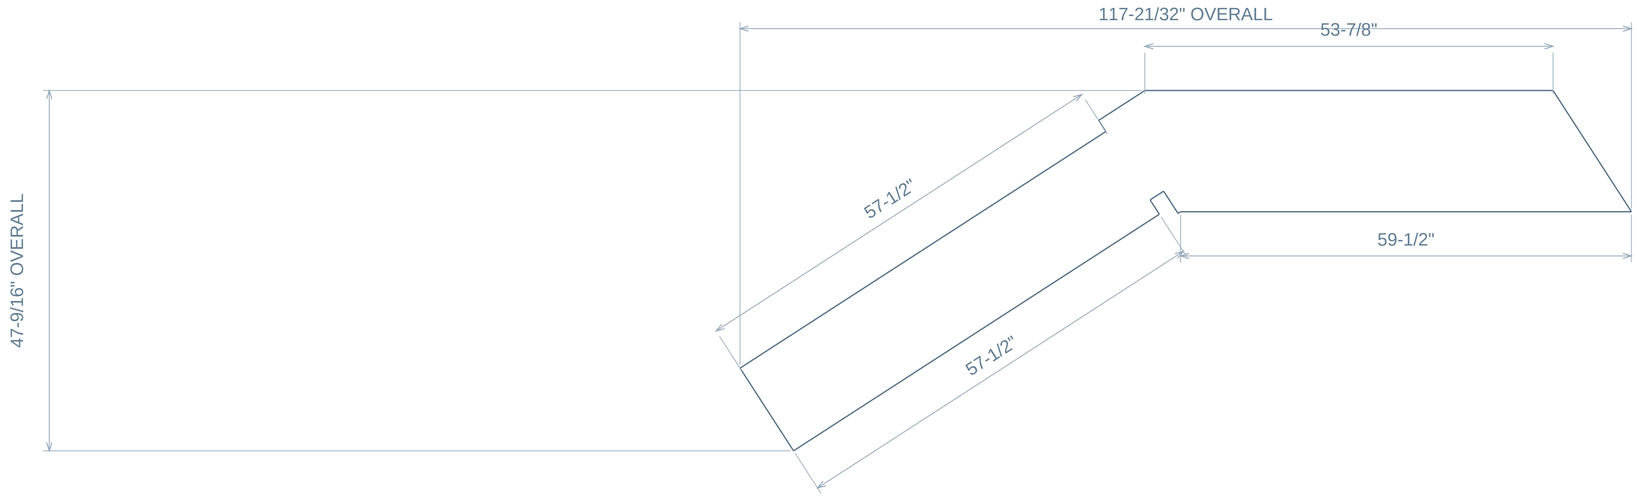


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

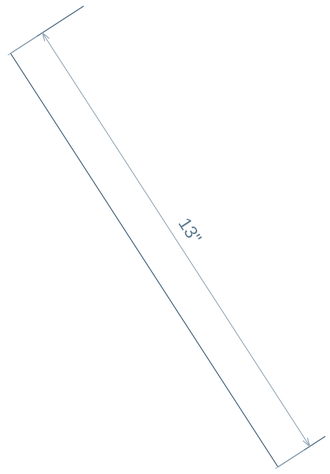

DETAIL 2 / CONNECTED OUTLINE / 1:3

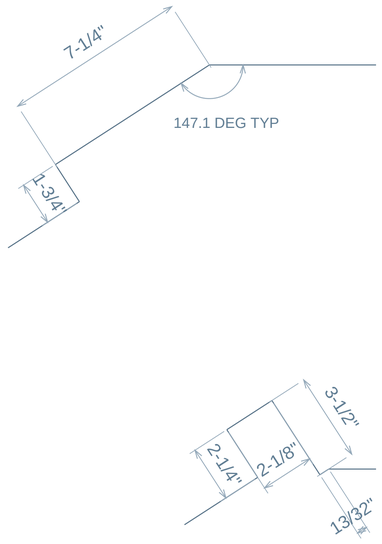

DETAIL 3 / CONNECTED OUTLINE / 1:3

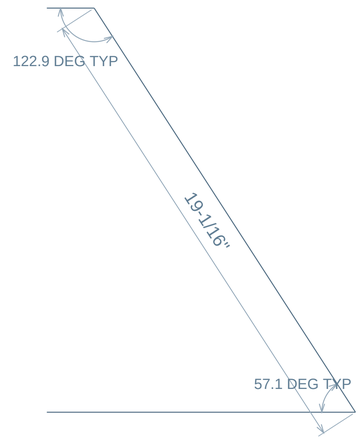

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P04-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 26 / COMPLETE PROFILE


body-0011 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

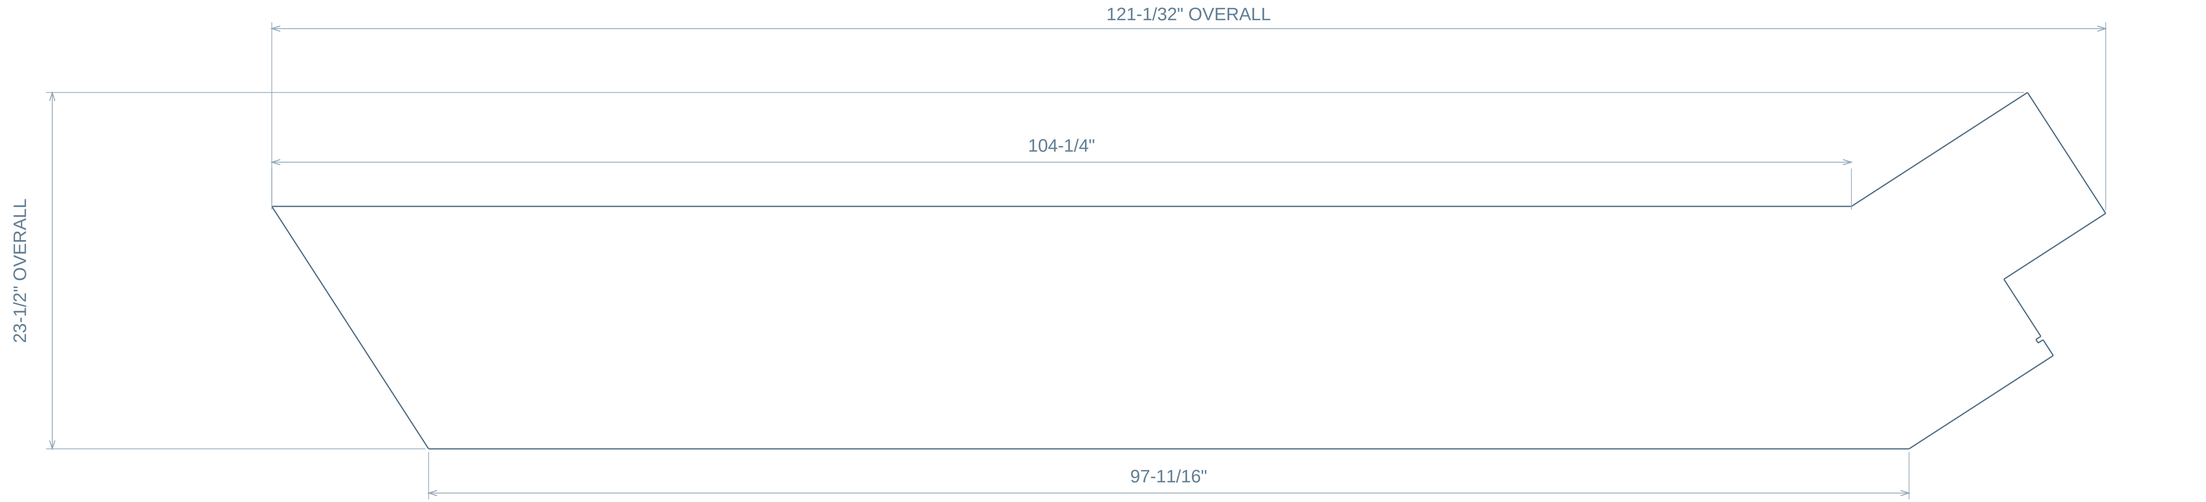


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3

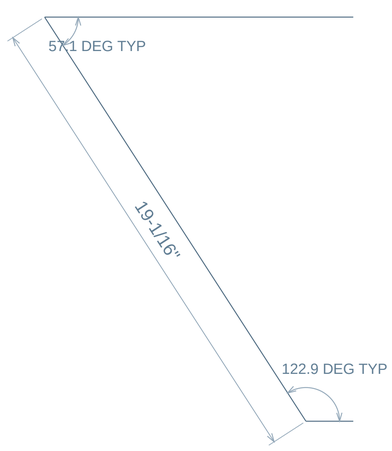

DETAIL 2 / CONNECTED OUTLINE / 1:4

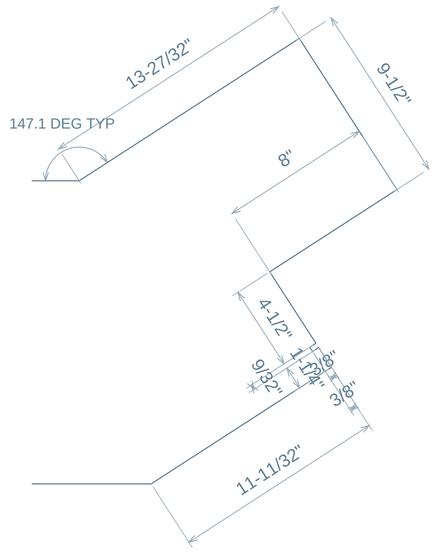

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 26 / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0011 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=16.00000" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 32.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

8.62201" FROM C

F2 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

9.65408" FROM C

F3 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.31250" FROM C

F4 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

11.95374" FROM C

F5 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.21962" FROM C

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P05-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 27 / COMPLETE PROFILE


body-0012 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

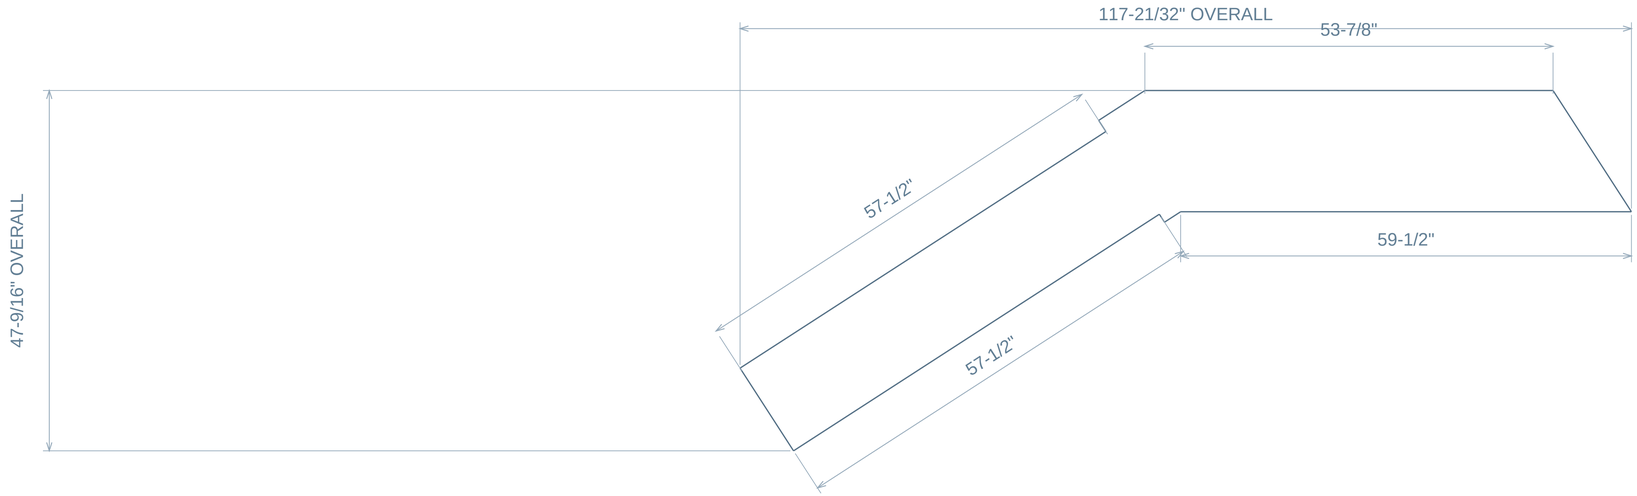


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

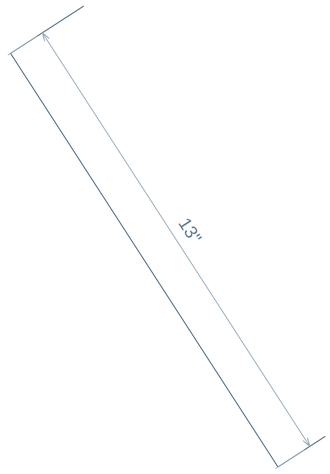

DETAIL 2 / CONNECTED OUTLINE / 1:3

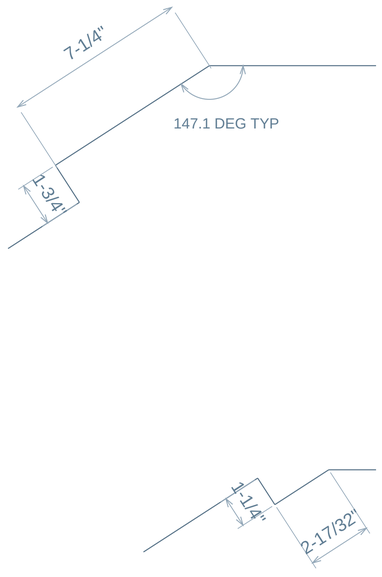

DETAIL 3 / CONNECTED OUTLINE / 1:3

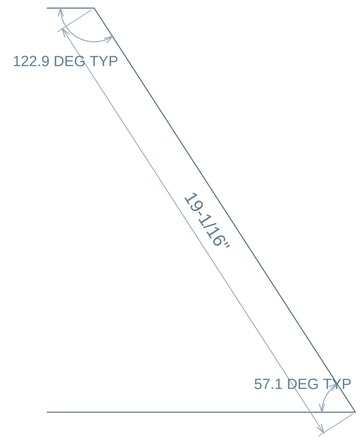

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stair asm body 27 / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0012 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=31.55401" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 5 RECTANGULAR THROUGH SLOTS

4 SPACES @ 13.09976" ALONG +U

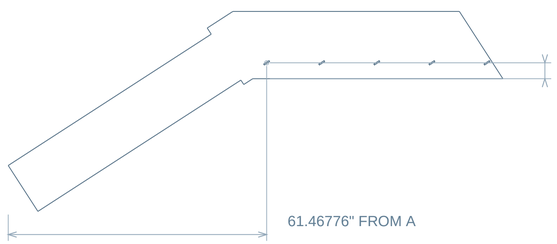




LONG AXIS 32.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

3.78038" FROM C

F2 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

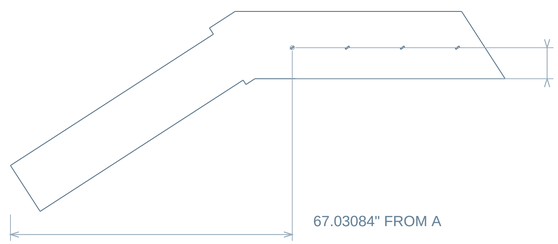




LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

7.37799" FROM C

F3 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

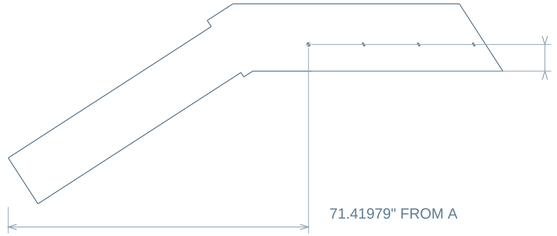




LONG AXIS 122.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

6.34592" FROM C

F4 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

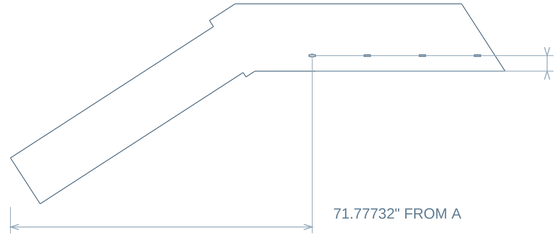




LONG AXIS 0.0 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

3.68750" FROM C

F5 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

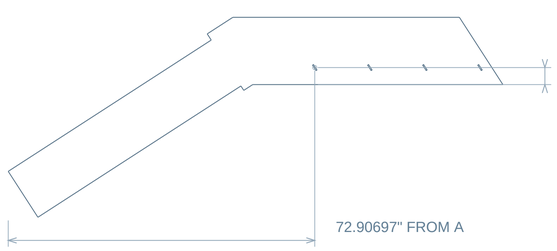



LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

4.04626" FROM C


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz LH

body-0013 | QTY 12 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

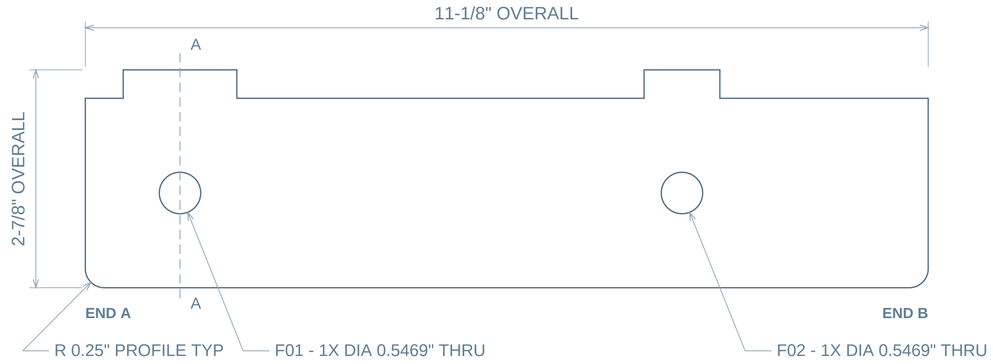

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

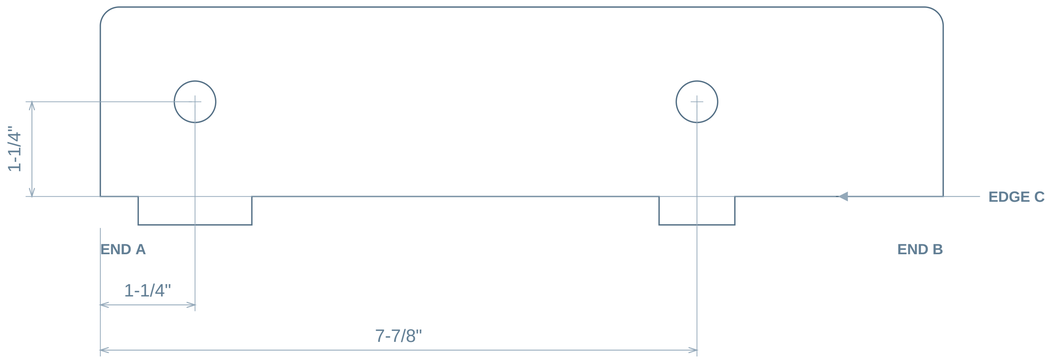


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

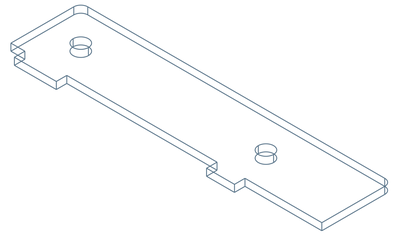

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert LH

body-0014 | QTY 12 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

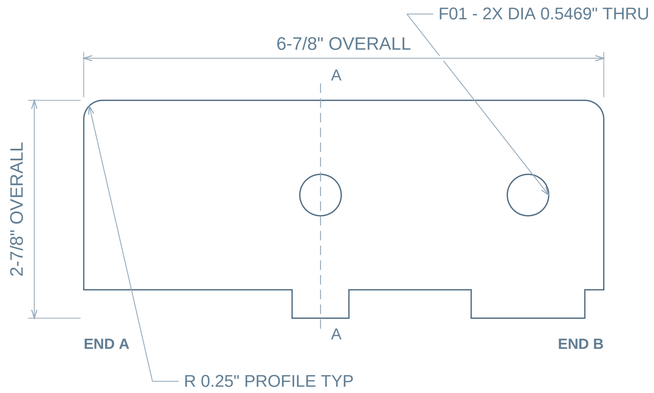

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

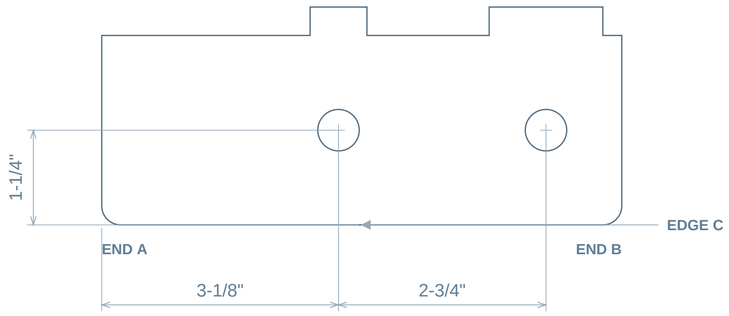


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

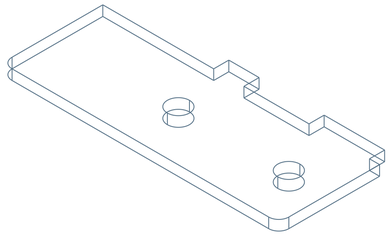

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top LH

body-0036 | QTY 1 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

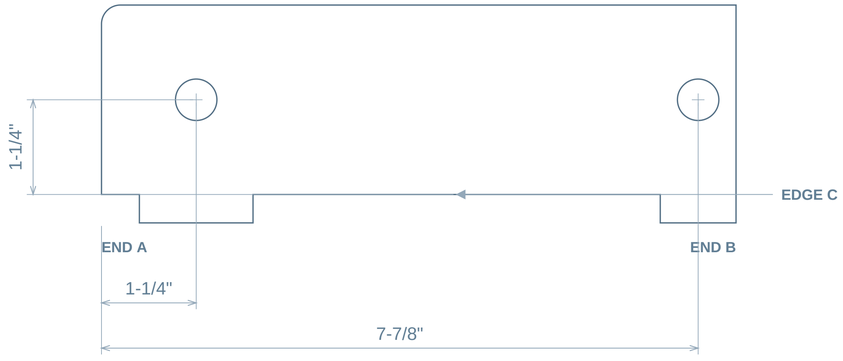

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

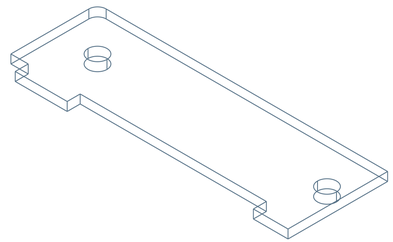

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.