

OG SOUTH

29 bodies / 5 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

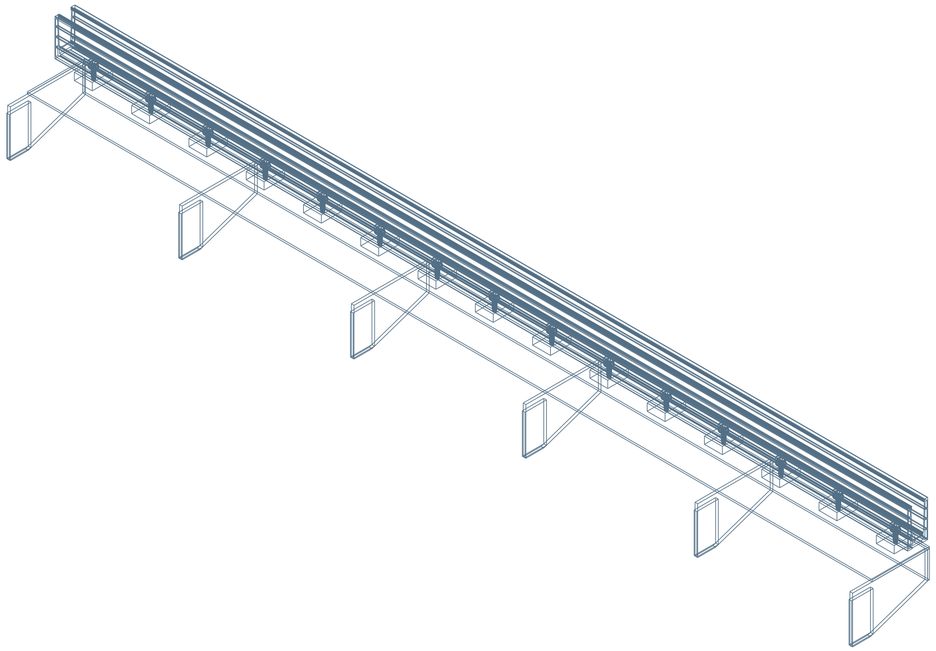

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B066-P02	OG glass asm body 630	1	118-1/16"
02 / 2606-B066-P03	OG glass asm body 631	1	118-9/32"
03 / 2606-B066-P04	og mount plates knife plate - south	6	12-11/32"
04 / 2606-B066-P05	og mount plates weld tab	6	6-9/32"
05 / 2606-B066-P07	tap block	15	3-15/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

OG glass asm body 630

body-0195 | QTY 1 IN OG SOUTH | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A



02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 59" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

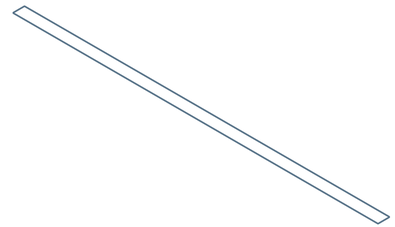

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 118-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

OG glass asm body 631

body-0196 | QTY 1 IN OG SOUTH | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A

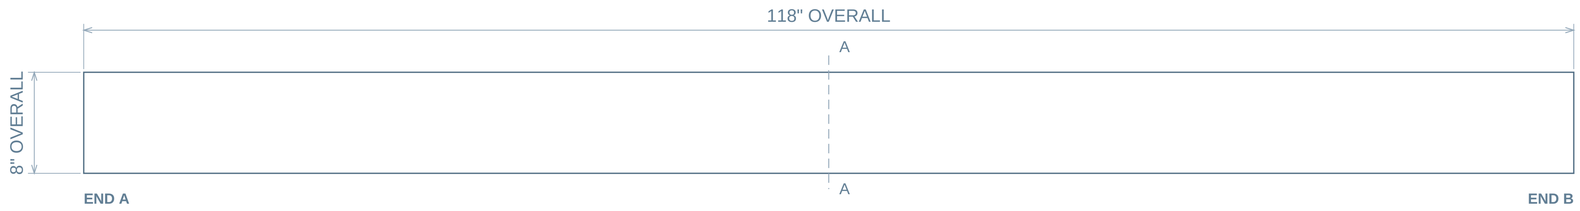

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 59" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

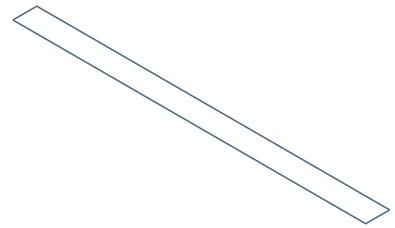

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 118-9/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

og mount plates knife plate - south / COMPLETE PROFILE


body-0197 / QTY 6 / NORMAL DEPTH 3/8" / INCHES

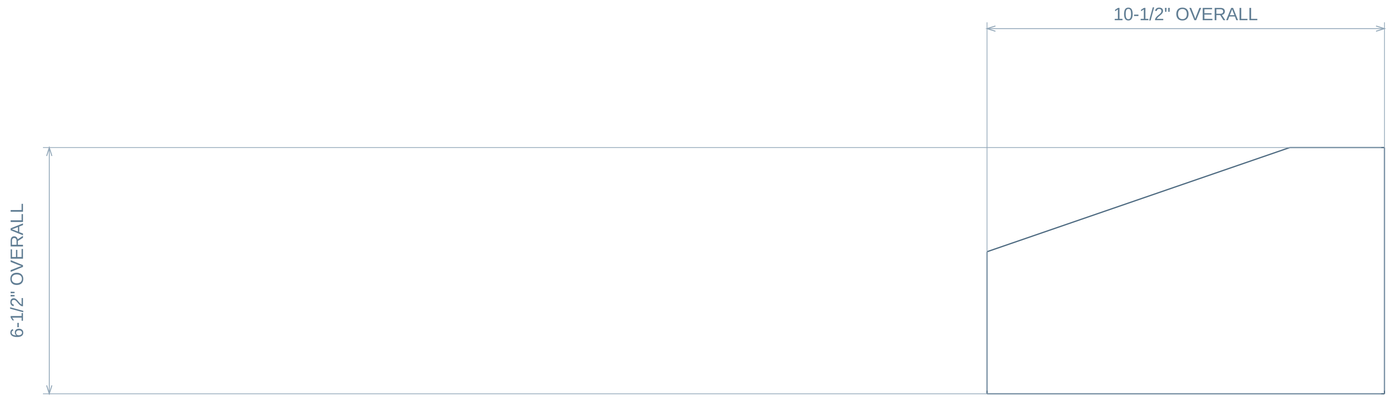

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

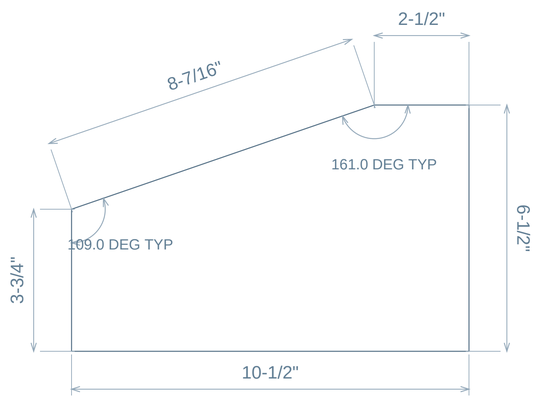


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

og mount plates weld tab

body-0202 | QTY 6 IN OG SOUTH | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

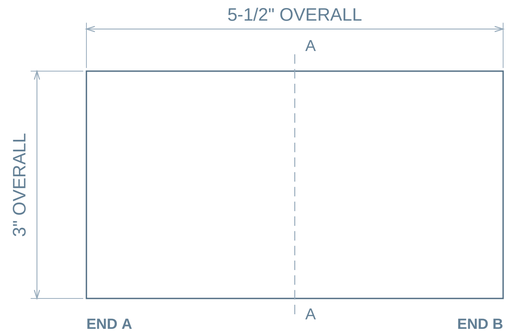

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

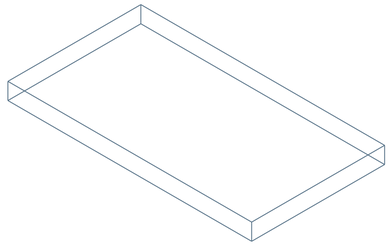

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 6-9/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


tap block

body-0231 | QTY 15 IN OG SOUTH | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

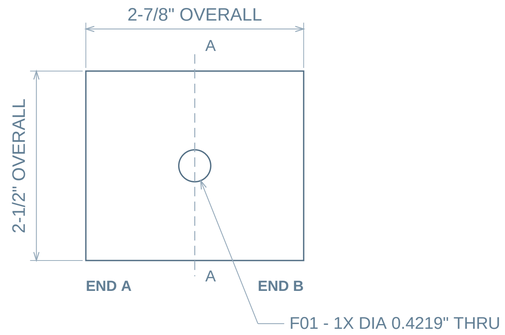

02 / FRONT - EDGE VIEW

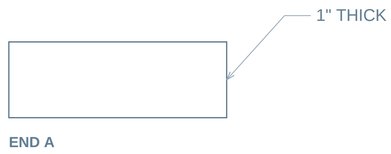


03 / BOTTOM - FACE B

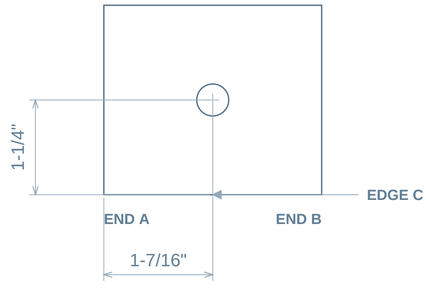


04 / SECTION A-A

X = 1-7/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

OG WEST

22 bodies / 5 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

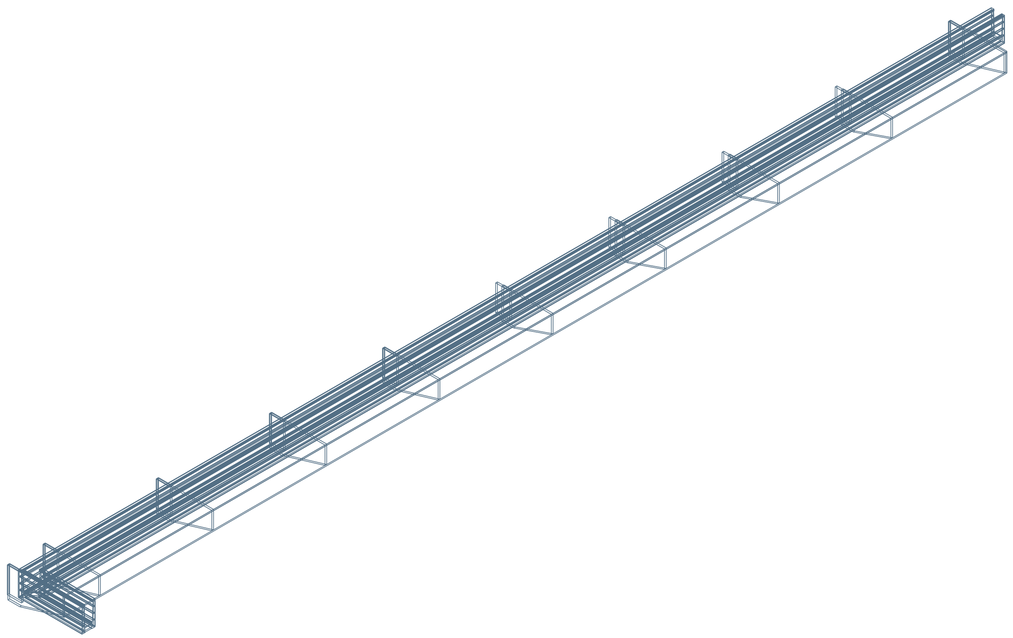

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B067-P03	OG glass asm body 644	1	200-3/32"
02 / 2606-B067-P04	OG glass asm body 645	1	199-31/32"
03 / 2606-B067-P05	og mount plates knife plate - west	6	13-3/8"
04 / 2606-B067-P06	og mount plates knife plate - south	4	12-11/32"
05 / 2606-B067-P07	og mount plates weld tab	10	6-9/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each row includes size and two center-location dimensions.

Formed bodies retain their source rails and cutout locations.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

OG glass asm body 644

body-0209 | QTY 1 IN OG WEST | INCHES | TOP / FRONT / BOTTOM SCALE 1:10

01 / TOP - FACE A

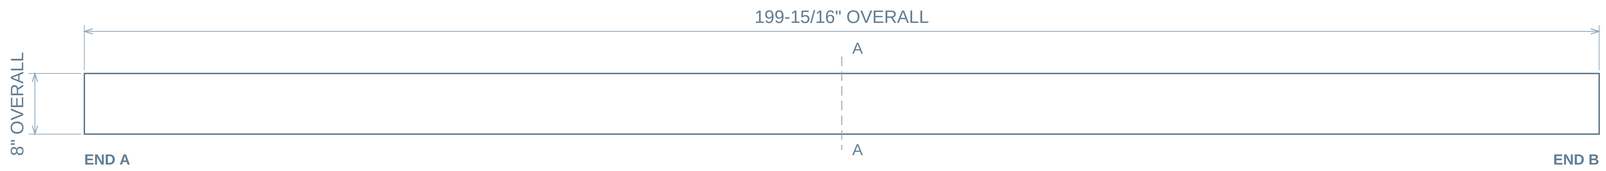

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 99-31/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

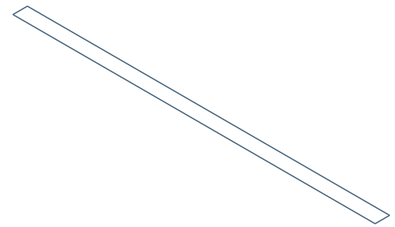

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 200-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

OG glass asm body 645

body-0210 | QTY 1 IN OG WEST | INCHES | TOP / FRONT / BOTTOM SCALE 1:10

01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 99-31/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 199-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

og mount plates knife plate - west / COMPLETE PROFILE


body-0211 / QTY 6 / NORMAL DEPTH 3/8" / INCHES

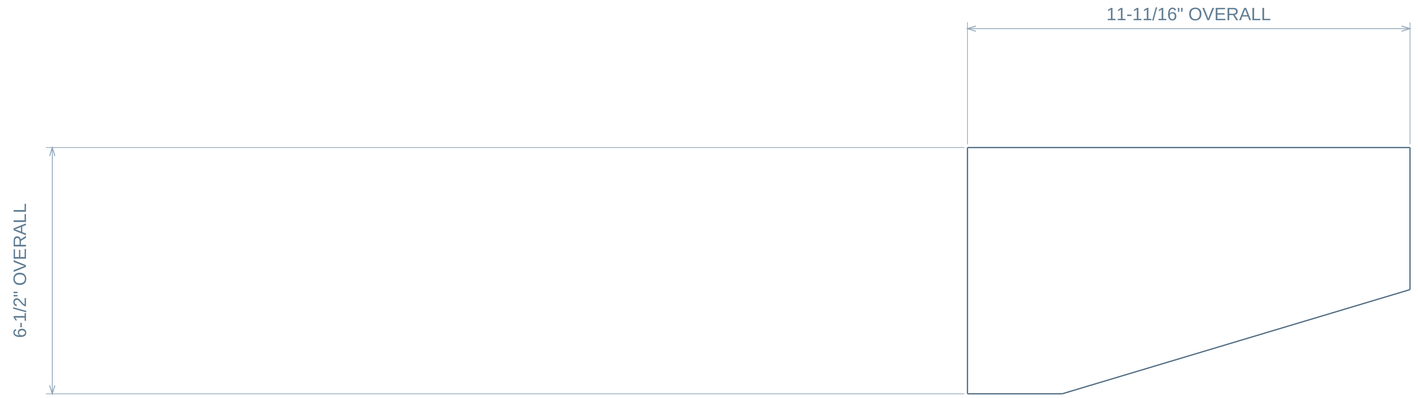

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

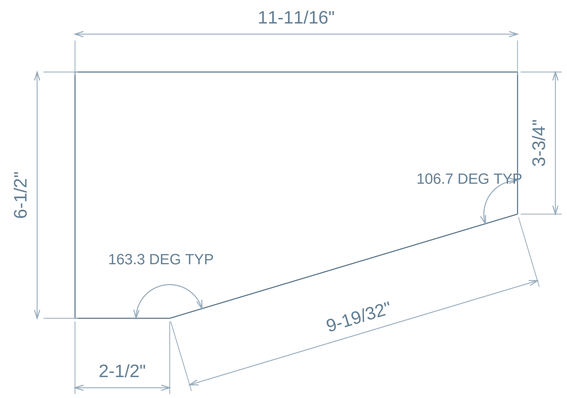


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

og mount plates knife plate - south / COMPLETE PROFILE


body-0212 / QTY 4 / NORMAL DEPTH 3/8" / INCHES

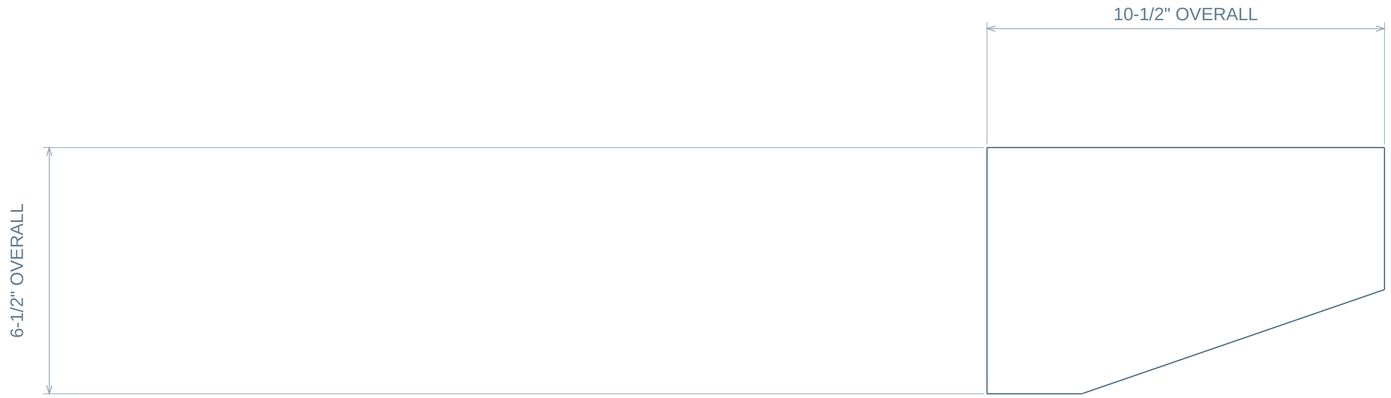

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

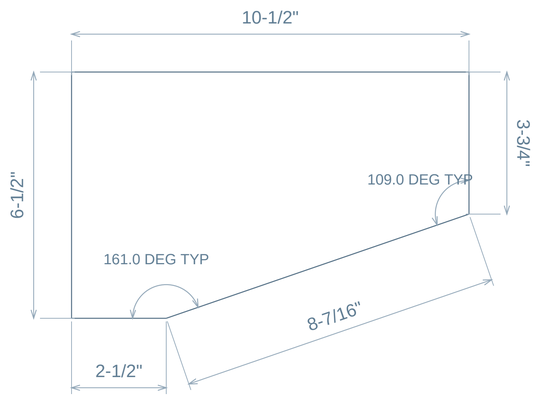


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

og mount plates weld tab

body-0216 | QTY 10 IN OG WEST | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

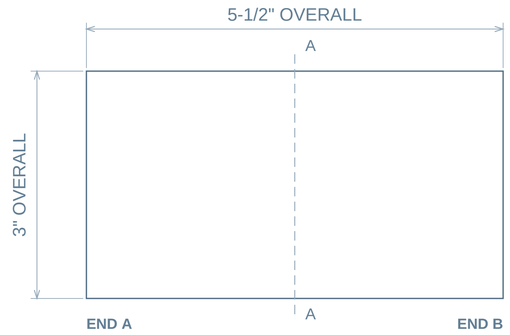

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

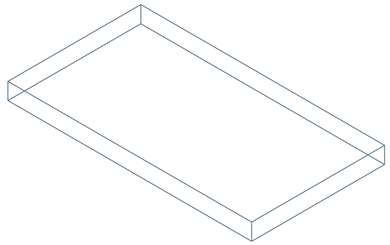

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 6-9/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

BTM LH STRINGER

17 bodies / 5 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

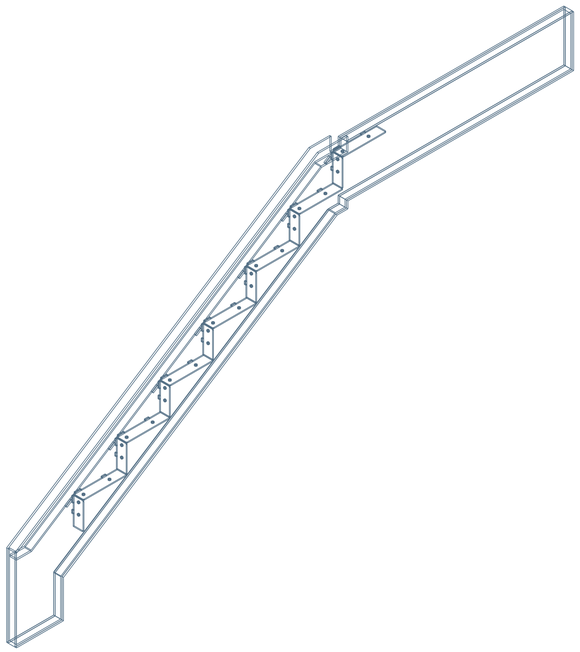

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B003-P01	stringer plates LHB horiz	1	158-1/32"
02 / 2606-B003-P02	stringer plates LHB outside	1	158"
03 / 2606-B003-P03	stringer plates LHB inside	1	158"
04 / 2606-B003-P04	treadplate carriers horiz LH	7	11-11/32"
05 / 2606-B003-P05	treadplate carriers vert LH	7	7-1/4"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each row/section includes size and two corner-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Perfect bodies, clean mesh source data and actual seams.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


BTM LH STRINGER

2606-B003-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB horiz / COMPLETE PROFILE


body-0546 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

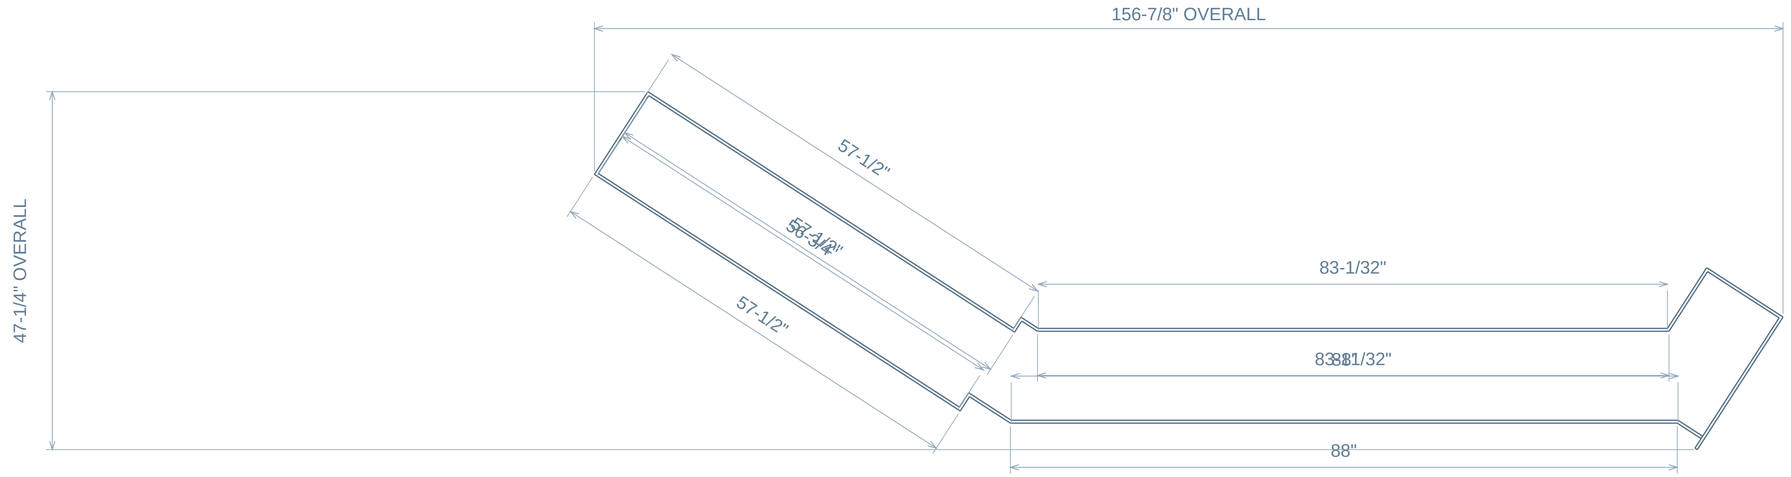


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

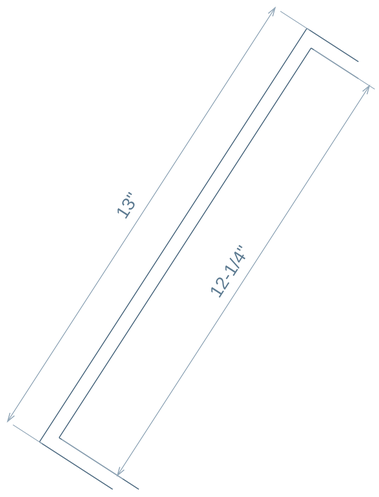

DETAIL 2 / CONNECTED OUTLINE / 1:3

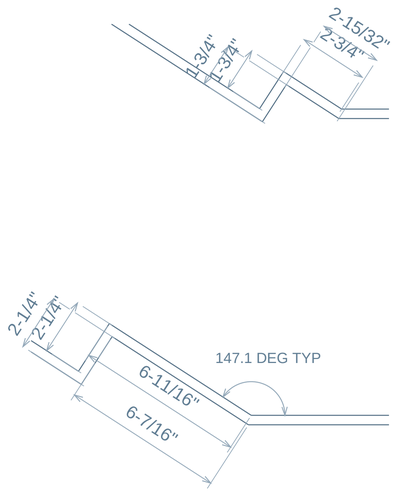

DETAIL 3 / CONNECTED OUTLINE / 1:4

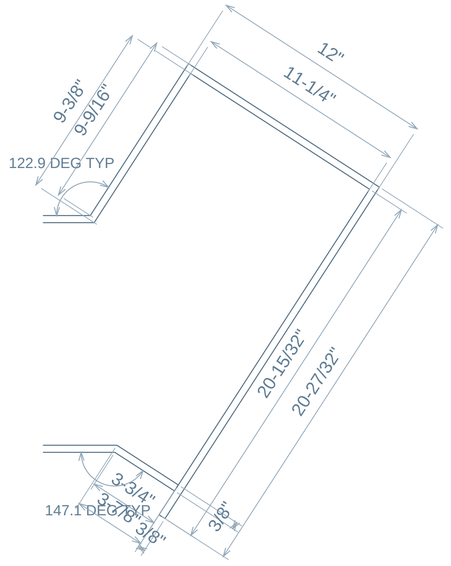

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM LH STRINGER

2606-B003-P02-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB outside / COMPLETE PROFILE


body-0547 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

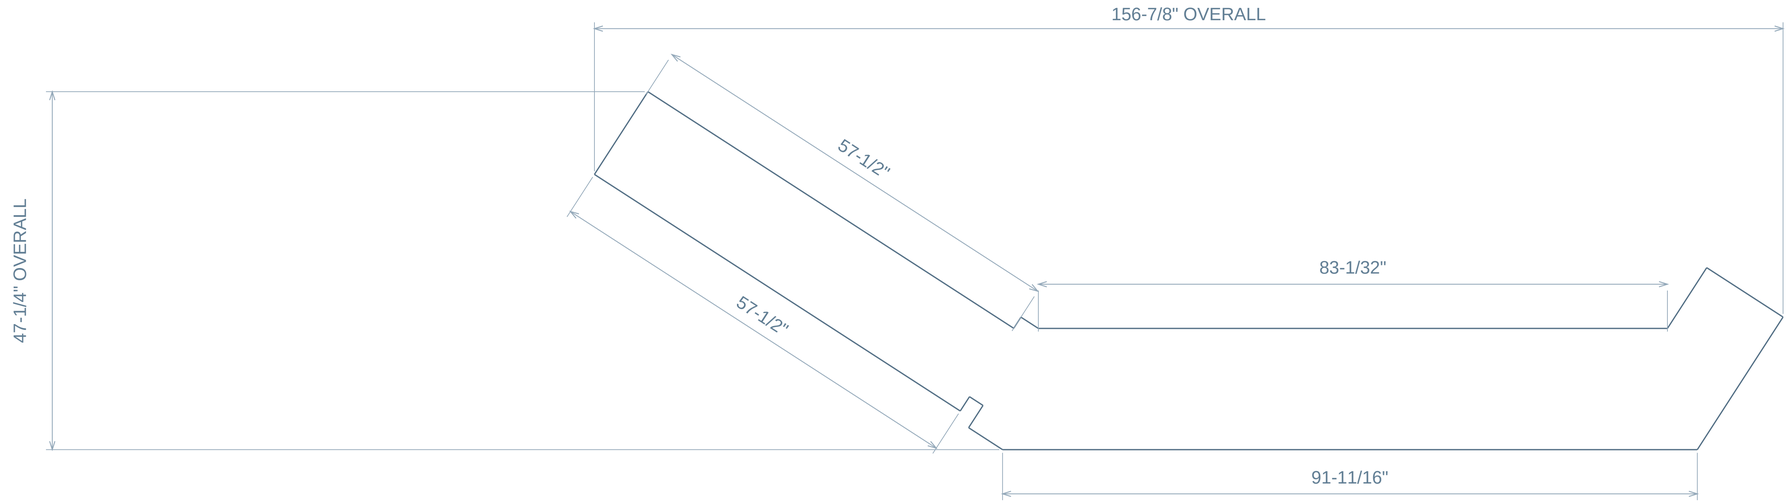


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

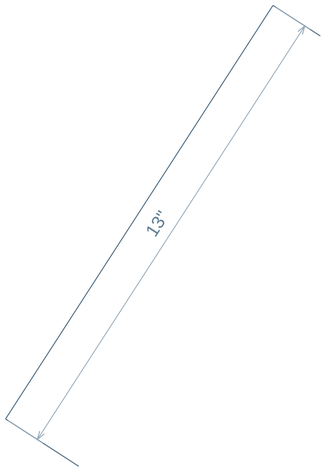

DETAIL 2 / CONNECTED OUTLINE / 1:3

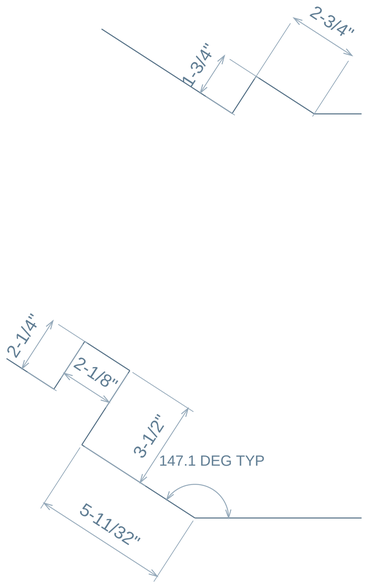

DETAIL 3 / CONNECTED OUTLINE / 1:4

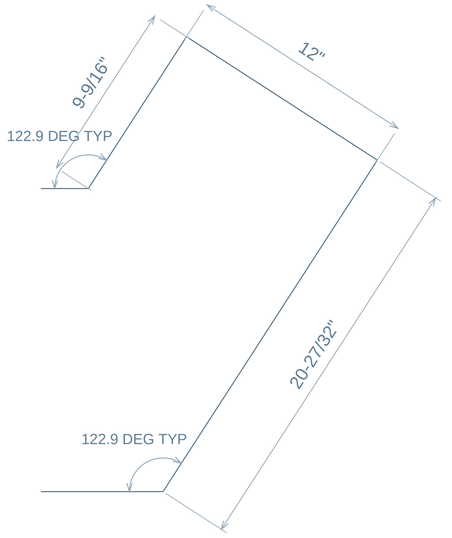

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM LH STRINGER

2606-B003-P03-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB inside / COMPLETE PROFILE


body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

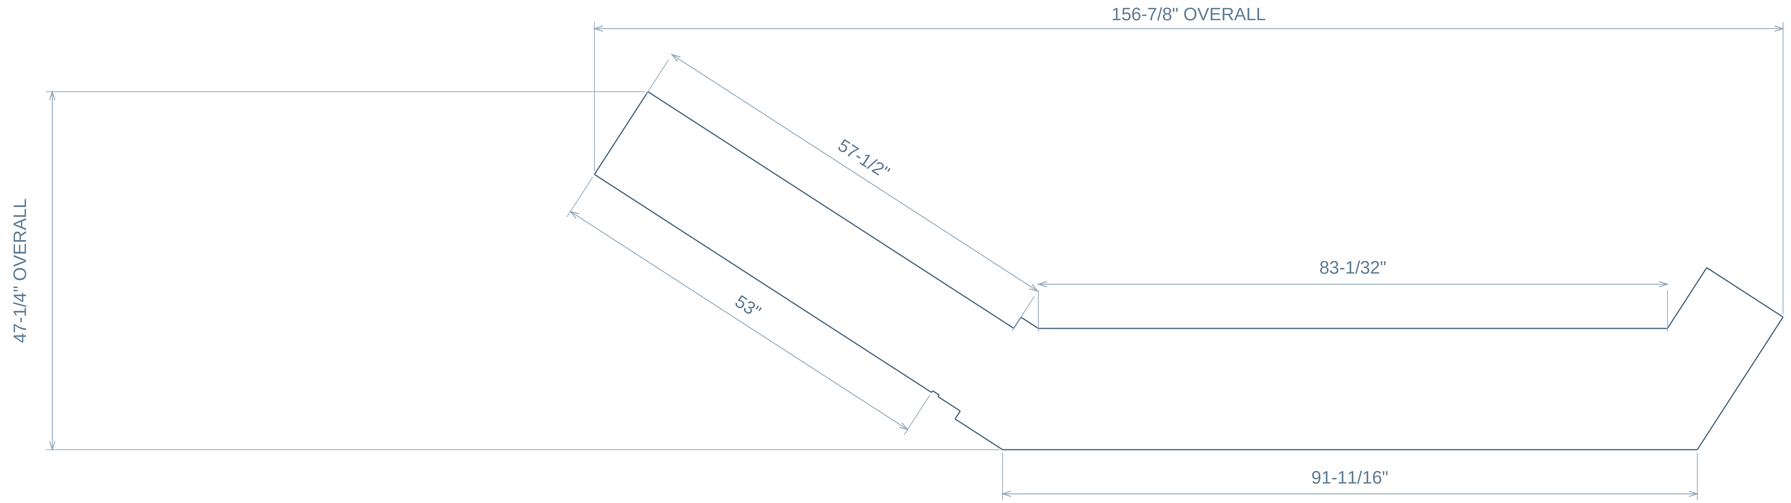


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

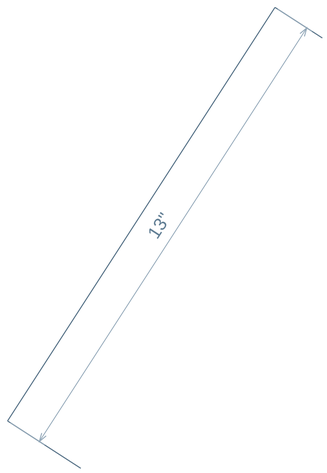

DETAIL 2 / CONNECTED OUTLINE / 1:3

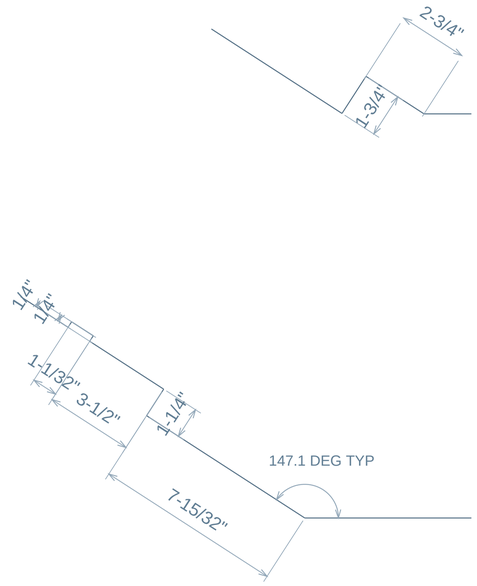

DETAIL 3 / CONNECTED OUTLINE / 1:4

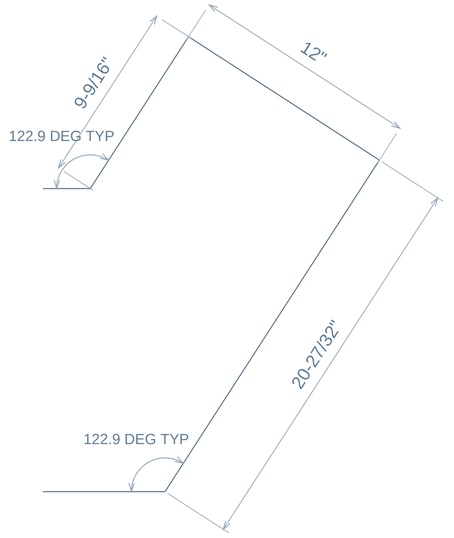

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHB inside / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=0.00000" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

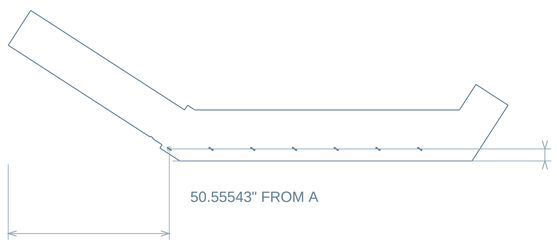




LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.78038" FROM C

F2 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

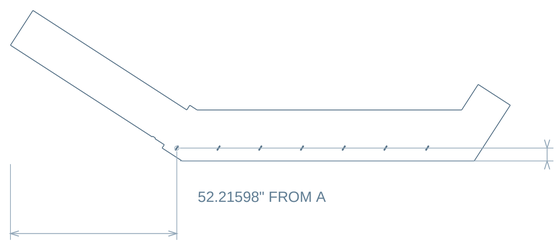




LONG AXIS 57.1 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

4.04626" FROM C

F3 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

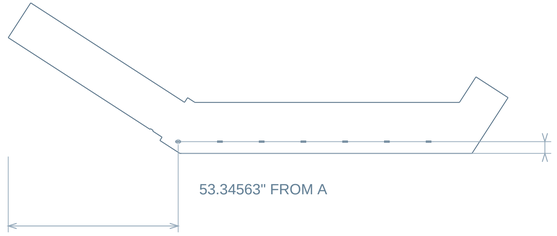




LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.68750" FROM C

F4 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

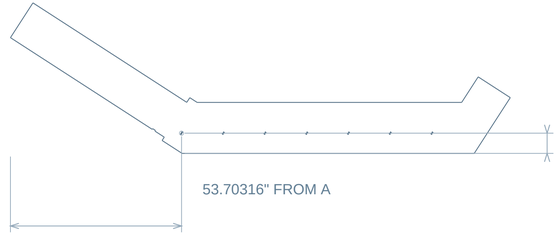




LONG AXIS 57.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

6.34592" FROM C

F5 / 6 RECTANGULAR THROUGH SLOTS

5 SPACES @ 13.09976" ALONG +U

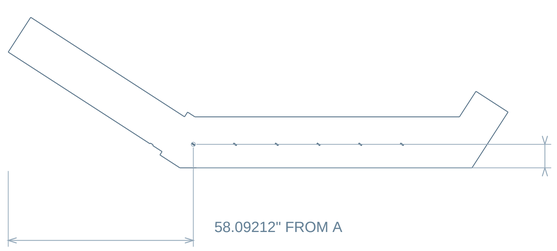



LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

7.37799" FROM C


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz LH

body-0549 | QTY 7 IN BTM LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

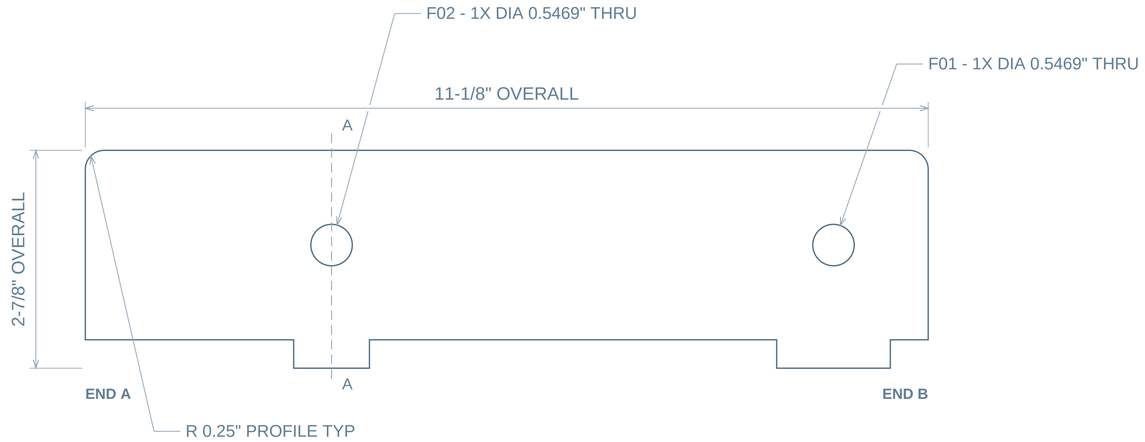

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

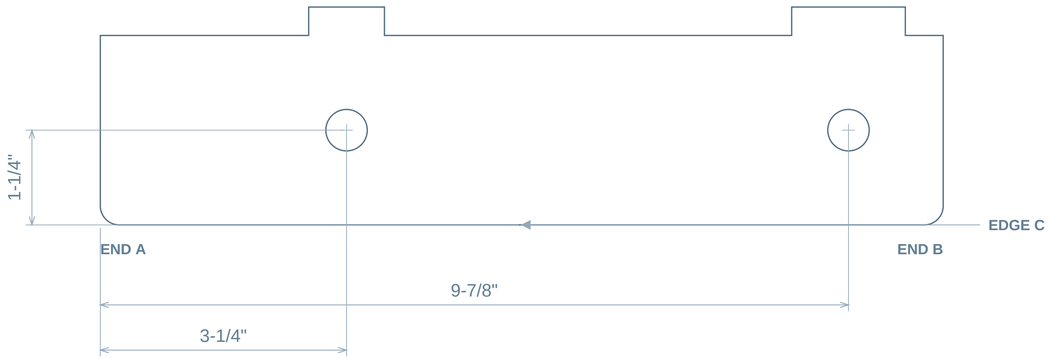


04 / SECTION A-A

X = 3-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

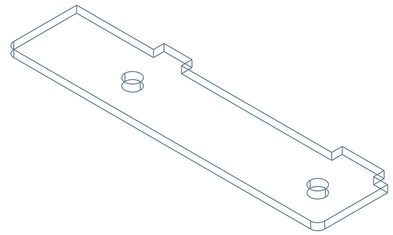

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert LH

body-0550 | QTY 7 IN BTM LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

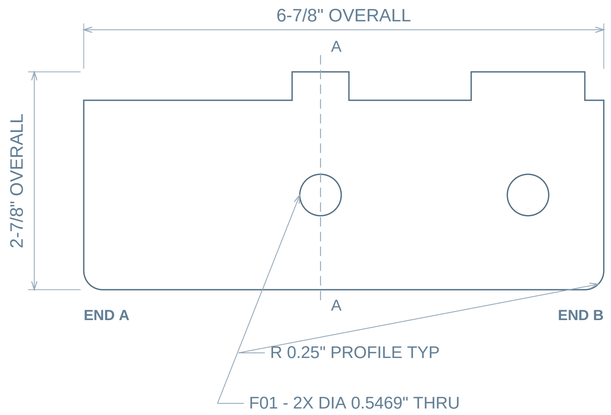

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

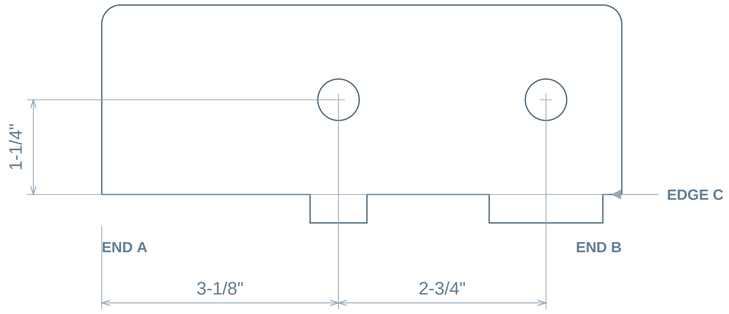


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

BTM RH STRINGER

3 bodies / 3 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

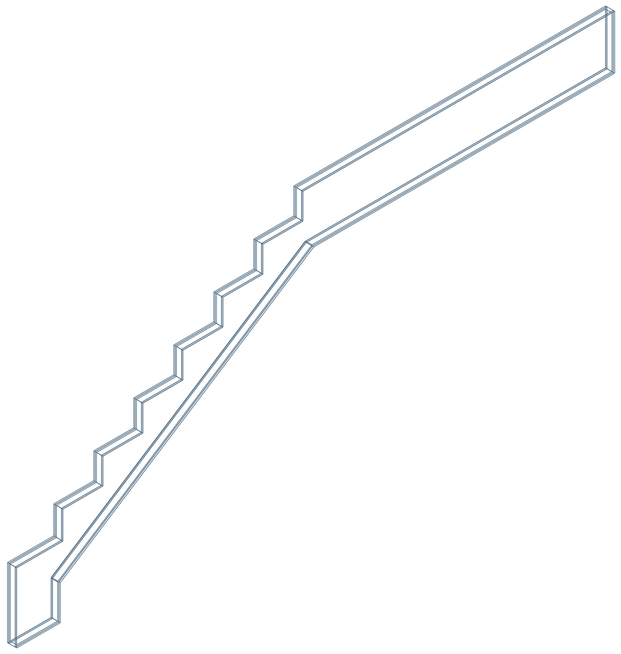

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B004-P01	stringer plates RHB horiz	1	178-1/2"
02 / 2606-B004-P02	stringer plates RHB inside	1	178-1/2"
03 / 2606-B004-P03	stringer plates RHB outside	1	178-1/2"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each hole/slot includes size and two center-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


BTM RH STRINGER

2606-B004-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHB horiz / COMPLETE PROFILE

body-0653 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

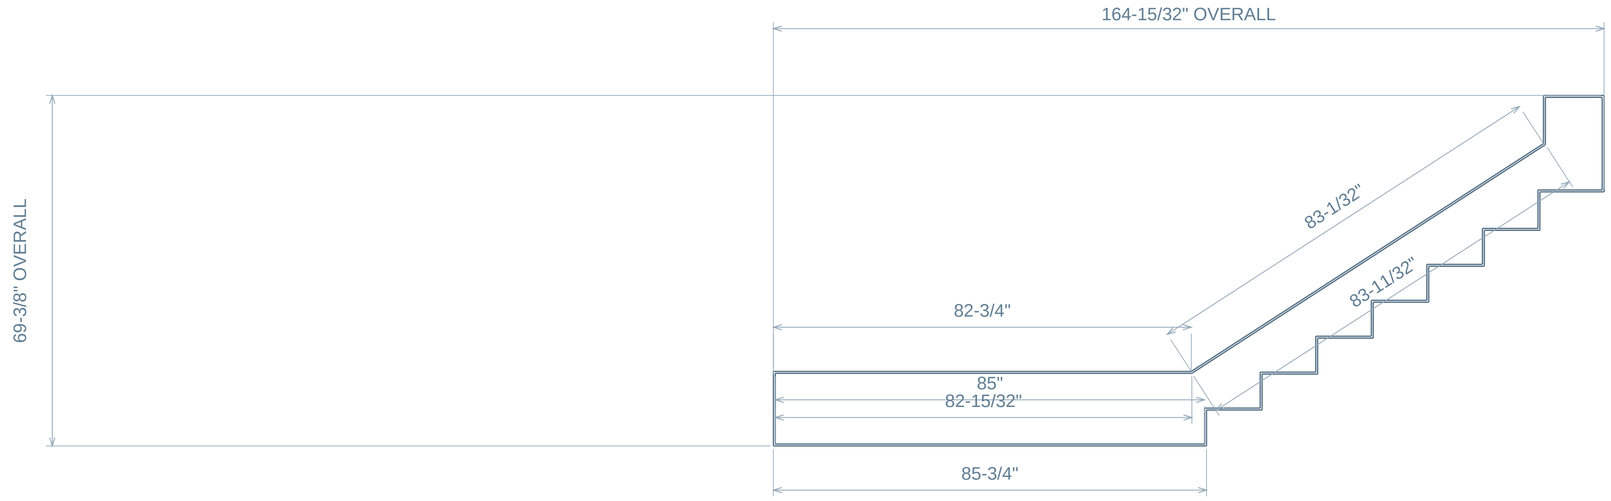

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stringer plates RHB horiz / CONNECTED CONTOUR DETAILS

body-0653 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES


DETAIL 1 / OUTER / 1:3




DETAIL 2 / INNER / 1:3



DETAIL 3 / INNER / 1:6

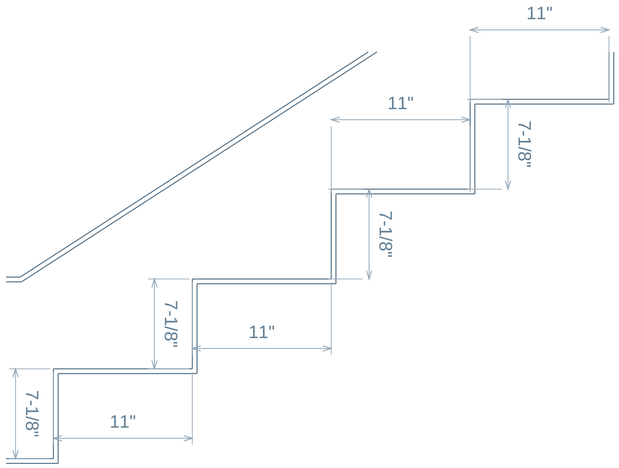

DETAIL 4 / OUTER / 1:6

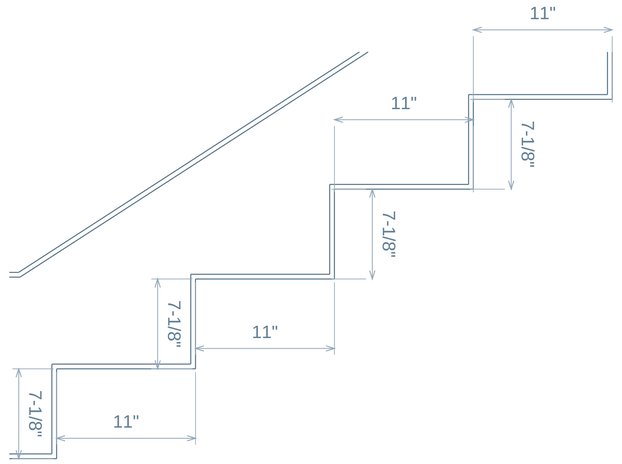


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates RHB horiz / CONNECTED CONTOUR DETAILS

body-0653 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES


DETAIL 5 / INNER / 1:5

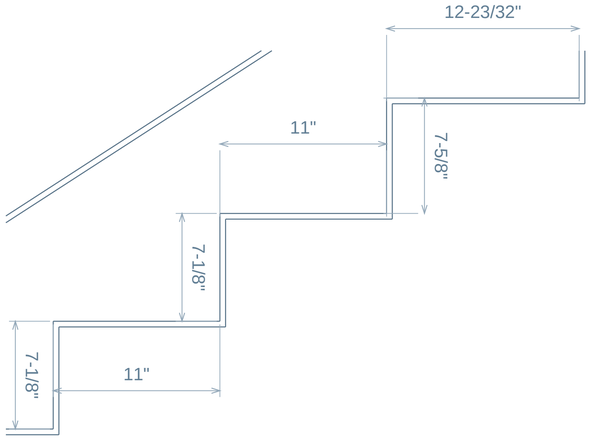


DETAIL 6 / OUTER / 1:5

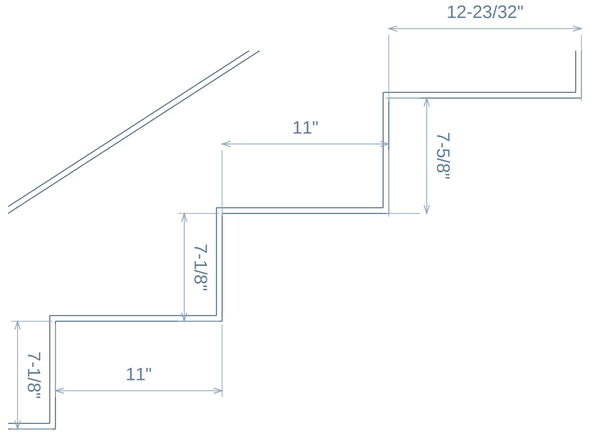

DETAIL 7 / OUTER / 1:4

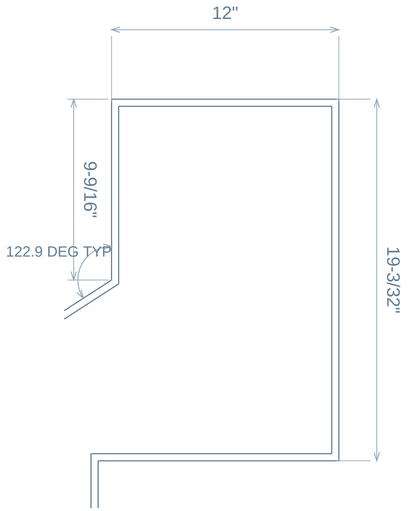

DETAIL 8 / INNER / 1:4

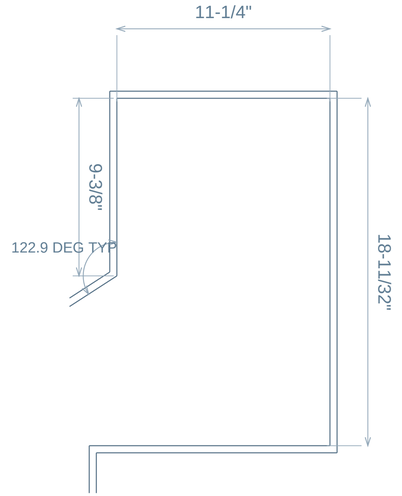

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM RH STRINGER

2606-B004-P02-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHB inside / COMPLETE PROFILE

body-0654 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

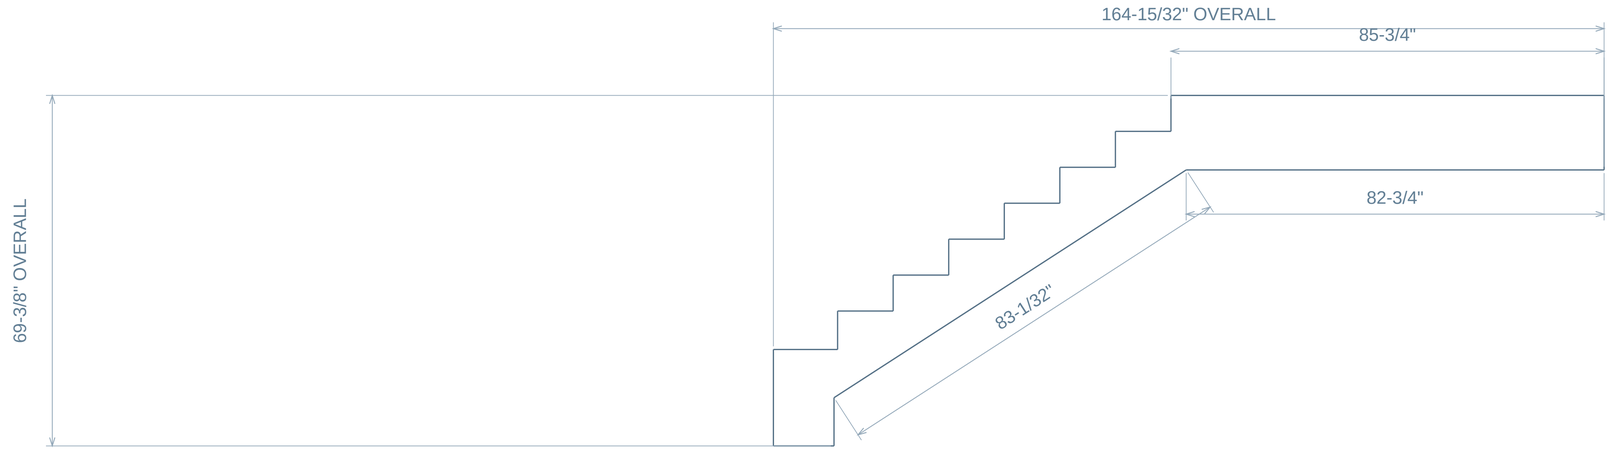

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates RHB inside / CONNECTED CONTOUR DETAILS

body-0654 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DETAIL 1 / OUTER / 1:7

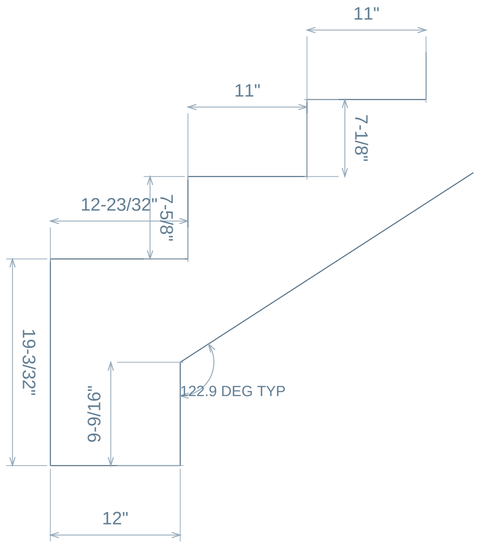

DETAIL 2 / OUTER / 1:6

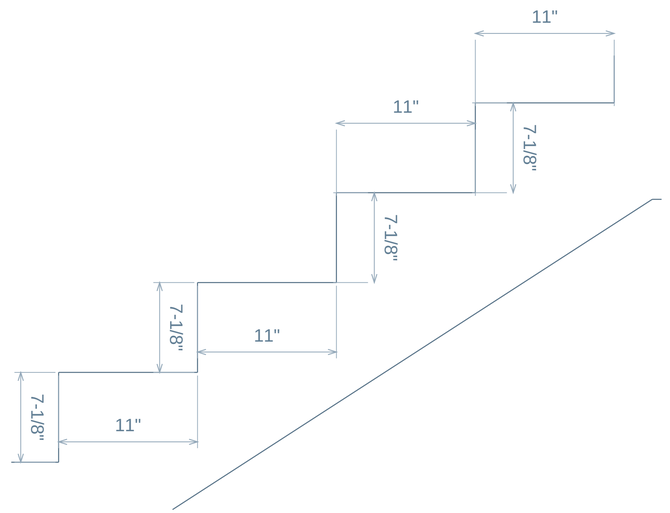

DETAIL 3 / OUTER / 1:2



DETAIL 4 / OUTER / 1:3



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM RH STRINGER

2606-B004-P03-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHB outside / COMPLETE PROFILE

body-0655 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

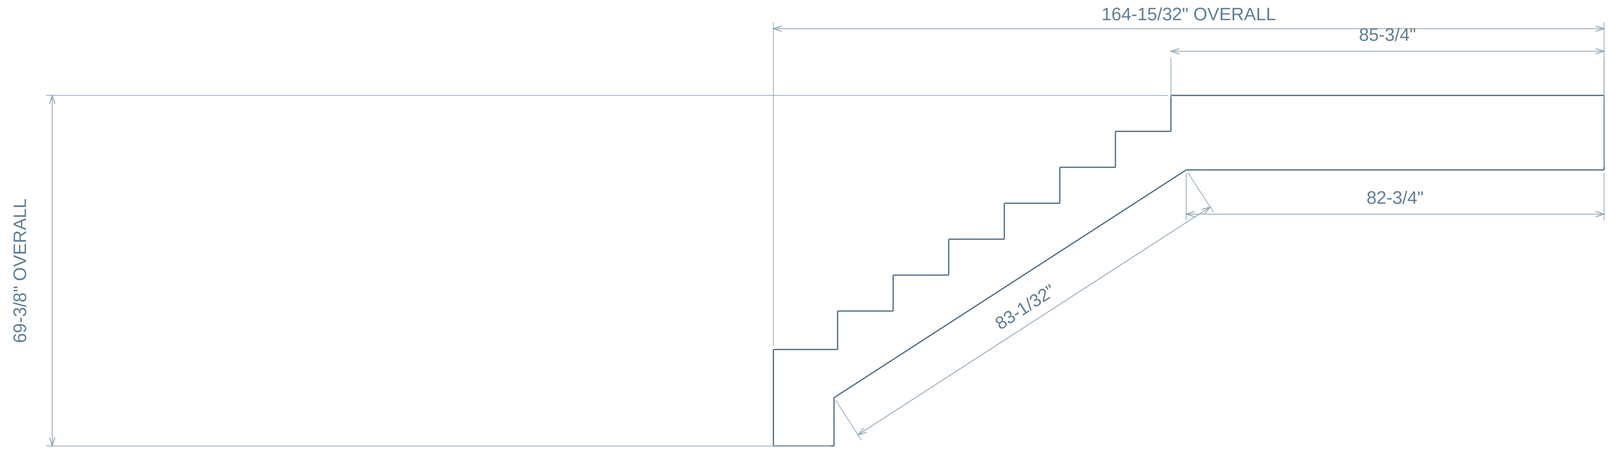

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates RHB outside / CONNECTED CONTOUR DETAILS

body-0655 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DETAIL 1 / OUTER / 1:7

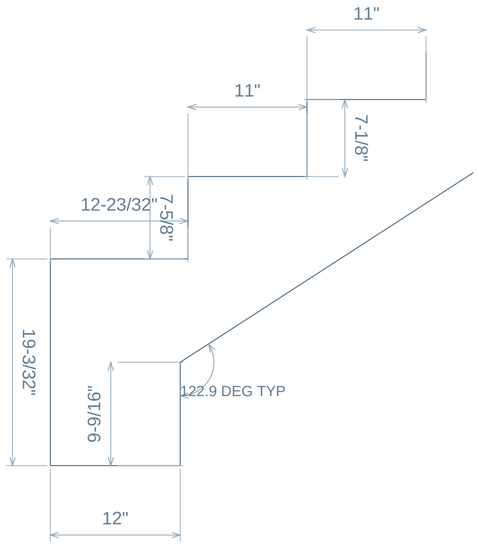

DETAIL 2 / OUTER / 1:6

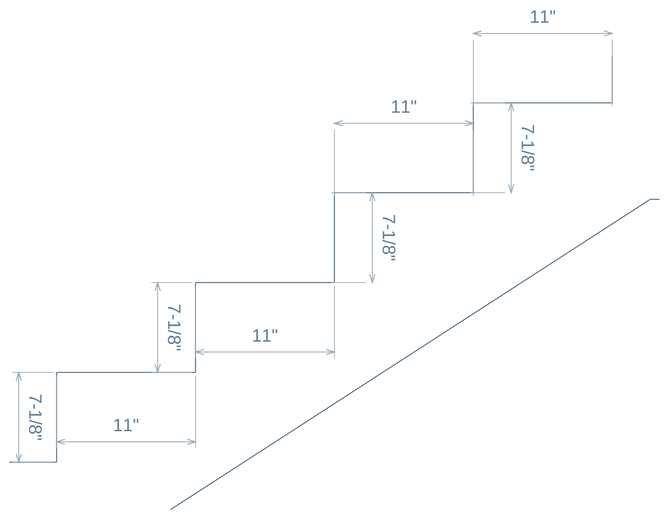

DETAIL 3 / OUTER / 1:2



DETAIL 4 / OUTER / 1:3




FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE


ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

BTM CONNECTION


6 bodies / 2 unique part types / installed source positions


ASSEMBLY / ISOMETRIC





ASSEMBLY / TOP





PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B043-P01	slab mount plate	2	19-13/16"
02 / 2606-B043-P05	stringer conn plate btm	4	11-11/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole row includes size and two center-location dimensions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

slab mount plate

body-0335 | QTY 2 IN BTM CONNECTION | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

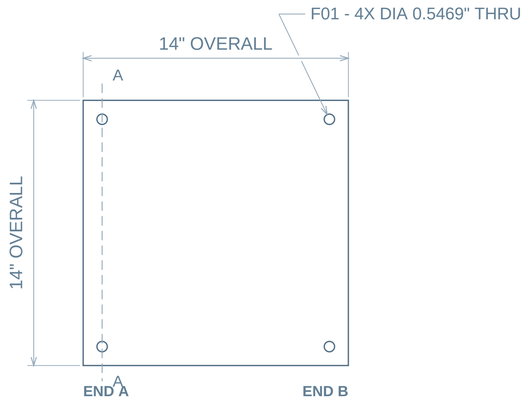

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

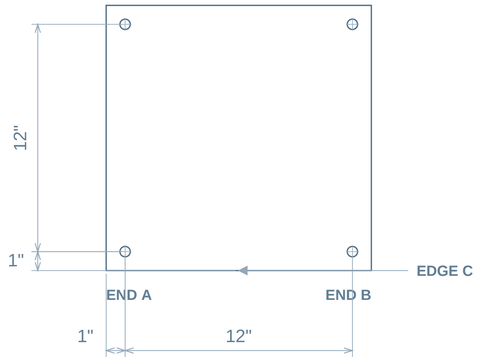

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 1" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

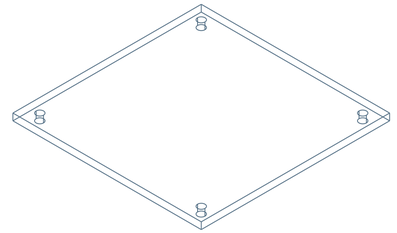

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stringer conn plate btm

body-0345 | QTY 4 IN BTM CONNECTION | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

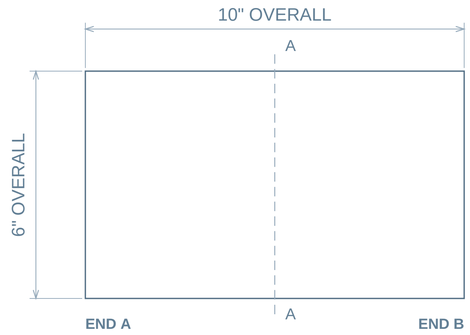

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 5" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

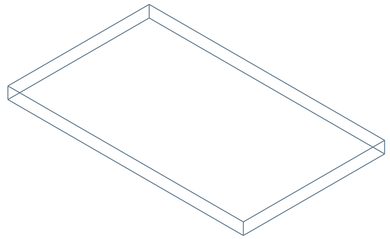

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 11-11/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

TOP LH STRINGER

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

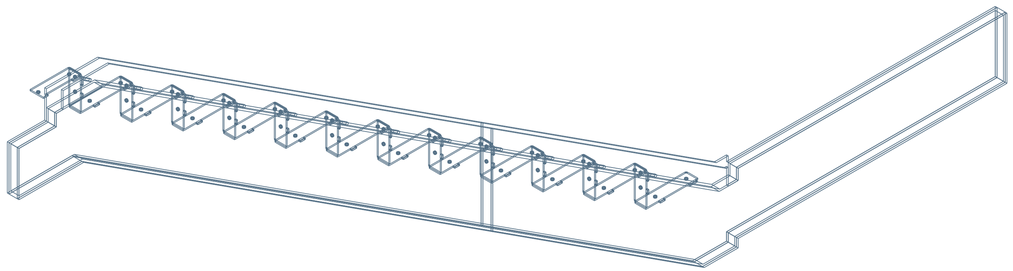

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B001-P01	stringer plates LHT horiz	1	231-3/16"
02 / 2606-B001-P02	stair asm body 24	1	121-1/32"
03 / 2606-B001-P03	stair asm body 25	1	119-7/16"
04 / 2606-B001-P04	stair asm body 26	1	121-1/32"
05 / 2606-B001-P05	stair asm body 27	1	119-7/16"
06 / 2606-B001-P06	treadplate carriers horiz LH	12	11-11/32"
07 / 2606-B001-P07	treadplate carriers vert LH	12	7-1/4"
08 / 2606-B001-P08	treadplate carriers horiz top LH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


TOP LH STRINGER

2606-B001-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHT horiz / COMPLETE PROFILE

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

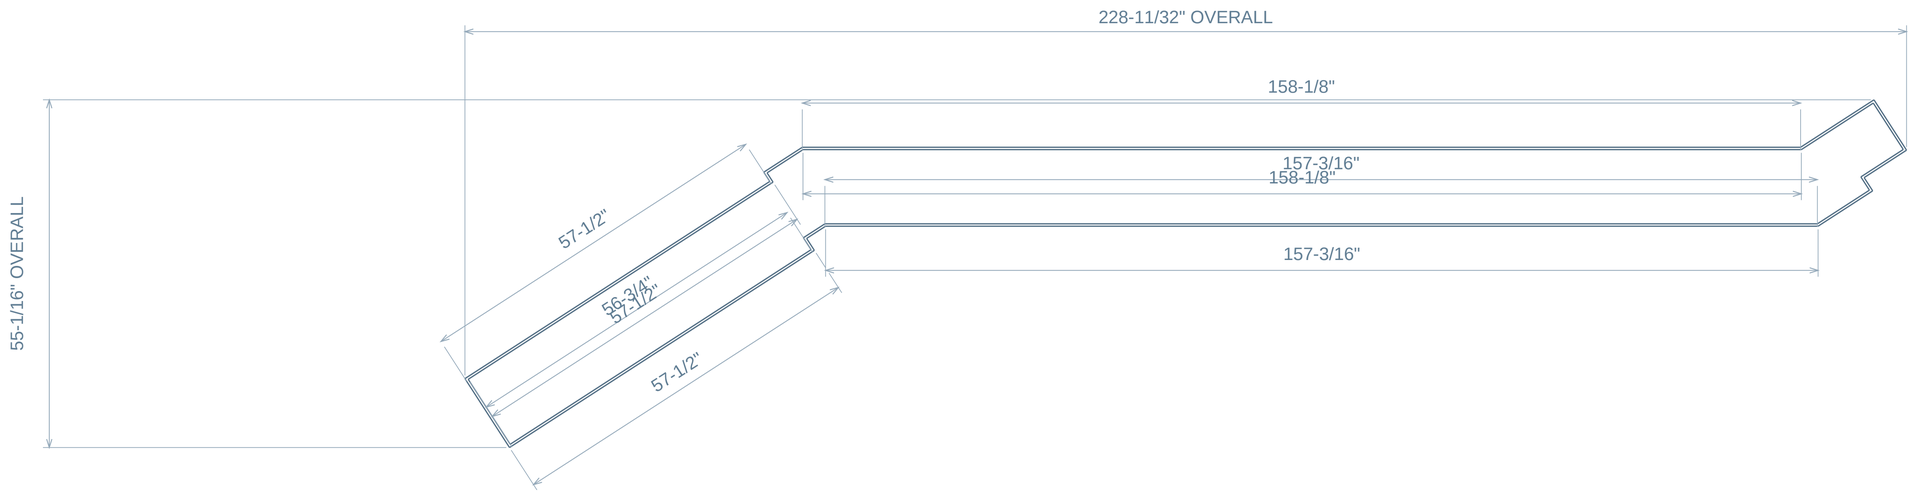

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES


DETAIL 1 / OUTER / 1:3




DETAIL 2 / INNER / 1:2

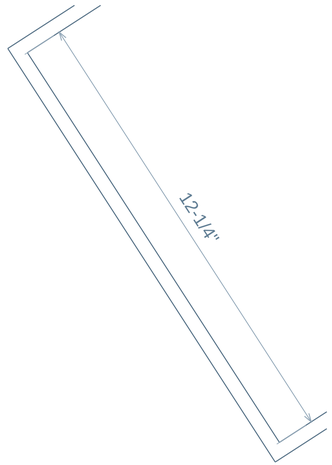



DETAIL 3 / OUTER / 1:4





DETAIL 4 / INNER / 1:4






FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHT horiz / CONNECTED CONTOUR DETAILS

body-0008 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

DETAIL 5 / INNER / 1:4

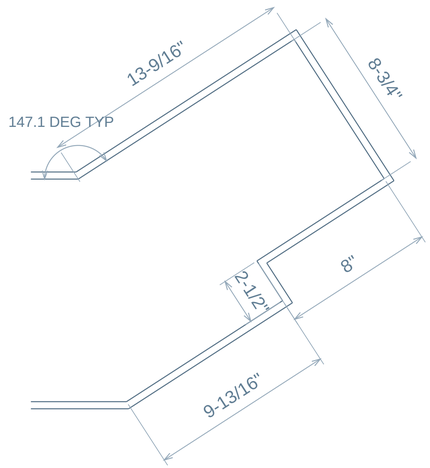

DETAIL 6 / OUTER / 1:4

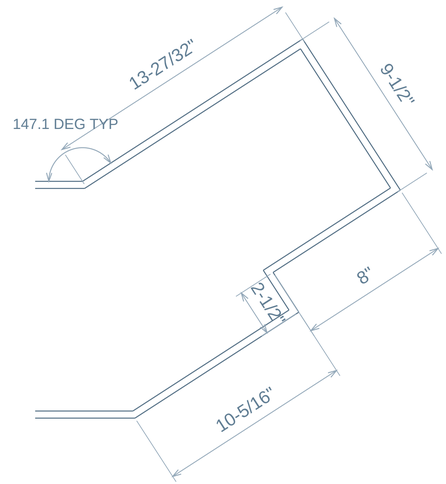

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606

TOP LH STRINGER

2606-B001-P02-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 24 / COMPLETE PROFILE


body-0009 / QTY 1 / NORMAL DEPTH 3/8" / INCHES




END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3

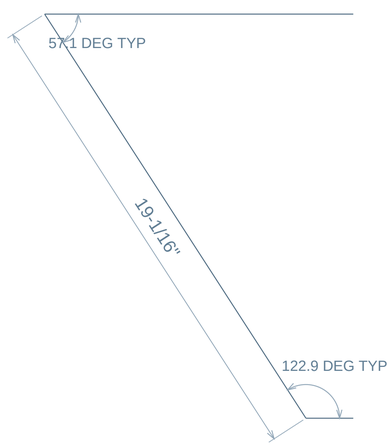

DETAIL 2 / CONNECTED OUTLINE / 1:4

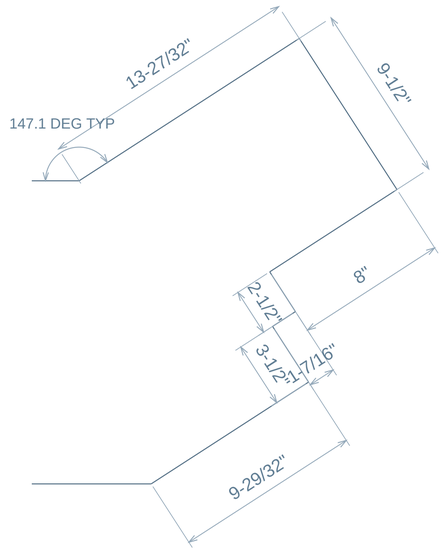

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P03-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 25 / COMPLETE PROFILE


body-0010 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

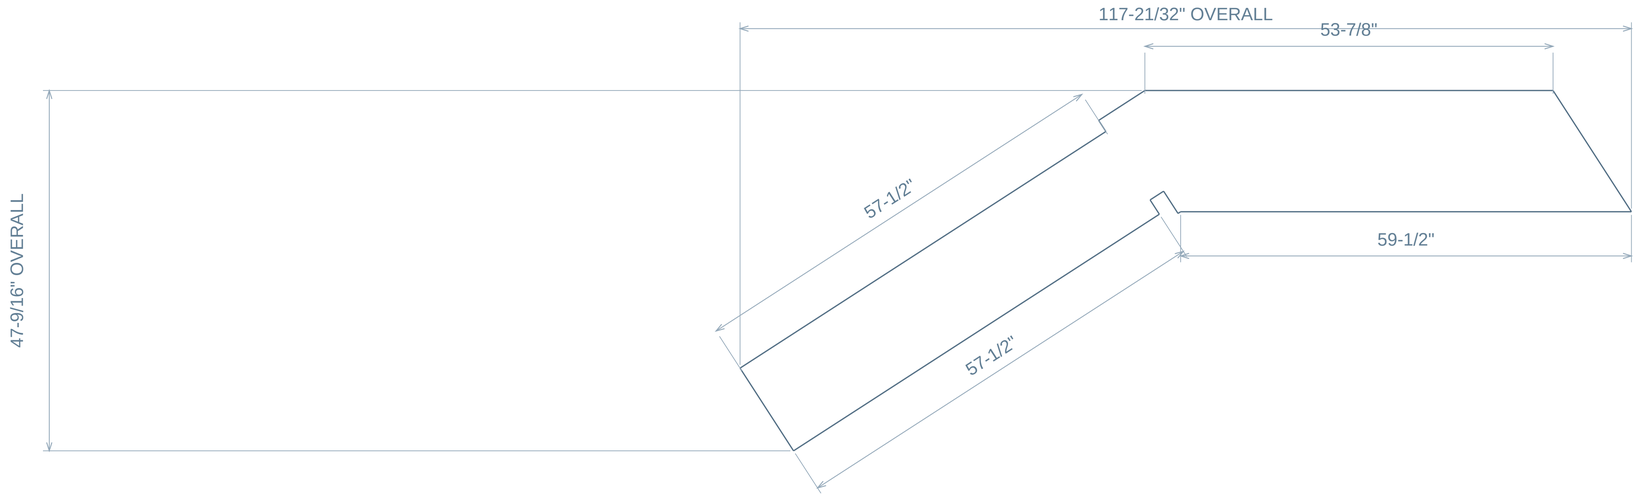


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

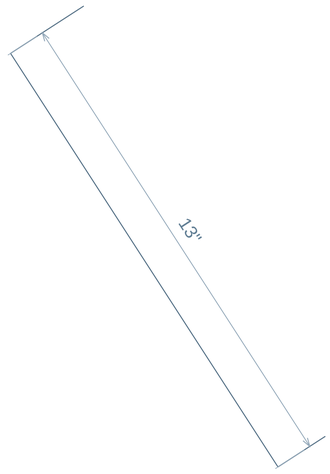

DETAIL 2 / CONNECTED OUTLINE / 1:3

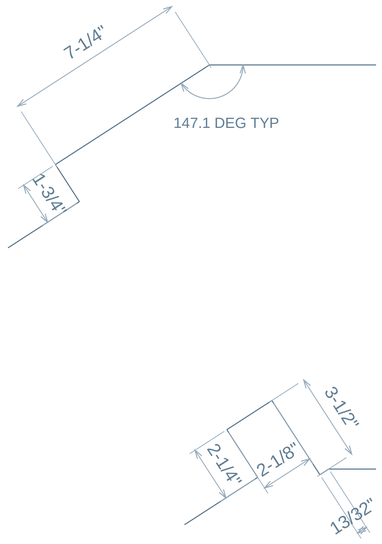

DETAIL 3 / CONNECTED OUTLINE / 1:3

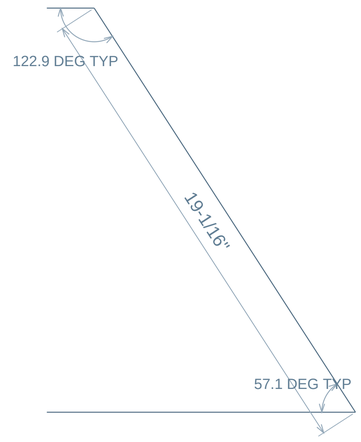

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P04-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 26 / COMPLETE PROFILE


body-0011 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

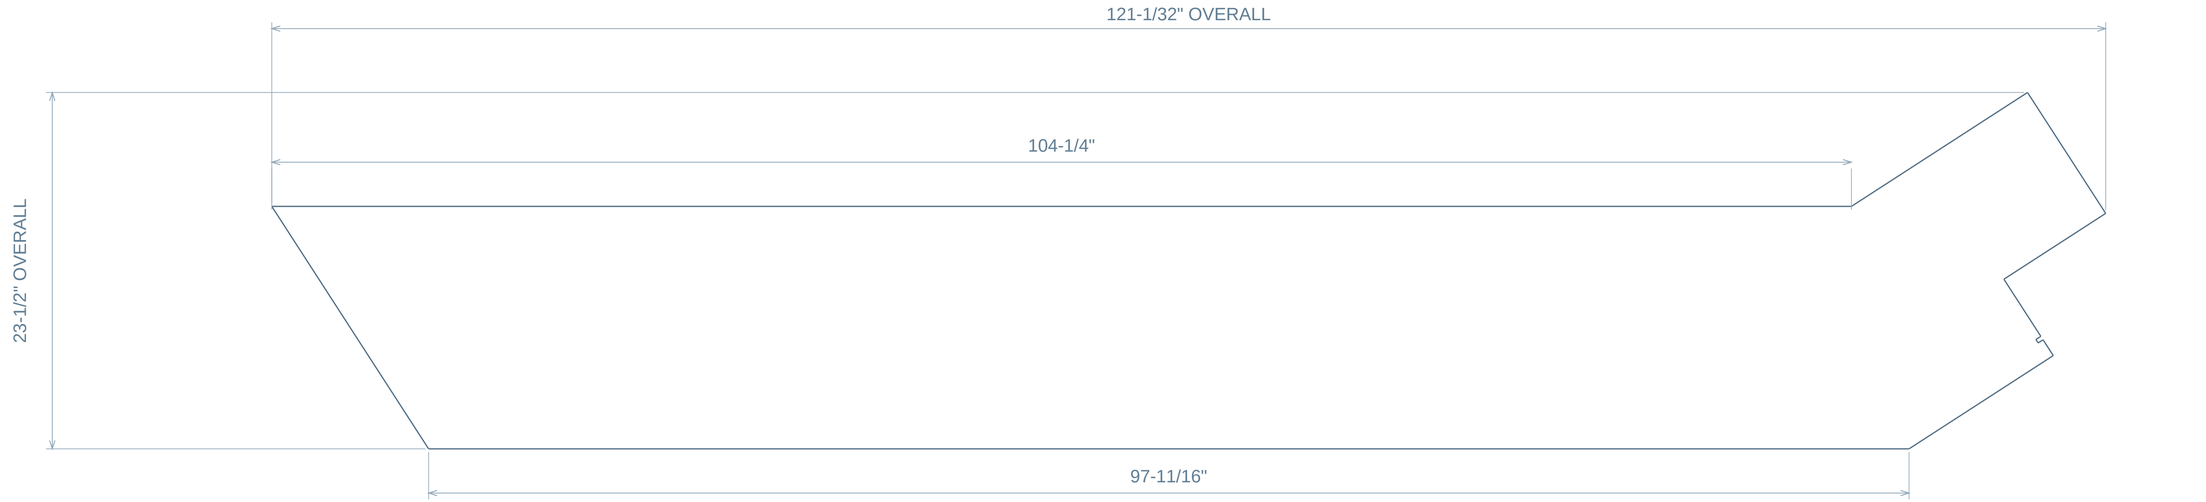


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3

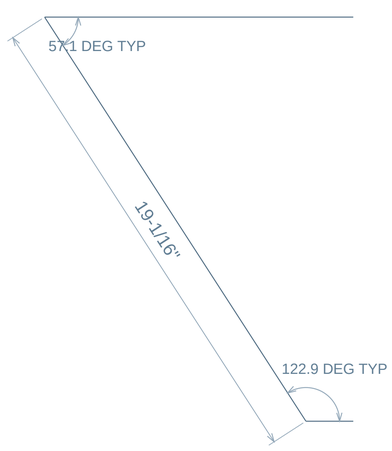

DETAIL 2 / CONNECTED OUTLINE / 1:4

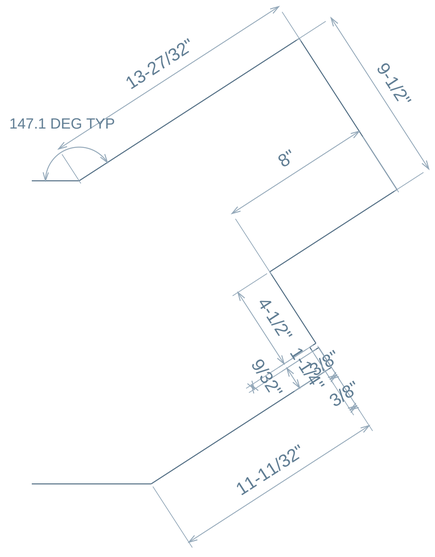

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 26 / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0011 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=16.00000" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 32.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

8.62201" FROM C

F2 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

9.65408" FROM C

F3 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.31250" FROM C

F4 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

11.95374" FROM C

F5 / 8 RECTANGULAR THROUGH SLOTS

7 SPACES @ 13.09976" ALONG +U





LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.21962" FROM C

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP LH STRINGER

2606-B001-P05-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 27 / COMPLETE PROFILE


body-0012 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

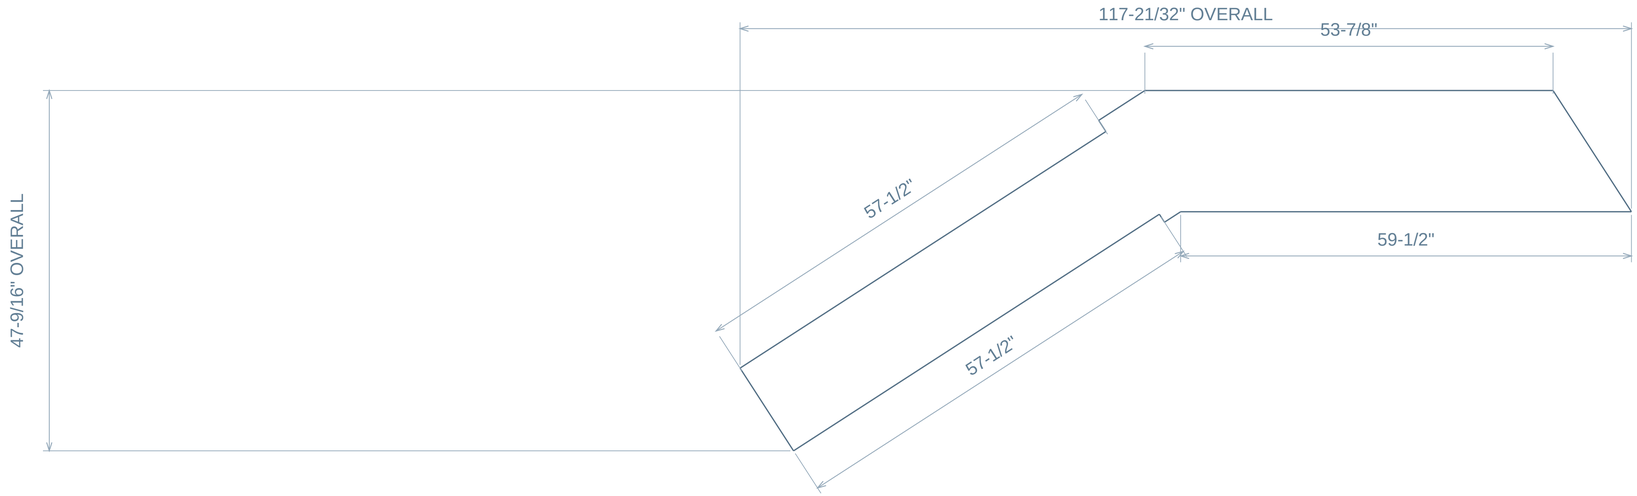


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

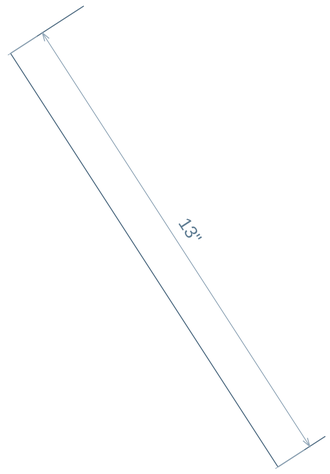

DETAIL 2 / CONNECTED OUTLINE / 1:3

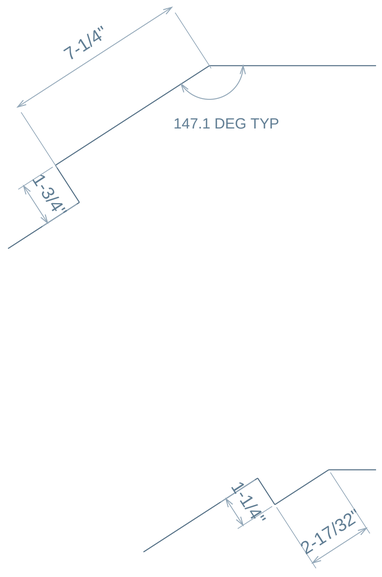

DETAIL 3 / CONNECTED OUTLINE / 1:3

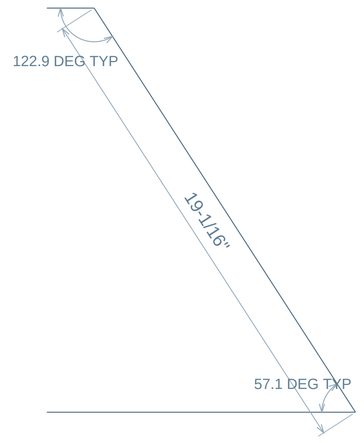

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stair asm body 27 / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0012 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=31.55401" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 5 RECTANGULAR THROUGH SLOTS

4 SPACES @ 13.09976" ALONG +U

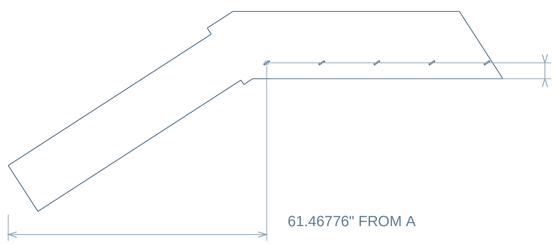




LONG AXIS 32.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

3.78038" FROM C

F2 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

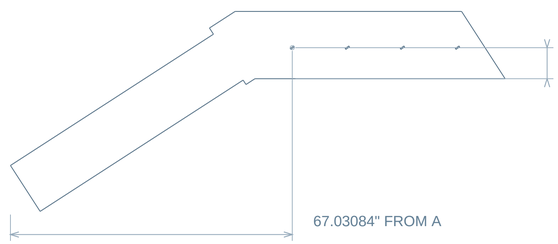




LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

7.37799" FROM C

F3 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

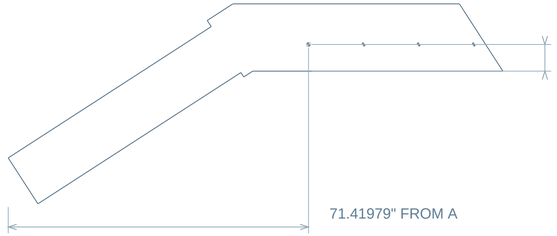




LONG AXIS 122.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

6.34592" FROM C

F4 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

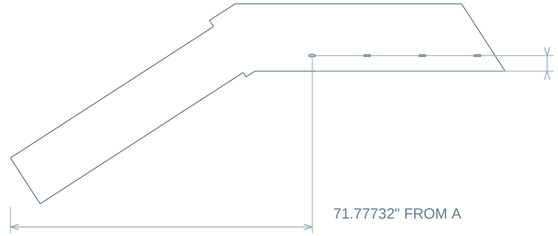




LONG AXIS 0.0 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

3.68750" FROM C

F5 / 4 RECTANGULAR THROUGH SLOTS

3 SPACES @ 13.09976" ALONG +U

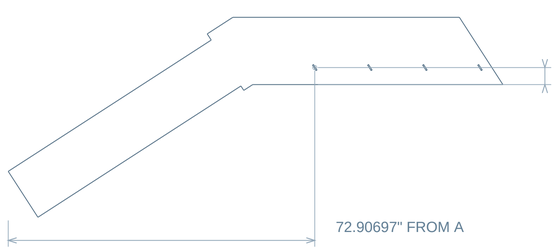



LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

4.04626" FROM C


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz LH

body-0013 | QTY 12 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

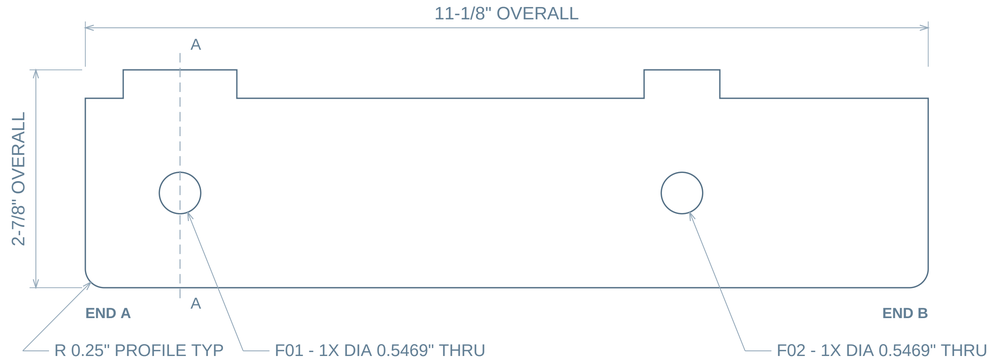

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

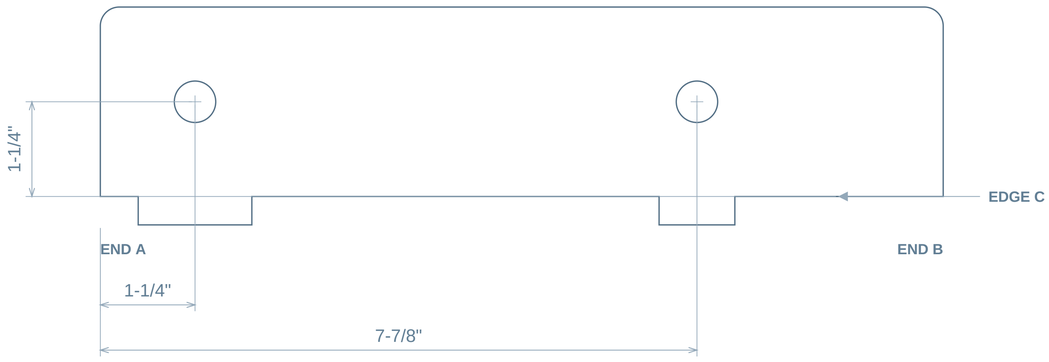


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

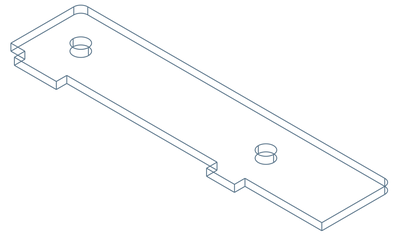

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert LH

body-0014 | QTY 12 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

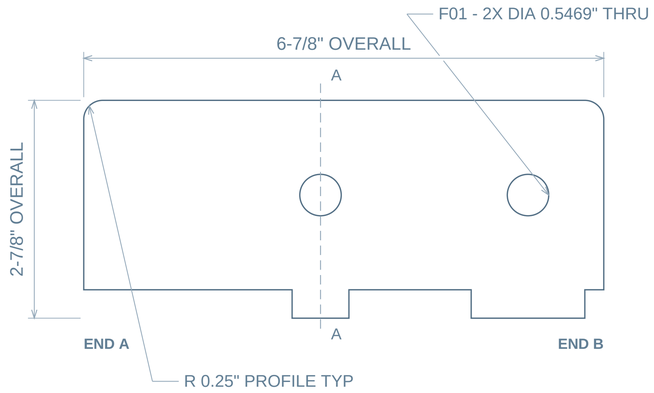

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

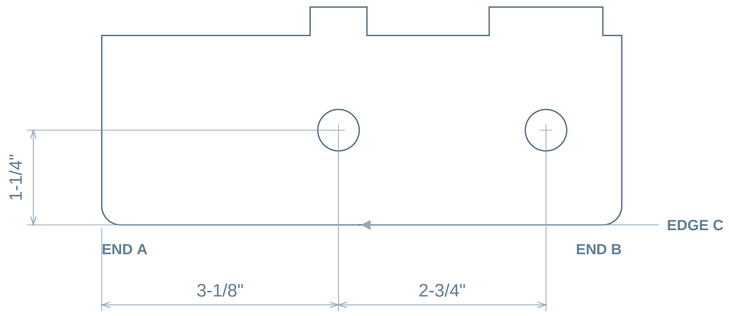


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

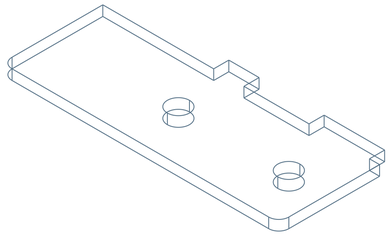

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top LH

body-0036 | QTY 1 IN TOP LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

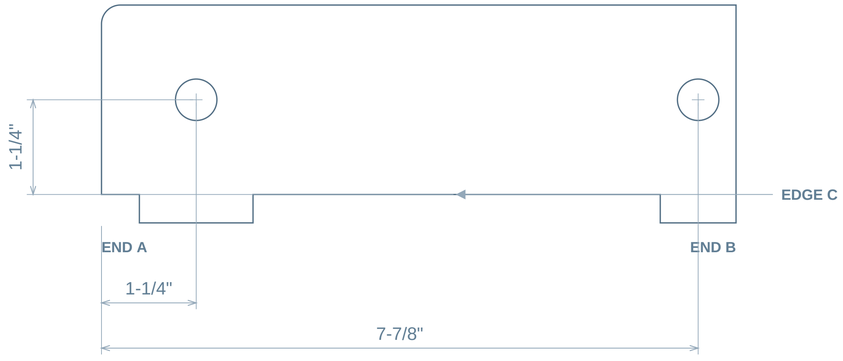

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

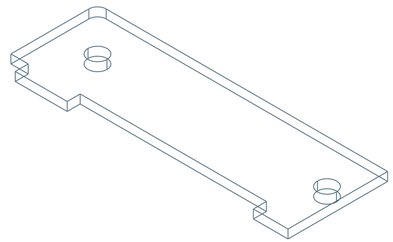

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

TOP RH STRINGER

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

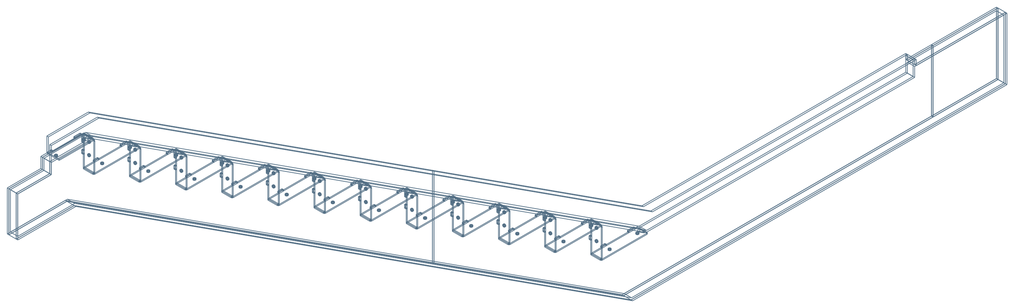

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B002-P01	stringer plates RHT horiz	1	254-7/16"
02 / 2606-B002-P02	stringer plates RHT inside	1	254-7/16"
03 / 2606-B002-P03	stair asm body 259	1	21-13/32"
04 / 2606-B002-P04	stair asm body 260	1	128-7/16"
05 / 2606-B002-P05	stair asm body 261	1	121-1/32"
06 / 2606-B002-P06	treadplate carriers horiz RH	12	11-11/32"
07 / 2606-B002-P07	treadplate carriers vert RH	12	7-1/4"
08 / 2606-B002-P08	treadplate carriers horiz top RH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Formed bodies retain their source-face and bend sections.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


TOP RH STRINGER

2606-B002-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHT horiz / COMPLETE PROFILE

body-0081 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

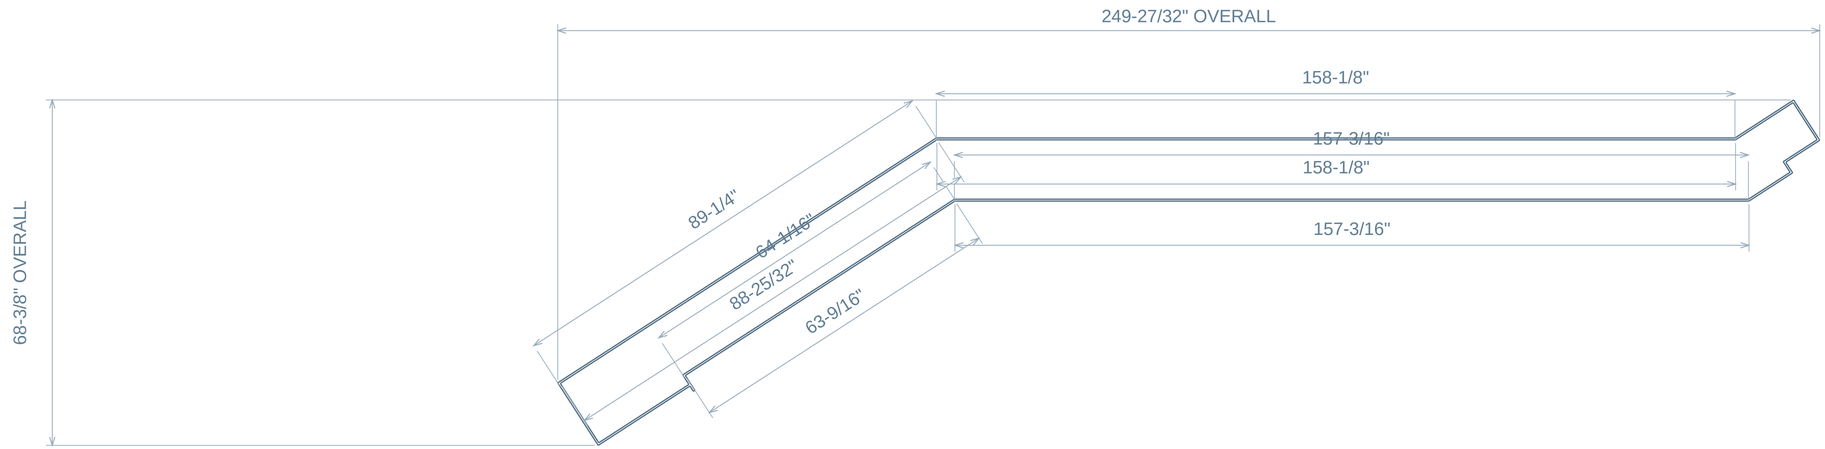

END A / U = 0 AT LEFTMOST MATERIAL

END B

CONNECTED OUTER AND INNER CONTOUR DETAILS FOLLOW / SAME U,V FRAME / VIEW BREAKS ARE NOT SPLICES


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates RHT horiz / CONNECTED CONTOUR DETAILS

body-0081 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES


DETAIL 1 / OUTER / 1:3

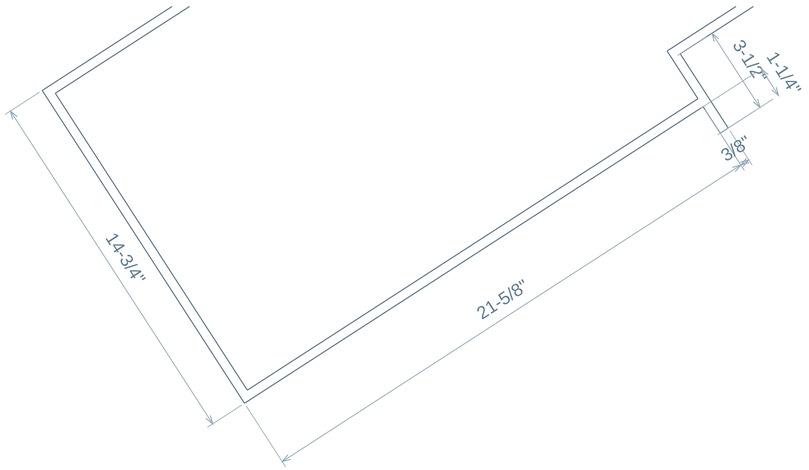


DETAIL 2 / INNER / 1:3

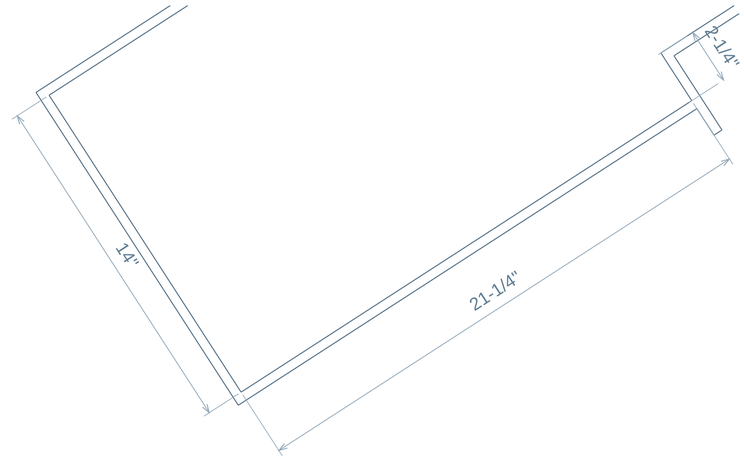

DETAIL 3 / INNER / 1:4

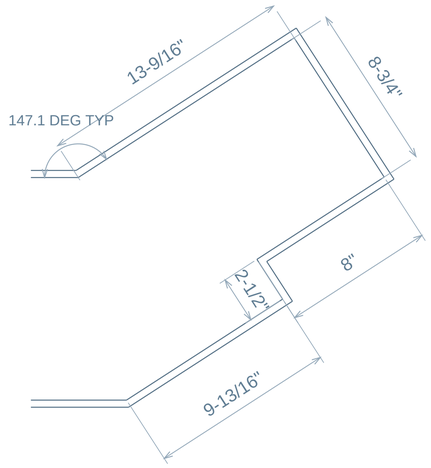

DETAIL 4 / OUTER / 1:4

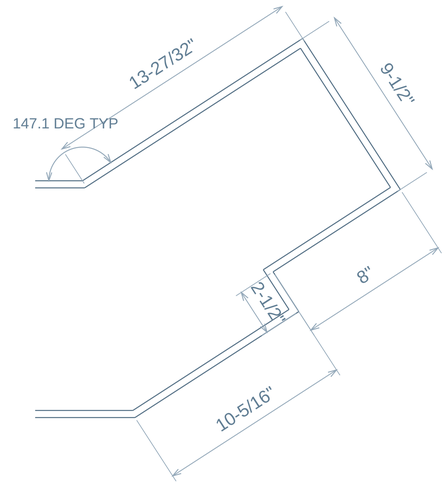

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP RH STRINGER

2606-B002-P02-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates RHT inside / COMPLETE PROFILE


body-0082 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

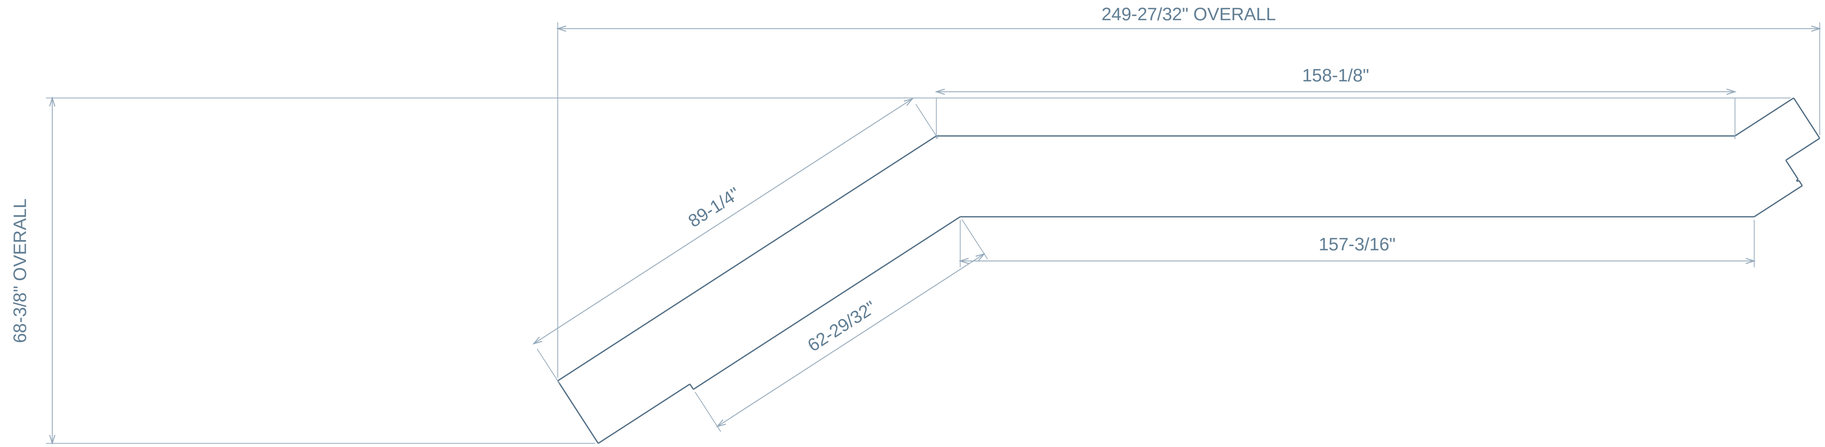


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:4

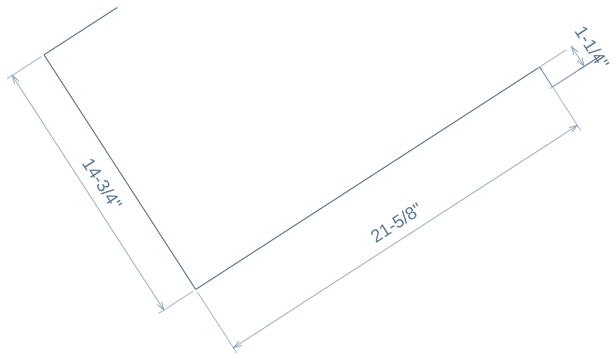

DETAIL 2 / CONNECTED OUTLINE / 1:4

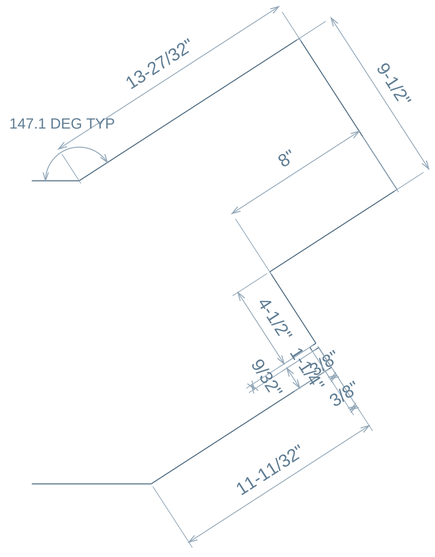

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE


ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stringer plates RHT inside / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0082 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=60.85838" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 13 RECTANGULAR THROUGH SLOTS

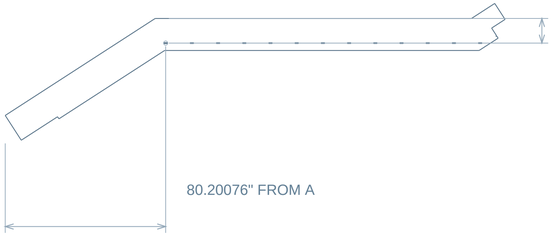

12 SPACES @ 13.09976" ALONG +U




LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

12.31250" FROM C

F2 / 13 RECTANGULAR THROUGH SLOTS

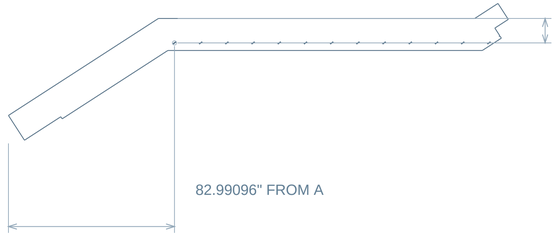

12 SPACES @ 13.09976" ALONG +U




LONG AXIS 32.9 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

12.21962" FROM C

F3 / 12 RECTANGULAR THROUGH SLOTS

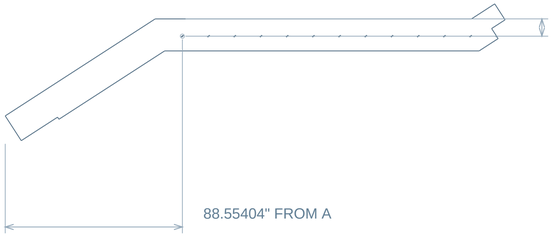

11 SPACES @ 13.09976" ALONG +U




LONG AXIS 32.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

8.62201" FROM C

F4 / 12 RECTANGULAR THROUGH SLOTS

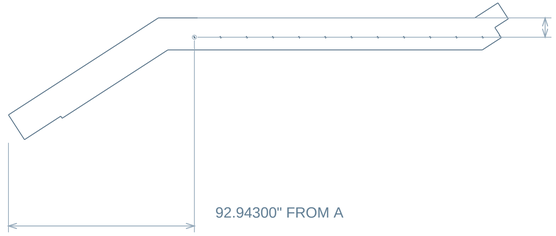

11 SPACES @ 13.09976" ALONG +U




LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

9.65408" FROM C

F5 / 12 RECTANGULAR THROUGH SLOTS

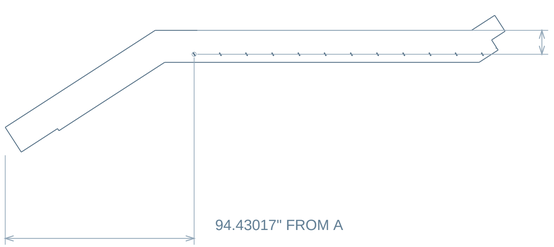

11 SPACES @ 13.09976" ALONG +U



LONG AXIS 122.9 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

11.95374" FROM C


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 259

body-0083 | QTY 1 IN TOP RH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

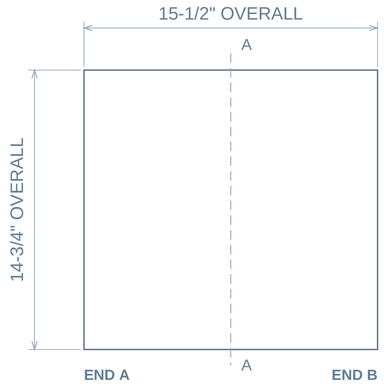

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 7-3/4" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

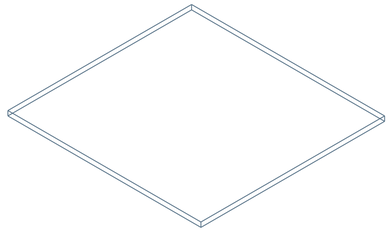

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 21-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

CALIPER / 2606


TOP RH STRINGER

2606-B002-P04-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 260 / COMPLETE PROFILE

body-0084 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

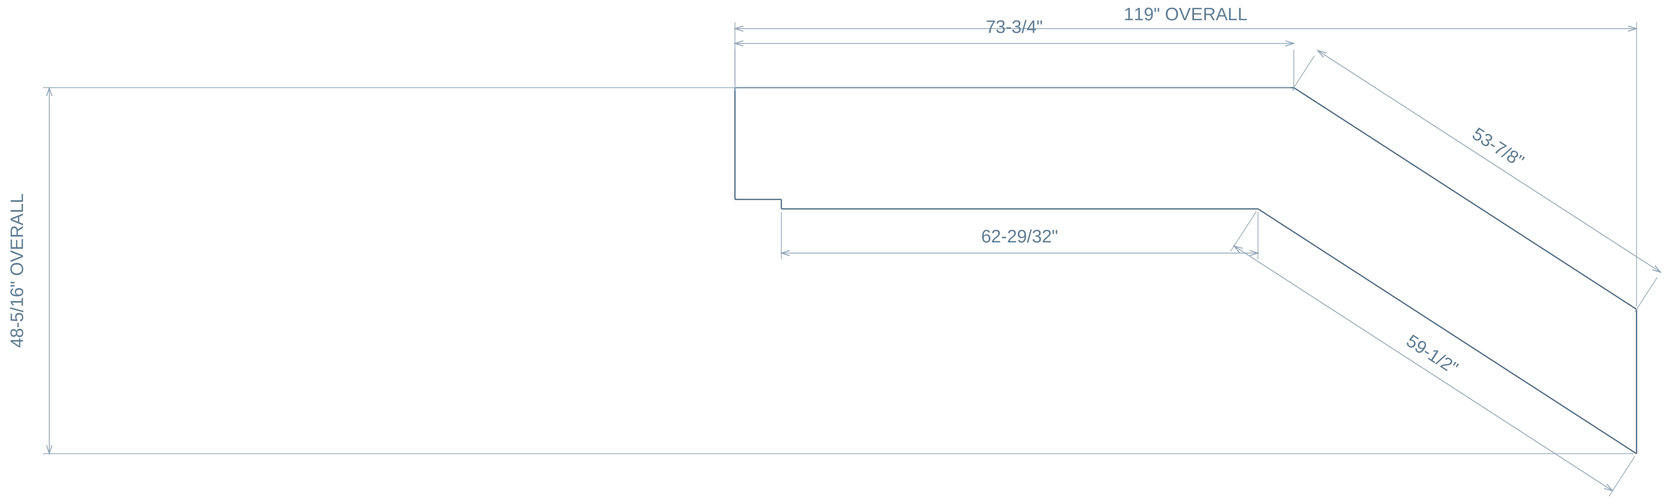

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3



DETAIL 2 / CONNECTED OUTLINE / 1:4



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


TOP RH STRINGER

2606-B002-P05-R08 / 1


REVIEW 08 / 2026-10-26

stair asm body 261 / COMPLETE PROFILE


body-0085 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

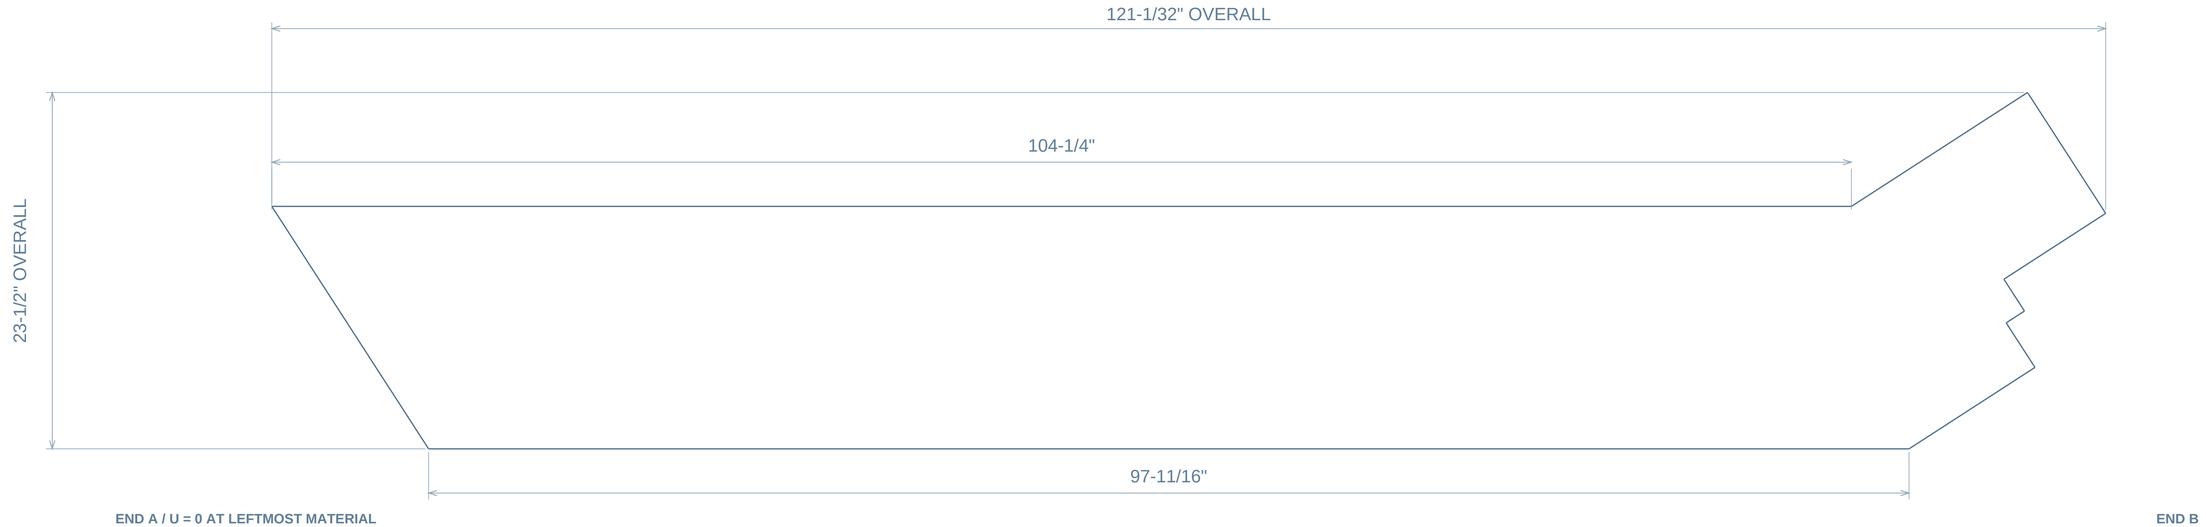

DETAIL 1 / CONNECTED OUTLINE / 1:3

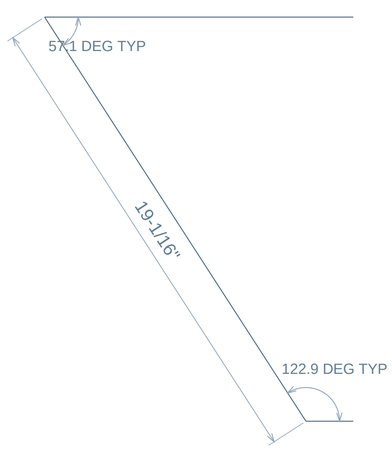

DETAIL 2 / CONNECTED OUTLINE / 1:4

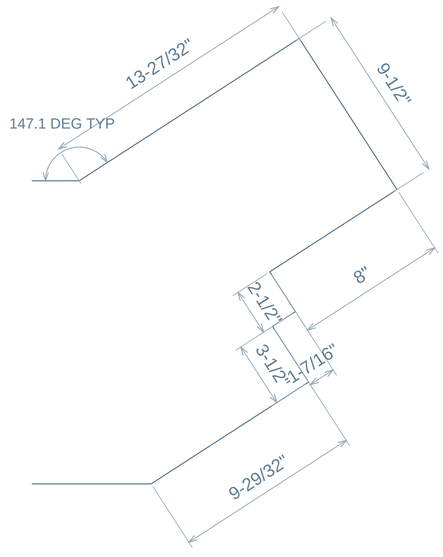


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz RH

body-0086 | QTY 12 IN TOP RH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

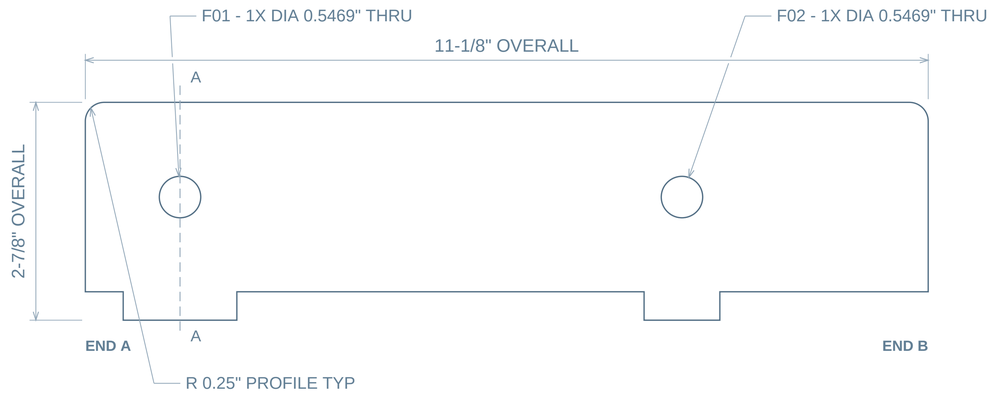

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

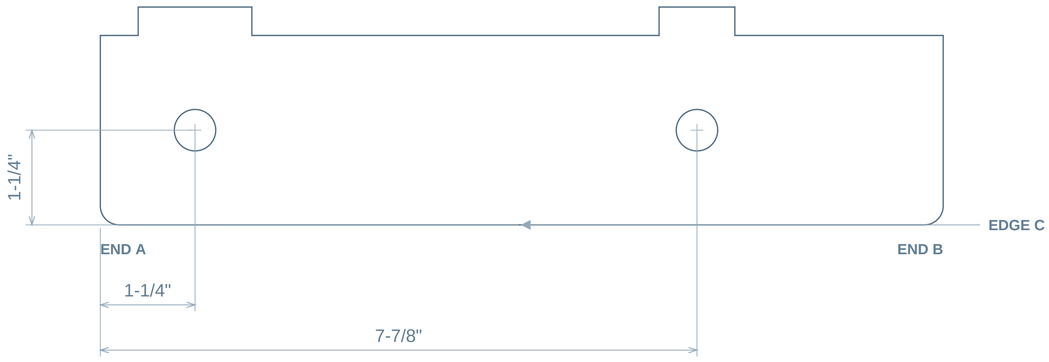


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

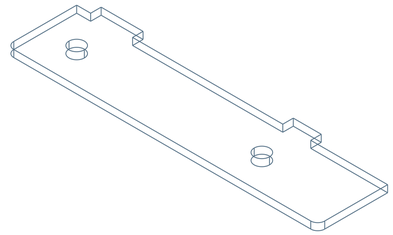

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert RH

body-0087 | QTY 12 IN TOP RH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

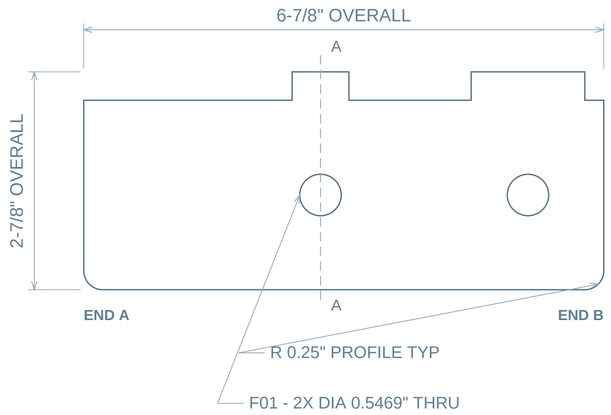

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

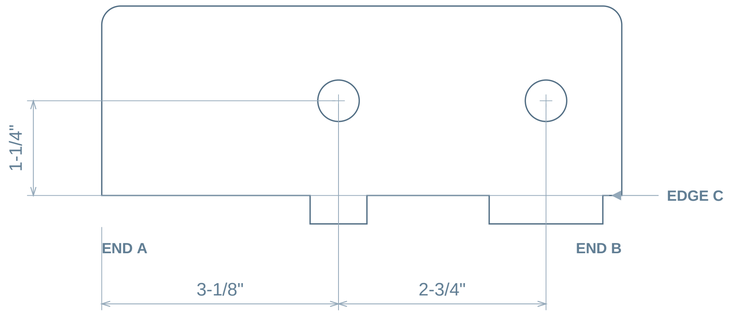


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top RH

body-0110 | QTY 1 IN TOP RH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

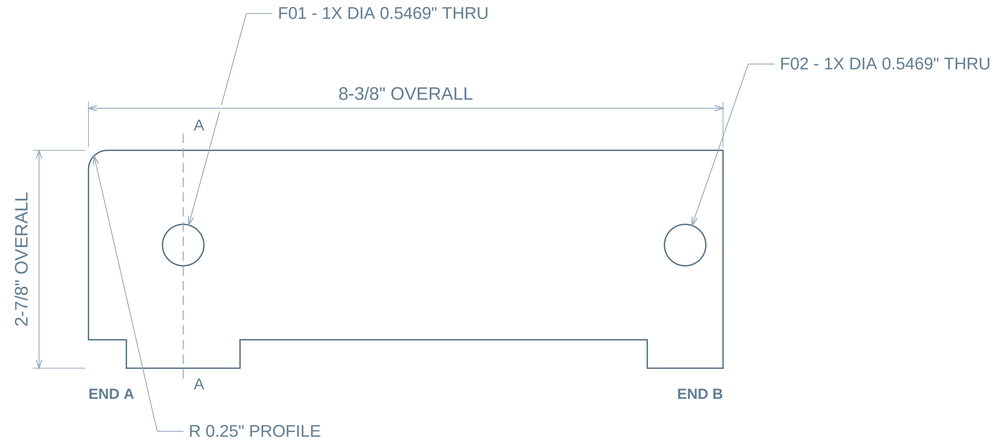

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

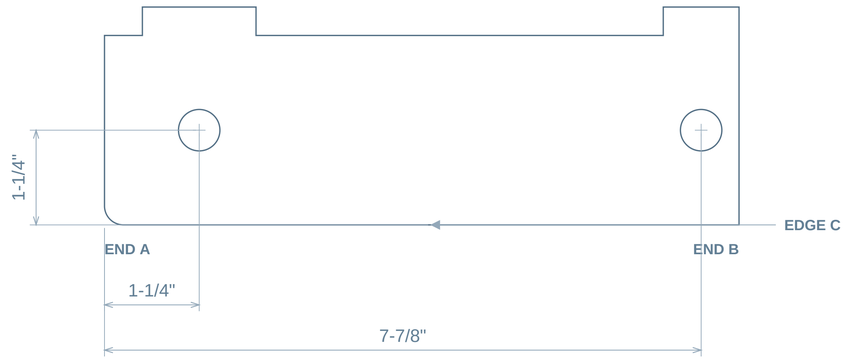


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

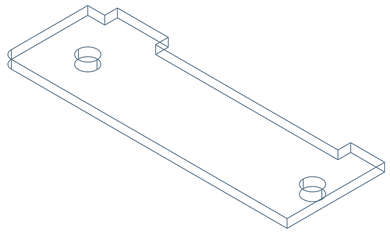

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

TOP CONNECTION PLATES

4 bodies / 1 unique part types / installed source positions

ASSEMBLY / ISOMETRIC





ASSEMBLY / TOP





PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B025-P01	stiffener plates for hangers stringer connection	4	12"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each row shall include size and web center location dimensions.

Formed bodies retain their source radii and actual solutions.


Material, finish and manufacturing tolerances require job release data.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

stiffener plates for hangers stringer connection / COMPLETE PROFILE

body-0331 / QTY 4 / NORMAL DEPTH 1/2" / INCHES

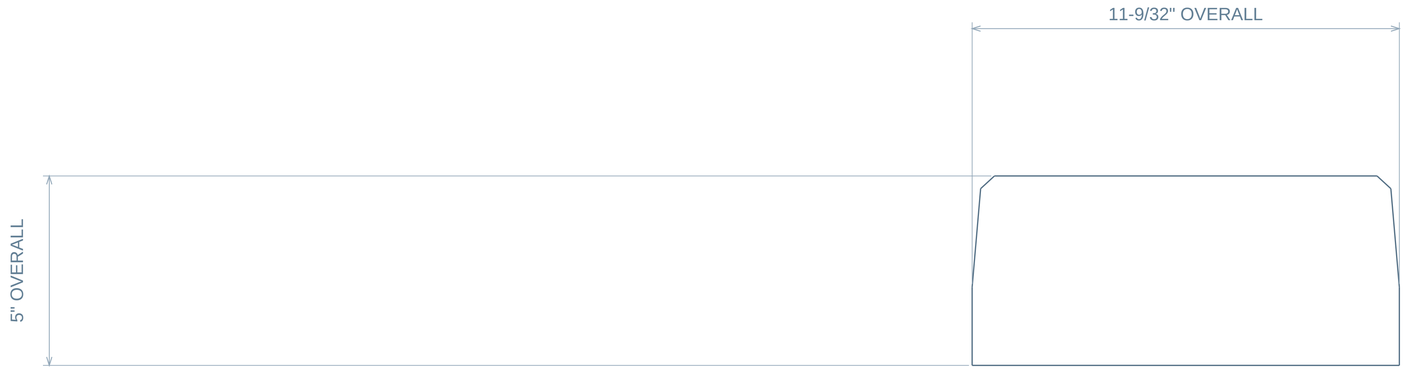

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2




FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

ML HANGER ASSEMBLY

39 bodies / 29 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

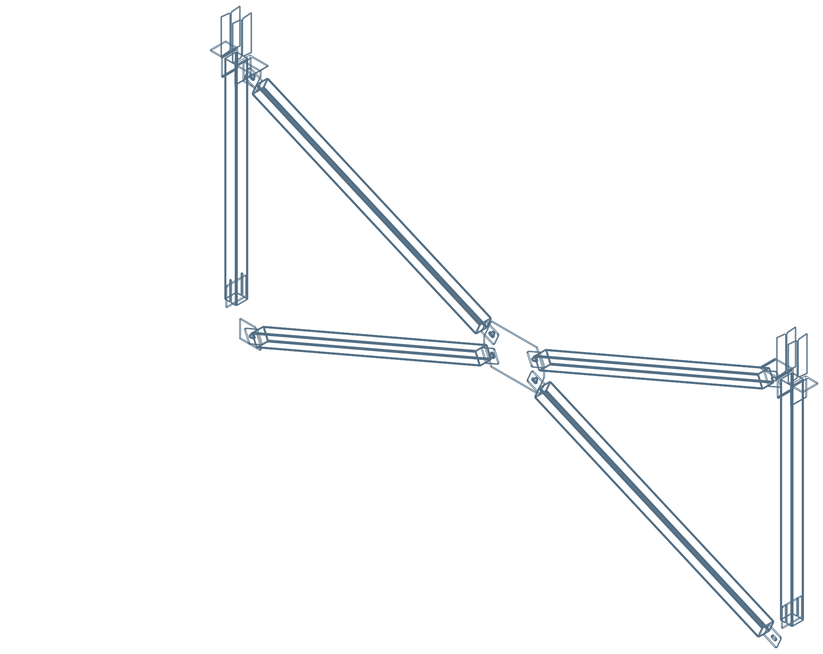

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B035-P01	hanger HSS	1	68-5/8"
02 / 2606-B035-P02	hanger trimmed clip angle	2	8-25/32"
03 / 2606-B035-P03	hanger clip angle - with gusset	2	9-27/32"
04 / 2606-B035-P04	hanger conn to stringer CL knife plate	2	8-3/4"
05 / 2606-B035-P05	stiffener plates for hangers	8	11-11/32"
06 / 2606-B035-P06	cross bracing^26-0727 hanger asm center plate	1	19-25/32"
07 / 2606-B035-P07	hanger asm body 816	1	4-31/32"
08 / 2606-B035-P08	hanger asm body 817	1	4-31/32"
09 / 2606-B035-P09	hanger asm body 818	1	79-27/32"
10 / 2606-B035-P10	hanger asm body 819	1	5-7/8"
11 / 2606-B035-P11	hanger asm body 820	1	5-7/8"
12 / 2606-B035-P12	hanger asm body 821	1	4-31/32"
13 / 2606-B035-P13	hanger asm body 822	1	4-31/32"
14 / 2606-B035-P14	hanger asm body 823	1	79-27/32"
15 / 2606-B035-P15	hanger asm body 824	1	5-7/8"
16 / 2606-B035-P16	hanger asm body 825	1	5-7/8"
17 / 2606-B035-P17	hanger asm body 826	1	4-31/32"
18 / 2606-B035-P18	hanger asm body 827	1	4-31/32"
19 / 2606-B035-P19	hanger asm body 828	1	79-27/32"
20 / 2606-B035-P20	hanger asm body 829	1	5-7/8"
21 / 2606-B035-P21	hanger asm body 830	1	5-7/8"
22 / 2606-B035-P22	hanger asm body 831	1	4-31/32"
23 / 2606-B035-P23	hanger asm body 832	1	4-31/32"
24 / 2606-B035-P24	hanger asm body 833	1	79-27/32"
25 / 2606-B035-P25	hanger asm body 834	1	5-7/8"
26 / 2606-B035-P26	hanger asm body 835	1	5-7/8"
27 / 2606-B035-P27	cross bracing^26-0727 hanger asm btm gusset	1	8-25/32"
28 / 2606-B035-P28	cross bracing^26-0727 hanger asm top gusset	1	7-31/32"
29 / 2606-B035-P29	hanger HSS EAST	1	68-5/8"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each row/sheet includes size and two corner-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Printed bodies retain their source item and actual locations.

Material, finish and manufacturing tolerances require job release data.

hanger HSS

body-0290 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

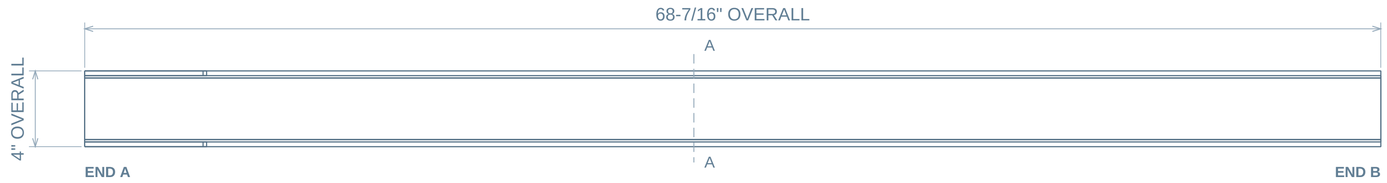

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 32-5/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC

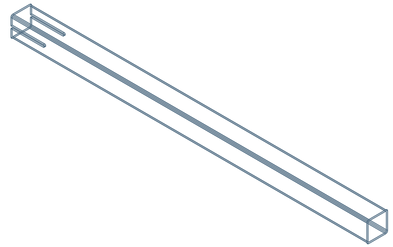

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 68-5/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger trimmed clip angle

body-0291 | QTY 2 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A



02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B




04 / SECTION A-A

CUT V = 2-11/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 8-25/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


hanger clip angle - with gusset

body-0292 | QTY 2 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A



02 / FRONT - FORM PLAN

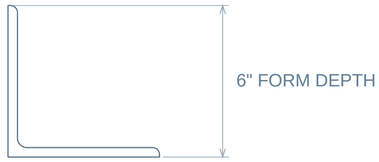


03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT V = 2-11/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:3

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 9-27/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger conn to stringer CL knife plate

body-0293 | QTY 2 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

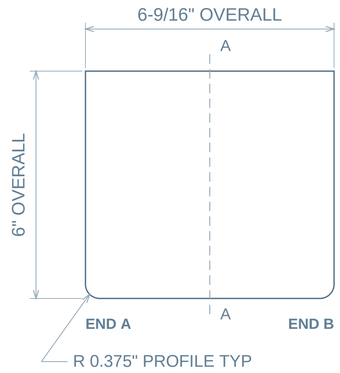


02 / FRONT - EDGE VIEW

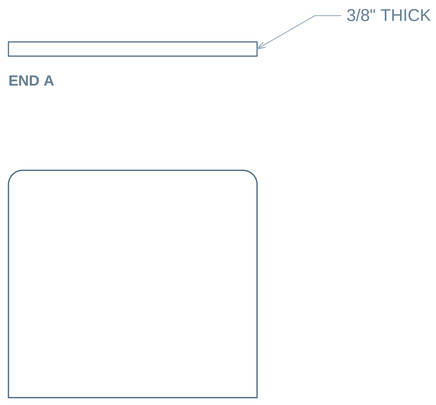

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 3-9/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

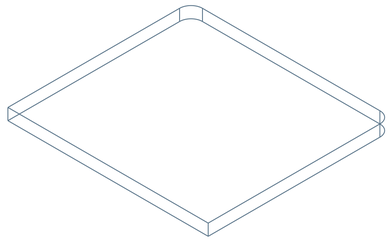

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 8-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

CALIPER / 2606


ML HANGER ASSEMBLY

2606-B035-P05-R08 / 1

REVIEW 08 / 2026-10-26

stiffener plates for hangers / COMPLETE PROFILE


body-0294 / QTY 8 / NORMAL DEPTH 1/4" / INCHES

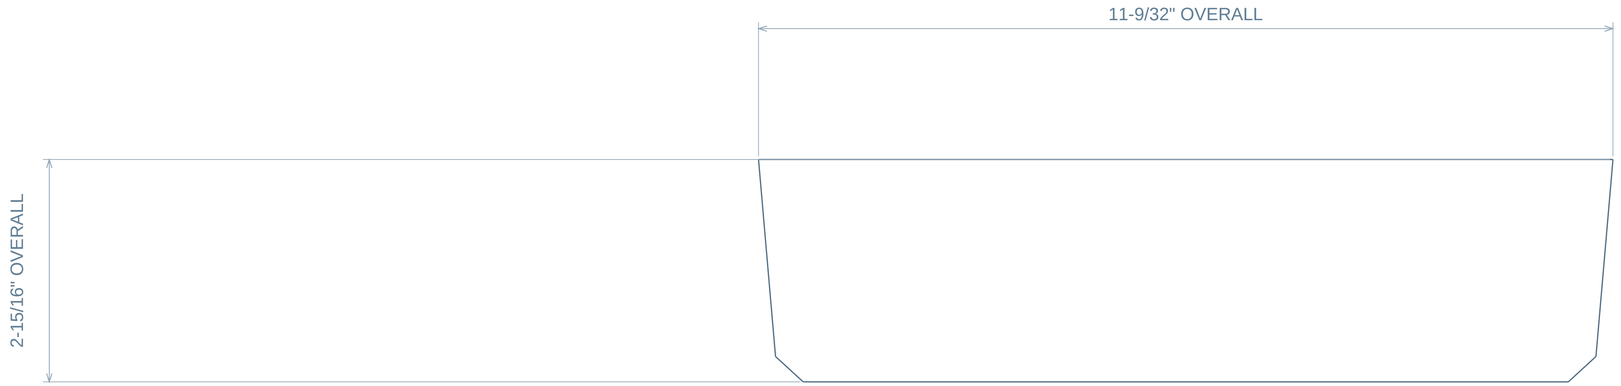

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

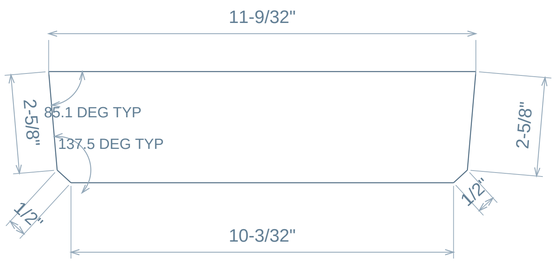


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

cross bracing^26-0727 hanger asm center plate / COMPLETE PROFILE


body-0298 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

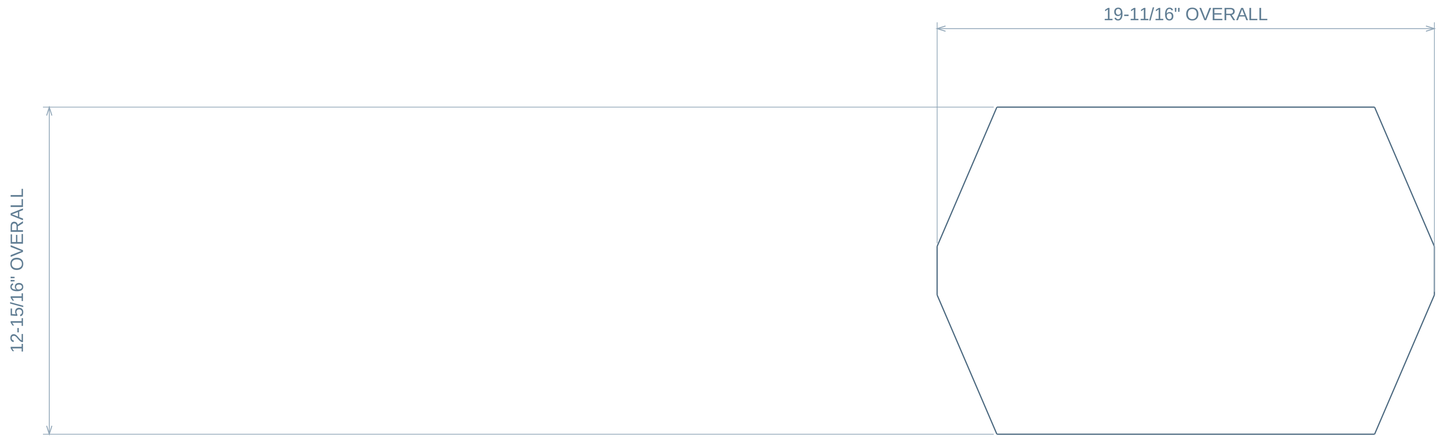

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:3

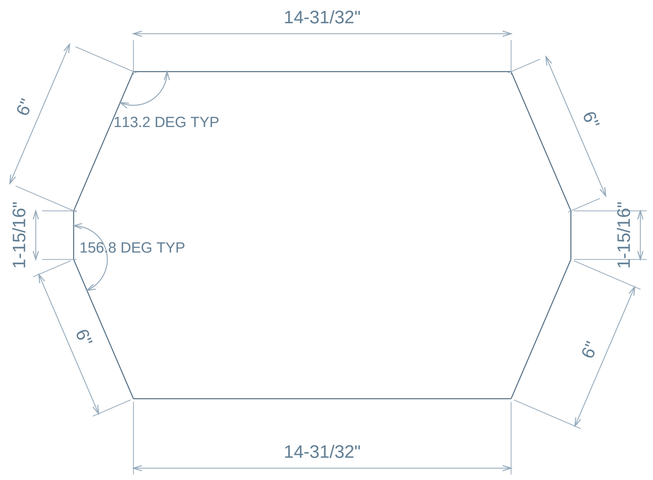


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

cross bracing^26-0727 hanger asm center plate

body-0298 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

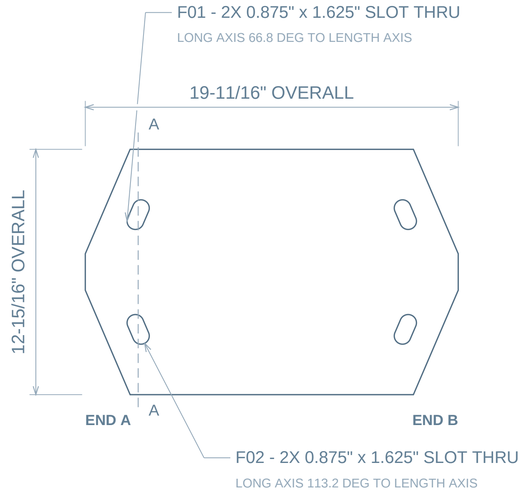

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

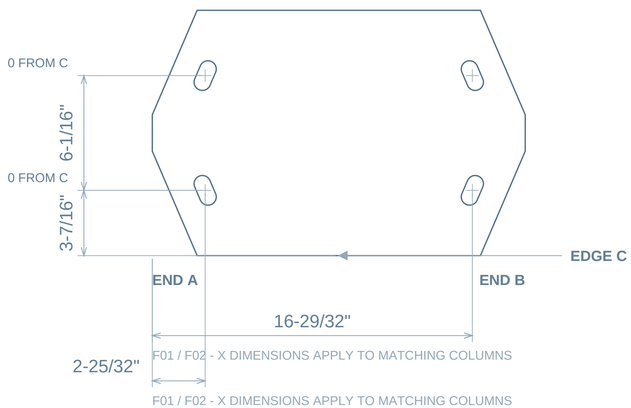


04 / SECTION A-A

X = 2-25/32" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

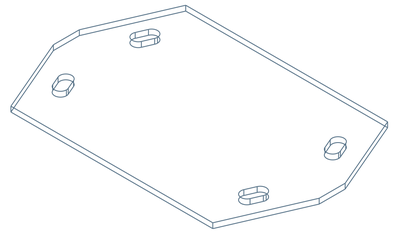

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 816

body-0299 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

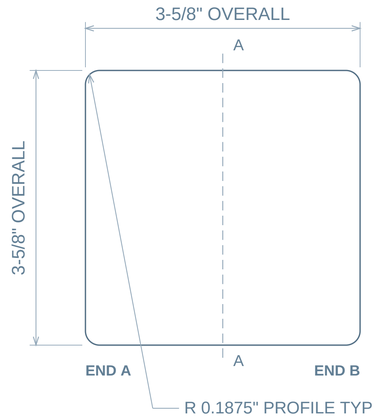

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 817

body-0300 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

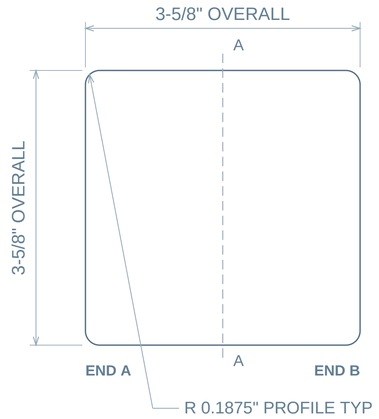

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

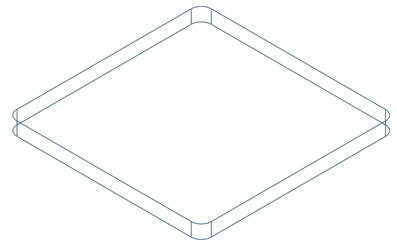

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

hanger asm body 818

body-0301 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

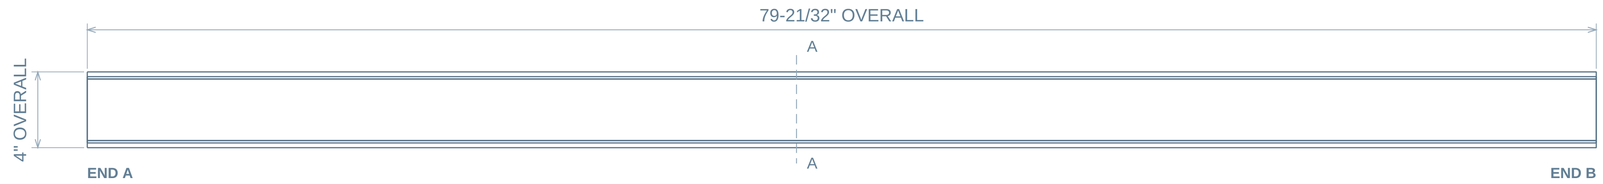

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 37-7/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 79-27/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

hanger asm body 819

body-0302 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

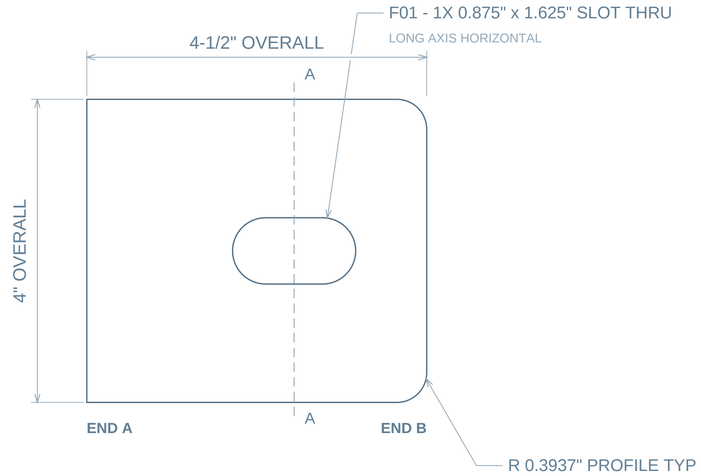

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

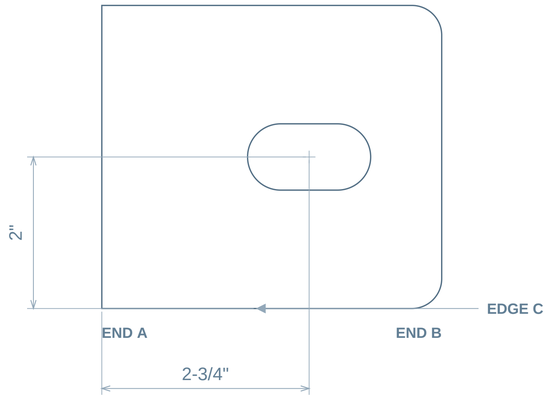

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger asm body 820

body-0303 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

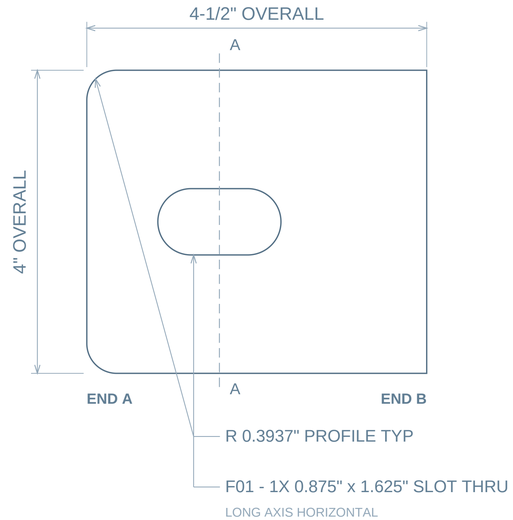


02 / FRONT - EDGE VIEW

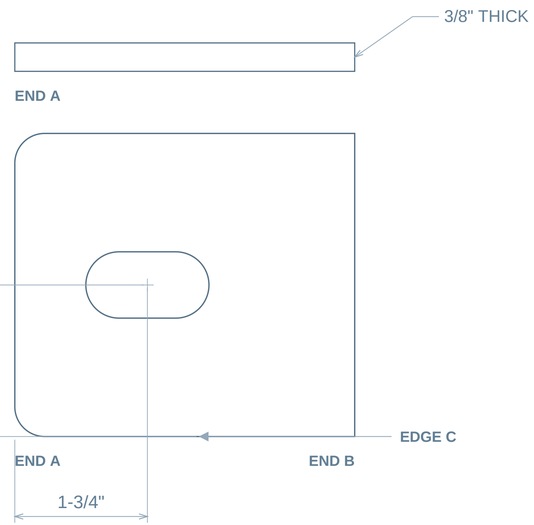

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 1-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 821

body-0304 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

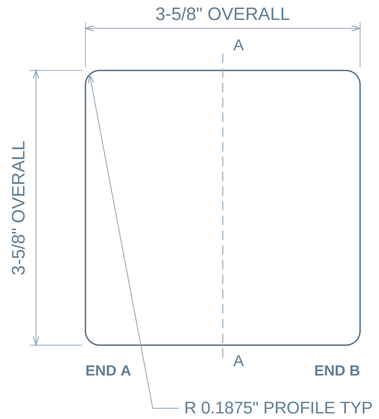

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger asm body 822

body-0305 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

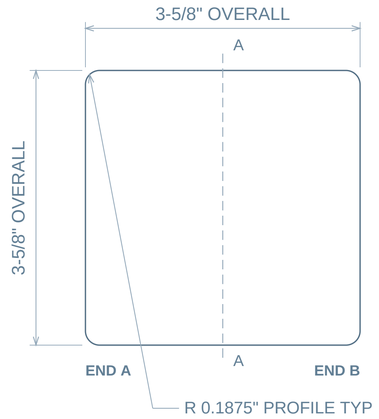

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 823

body-0306 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

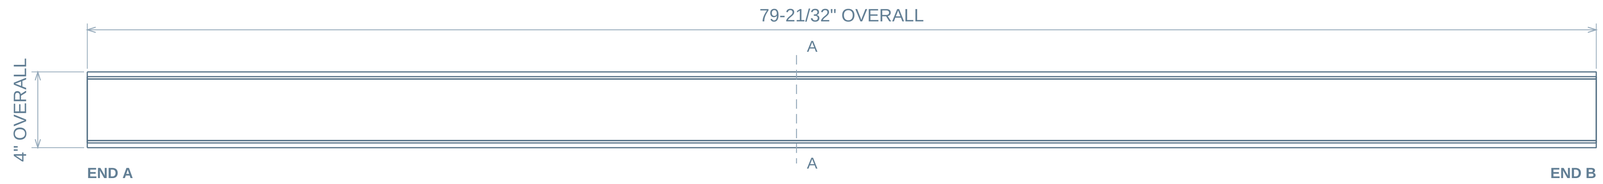

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 37-7/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 79-27/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 824

body-0307 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

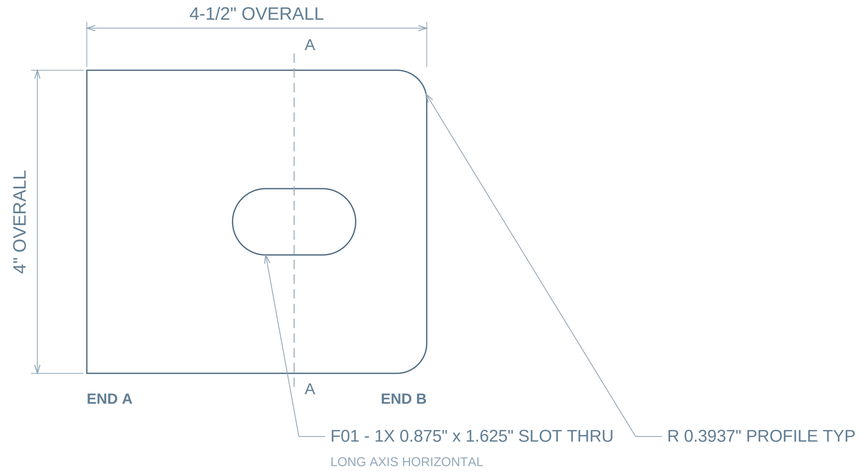

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

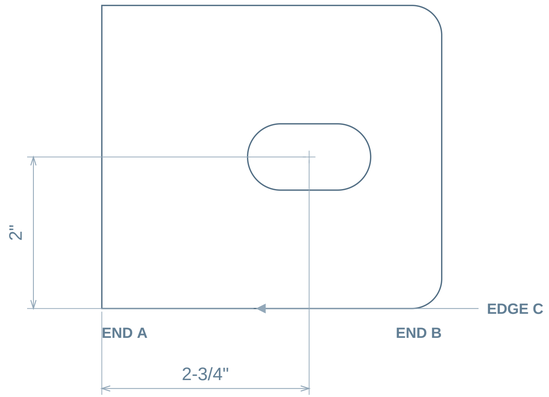

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

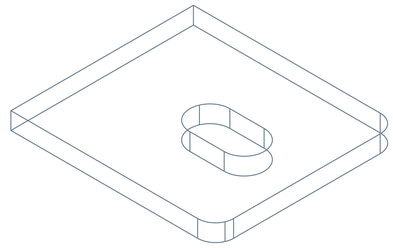

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

hanger asm body 825

body-0308 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

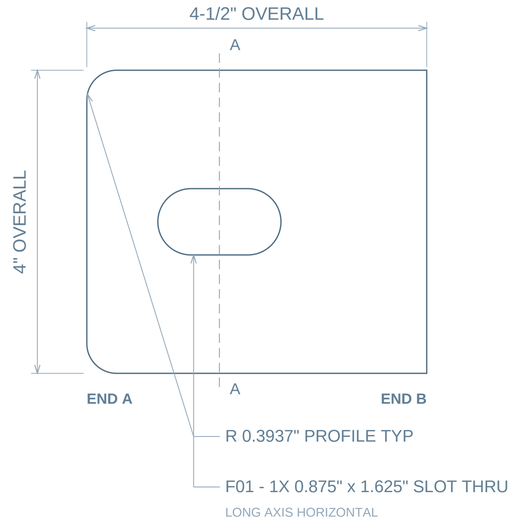

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

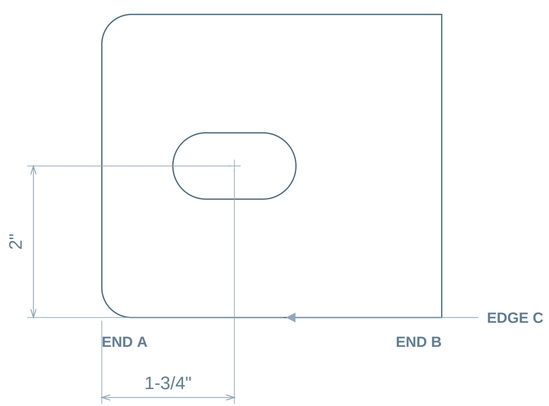

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger asm body 826

body-0309 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

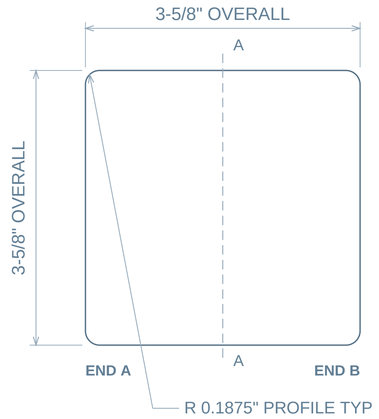

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


hanger asm body 827

body-0310 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

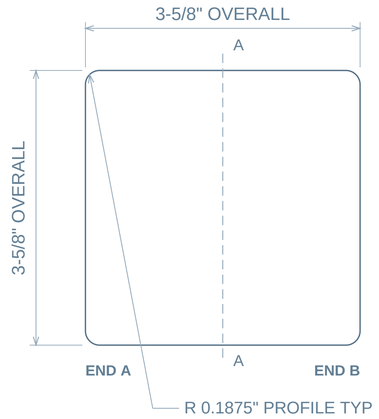

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 828

body-0311 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

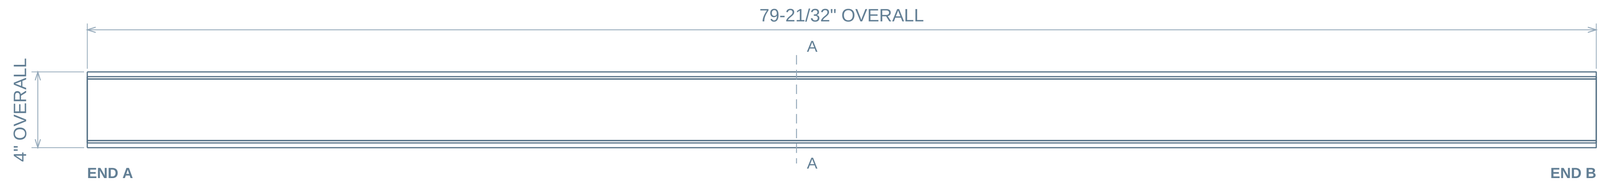

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 37-7/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 79-27/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger asm body 829

body-0312 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

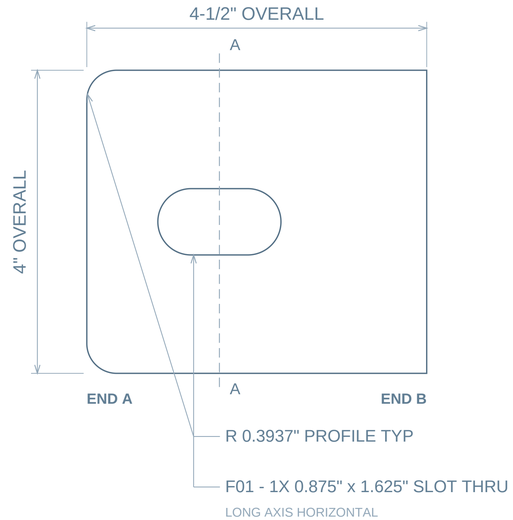


02 / FRONT - EDGE VIEW

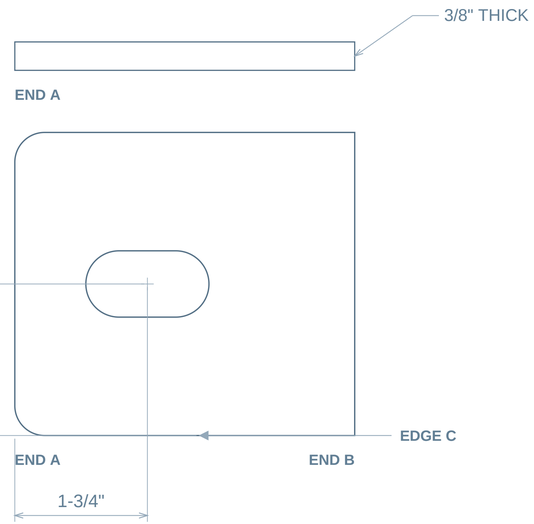

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 1-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

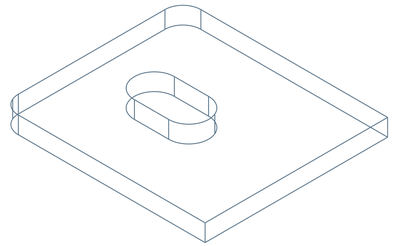

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


hanger asm body 830

body-0313 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

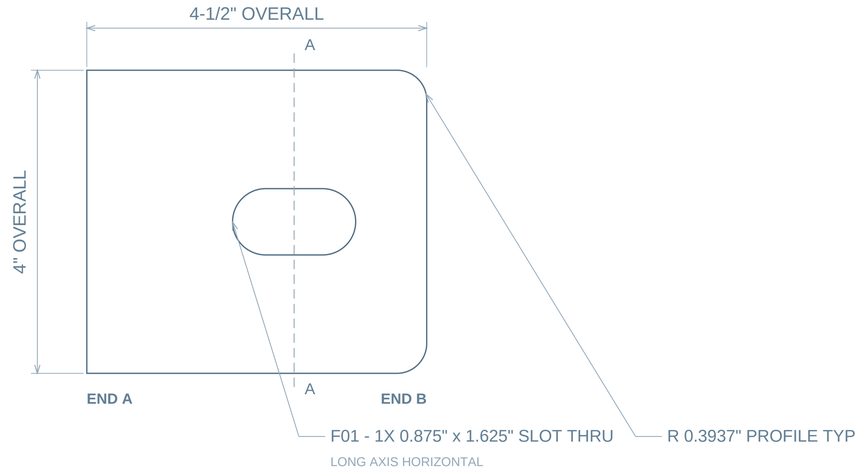


02 / FRONT - EDGE VIEW

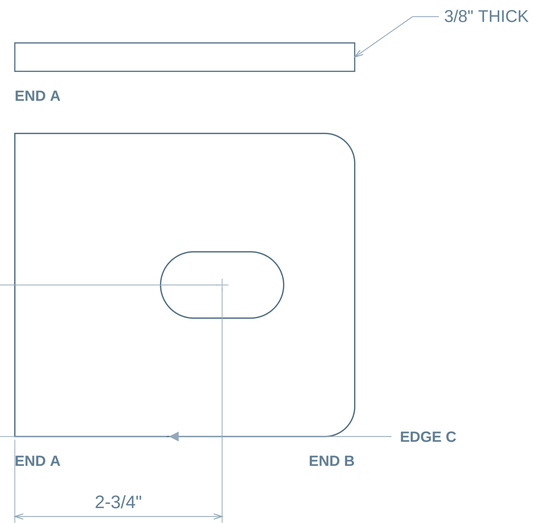

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

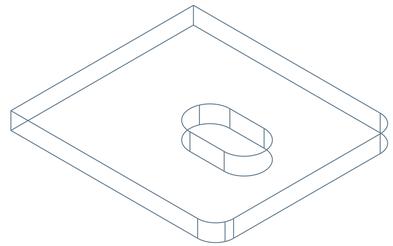

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 831

body-0314 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

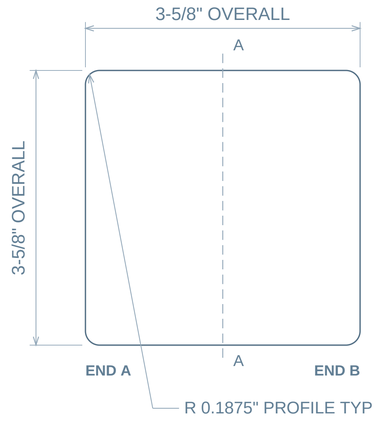

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

hanger asm body 832

body-0315 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

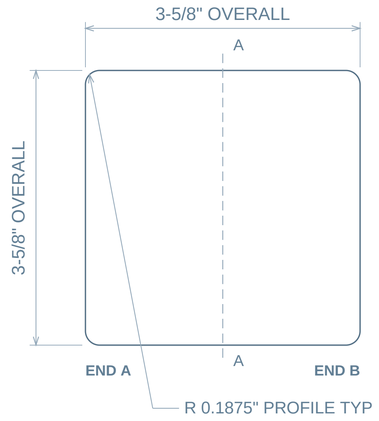

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-13/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 4-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

hanger asm body 833

body-0316 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

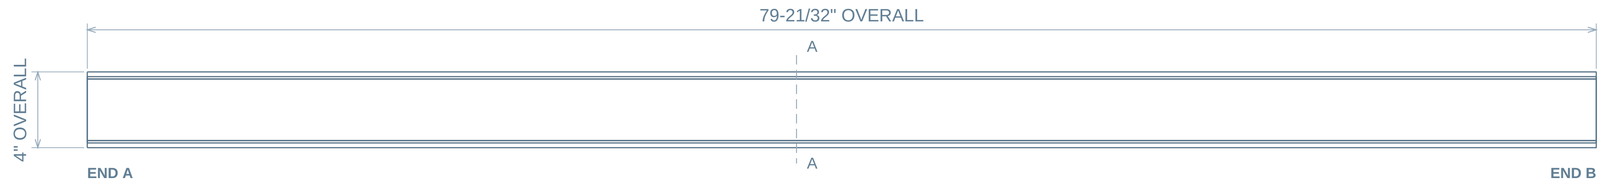

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 37-7/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 79-27/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


hanger asm body 834

body-0317 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

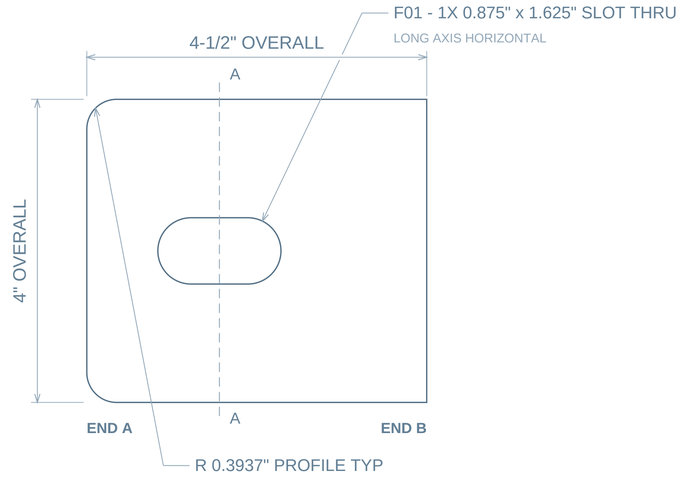


02 / FRONT - EDGE VIEW

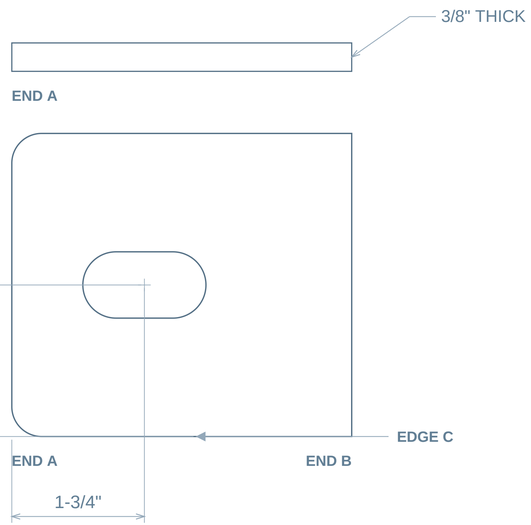

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 1-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

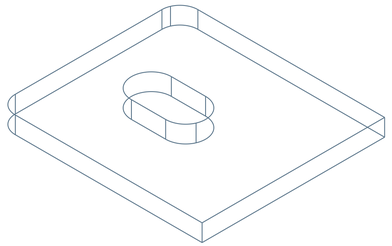

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


hanger asm body 835

body-0318 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

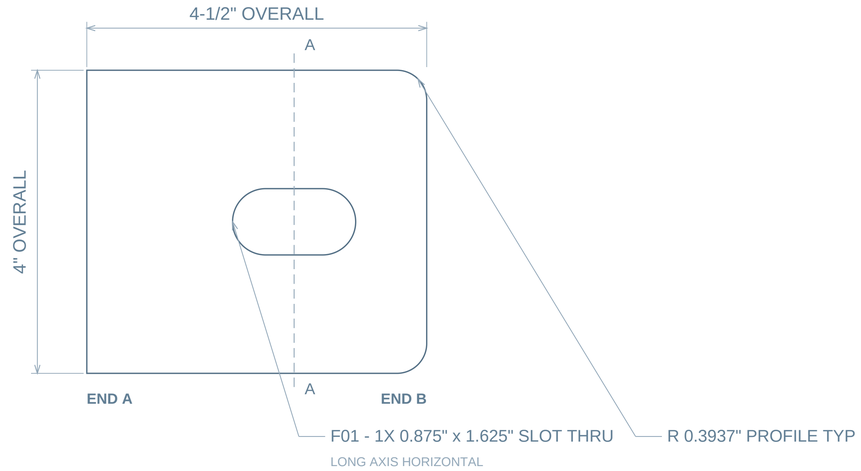


02 / FRONT - EDGE VIEW

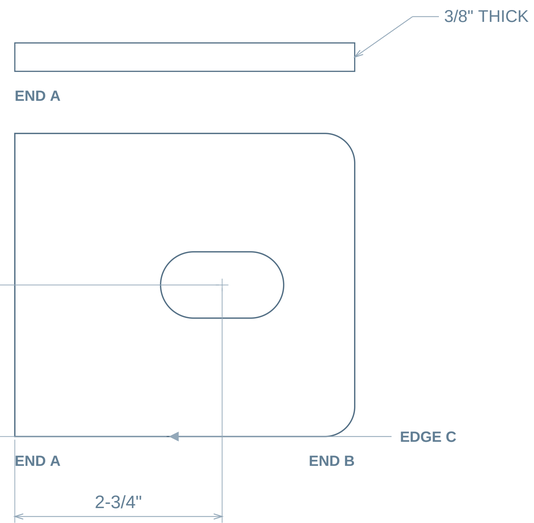

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

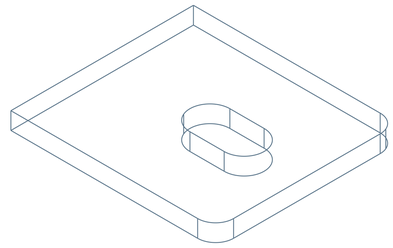

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

cross bracing^26-0727 hanger asm btm gusset / COMPLETE PROFILE


body-0319 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

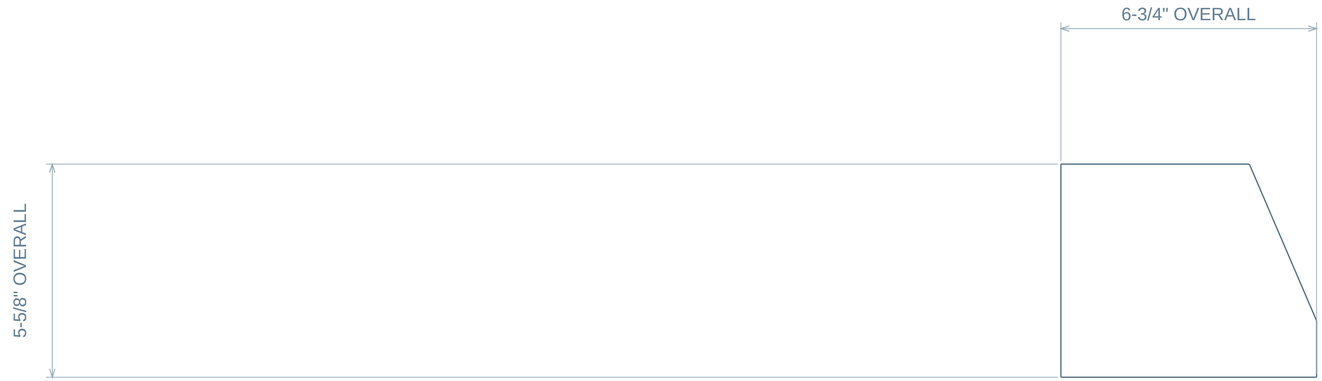

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

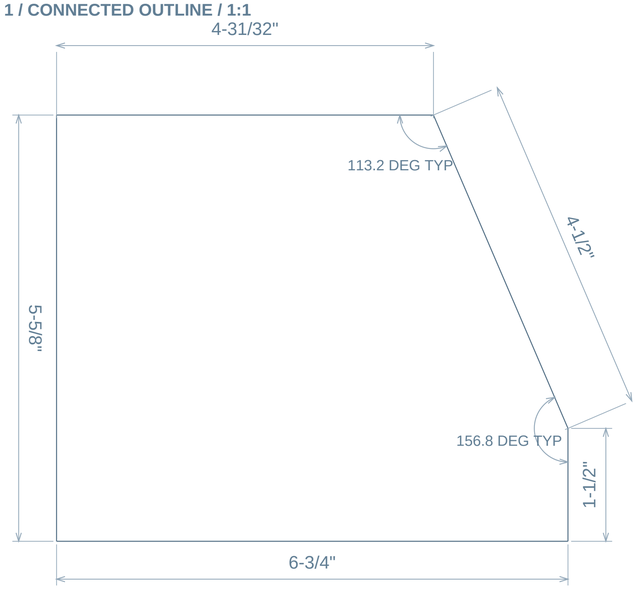


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

cross bracing^26-0727 hanger asm btm gusset

body-0319 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2


01 / TOP - FACE A

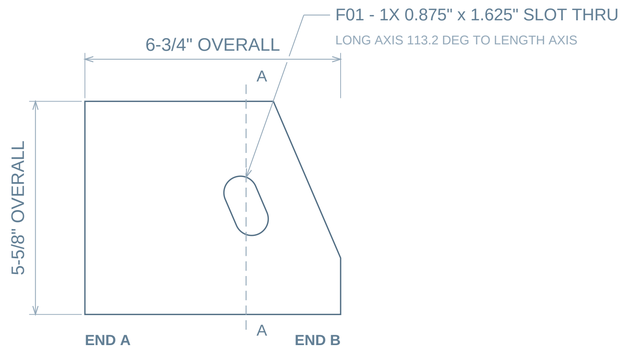

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

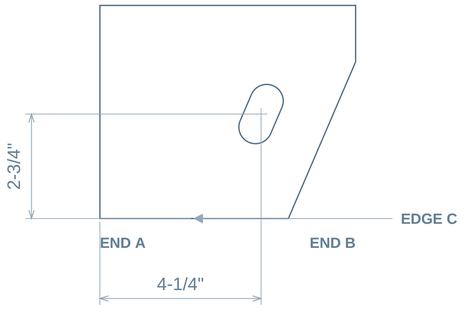

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 4-1/4" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

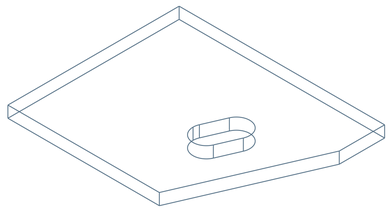

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW


END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

cross bracing^26-0727 hanger asm top gusset / COMPLETE PROFILE


body-0320 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

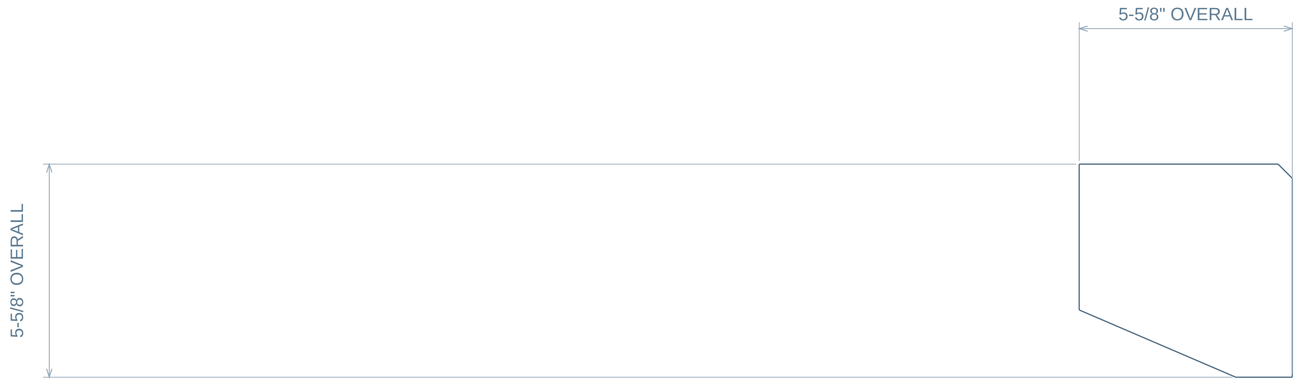

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

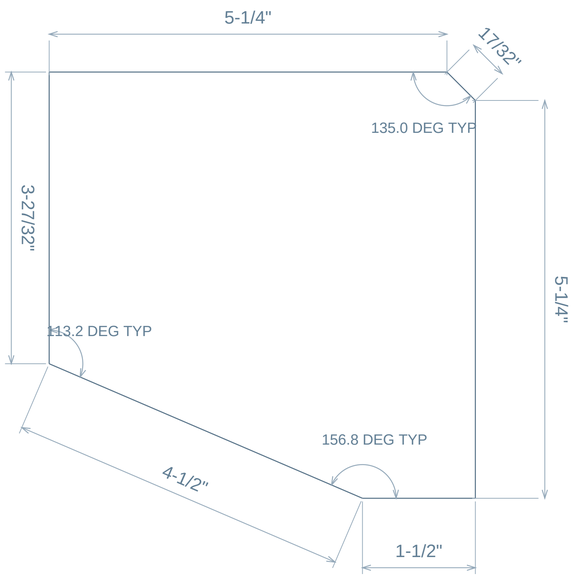


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

cross bracing^26-0727 hanger asm top gusset

body-0320 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2


01 / TOP - FACE A

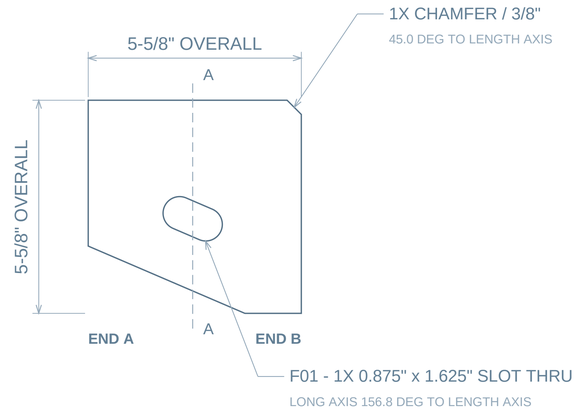

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

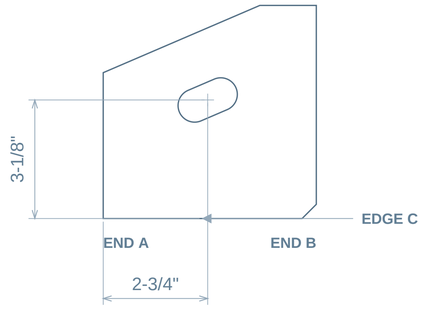

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-3/4" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

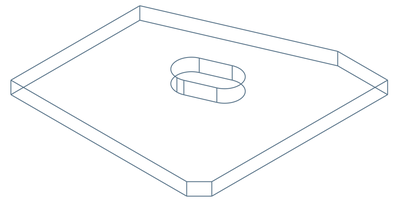

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

hanger HSS EAST

body-0321 | QTY 1 IN ML HANGER ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

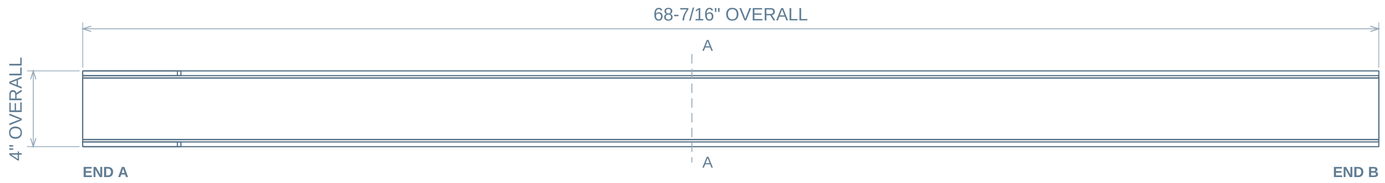

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 32-5/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC

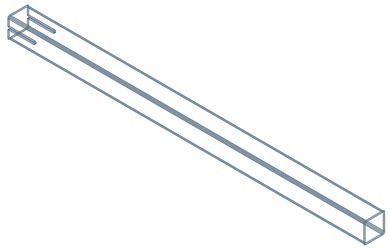

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 68-5/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

ML BACK BEAM

4 bodies / 4 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

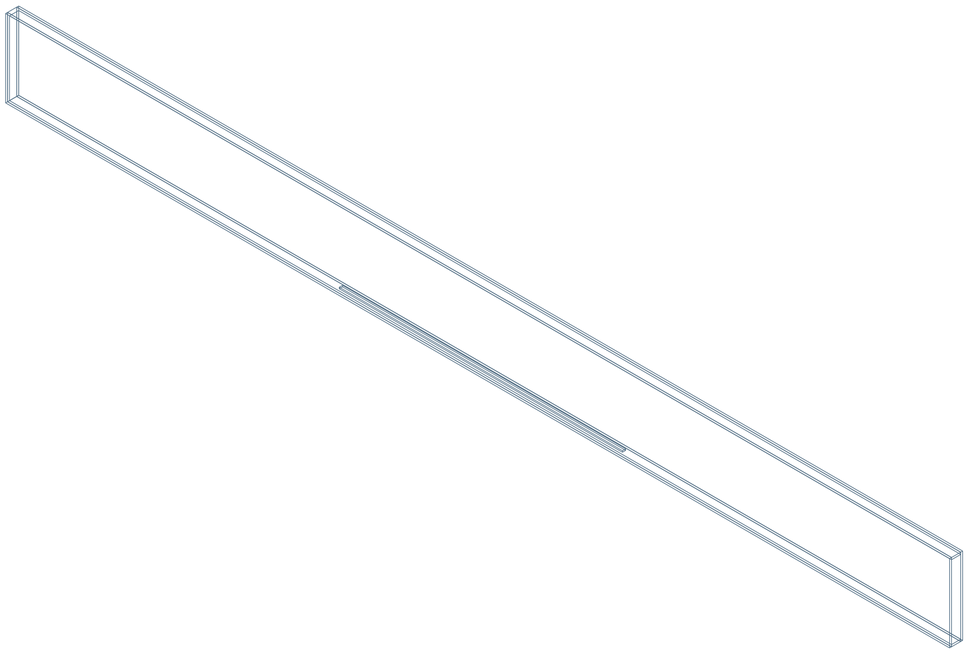

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B030-P01	stair asm body 615	1	180-19/32"
02 / 2606-B030-P02	stair asm body 616	1	180-19/32"
03 / 2606-B030-P03	stair asm body 617	1	180-5/8"
04 / 2606-B030-P04	stair asm body 618	1	54"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

stair asm body 615

body-0185 | QTY 1 IN ML BACK BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A

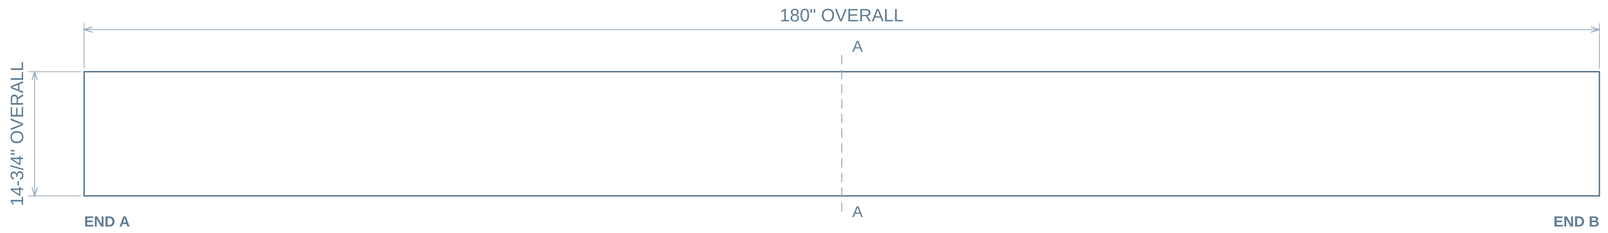

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 90" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

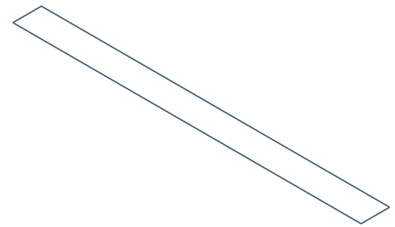

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 180-19/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 616

body-0186 | QTY 1 IN ML BACK BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A

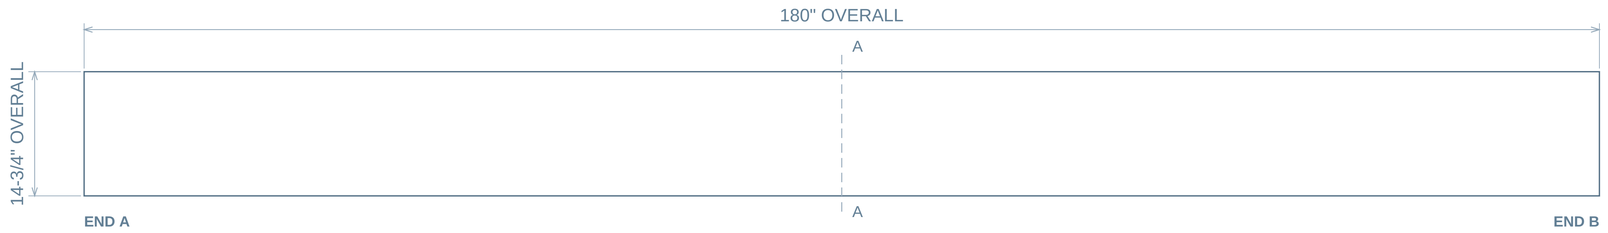

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 90" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

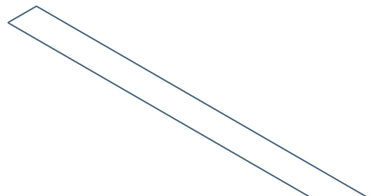

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 180-19/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 617

body-0187 | QTY 1 IN ML BACK BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A



02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 84-19/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:7

05 / ISOMETRIC

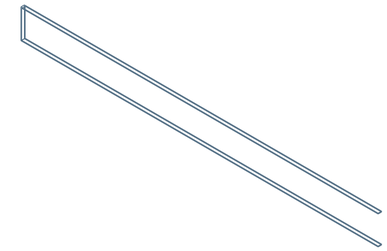

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 180-5/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 618

body-0188 | QTY 1 IN ML BACK BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A



02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 27" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

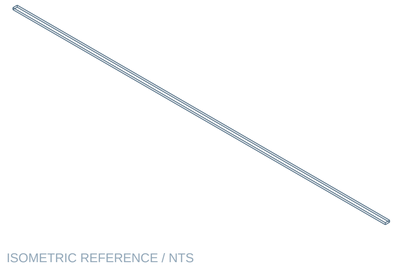

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 54"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

ML FRONT WEST BEAM

4 bodies / 4 unique part types / installed source positions

ASSEMBLY / ISOMETRIC



ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B027-P01	stair asm body 422	1	61-3/4"
02 / 2606-B027-P02	stair asm body 423	1	61-3/4"
03 / 2606-B027-P03	stair asm body 426	1	60-1/32"
04 / 2606-B027-P04	stair asm body 427	1	60-1/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each hole/slot includes size and two center-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

stair asm body 422

body-0169 | QTY 1 IN ML FRONT WEST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

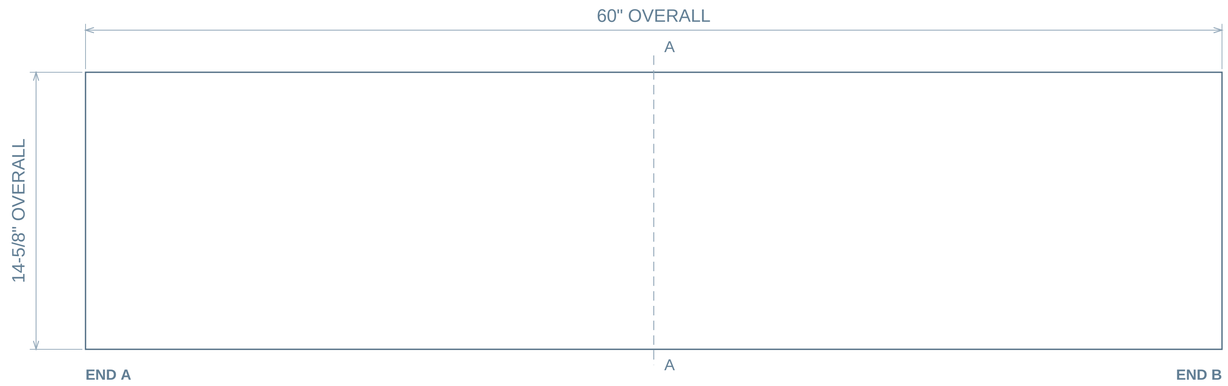

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 30" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

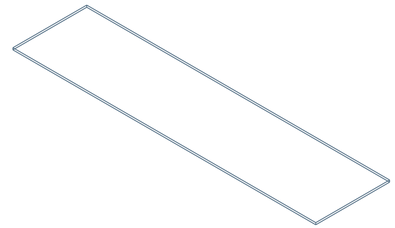

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 61-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 423

body-0170 | QTY 1 IN ML FRONT WEST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

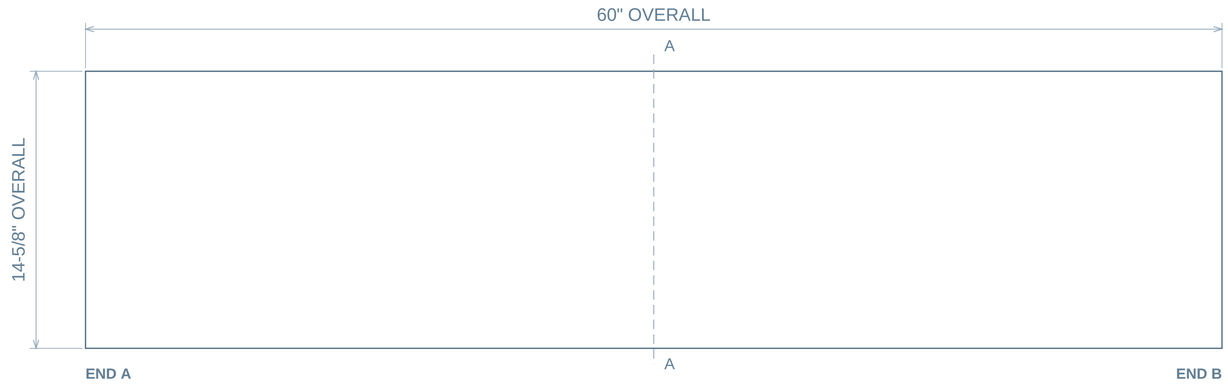

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 30" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

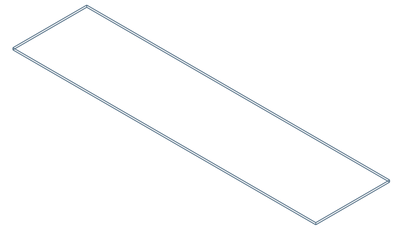

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 61-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 426

body-0173 | QTY 1 IN ML FRONT WEST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

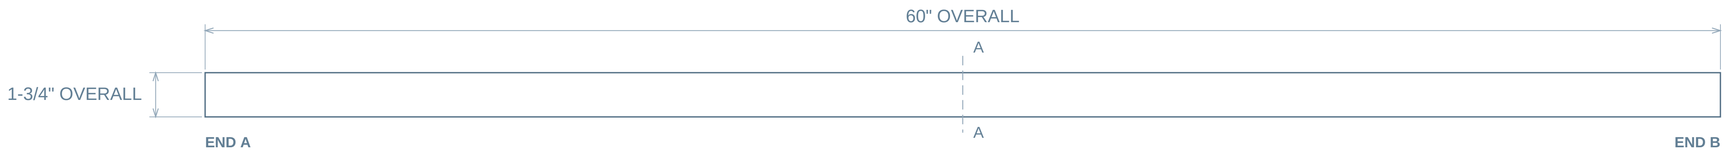

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 30" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

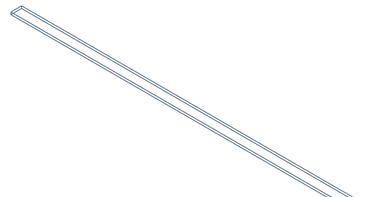

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 60-1/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


stair asm body 427

body-0174 | QTY 1 IN ML FRONT WEST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

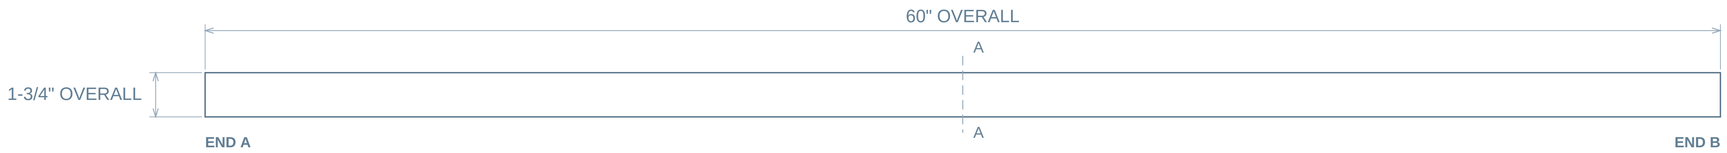


02 / FRONT - EDGE VIEW

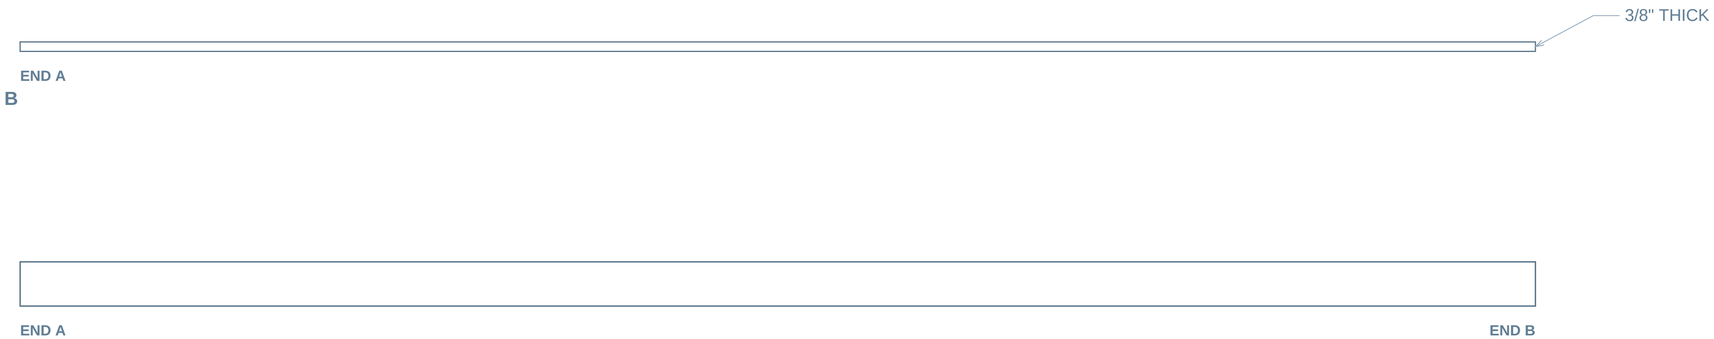

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 30" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

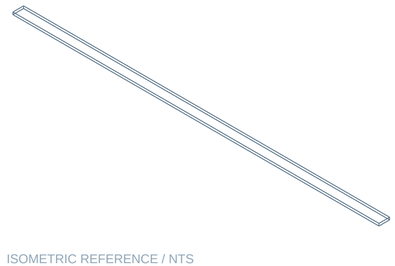

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 60-1/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

ML FRONT CENTER BEAM

8 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

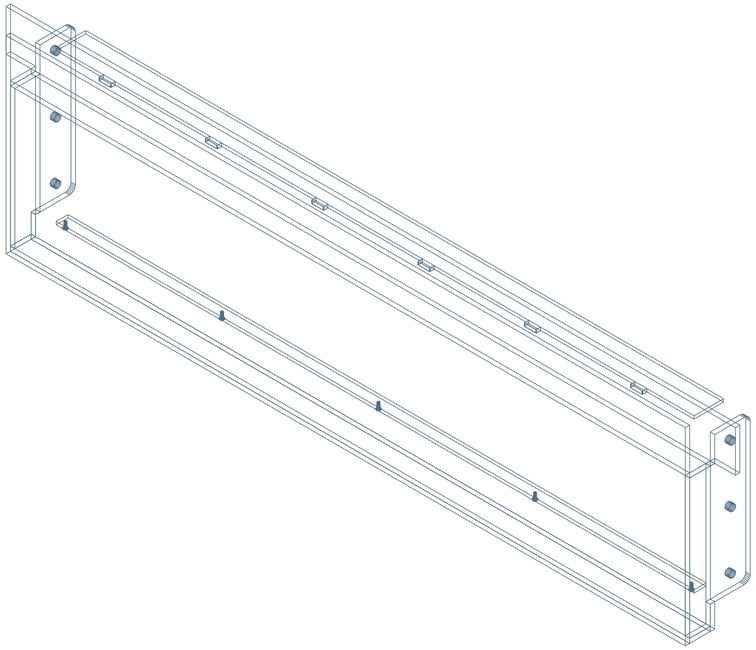

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B029-P01	stair asm body 430	1	57-17/32"
02 / 2606-B029-P02	stair asm body 431	1	57-17/32"
03 / 2606-B029-P03	stair asm body 432	1	59-11/16"
04 / 2606-B029-P04	stair asm body 433	1	14-21/32"
05 / 2606-B029-P05	stair asm body 434	1	14-21/32"
06 / 2606-B029-P06	stair asm body 435	1	54-1/16"
07 / 2606-B029-P07	stair asm body 436	1	61-27/32"
08 / 2606-B029-P08	stair asm body 437	1	54"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each hole/slot includes size and two center-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Formed bodies: read inner solid; flats are actual sections.

Material, finish and manufacturing tolerances require job release data.

stair asm body 430

body-0177 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

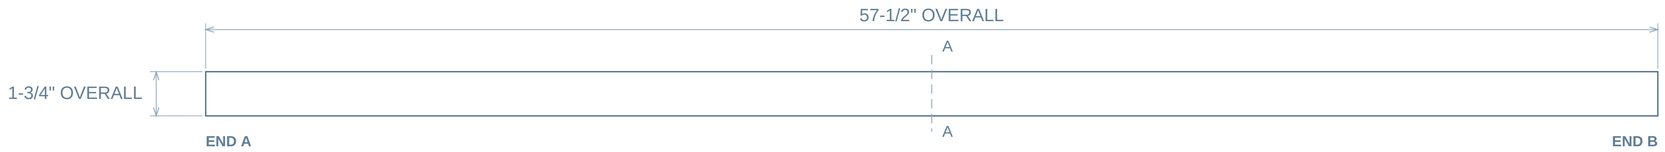

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 57-17/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 431

body-0178 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

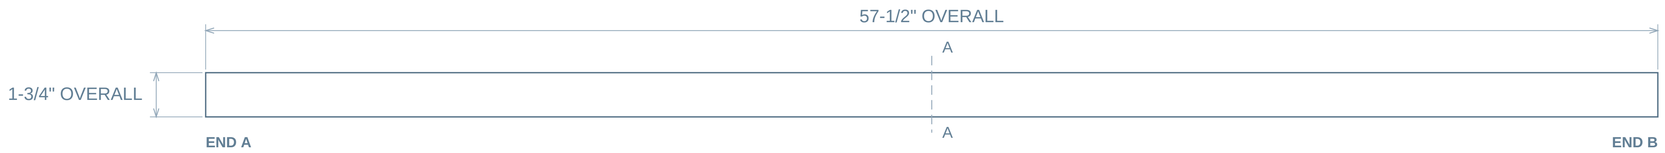

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 57-17/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 432

body-0179 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

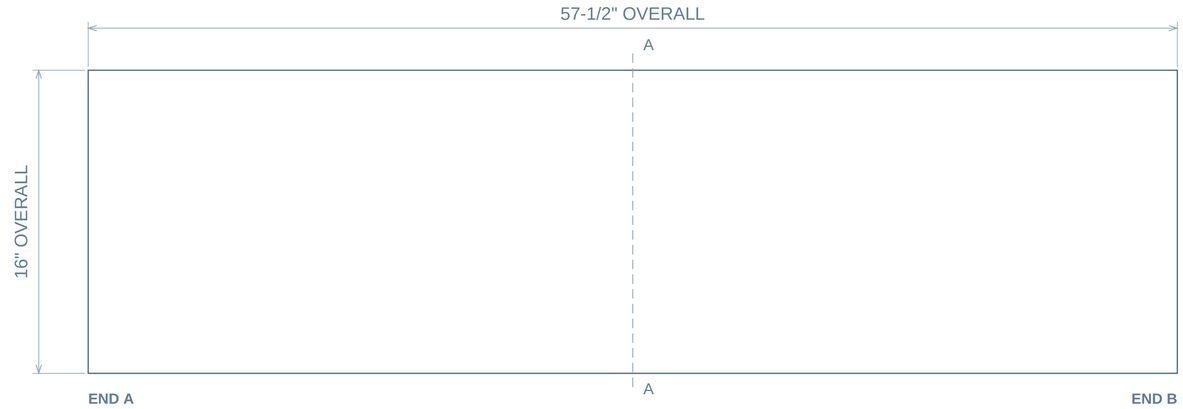

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

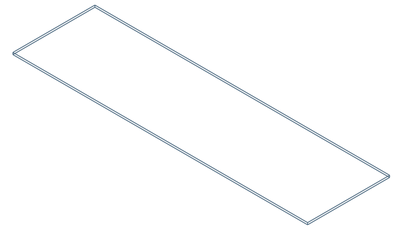

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-11/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 433

body-0180 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

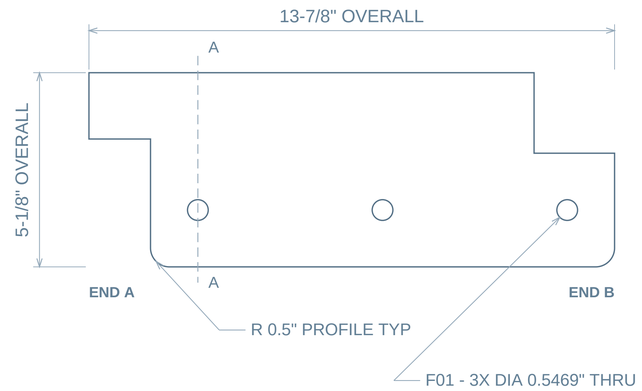

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-7/8" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

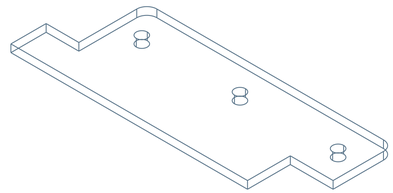

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 434

body-0181 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

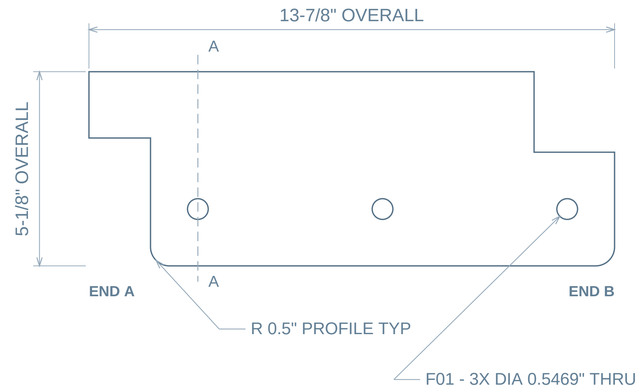

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 2-7/8" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

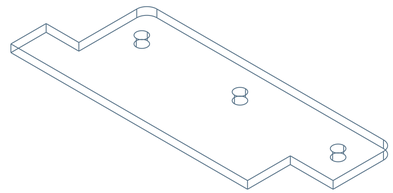

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 435

body-0182 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

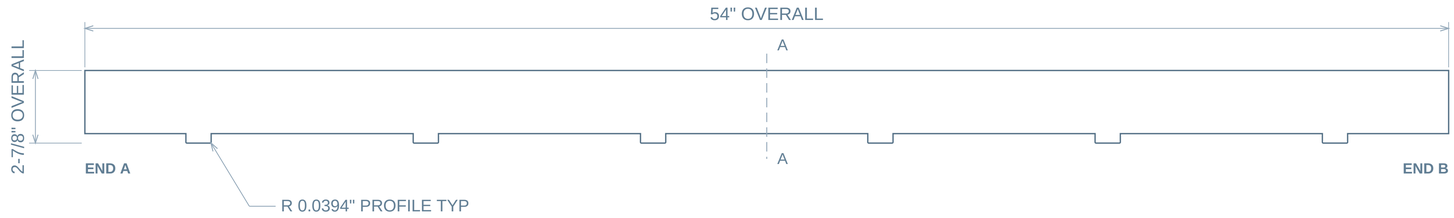


02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B



04 / SECTION A-A

X = 27" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 54-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


stair asm body 436

body-0183 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

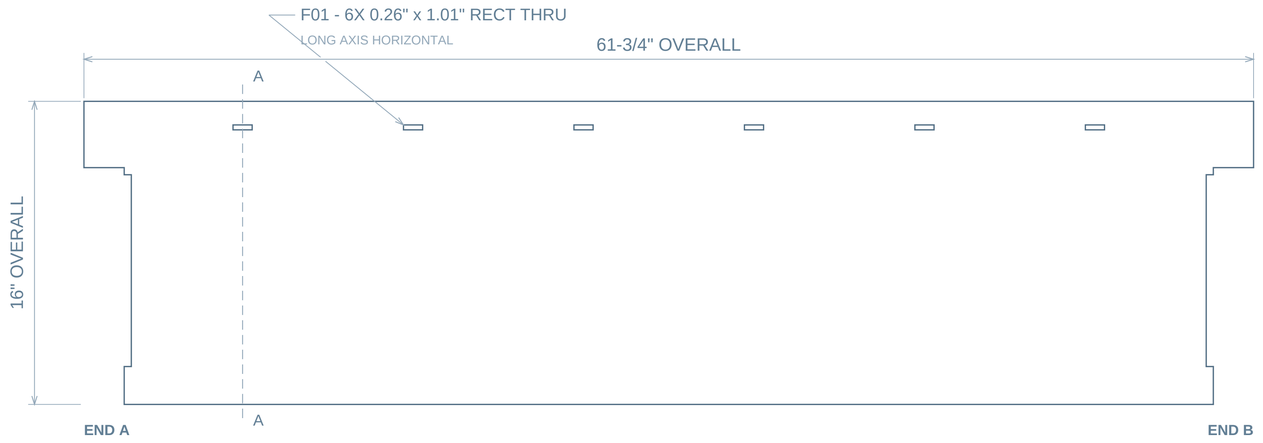

02 / FRONT - EDGE VIEW

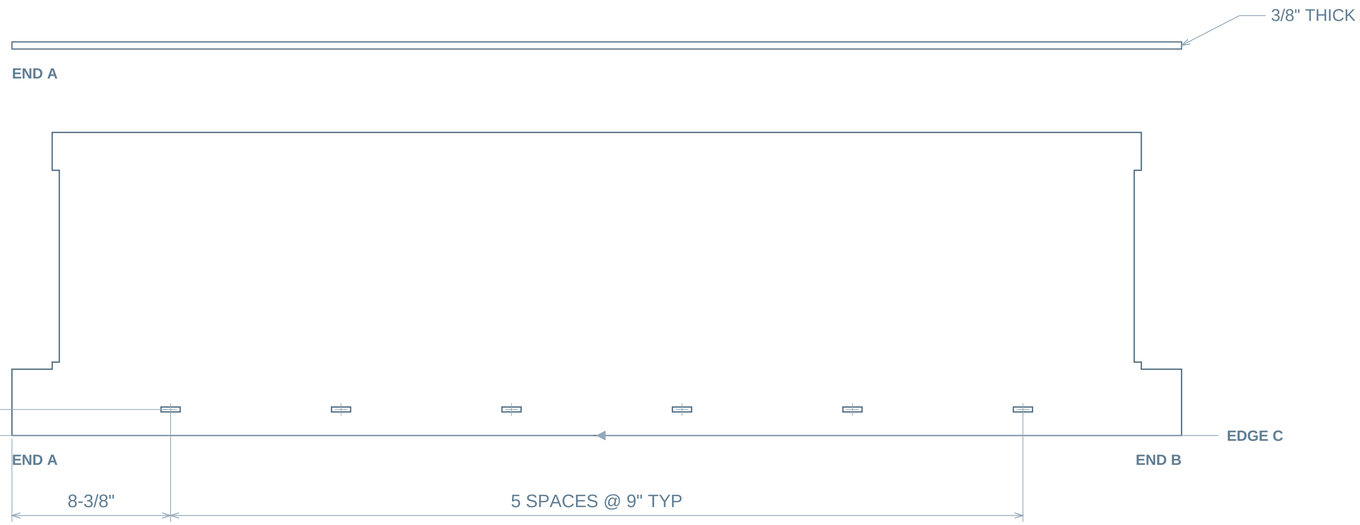

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 8-3/8" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

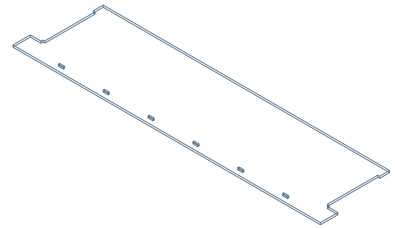

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 437

body-0184 | QTY 1 IN ML FRONT CENTER BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A



02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B


04 / SECTION A-A

X = 27" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 54"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

ML FRONT EAST BEAM

4 bodies / 4 unique part types / installed source positions

ASSEMBLY / ISOMETRIC



ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B028-P01	stair asm body 424	1	59-11/32"
02 / 2606-B028-P02	stair asm body 425	1	59-11/32"
03 / 2606-B028-P03	stair asm body 428	1	57-17/32"
04 / 2606-B028-P04	stair asm body 429	1	57-17/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

stair asm body 424

body-0171 | QTY 1 IN ML FRONT EAST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

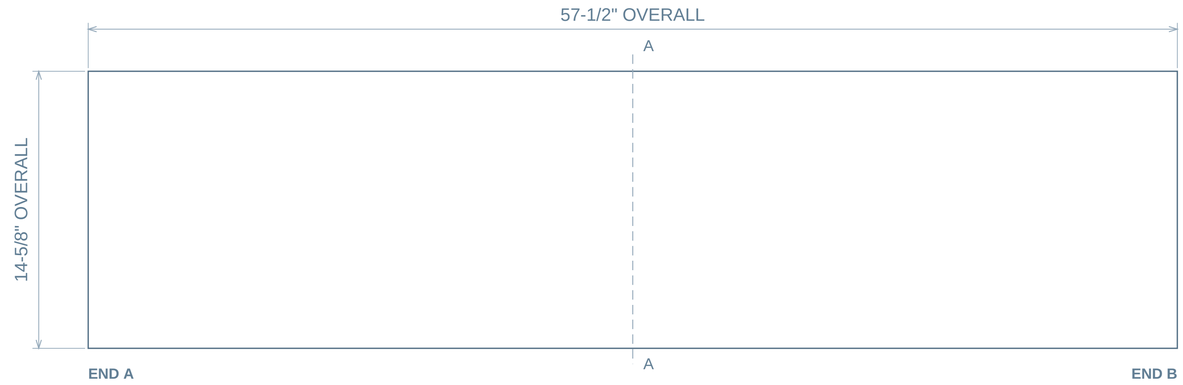

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

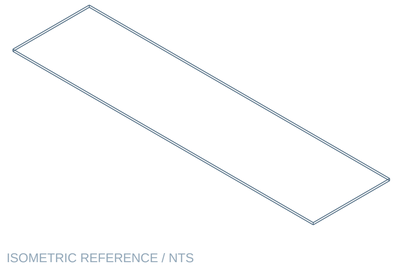

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 425

body-0172 | QTY 1 IN ML FRONT EAST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

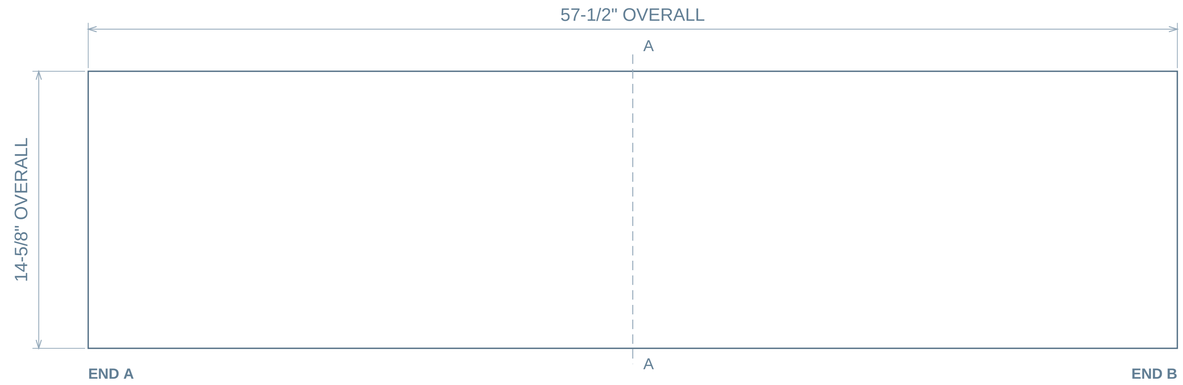

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

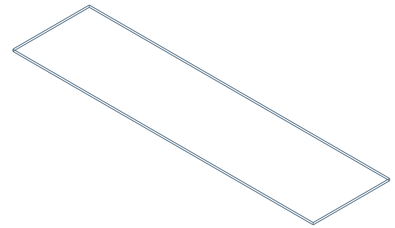

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 428

body-0175 | QTY 1 IN ML FRONT EAST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

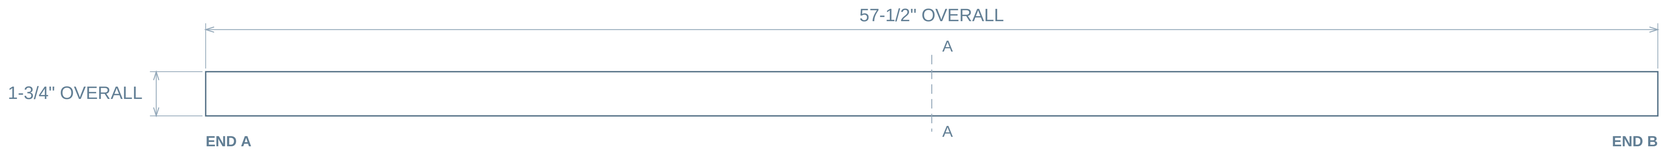

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 57-17/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 429

body-0176 | QTY 1 IN ML FRONT EAST BEAM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

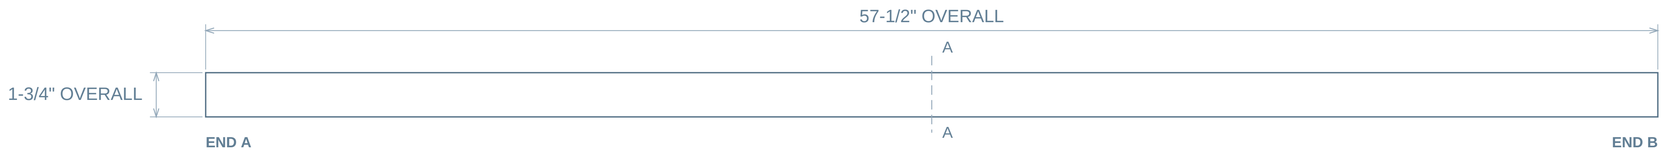

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 57-17/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


ML PLATFORM

3 bodies / 3 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

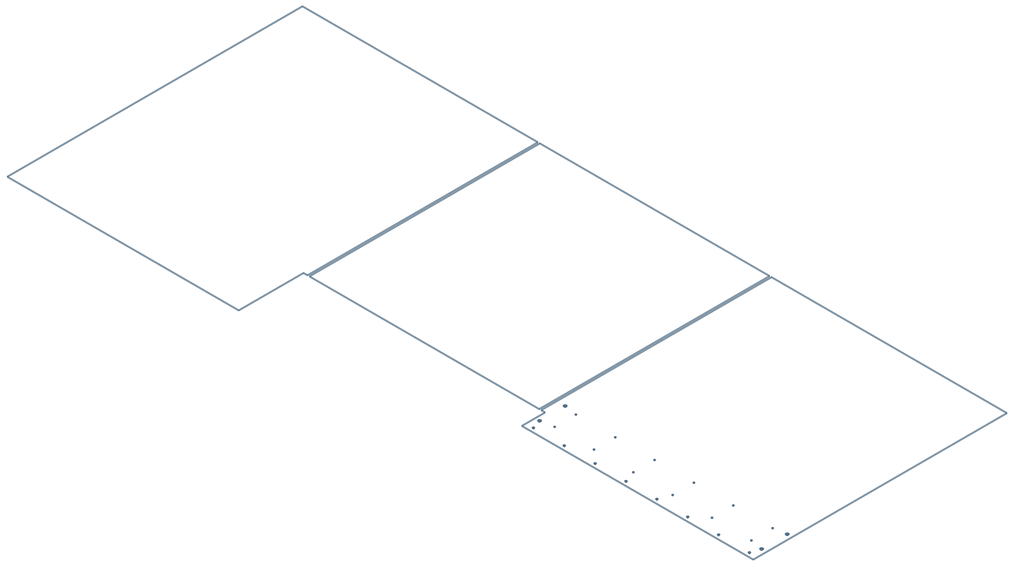

ASSEMBLY / TOP

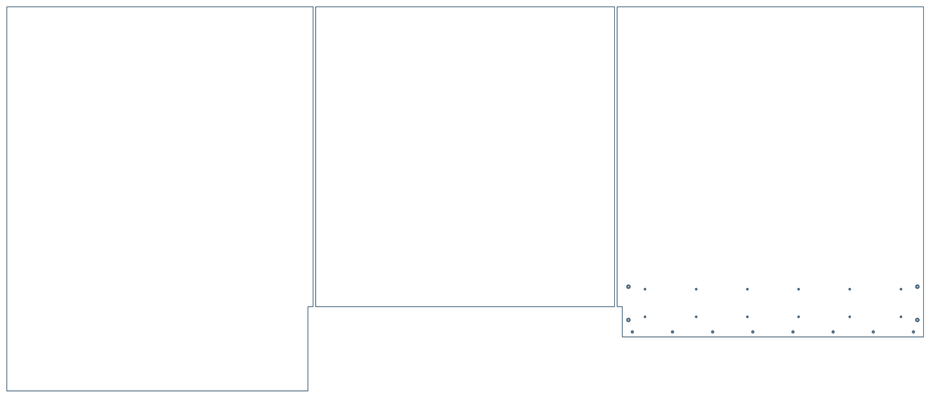

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B032-P01	stair asm body 619	1	97-25/32"
02 / 2606-B032-P02	stair asm body 620	1	89-5/8"
03 / 2606-B032-P03	stair asm body 621	1	84-1/4"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

stair asm body 619

body-0833 | QTY 1 IN ML PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:15


01 / TOP - FACE A

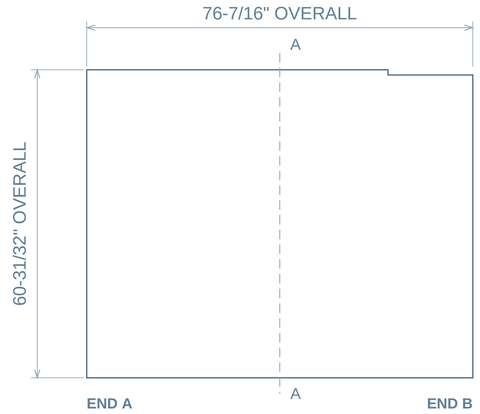

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 38-7/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC

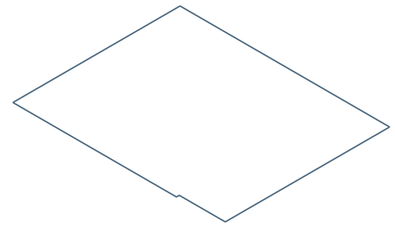

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 97-25/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 620


body-0834 / QTY 1 / INCHES / FACE SCALE 1:9

01 / TOP - FACE A

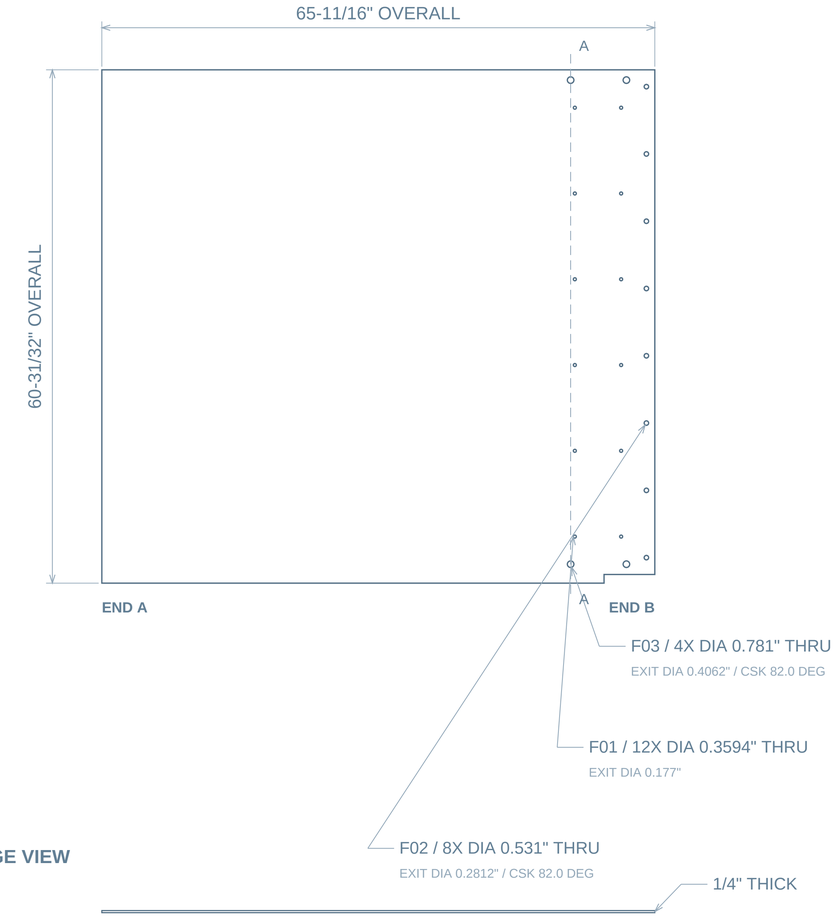

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B / FEATURE LOCATIONS

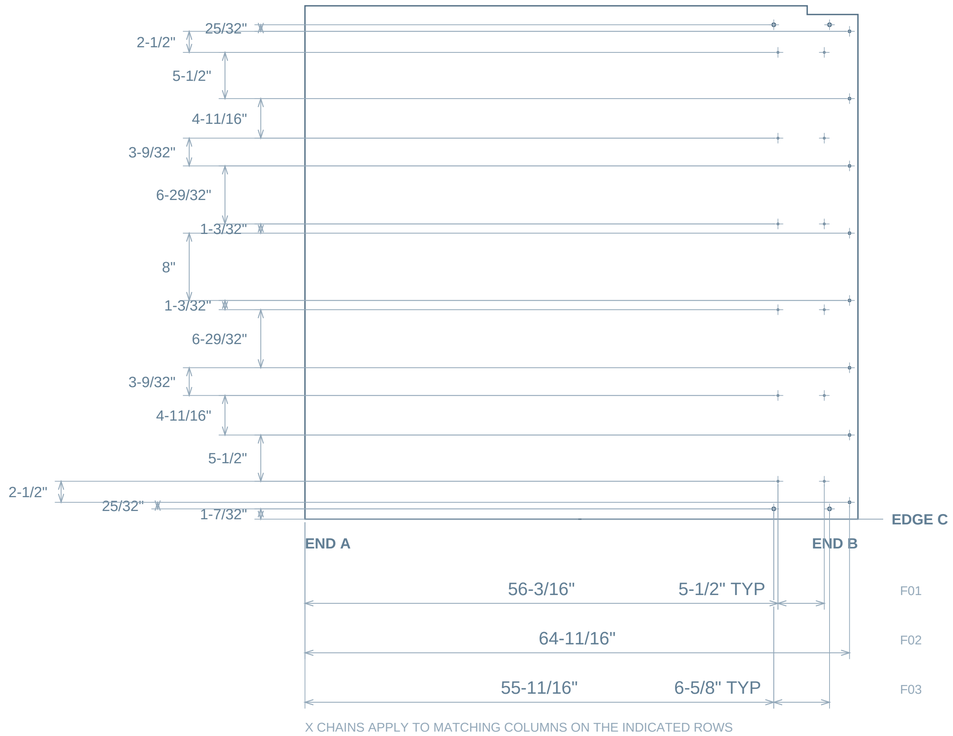


X CHAINS APPLY TO MATCHING COLUMNS ON THE INDICATED ROWS

04 / SECTION A-A

X = 55-11/16" FROM END A

1/4" PLATE / SECTION 1:10.975

05 / ISOMETRIC



FEATURE / DATUM NOTES


X from END A. Y from marked EDGE C. Dimensions locate feature centers.

Shared columns and equal pitches are consolidated; exceptions remain dimensioned.

stair asm body 621

body-0835 | QTY 1 IN ML PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

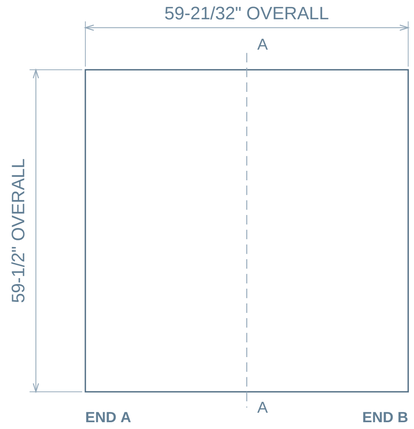

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 29-27/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC

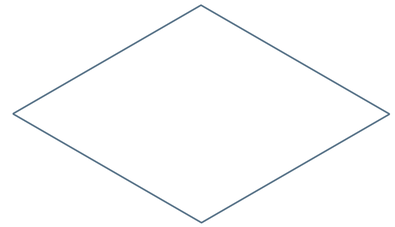

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 84-1/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


TOP TREADS

54 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

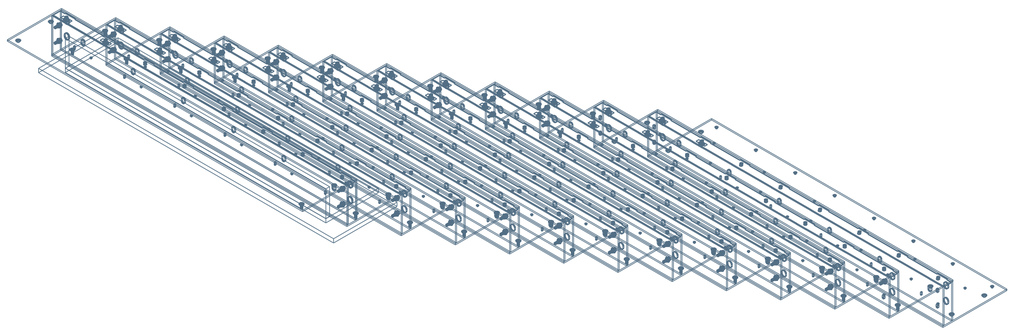

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B005-P01	treadplates treadplate - typ top run	12	61-11/32"
02 / 2606-B005-P02	treadplates riser plate - top run	13	60-11/32"
03 / 2606-B005-P03	treadplates underside riser plate - typ top run	13	60-11/32"
04 / 2606-B005-P04	treadplates top horiz wall - top run	12	59-31/32"
05 / 2606-B005-P80	treadplates treadplate - top tread	1	60-15/16"
06 / 2606-B005-P81	stair asm body 287	1	53-1/8"
07 / 2606-B005-P82	stair asm body 288	1	53-15/16"
08 / 2606-B005-P83	stair asm body 289	1	61-1/4"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each hole/slot includes size and two center-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.


treadplates treadplate - typ top run

body-0000 / QTY 12 / INCHES / FACE SCALE 1:6

01 / TOP - FACE A

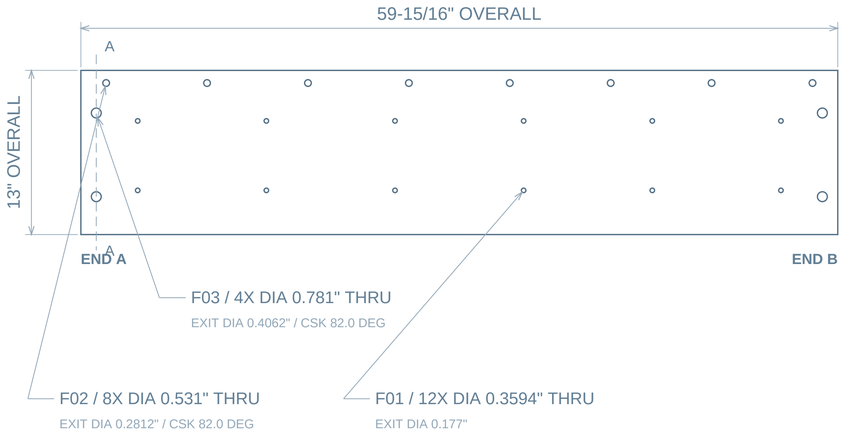

03 / BOTTOM - FACE B / FEATURE LOCATIONS

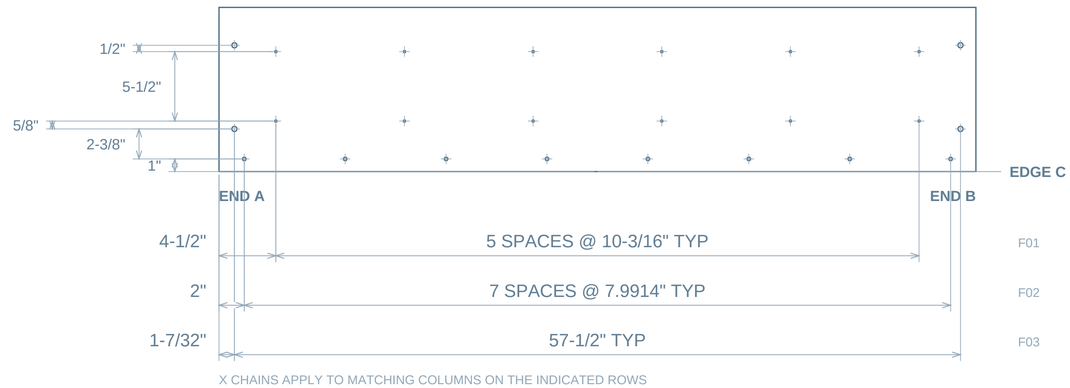

X CHAINS APPLY TO MATCHING COLUMNS ON THE INDICATED ROWS

02 / FRONT - EDGE VIEW




04 / SECTION A-A

X = 1-7/32" FROM END A

1/4" PLATE / SECTION 1:2.34

05 / ISOMETRIC



FEATURE / DATUM NOTES


X from END A. Y from marked EDGE C. Dimensions locate feature centers.

Shared columns and equal pitches are consolidated; exceptions remain dimensioned.

treadplates riser plate - top run

body-0001 | QTY 13 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3


01 / TOP - FACE A

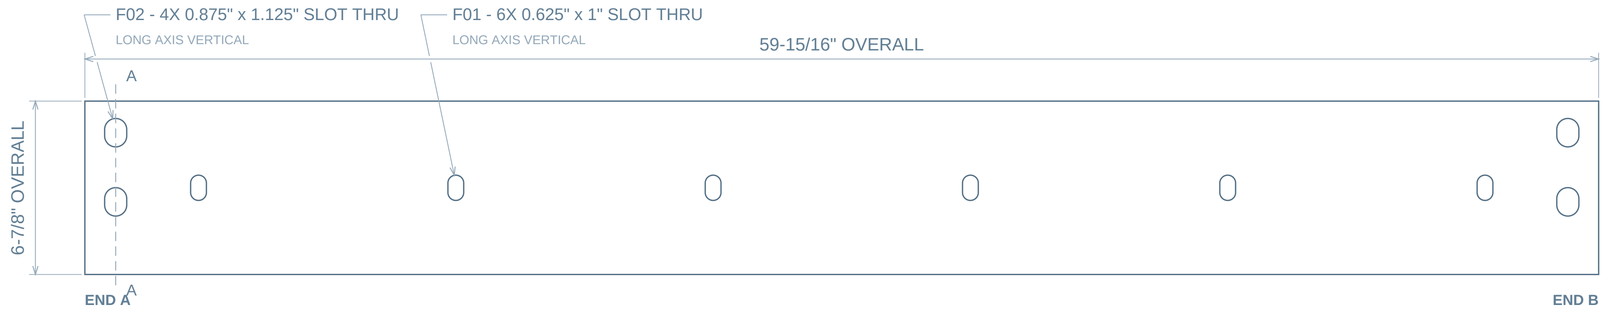

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

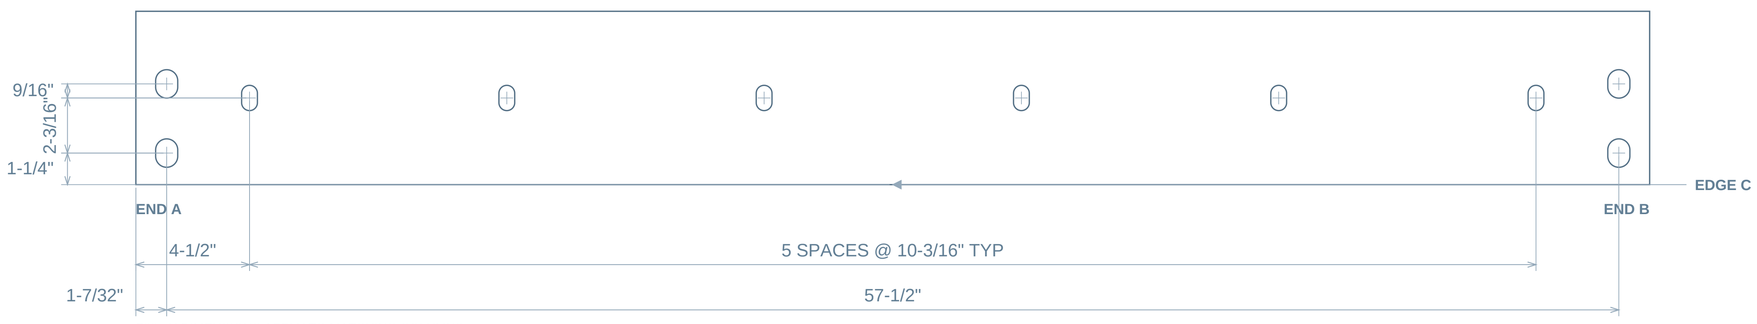

F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 1-7/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

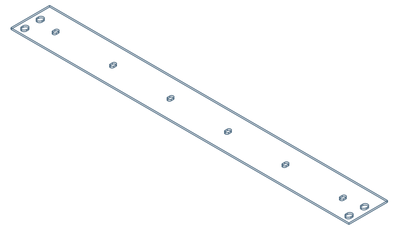

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates underside riser plate - typ top run

body-0002 | QTY 13 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3


01 / TOP - FACE A

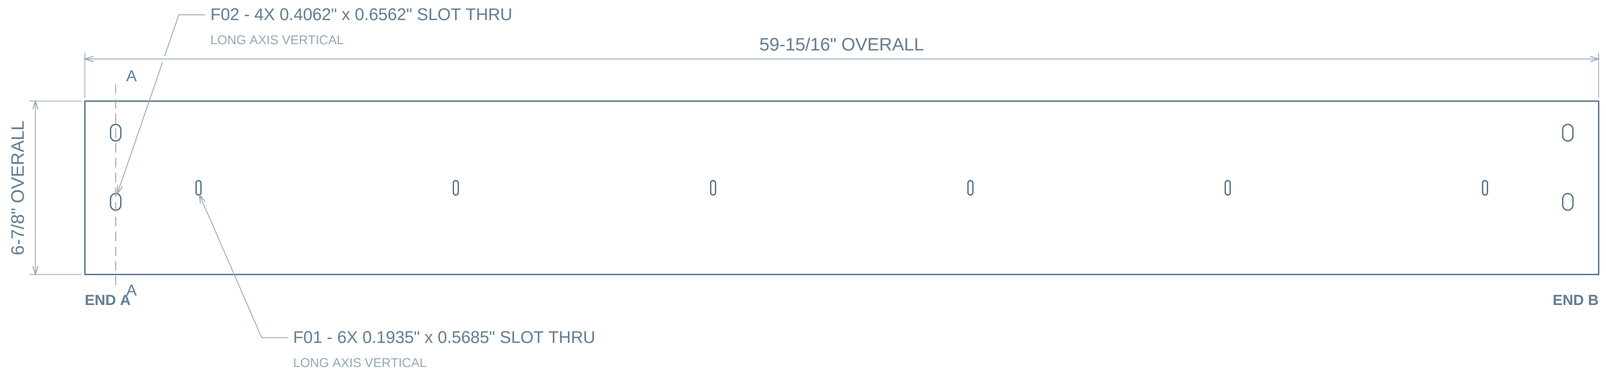

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

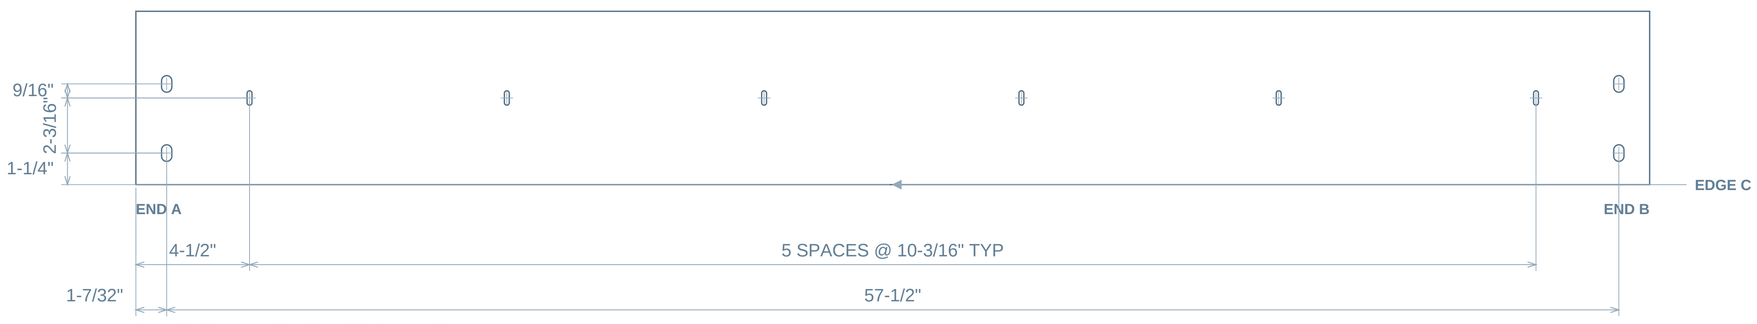

F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 1-7/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

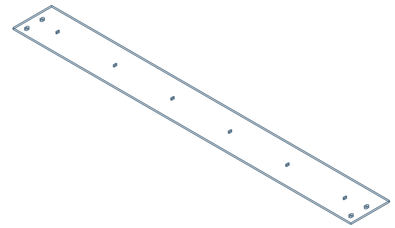

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates top horiz wall - top run

body-0003 | QTY 12 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

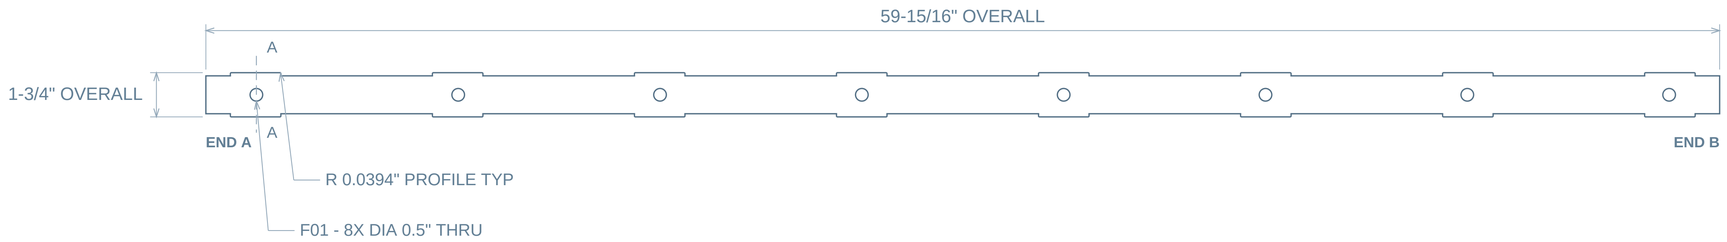

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

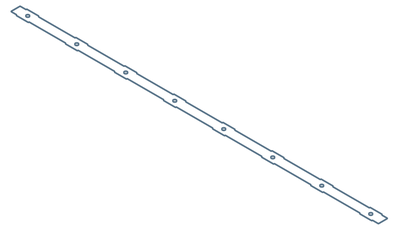

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates treadplate - top tread

body-0078 | QTY 1 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

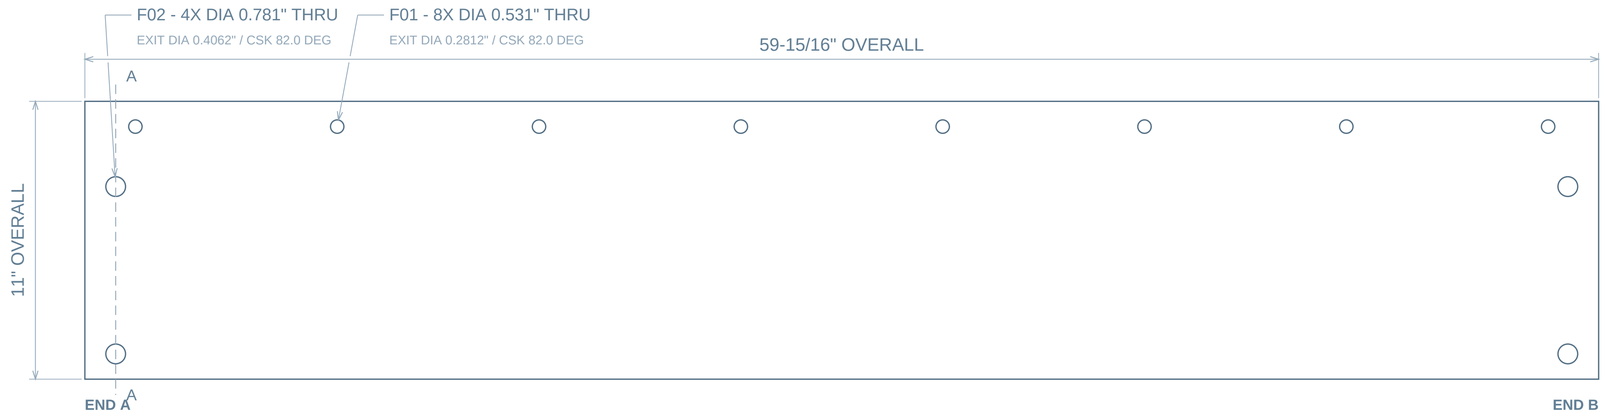

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS

04 / SECTION A-A

X = 1-7/32" FROM END A

ACTUAL COUNTERSINK SECTION / 1:3

05 / ISOMETRIC

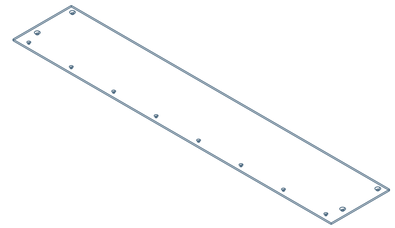

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 287

body-0111 | QTY 1 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

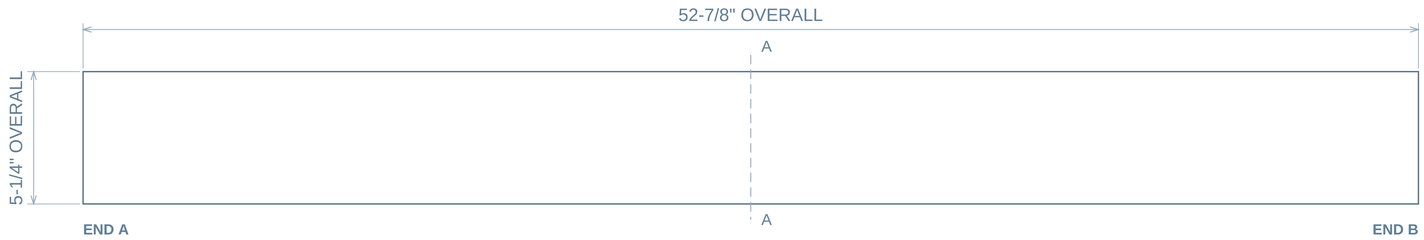

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 26-7/16" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

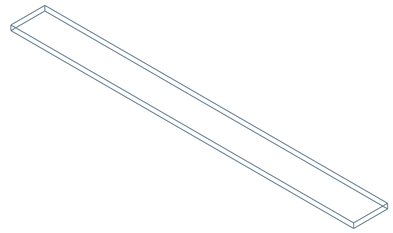

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 53-1/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 288

body-0112 | QTY 1 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

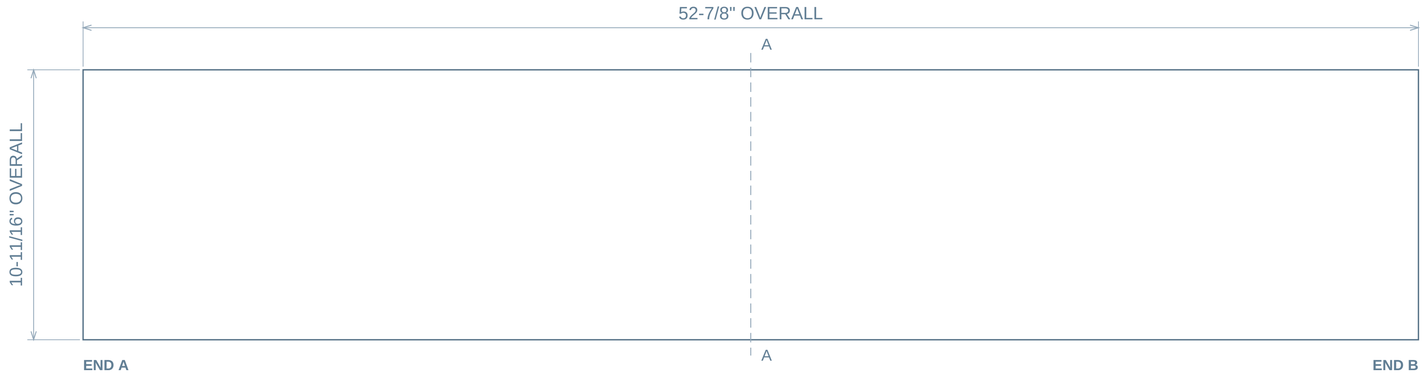

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



END A END B


04 / SECTION A-A

X = 26-7/16" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

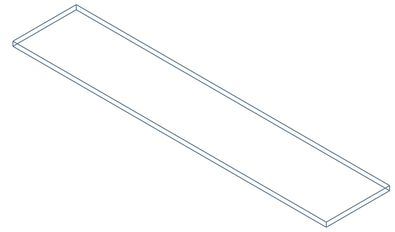

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 53-15/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 289

body-0113 | QTY 1 IN TOP TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

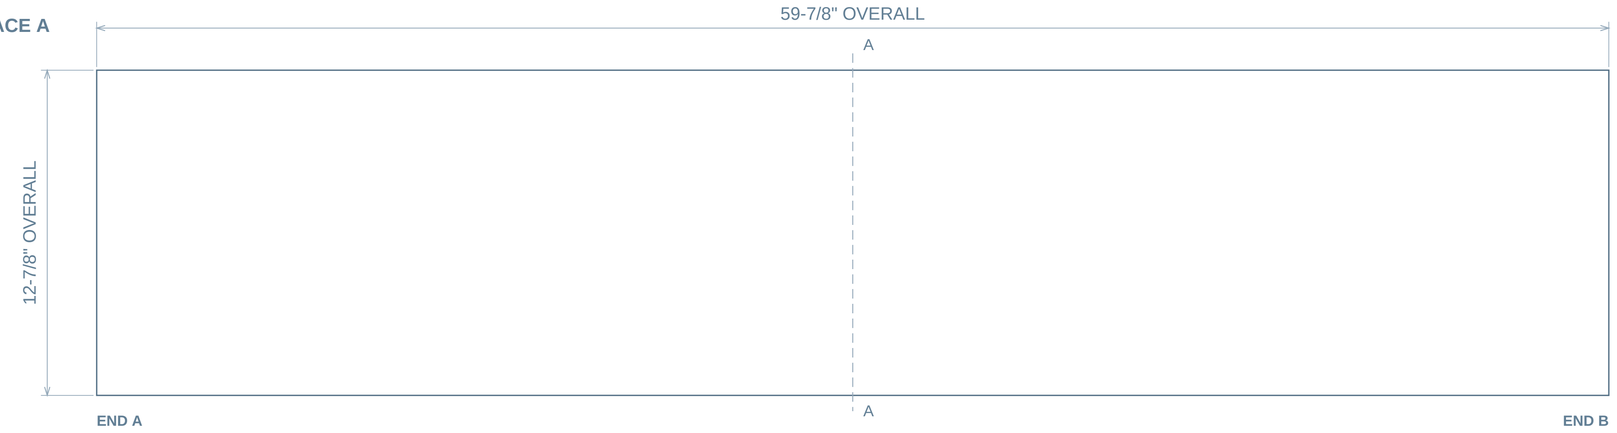

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 29-15/16" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

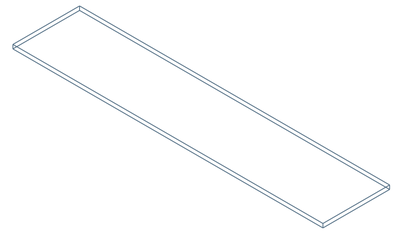

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 61-1/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


BTM TREADS

28 bodies / 6 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

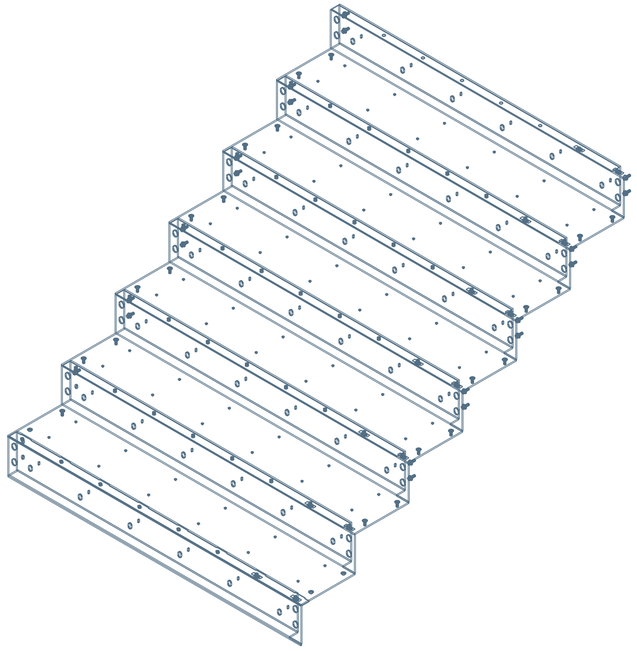

ASSEMBLY / TOP

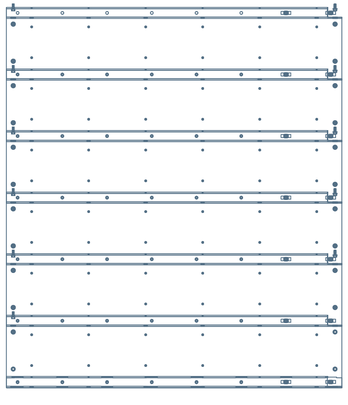

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B018-P01	treadplates treadplate - typ btm run	6	61-11/32"
02 / 2606-B018-P02	treadplates riser plate - top run	7	60-11/32"
03 / 2606-B018-P03	treadplates underside riser plate - btm run	7	57-27/32"
04 / 2606-B018-P04	treadplates top horiz wall - btm run	6	57-15/32"
05 / 2606-B018-P05	treadplates top horiz wall - top run	1	59-31/32"
06 / 2606-B018-P20	treadplates BTM OF BTM RISER	1	59-31/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each row includes size and two corner-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

treadplates treadplate - typ btm run

body-0524 | QTY 6 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

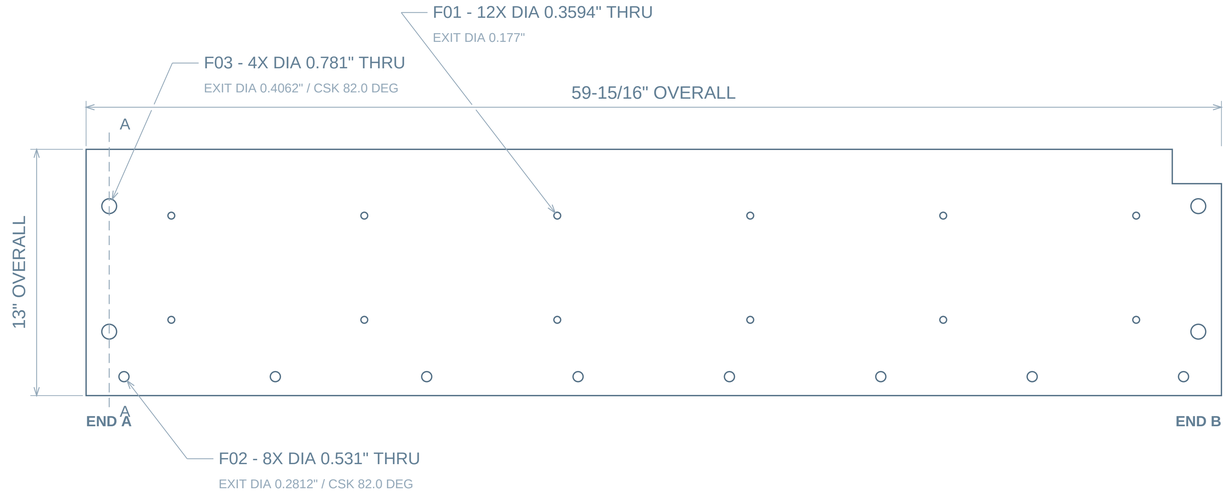

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

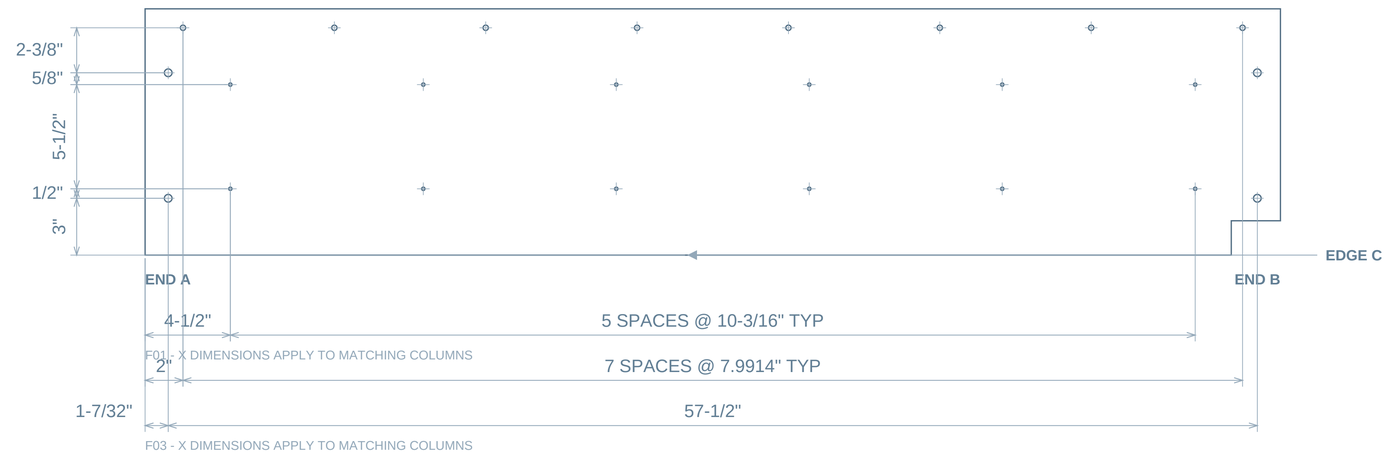


04 / SECTION A-A

X = 1-7/32" FROM END A

ACTUAL COUNTERSINK SECTION / 1:3

05 / ISOMETRIC

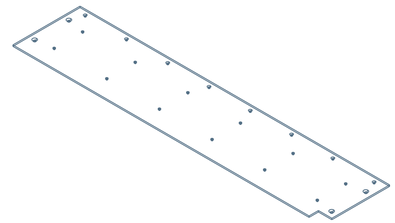

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates riser plate - top run

body-0525 | QTY 7 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3


01 / TOP - FACE A

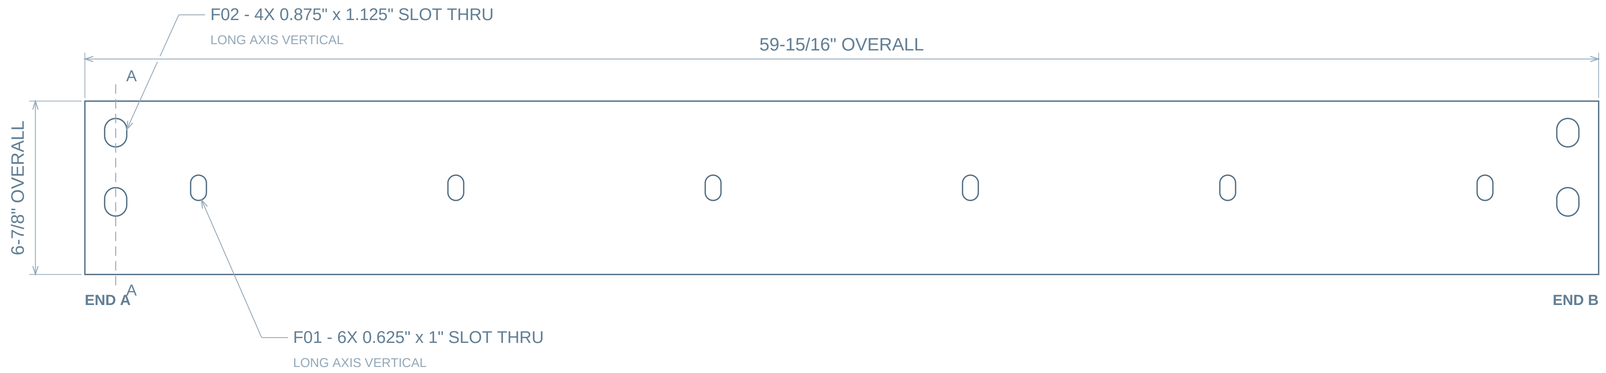

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

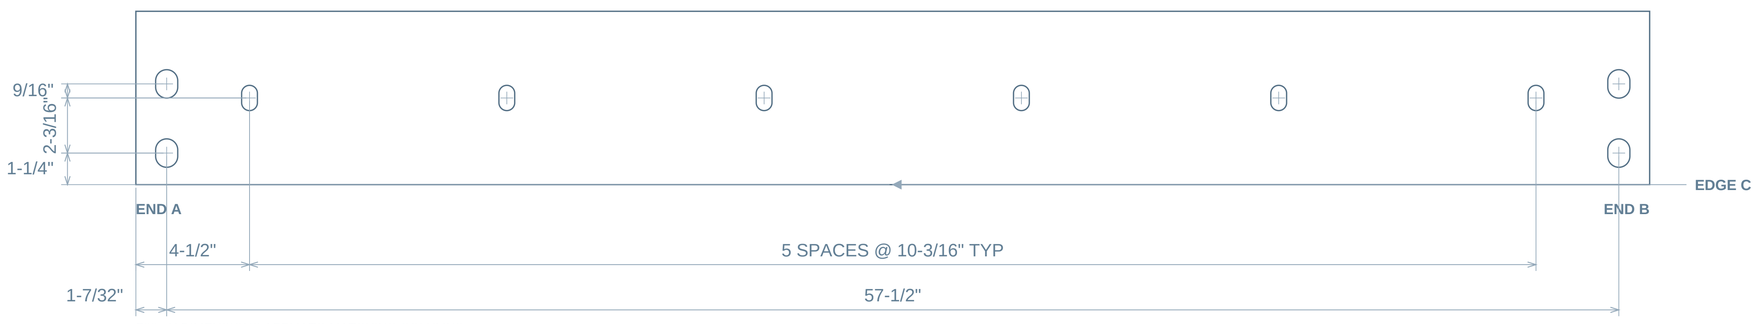

F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 1-7/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates underside riser plate - btm run

body-0526 | QTY 7 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3


01 / TOP - FACE A

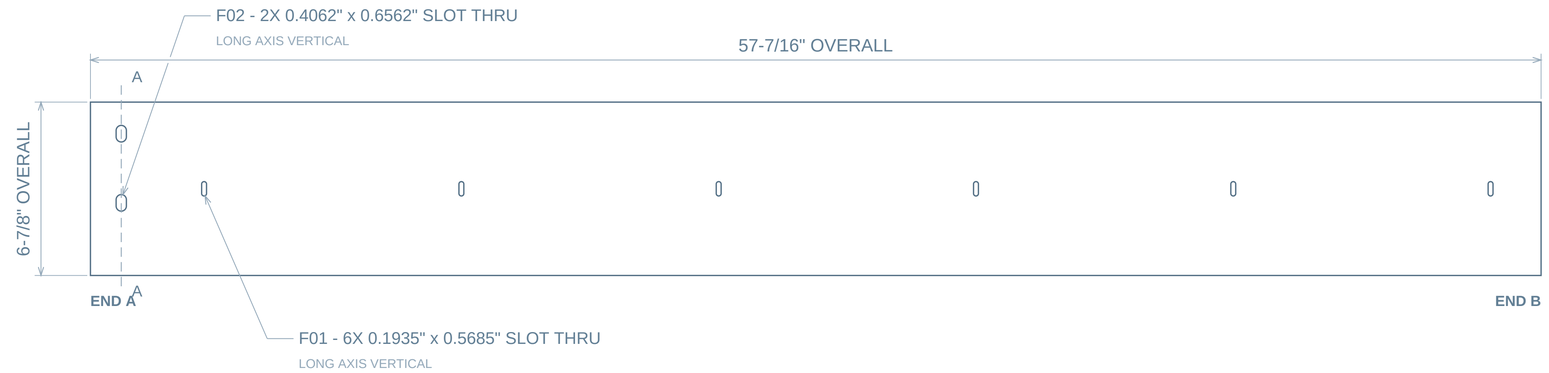

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

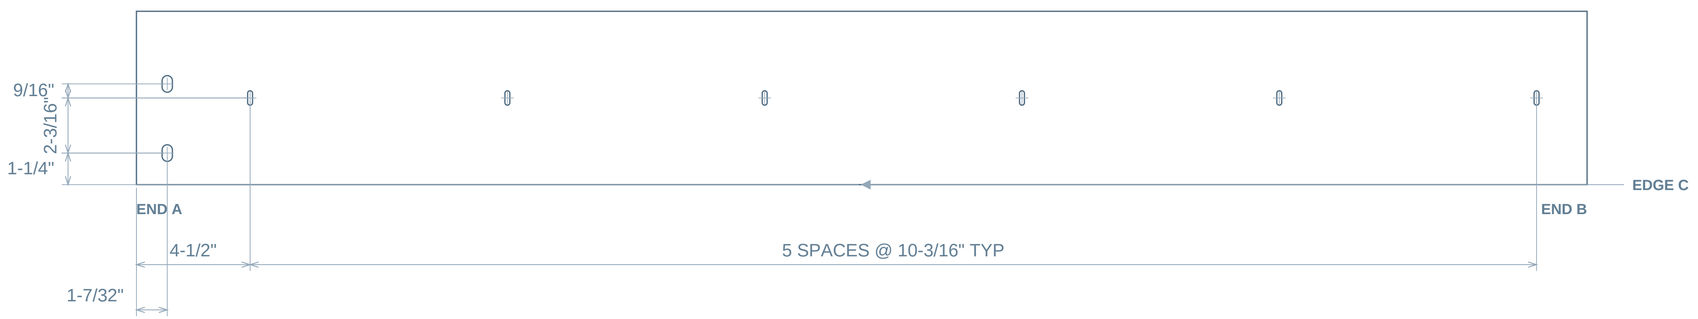

F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 1-7/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

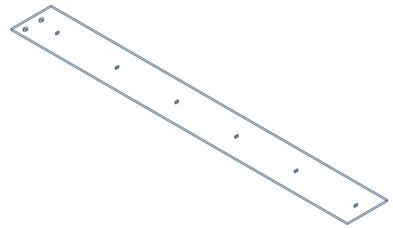

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates top horiz wall - btm run

body-0527 | QTY 6 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

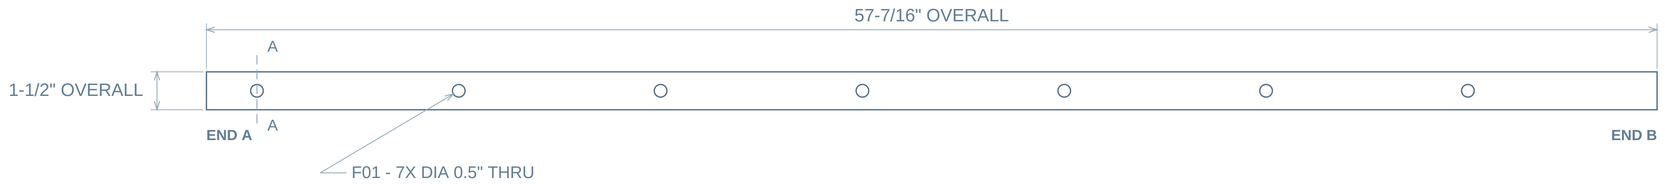

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplates top horiz wall - top run

body-0529 | QTY 1 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

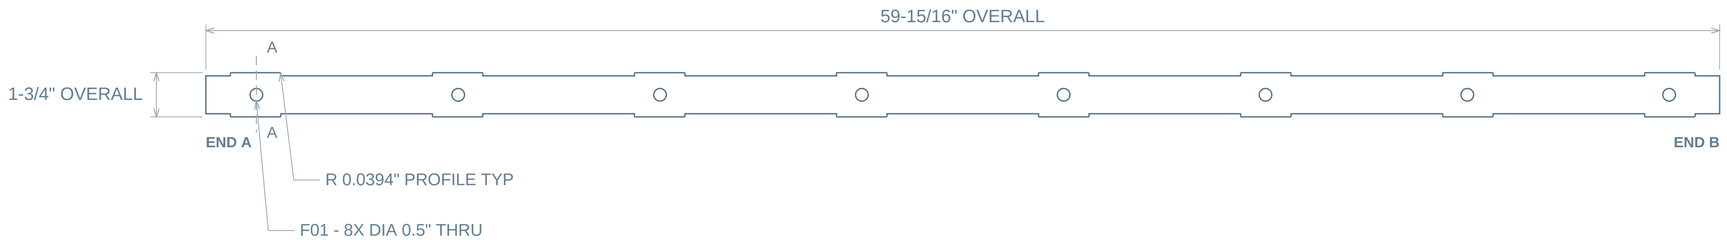

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


treadplates BTM OF BTM RISER

body-0545 | QTY 1 IN BTM TREADS | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

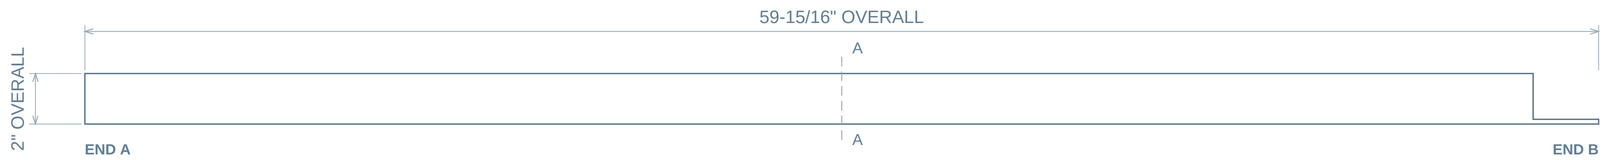


02 / FRONT - EDGE VIEW

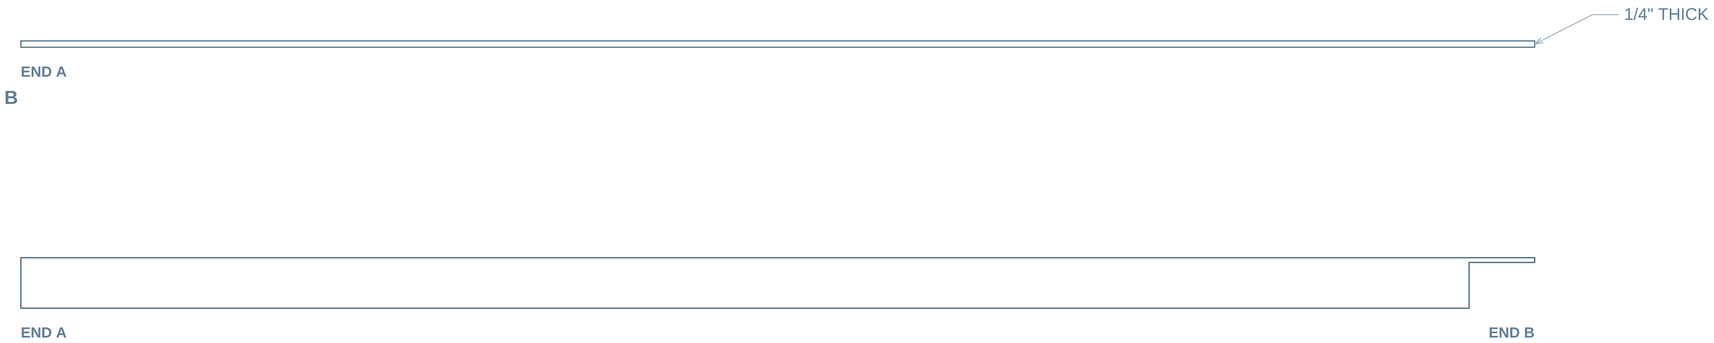

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 29-31/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

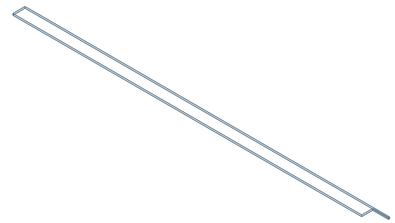

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


PLINTH ASSEMBLY

31 bodies / 29 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

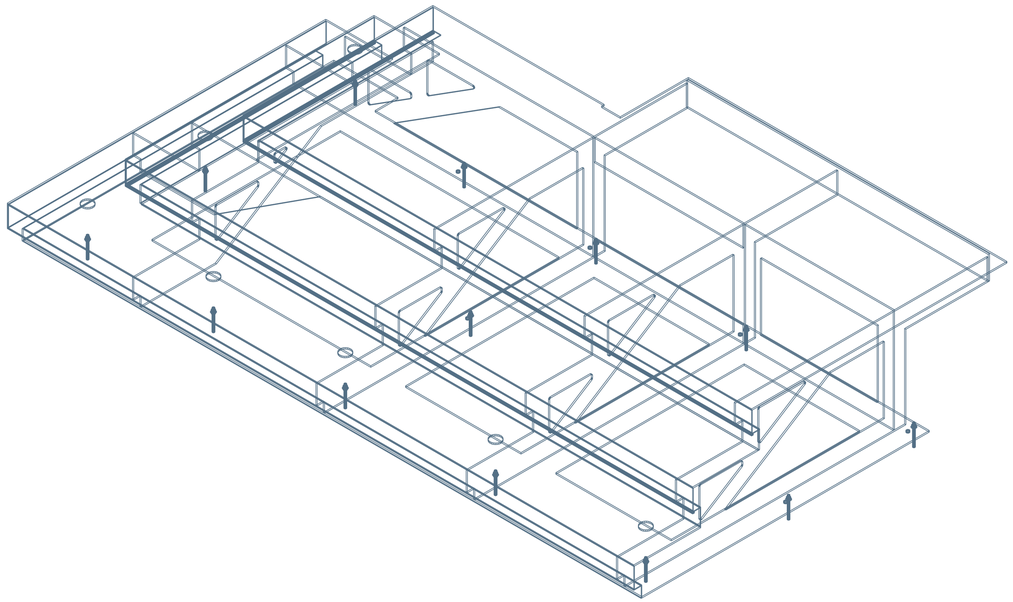

ASSEMBLY / TOP

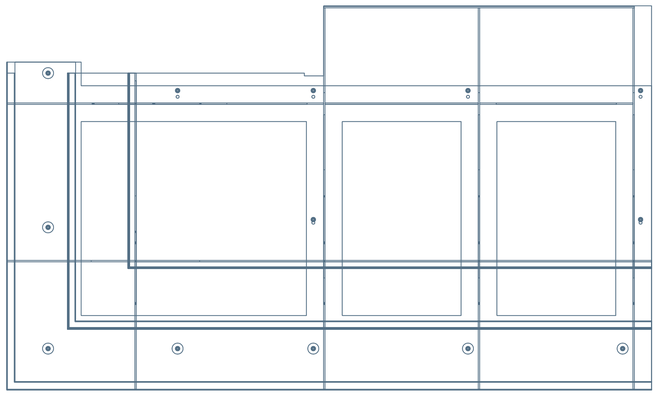

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B046-P01	plinth asm body 696	1	131-1/4"
02 / 2606-B046-P02	plinth asm body 697	1	59-15/32"
03 / 2606-B046-P03	plinth asm body 698	1	117-1/16"
04 / 2606-B046-P04	plinth asm body 699	1	129-1/4"
05 / 2606-B046-P05	plinth asm body 700	1	130-11/32"
06 / 2606-B046-P06	plinth asm body 701	1	128-17/32"
07 / 2606-B046-P07	plinth asm body 702	1	46-1/2"
08 / 2606-B046-P08	plinth asm body 703	1	106-1/16"
09 / 2606-B046-P09	plinth asm body 704	1	115-3/4"
10 / 2606-B046-P10	plinth asm body 705	1	115-3/4"
11 / 2606-B046-P11	plinth asm body 706	1	113-31/32"
12 / 2606-B046-P12	plinth asm body 707	1	35-9/16"
13 / 2606-B046-P13	plinth asm body 708	1	95-1/16"
14 / 2606-B046-P14	plinth asm body 709	1	101-13/32"
15 / 2606-B046-P15	plinth asm body 710	1	56-9/16"
16 / 2606-B046-P16	plinth asm body 711	1	106-5/16"
17 / 2606-B046-P17	platform stringer plates 2.0	3	71-3/8"
18 / 2606-B046-P18	platform stringer plates 02.1	1	57-21/32"
19 / 2606-B046-P19	platform stringer plates 03	1	117-23/32"
20 / 2606-B046-P20	plinth asm body 717	1	33-29/32"
21 / 2606-B046-P21	plinth asm body 718	1	28-3/32"
22 / 2606-B046-P22	plinth asm body 719	1	27-31/32"
23 / 2606-B046-P23	plinth asm body 720	1	60"
24 / 2606-B046-P27	plinth asm body 760	1	115-3/4"
25 / 2606-B046-P28	plinth asm body 761	1	115-3/4"
26 / 2606-B046-P29	plinth asm body 762	1	115-23/32"
27 / 2606-B046-P30	plinth asm body 763	1	101-13/32"
28 / 2606-B046-P31	plinth asm body 764	1	101-13/32"
29 / 2606-B046-P32	plinth asm body 765	1	101-13/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

plinth asm body 696

body-0856 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

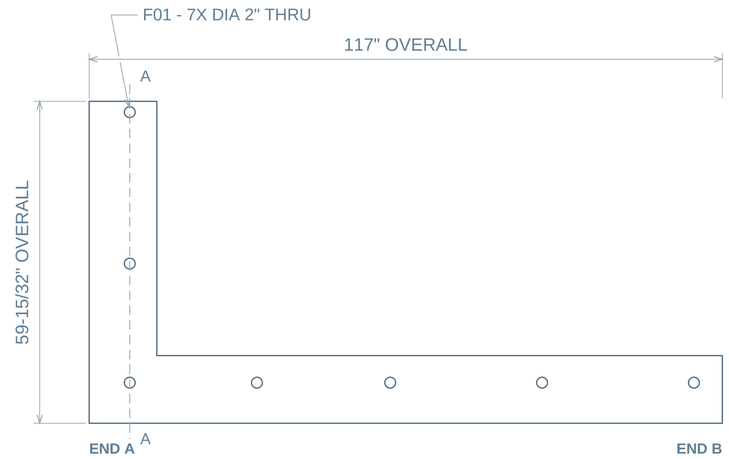

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

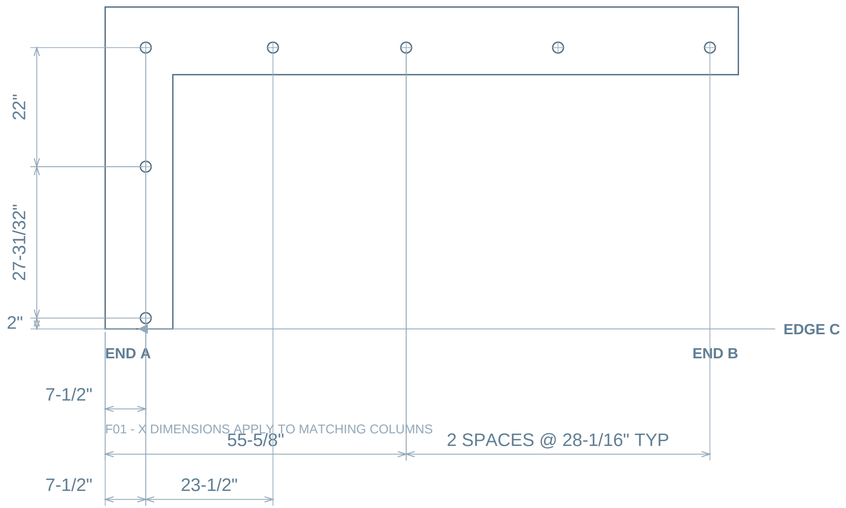


04 / SECTION A-A

X = 7-1/2" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC

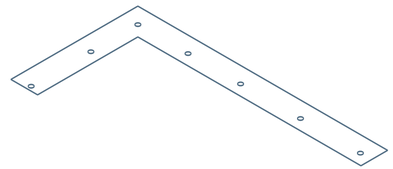

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 697

body-0857 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

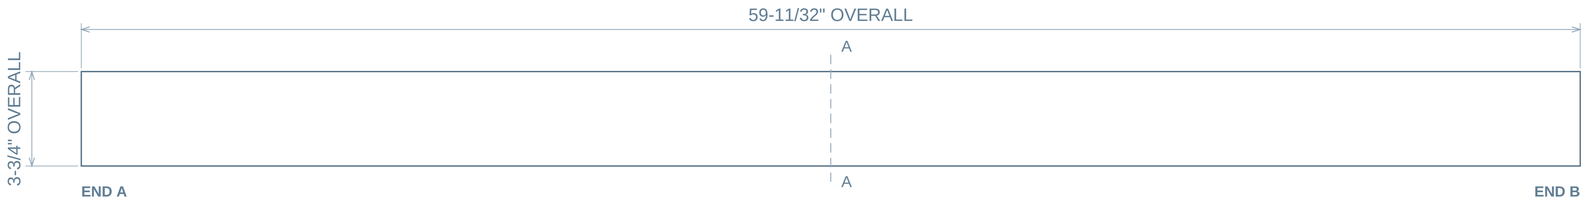


02 / FRONT - EDGE VIEW

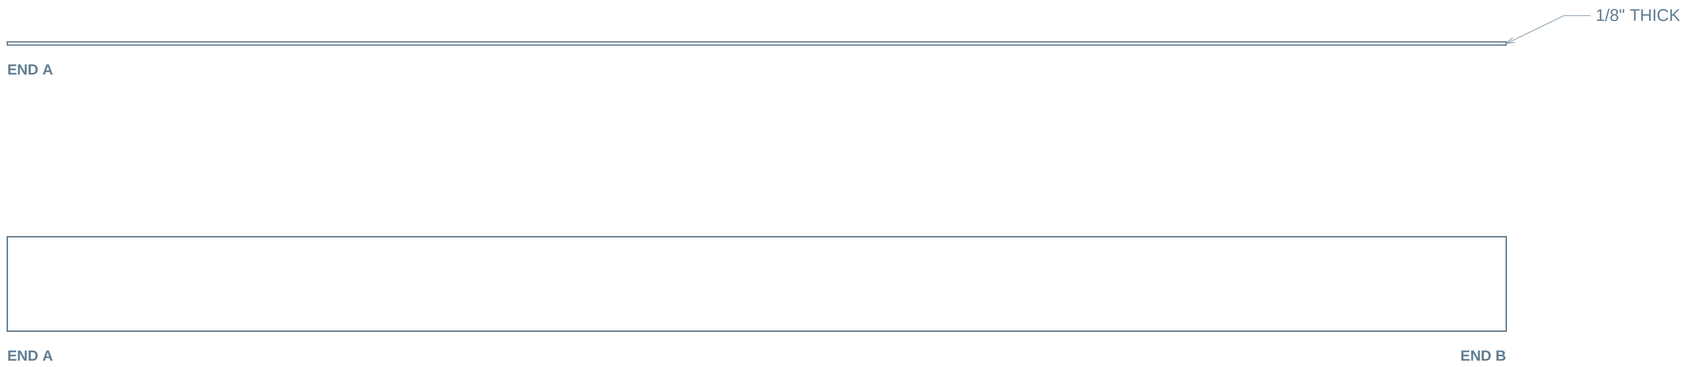

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 29-11/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

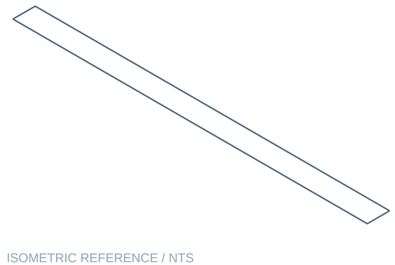

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 59-15/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 698

body-0248 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A




02 / FRONT - EDGE VIEW

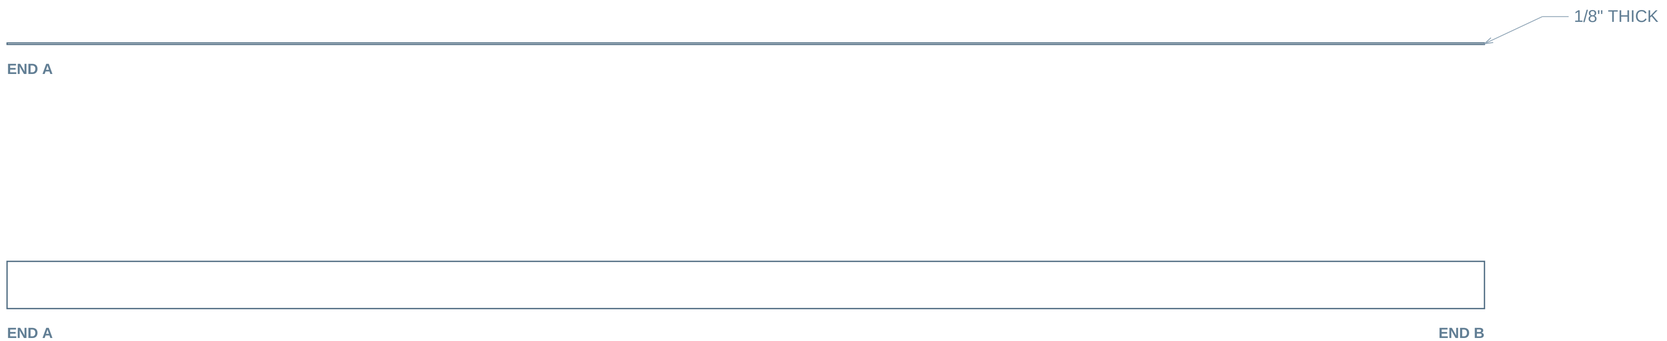

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 58-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

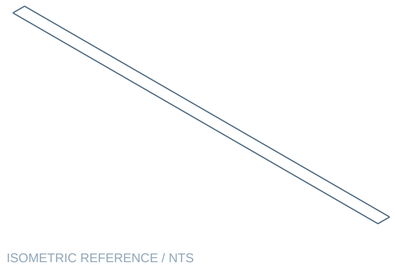

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 117-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 699

body-0858 / QTY 1 / INCHES / FACE SCALE 1:11


01 / TOP - FACE A

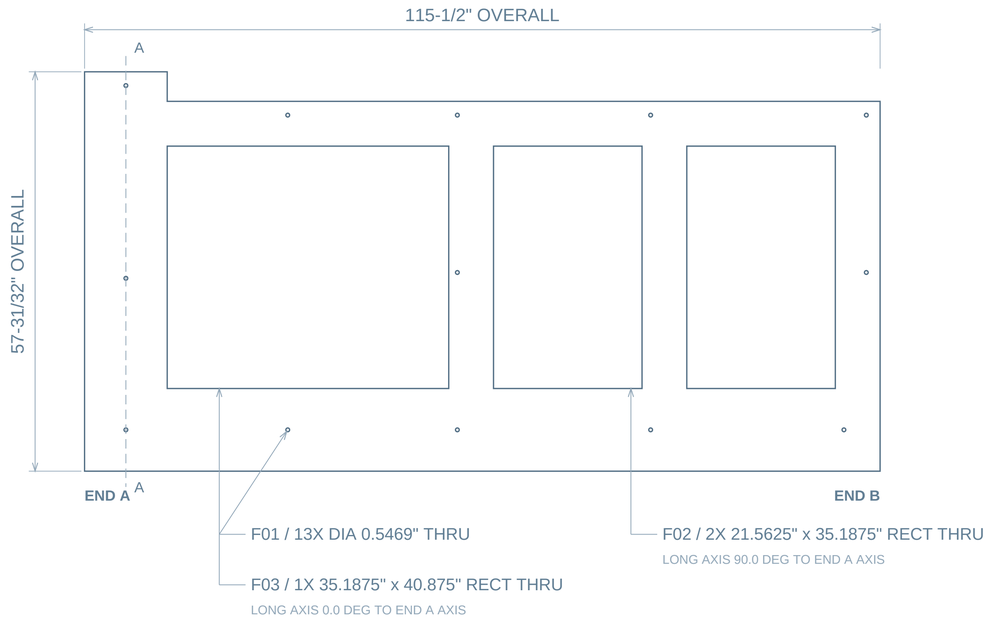

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B / FEATURE LOCATIONS

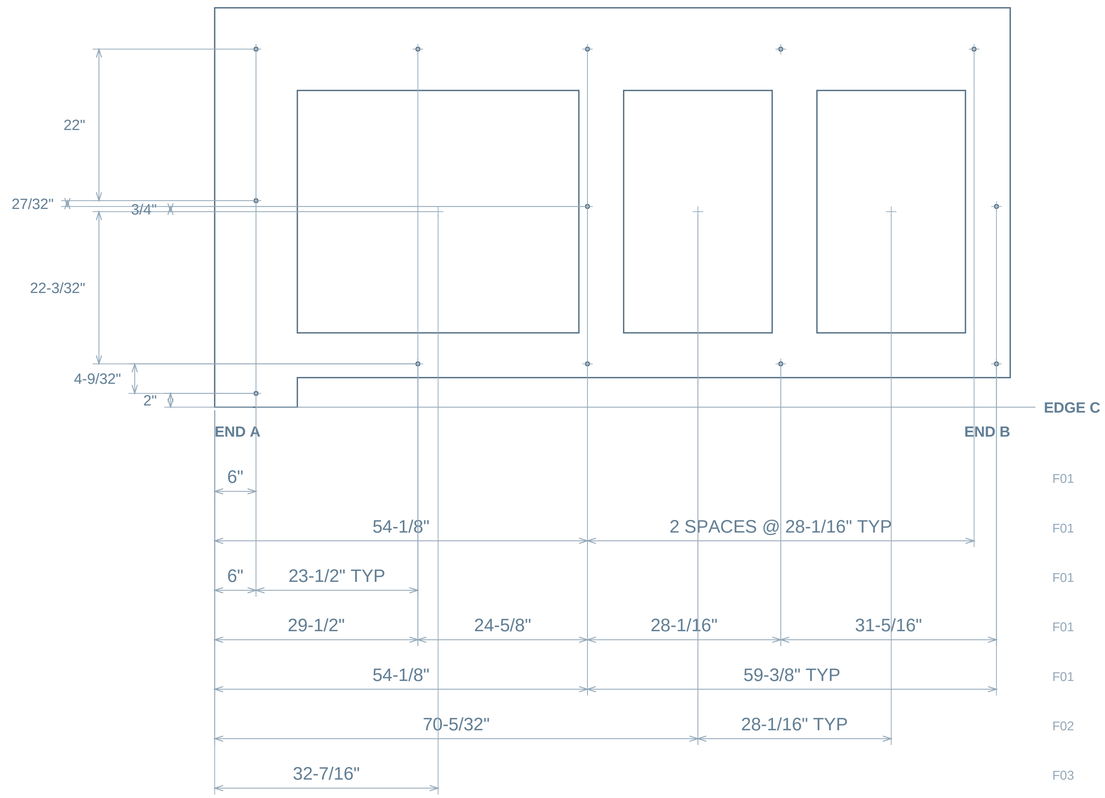


X CHAINS APPLY TO MATCHING COLUMNS ON THE INDICATED ROWS

04 / SECTION A-A

X = 6" FROM END A

1/4" PLATE / SECTION 1:10.436

05 / ISOMETRIC



FEATURE / DATUM NOTES


X from END A. Y from marked EDGE C. Dimensions locate feature centers.

Shared columns and equal pitches are consolidated; exceptions remain dimensioned.

plinth asm body 700

body-0859 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:14

01 / TOP - FACE A

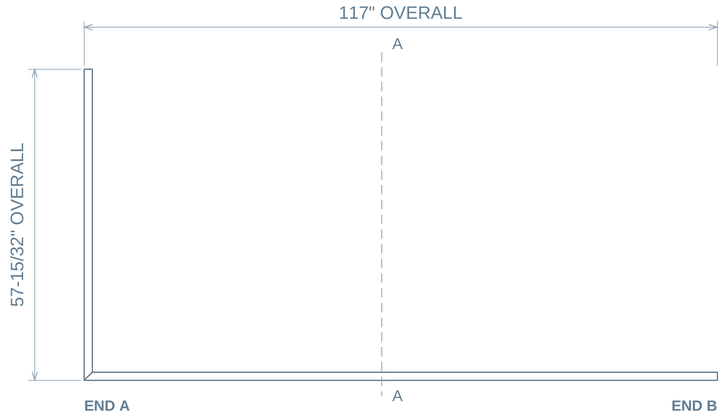

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 55" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

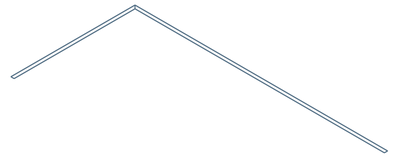

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 130-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


plinth asm body 701

body-0249 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:21

01 / TOP - FACE A



02 / FRONT - FORM PLAN

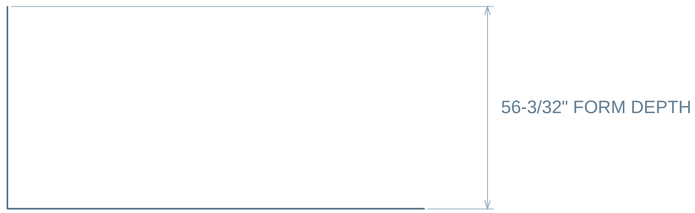

03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 54-11/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

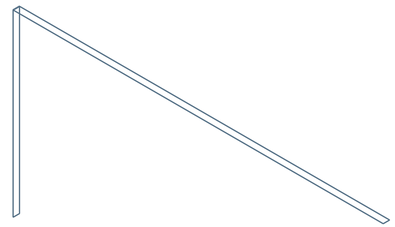

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 128-17/32”

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 702

body-0860 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

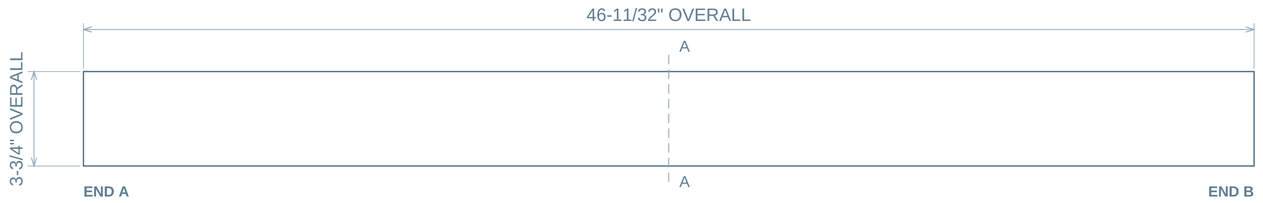

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 23-3/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

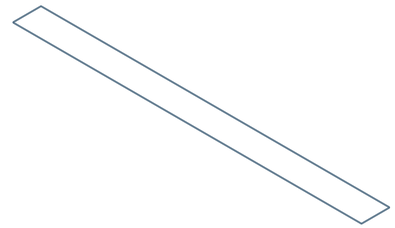

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 46-1/2"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 703

body-0253 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

01 / TOP - FACE A

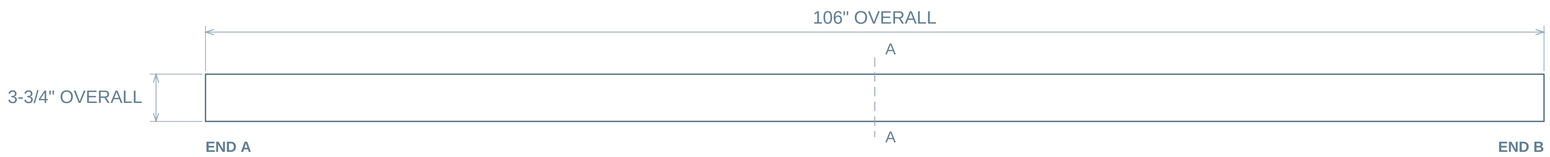

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 53" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

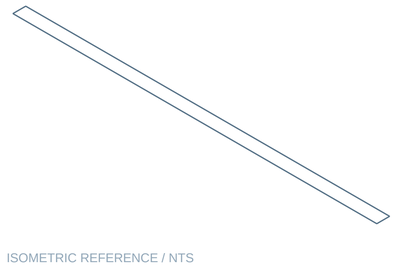

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 106-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 704

body-0861 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

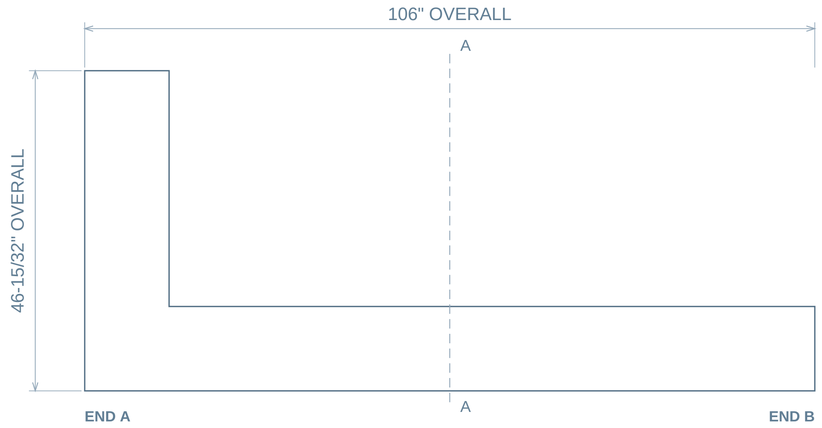

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

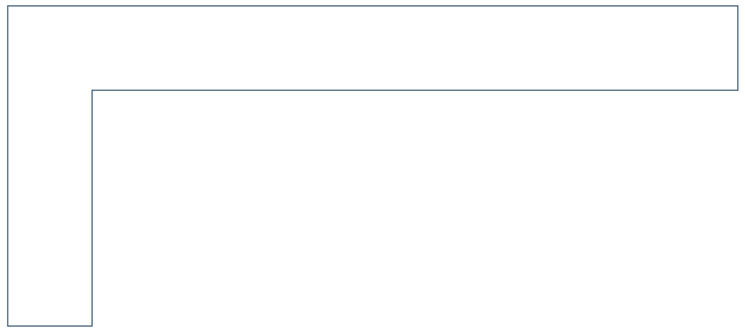


04 / SECTION A-A

X = 53" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC

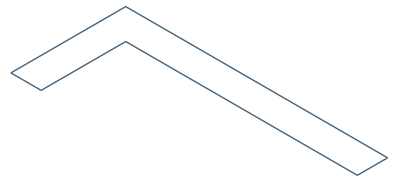

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 705

body-0862 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11

01 / TOP - FACE A

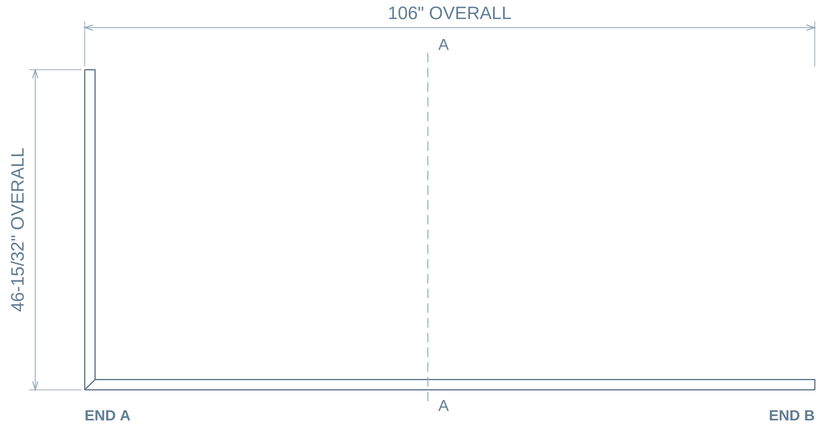

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

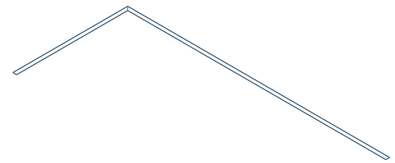

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 706

body-0863 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:17

01 / TOP - FACE A



02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-3/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

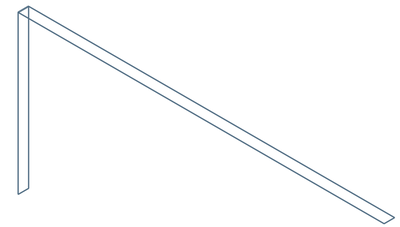

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 113-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 707

body-0864 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

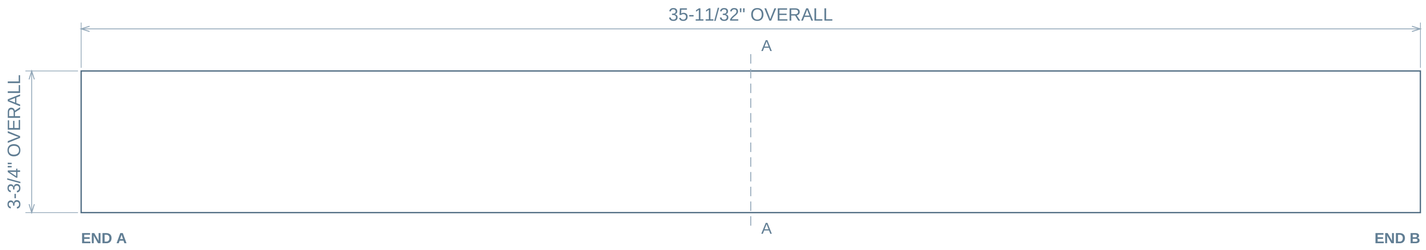

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 17-11/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

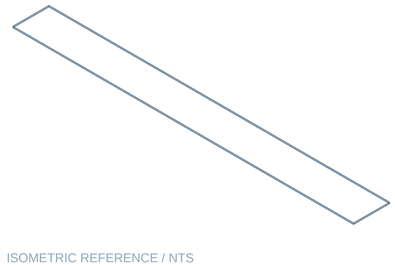

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 35-9/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 708

body-0258 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:5

01 / TOP - FACE A

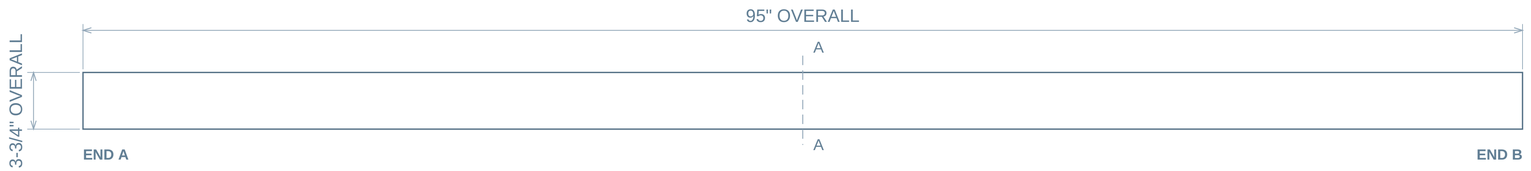

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 47-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 95-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 709

body-0261 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

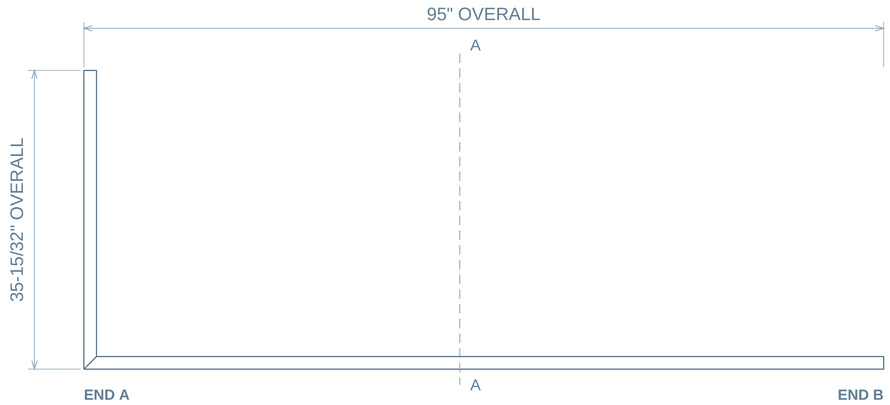

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

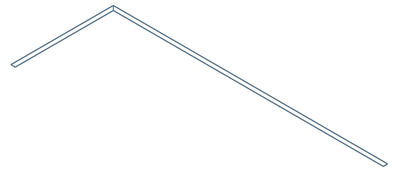

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 710

body-0260 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

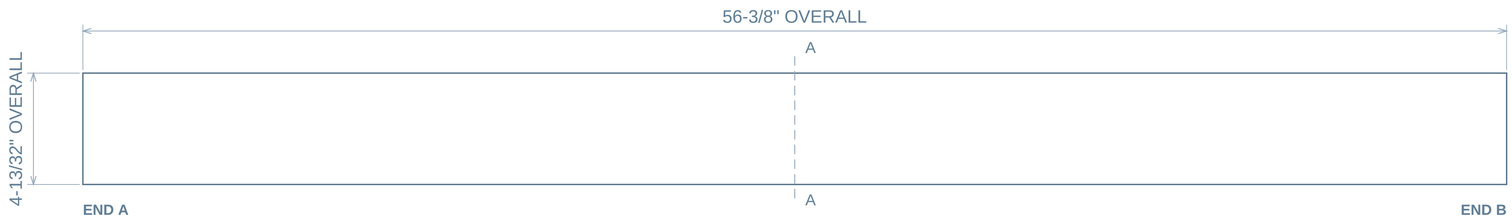

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 28-3/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

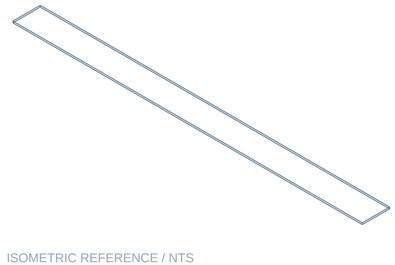

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 56-9/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 711

body-0865 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:12


01 / TOP - FACE A

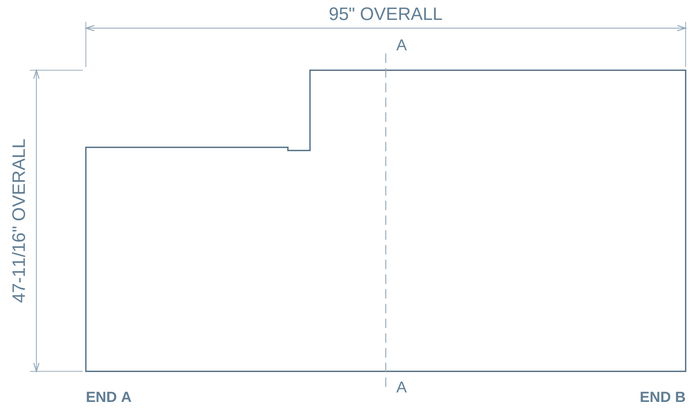

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

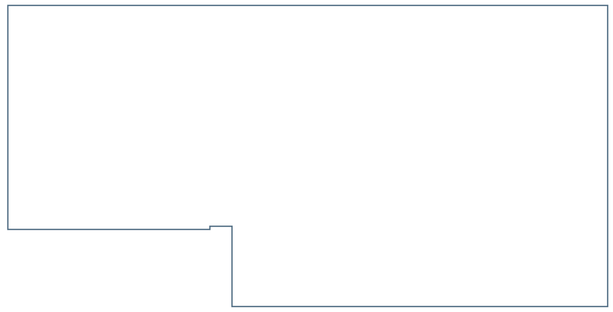


04 / SECTION A-A

X = 47-1/2" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC

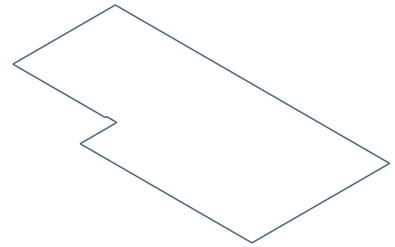

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 106-5/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


platform stringer plates 2.0 / COMPLETE FACE / OPENING LOCATIONS

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

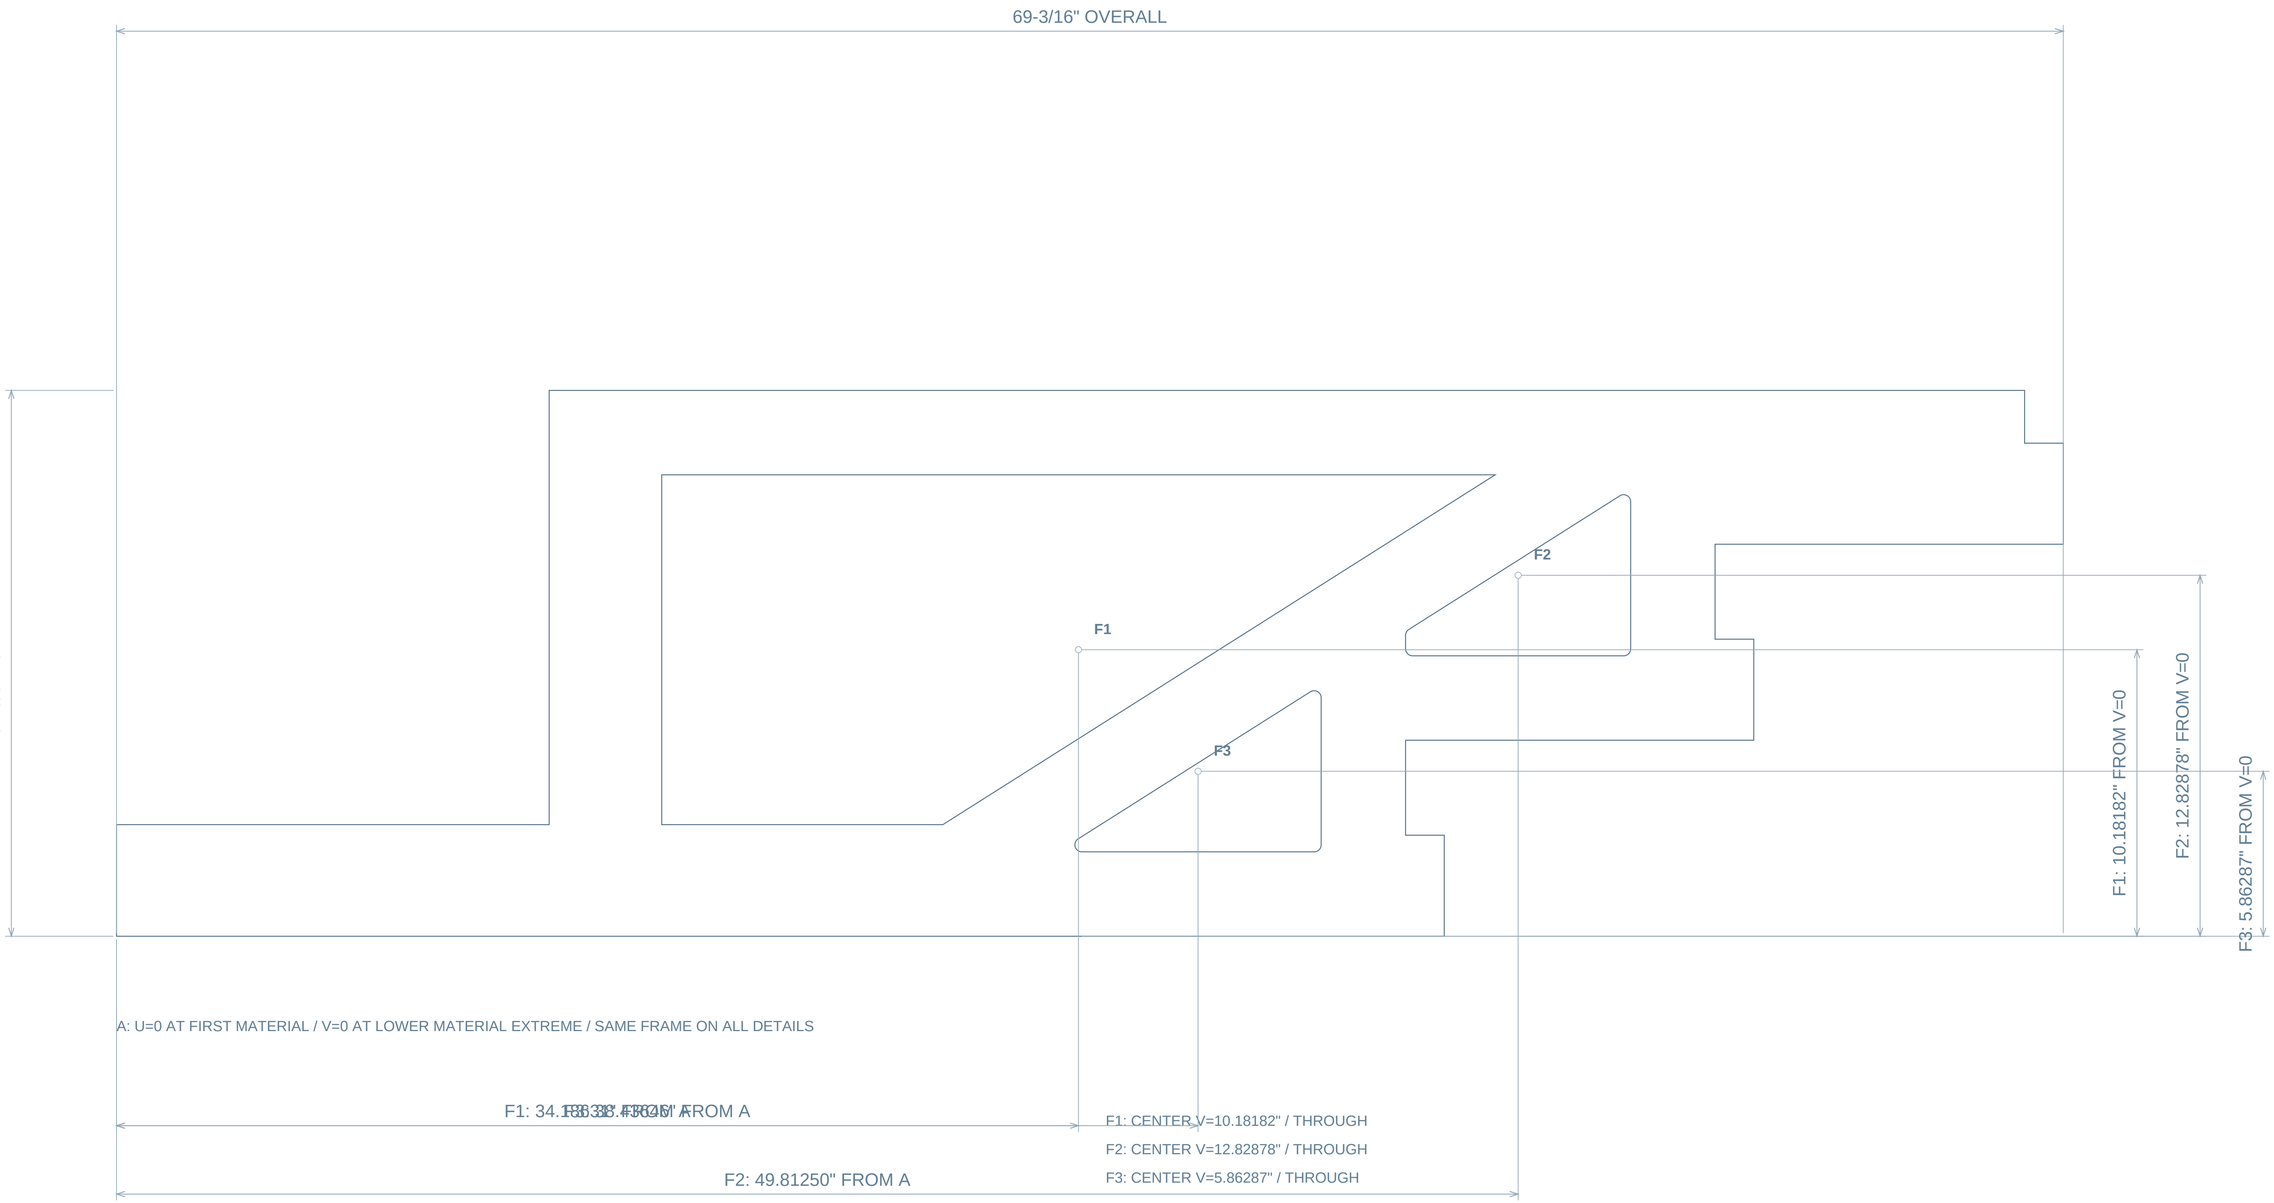

platform stringer plates 2.0 / OPENING F0 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

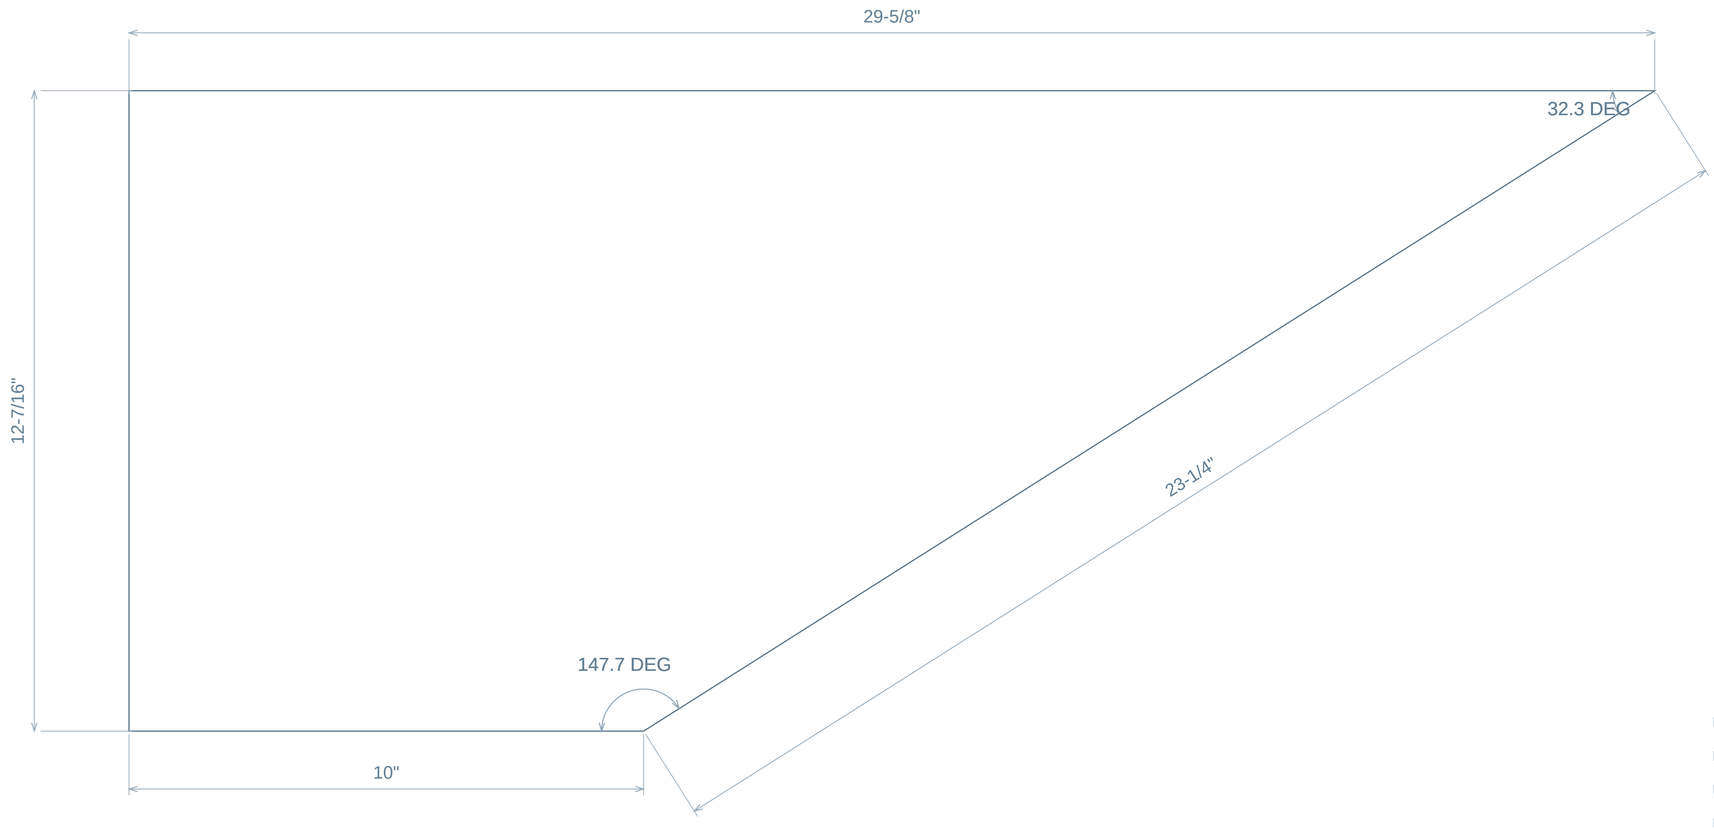

EDGE 41157 / LINE

EDGE 54288 / LINE

EDGE 42727 / LINE


EDGE 31758 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F1 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

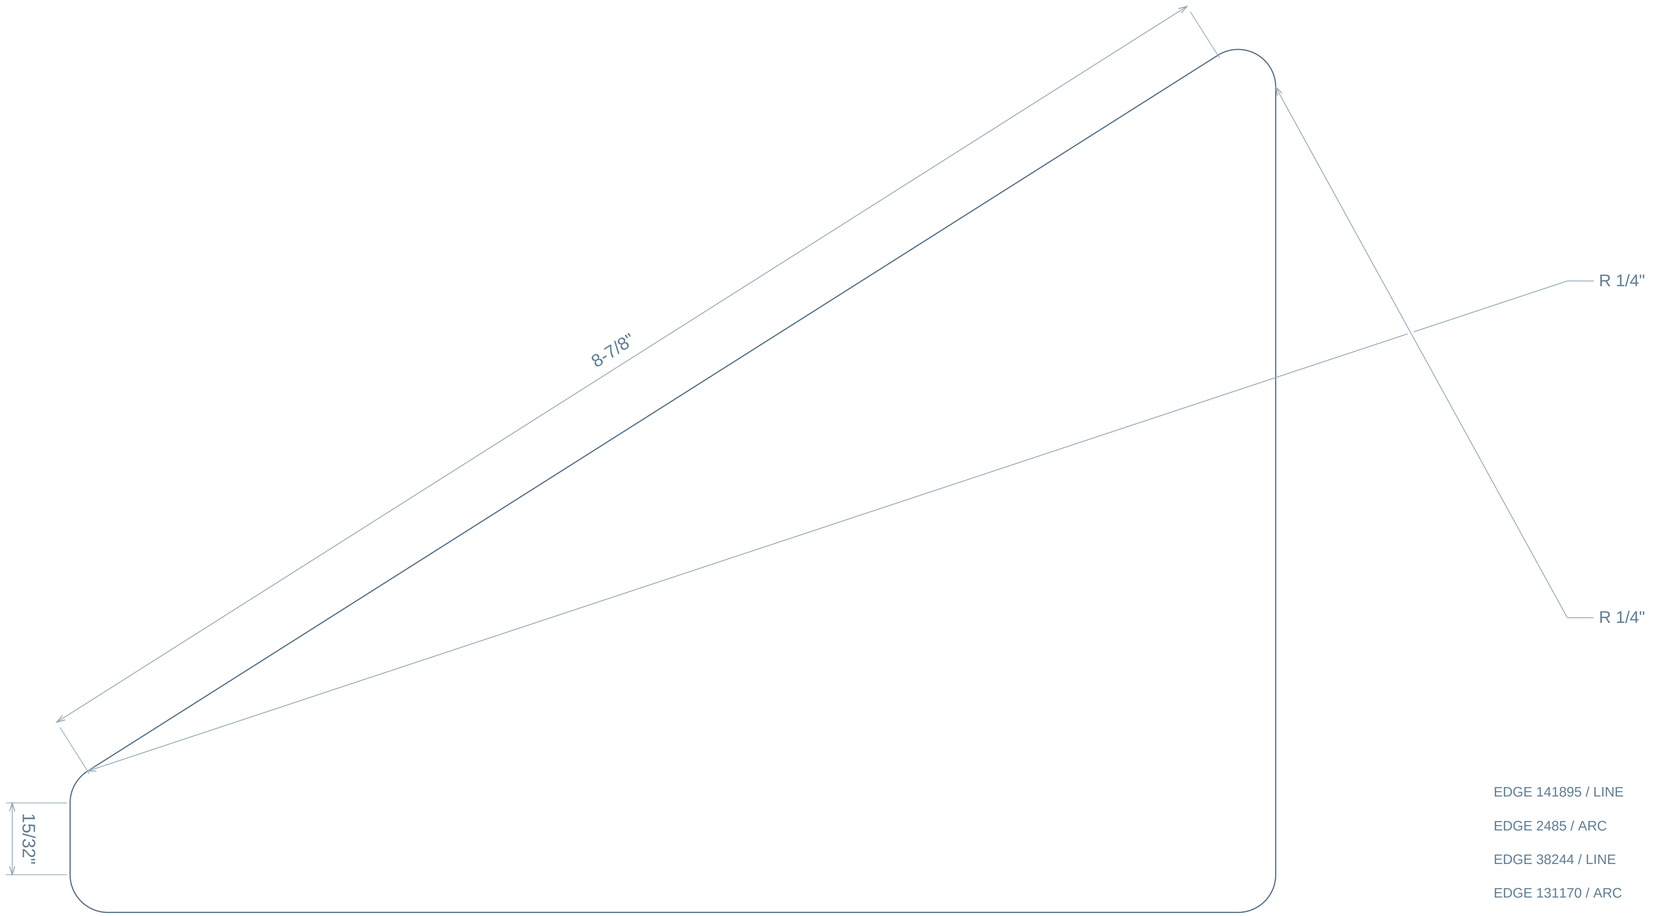

EDGE 141895 / LINE

EDGE 2485 / ARC

EDGE 38244 / LINE


EDGE 131170 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F1 / EDGES 5-8

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

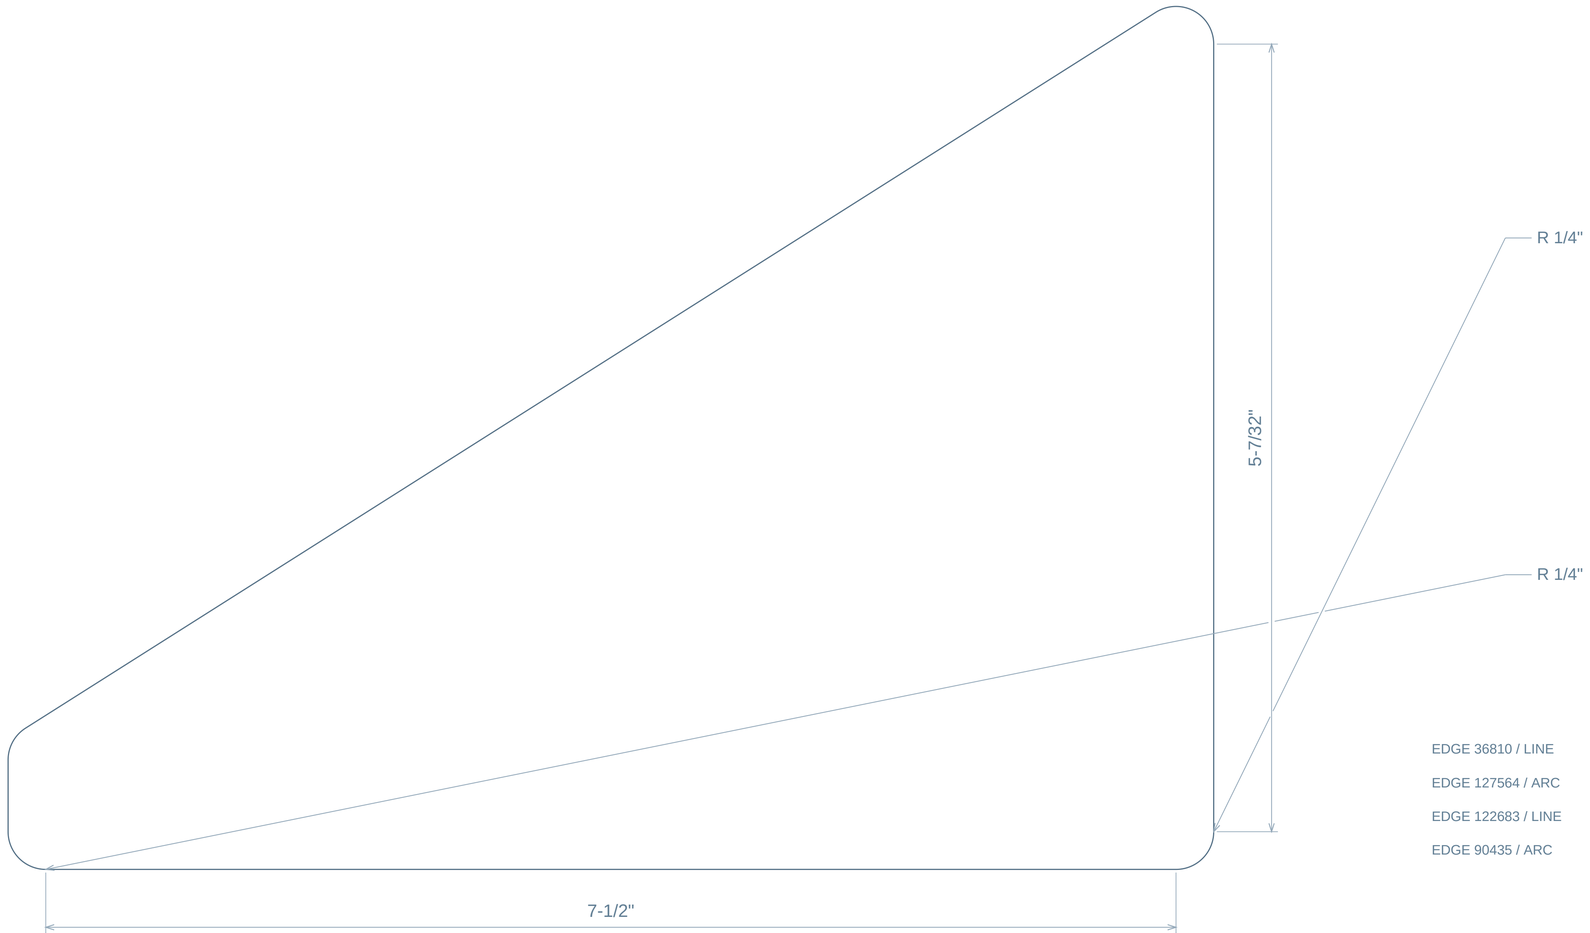

EDGE 36810 / LINE

EDGE 127564 / ARC


EDGE 122683 / LINE

EDGE 90435 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OPENING F2 / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

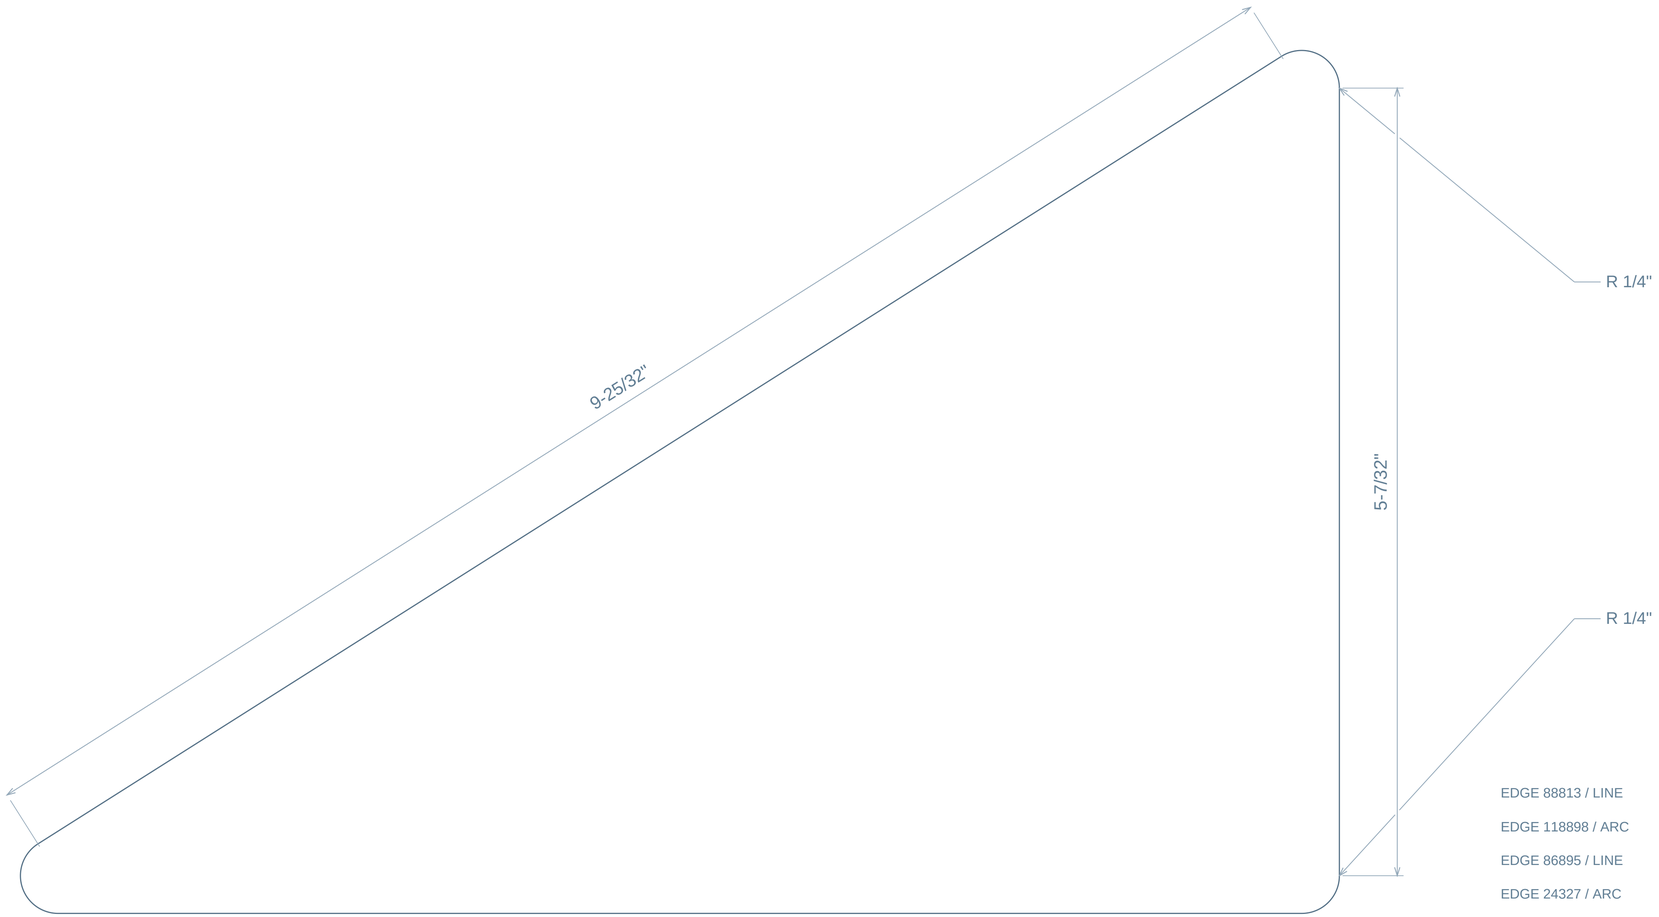


UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OPENING F2 / EDGES 5-7

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

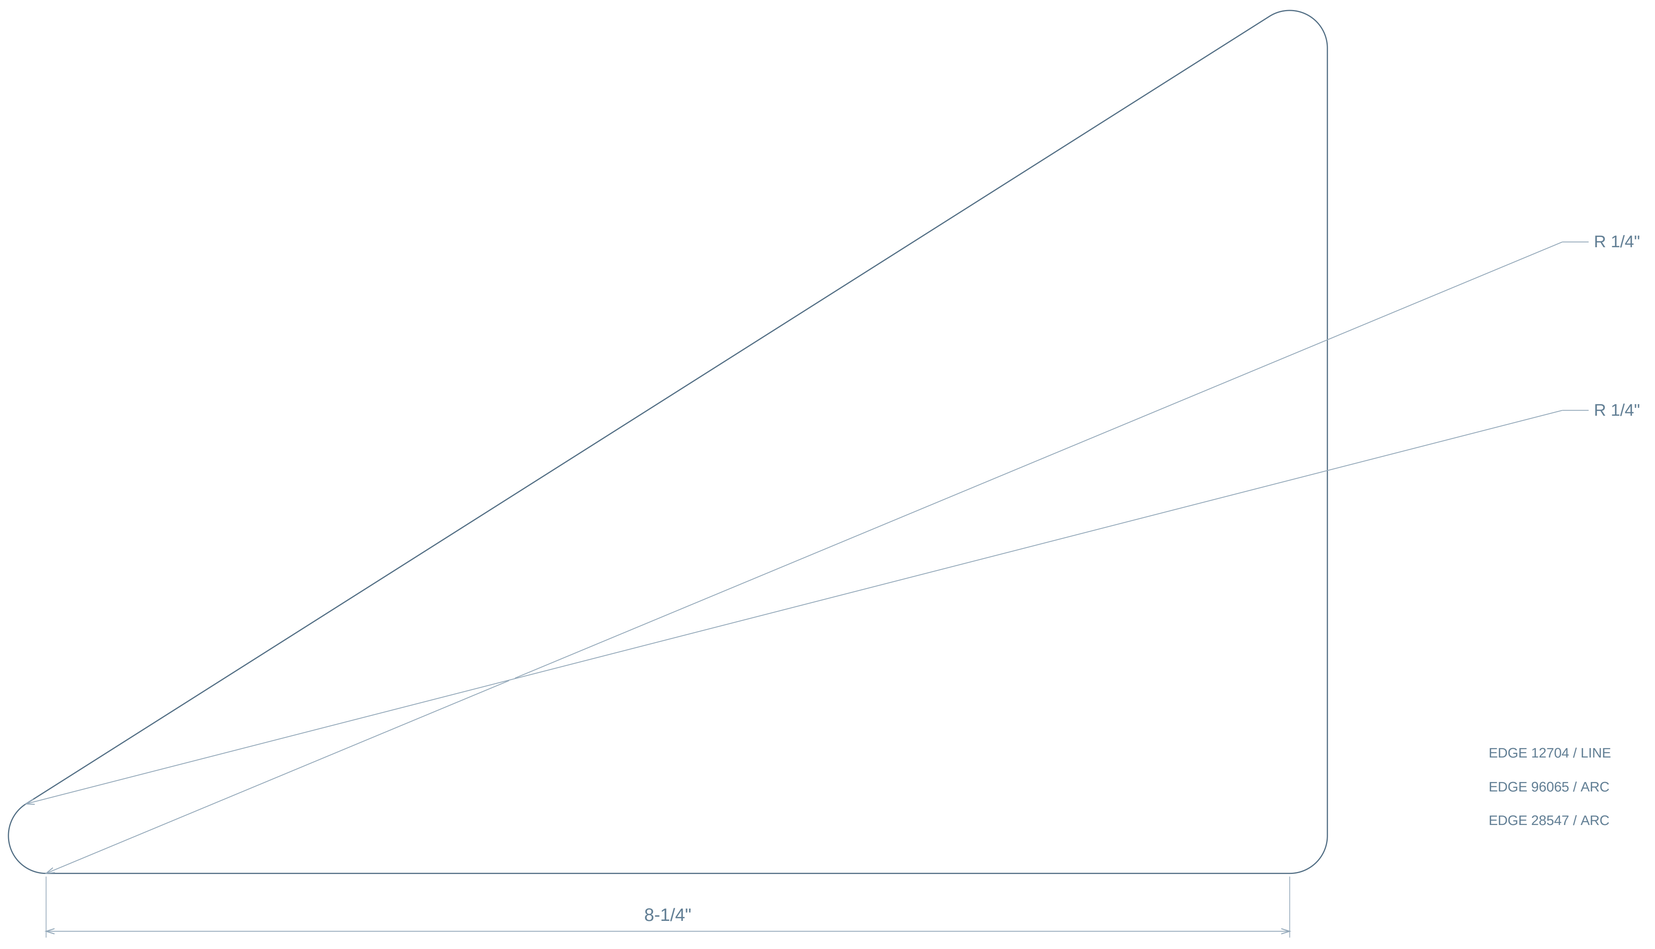

EDGE 12704 / LINE


EDGE 96065 / ARC

EDGE 28547 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OUTER PROFILE / EDGES 1-4

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

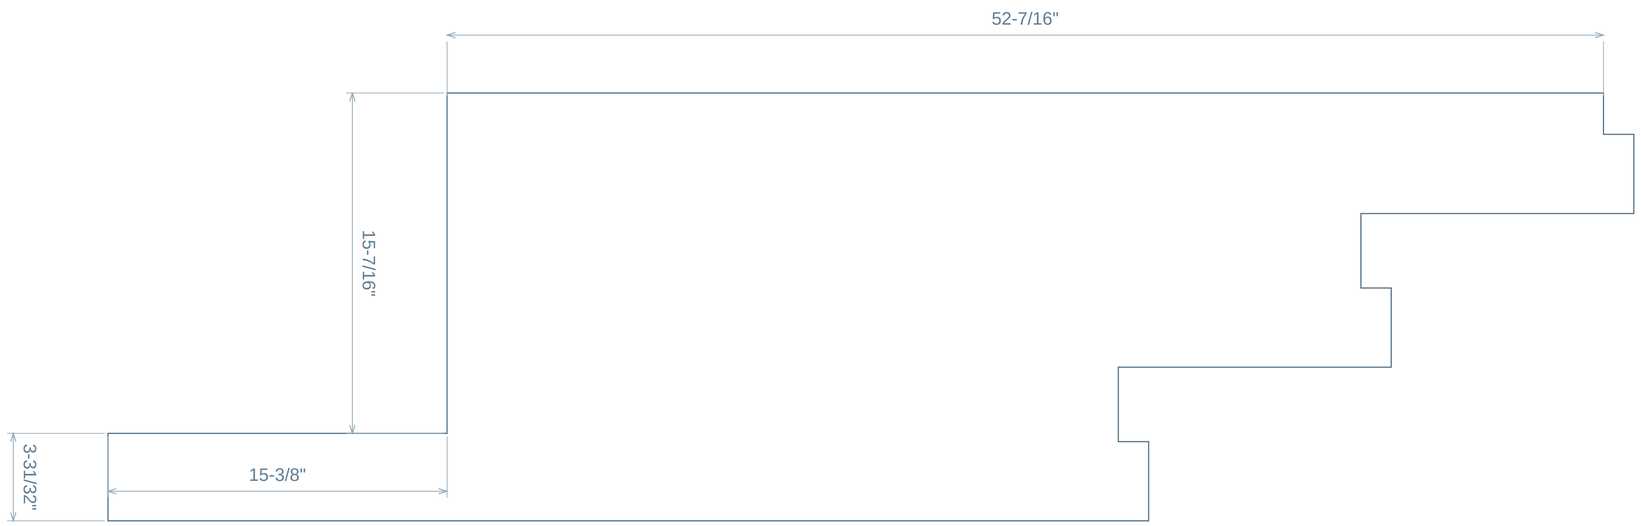

EDGE 138006 / LINE

EDGE 70453 / LINE

EDGE 21534 / LINE


EDGE 29550 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OUTER PROFILE / EDGES 5-8

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

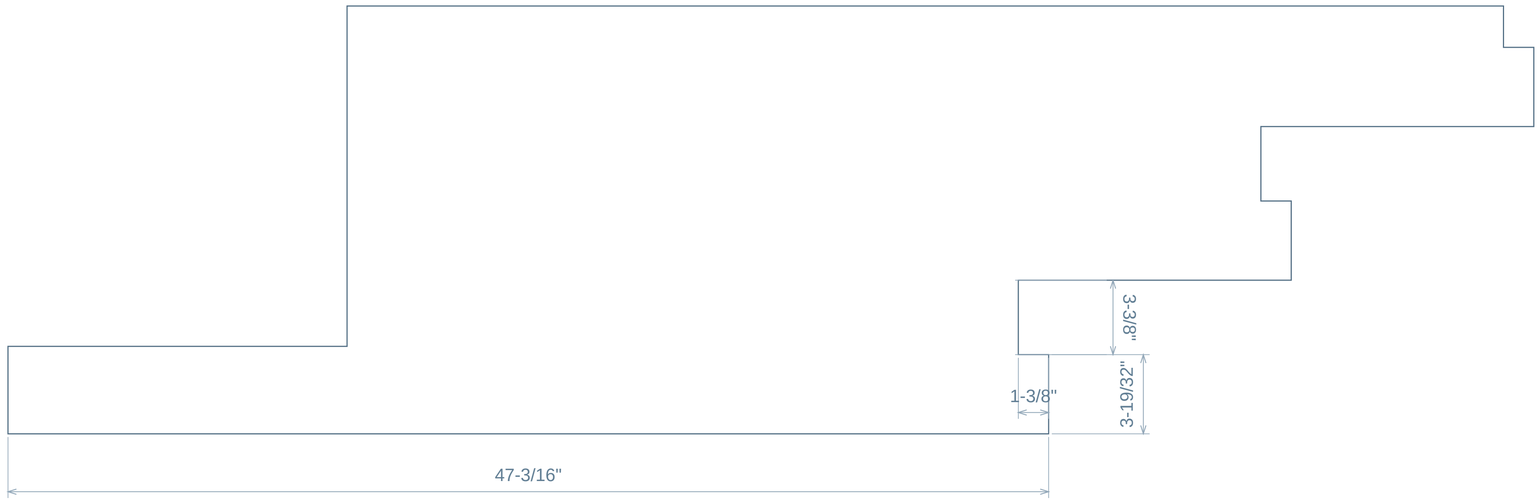

EDGE 45261 / LINE

EDGE 113857 / LINE

EDGE 8488 / LINE

EDGE 100361 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 2.0 / OUTER PROFILE / EDGES 9-12

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES



EDGE 63523 / LINE

EDGE 61073 / LINE

EDGE 28284 / LINE


EDGE 147137 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 2.0 / OUTER PROFILE / EDGES 13-16

body-0262 / QTY 3 / THICKNESS 1/4" / INCHES

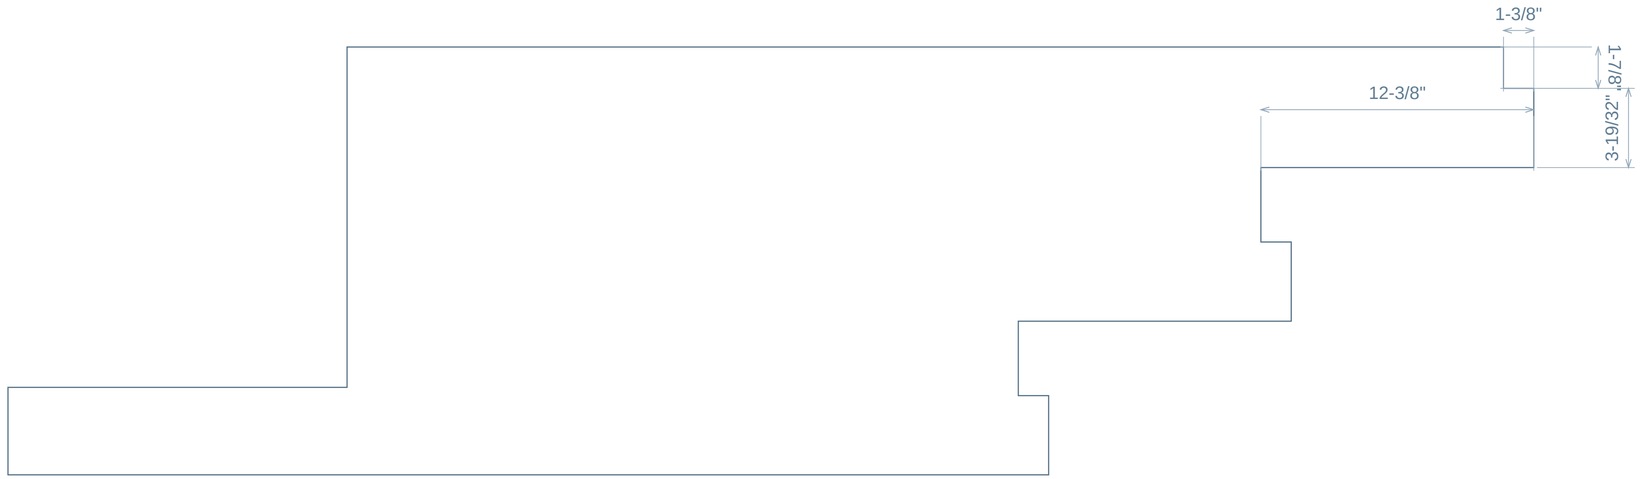

EDGE 44515 / LINE

EDGE 118842 / LINE


EDGE 57872 / LINE

EDGE 10231 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / COMPLETE FACE / OPENING LOCATIONS


body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

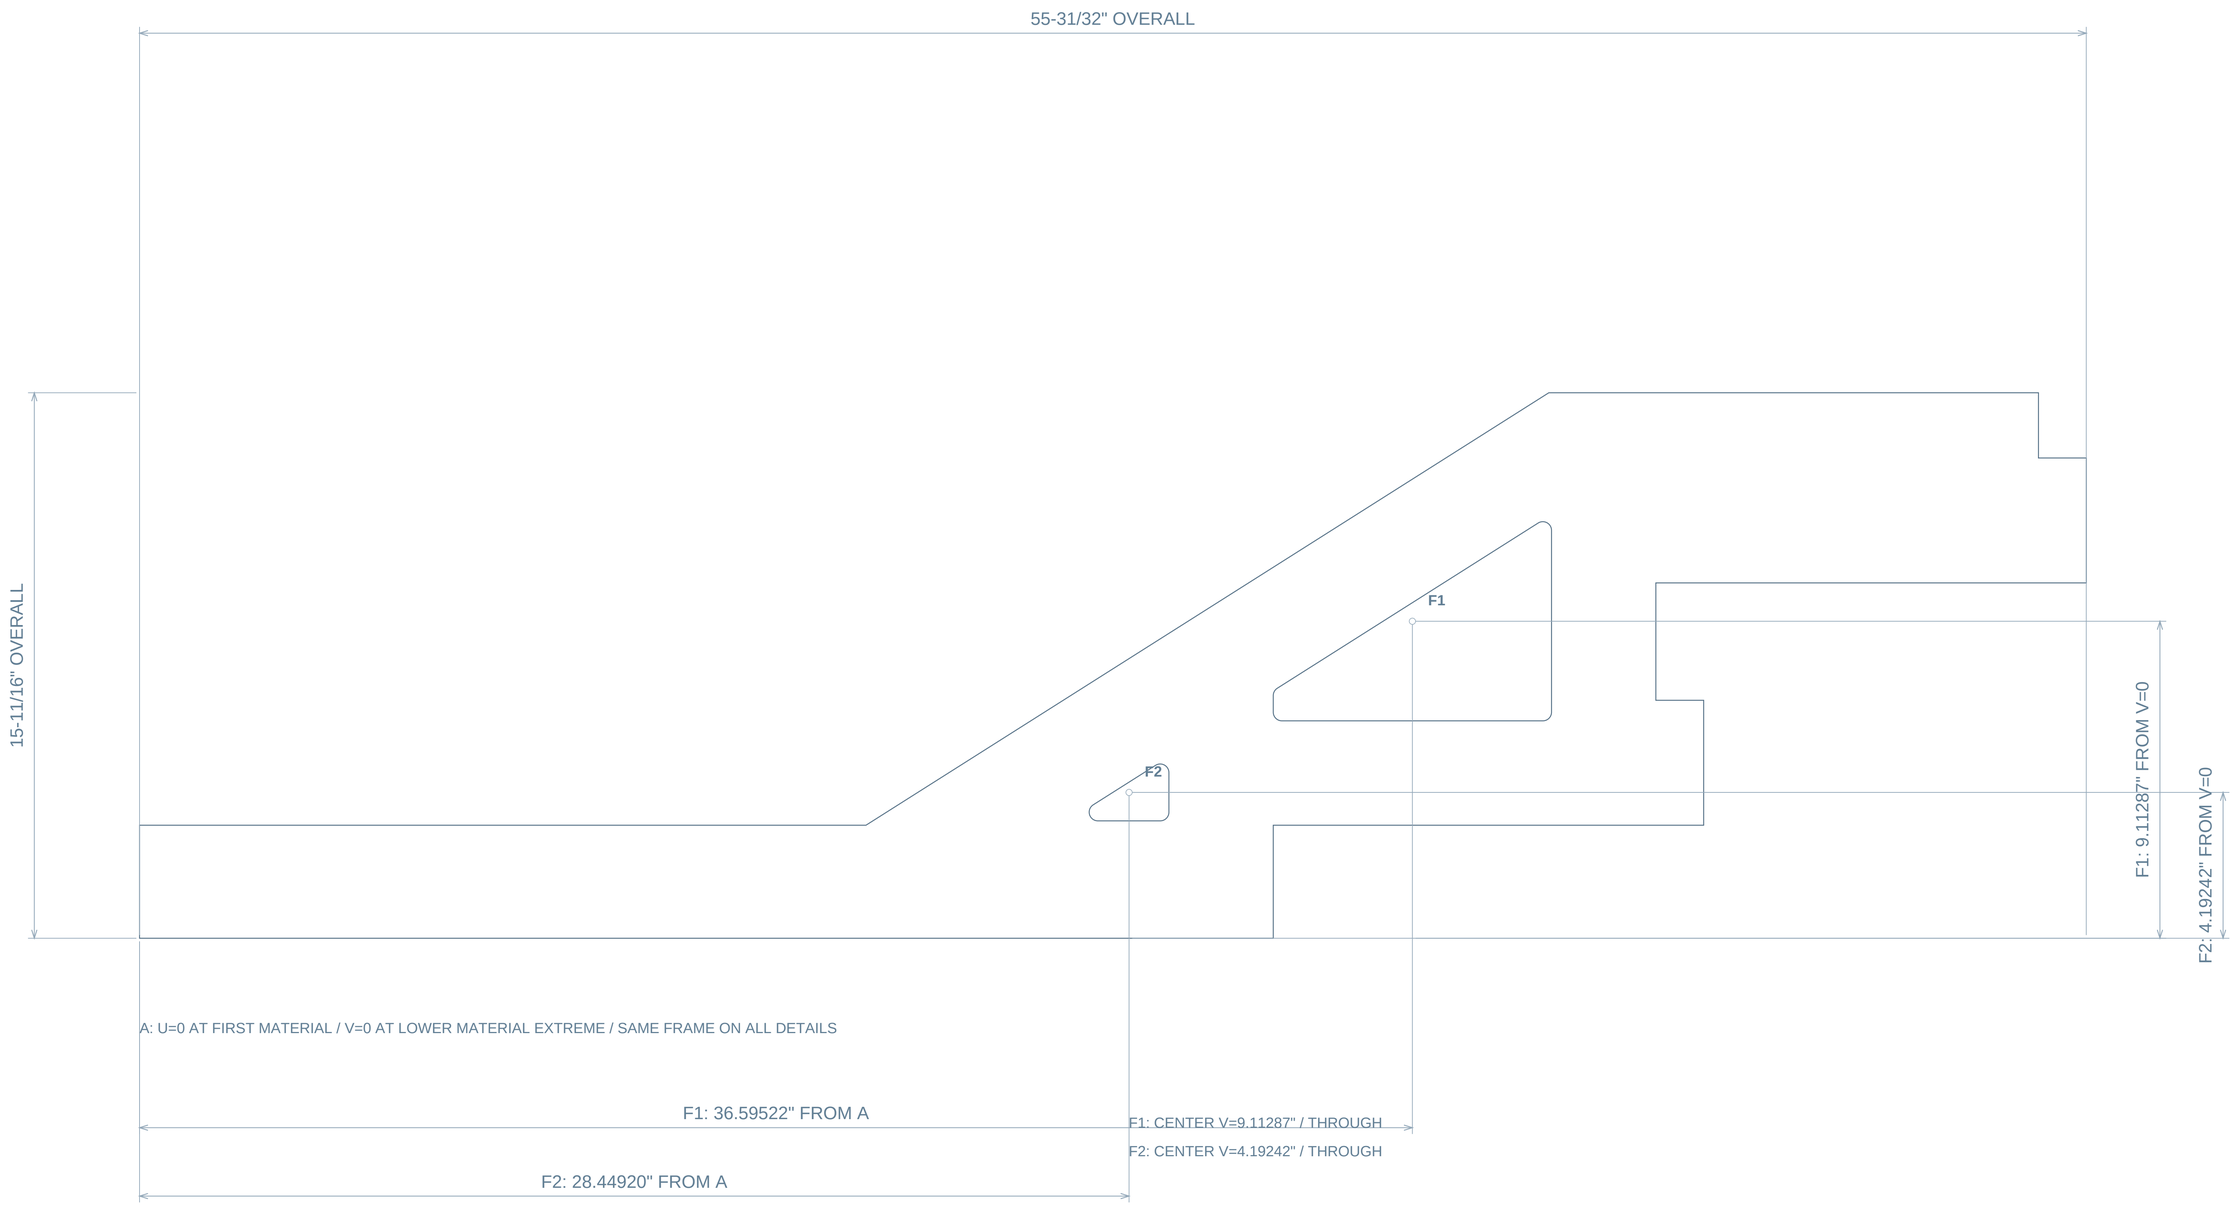

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F0 / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

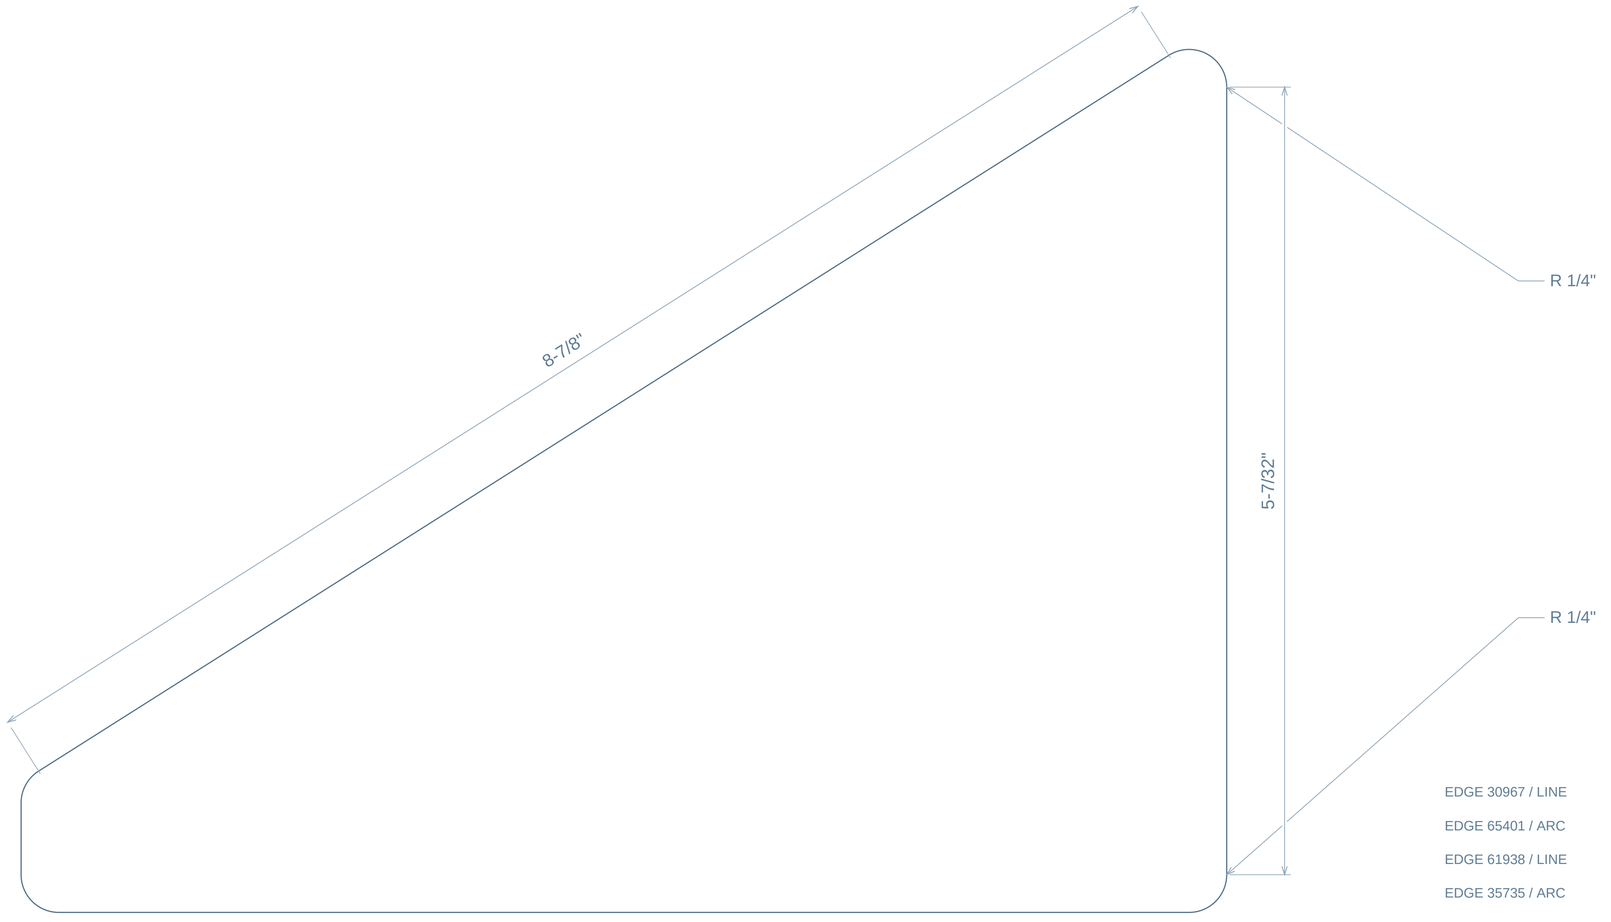

EDGE 30967 / LINE

EDGE 65401 / ARC

EDGE 61938 / LINE

EDGE 35735 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

CALIPER / 2606


PLINTH ASSEMBLY

2606-B046-P18-R08 / 3

REVIEW 08 / 2026-10-26

platform stringer plates 02.1 / OPENING F0 / EDGES 5-8

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

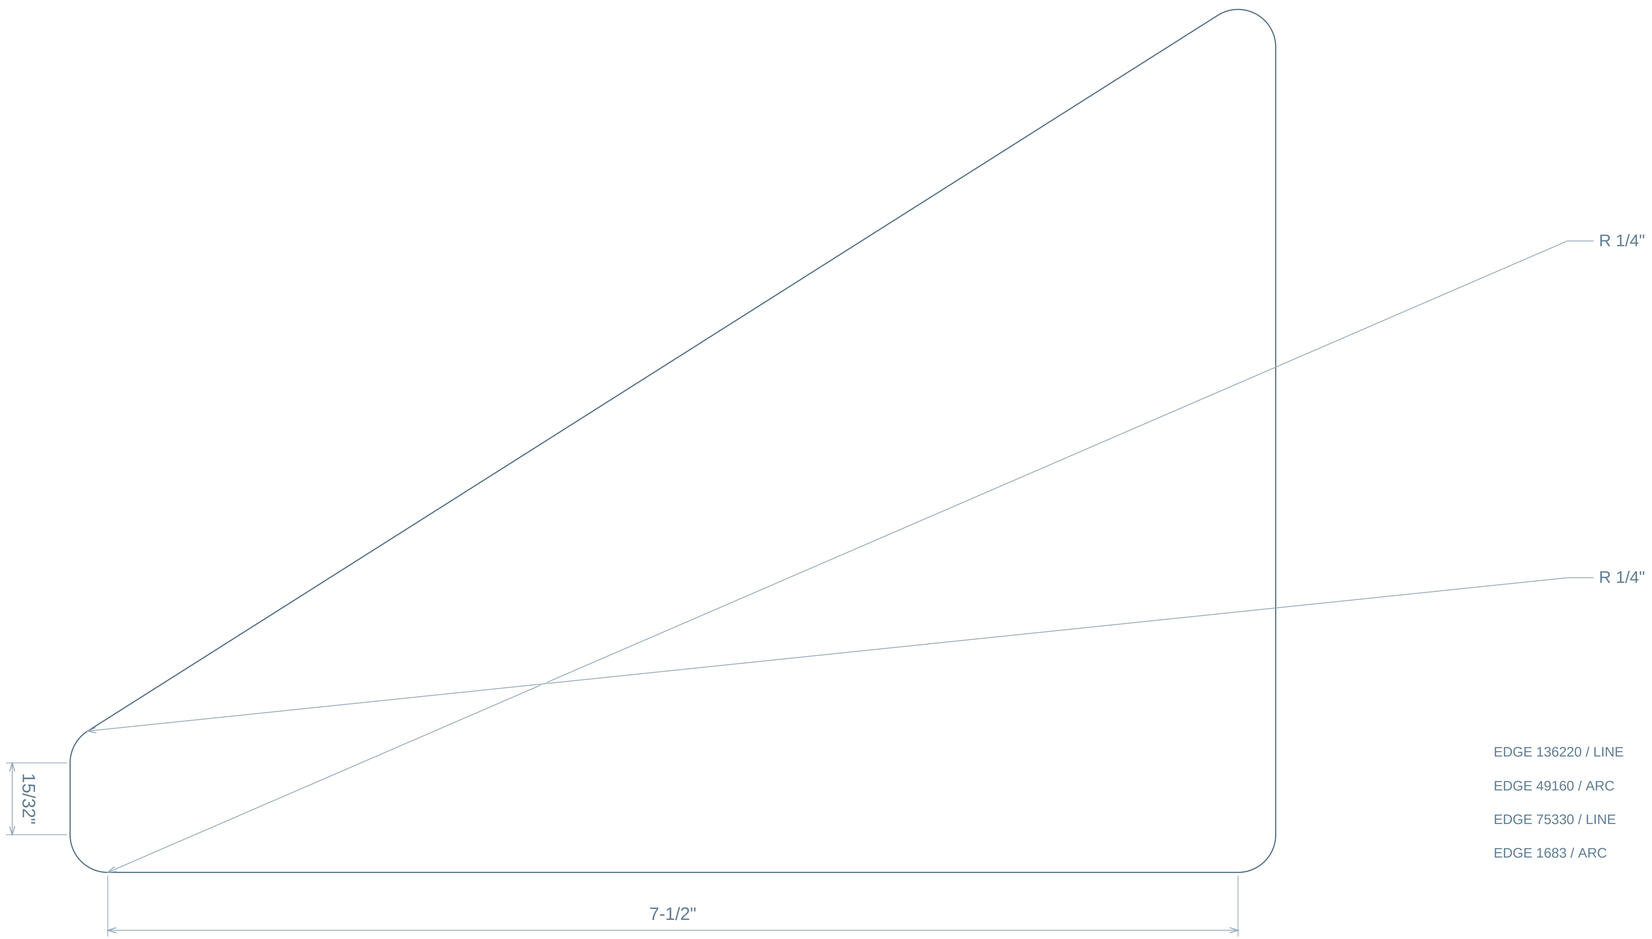

EDGE 136220 / LINE

EDGE 49160 / ARC

EDGE 75330 / LINE


EDGE 1683 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F1 / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

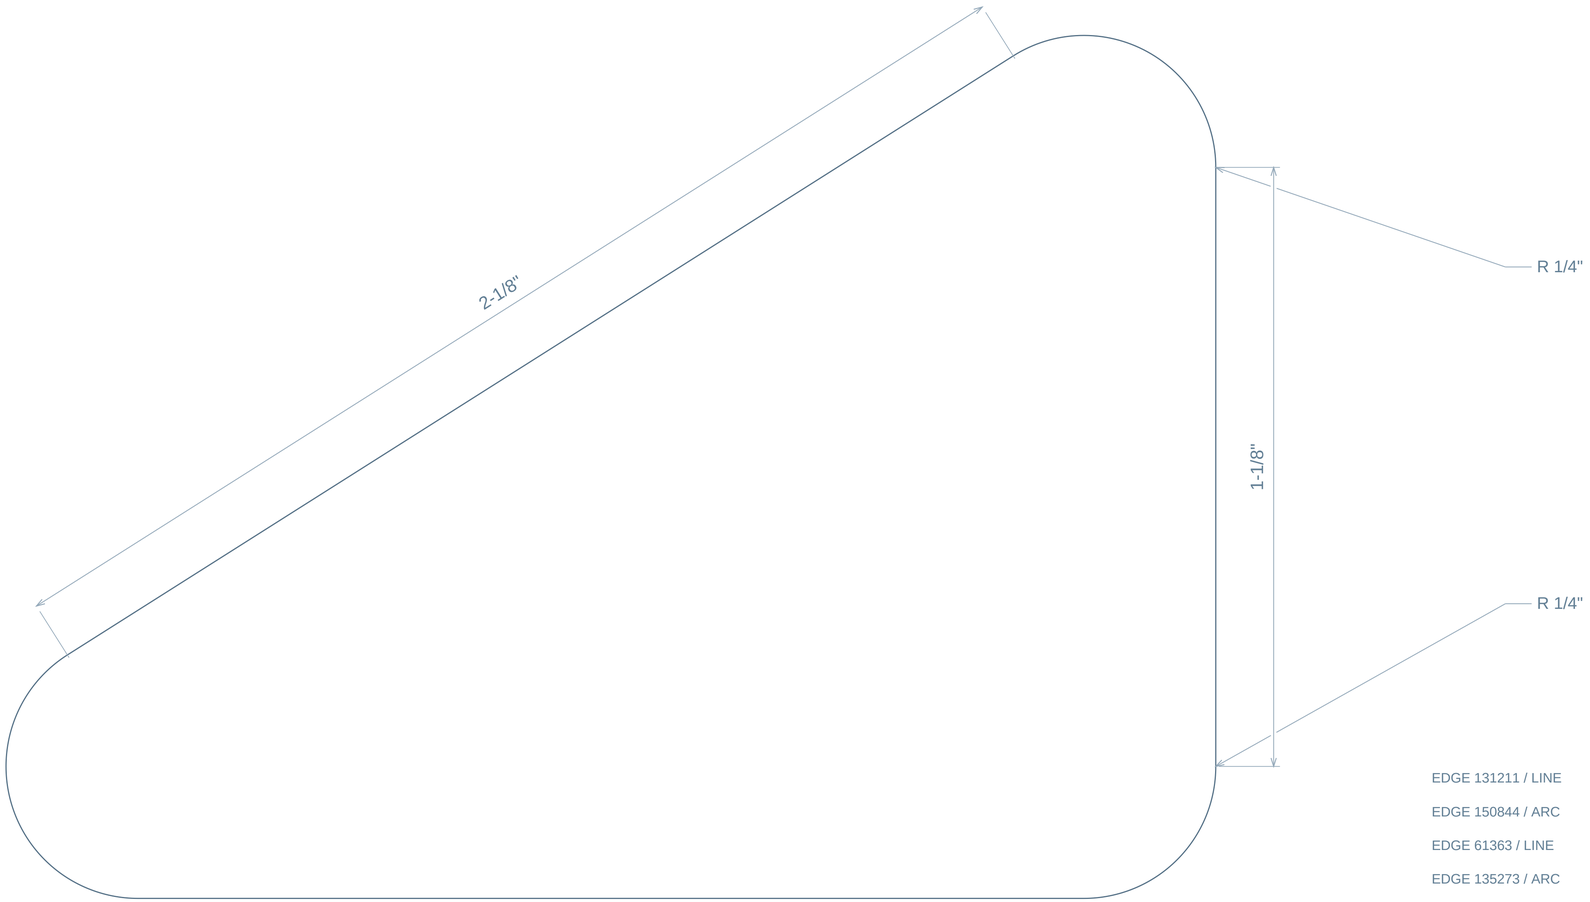

EDGE 131211 / LINE

EDGE 150844 / ARC

EDGE 61363 / LINE


EDGE 135273 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OPENING F1 / EDGES 5-7

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

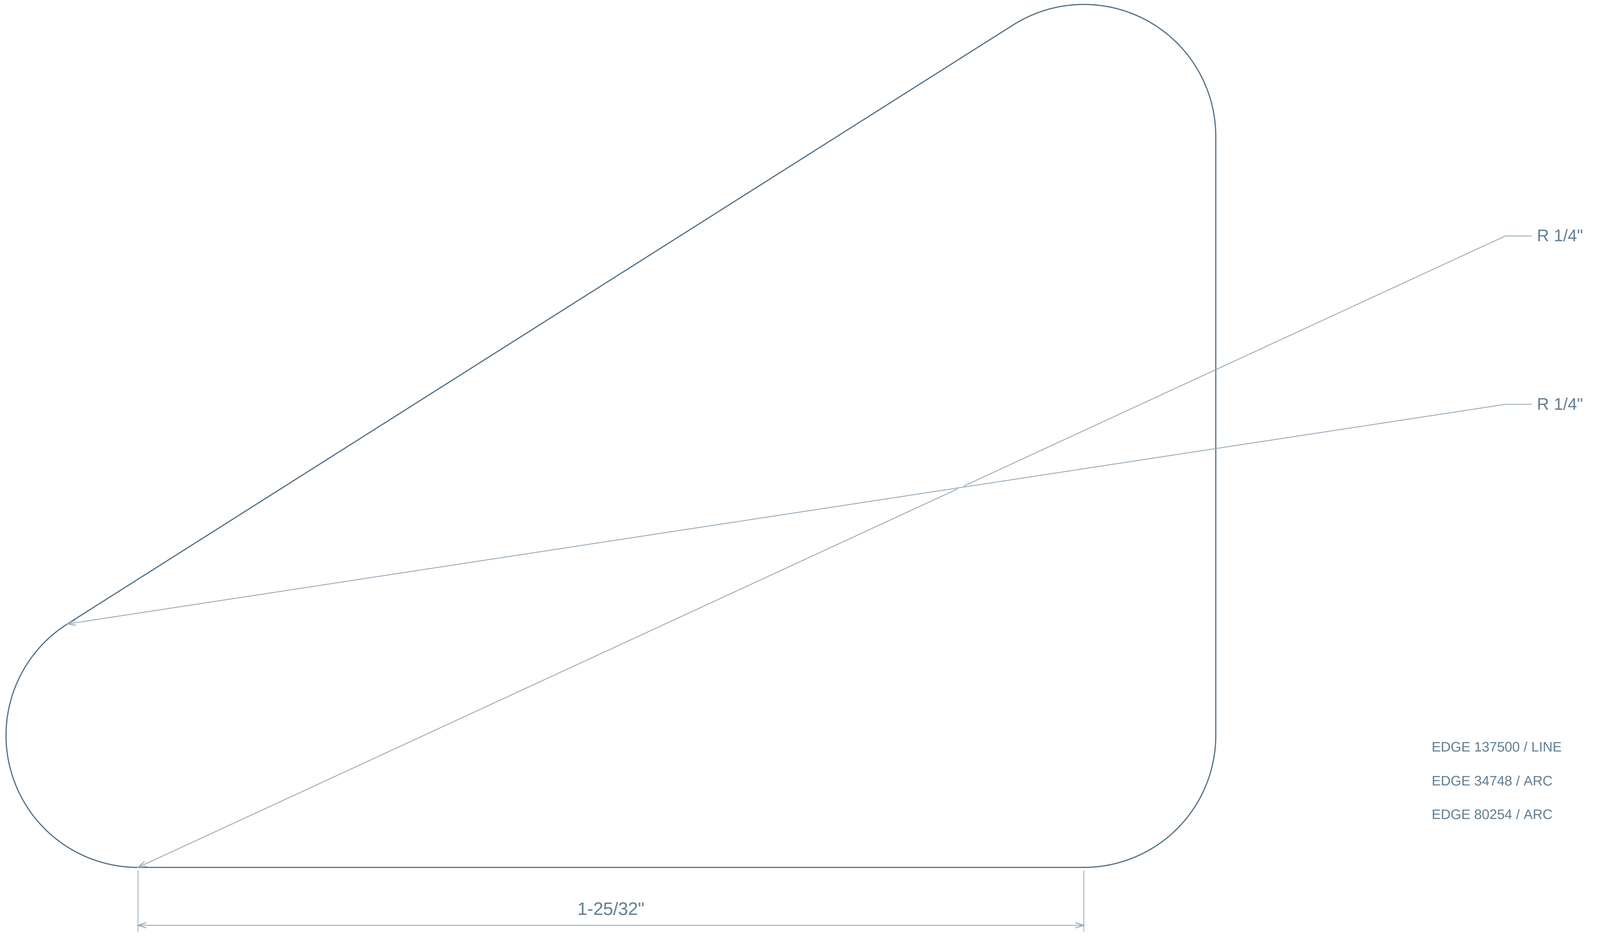

EDGE 137500 / LINE


EDGE 34748 / ARC

EDGE 80254 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / OUTER PROFILE / EDGES 1-4

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

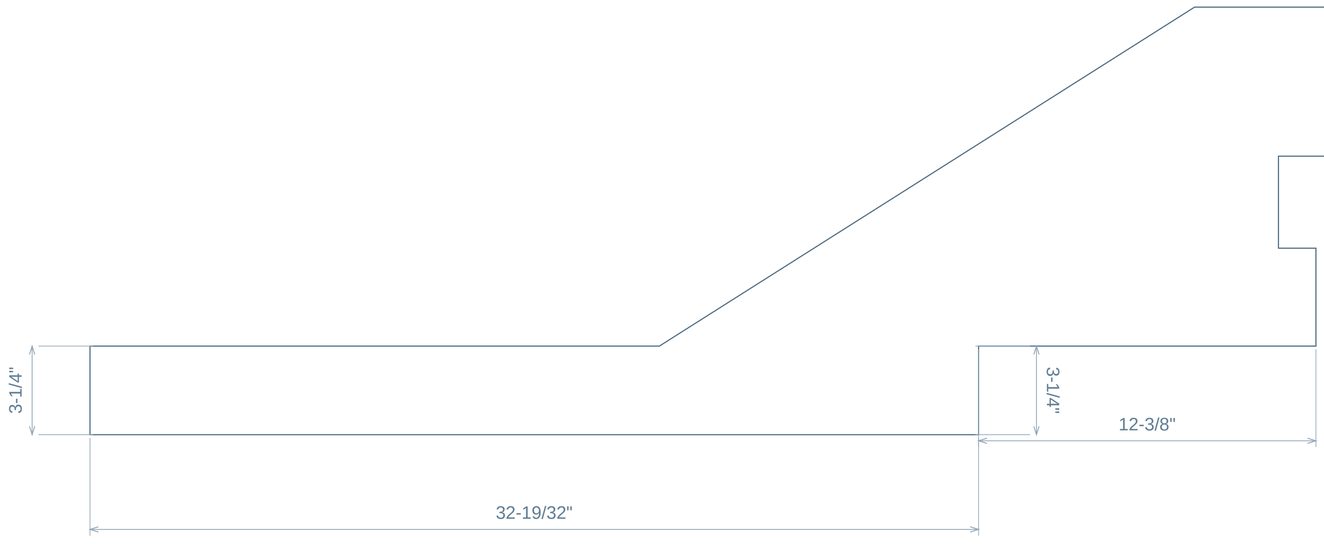

EDGE 127185 / LINE

EDGE 1039 / LINE


EDGE 47469 / LINE

EDGE 73653 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 02.1 / OUTER PROFILE / EDGES 5-8

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

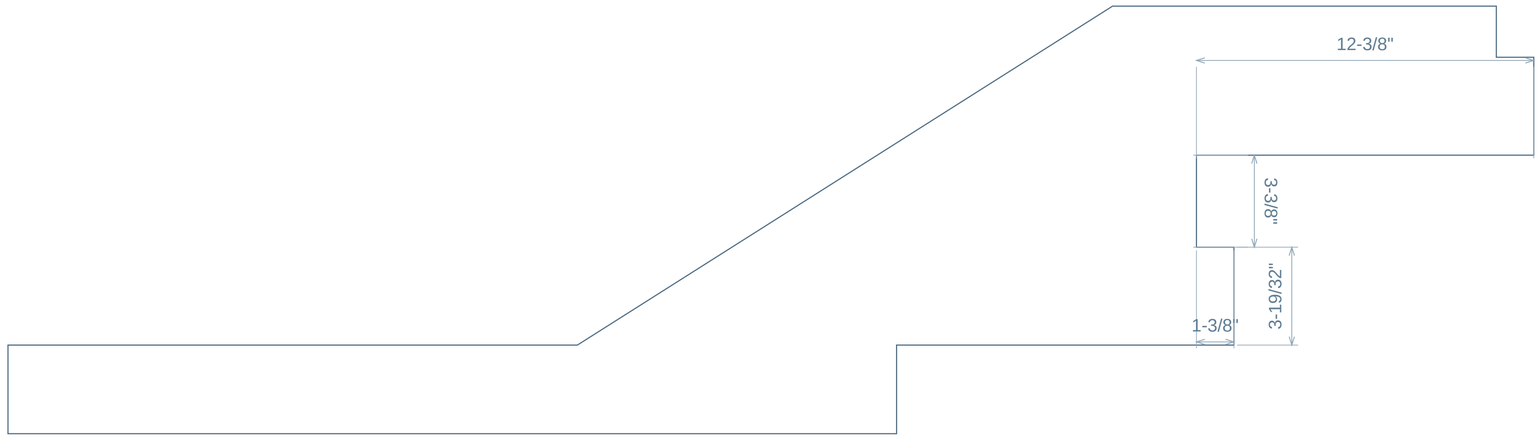

EDGE 106325 / LINE

EDGE 131083 / LINE

EDGE 127906 / LINE


EDGE 40665 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OUTER PROFILE / EDGES 9-12

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

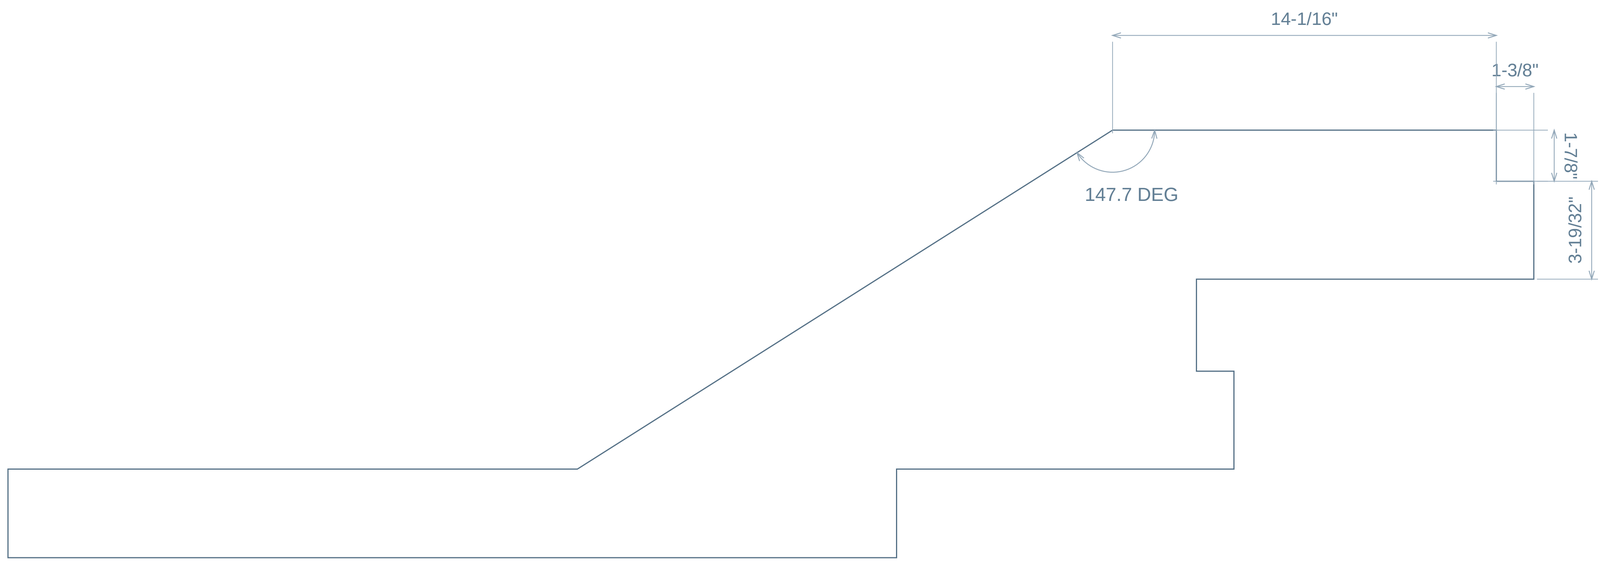

EDGE 131028 / LINE

EDGE 16106 / LINE

EDGE 104037 / LINE


EDGE 86205 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

platform stringer plates 02.1 / OUTER PROFILE / EDGES 13-14

body-0265 / QTY 1 / THICKNESS 1/4" / INCHES

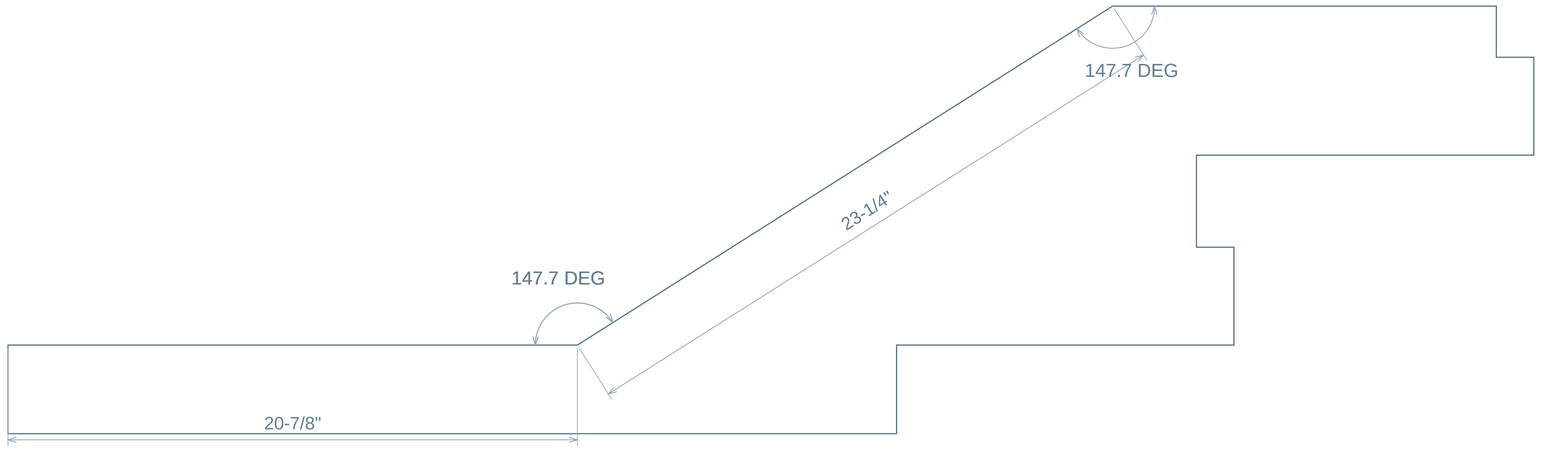


EDGE 125642 / LINE

EDGE 115249 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

platform stringer plates 03 / COMPLETE PROFILE


body-0266 / QTY 1 / NORMAL DEPTH 1/4" / INCHES

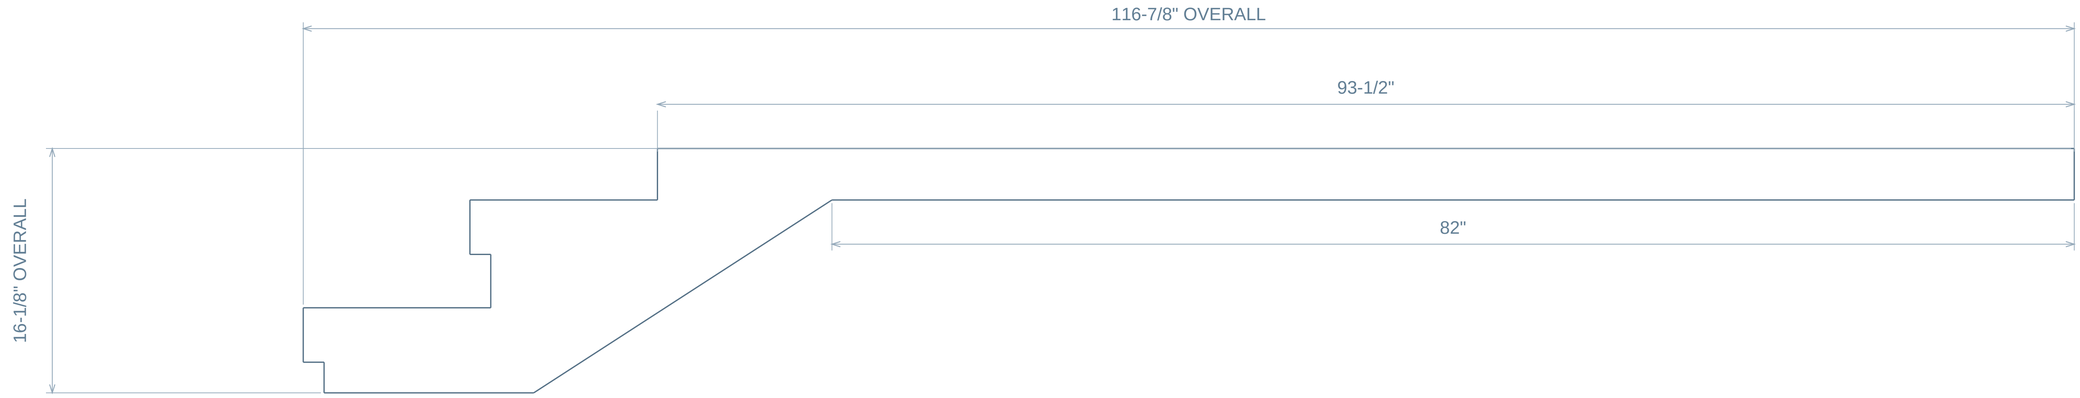

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:5

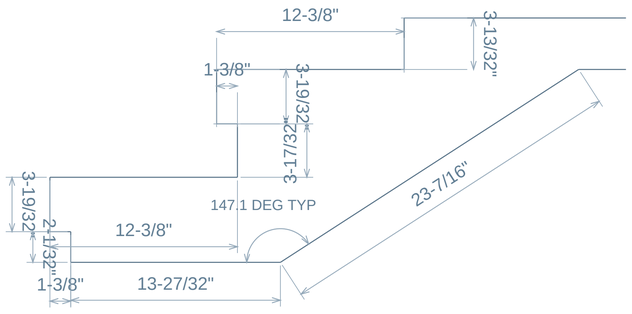

DETAIL 2 / CONNECTED OUTLINE / 1:1




FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

plinth asm body 717

body-0267 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:5


01 / TOP - FACE A

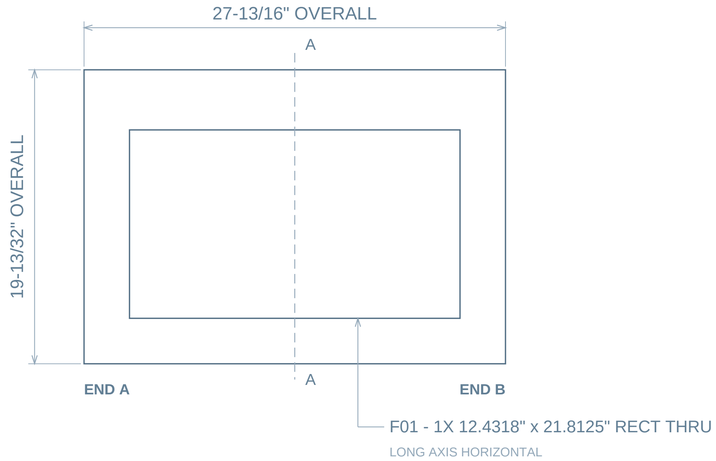

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

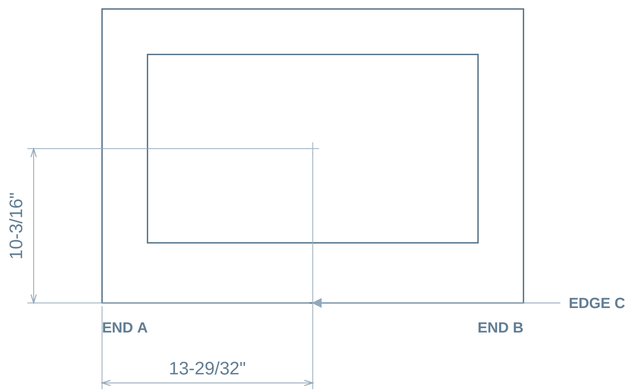


04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 718

body-0268 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

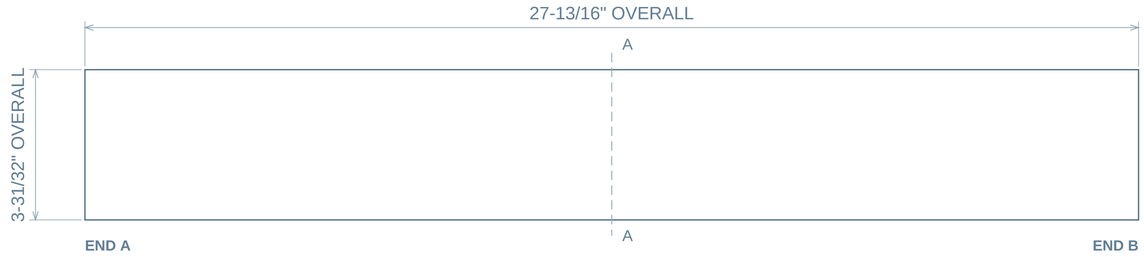

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

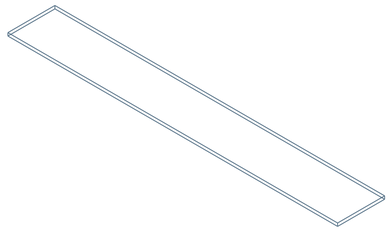

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 28-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

plinth asm body 719

body-0269 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

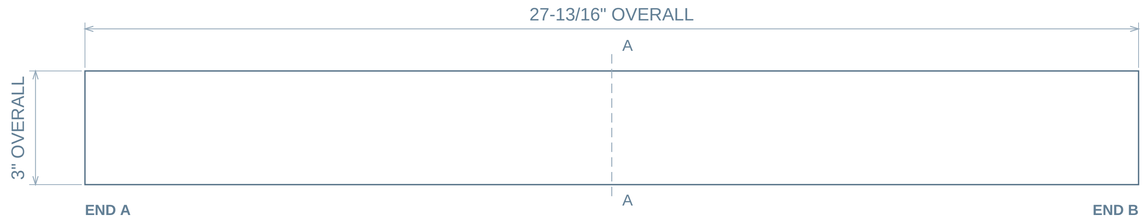

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 13-29/32" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

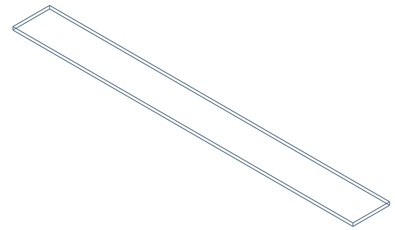

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 27-31/32"

No internal holes in the broad face.

DATUM / REVIEW


END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 720 / COMPLETE FACE / OPENING LOCATIONS

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

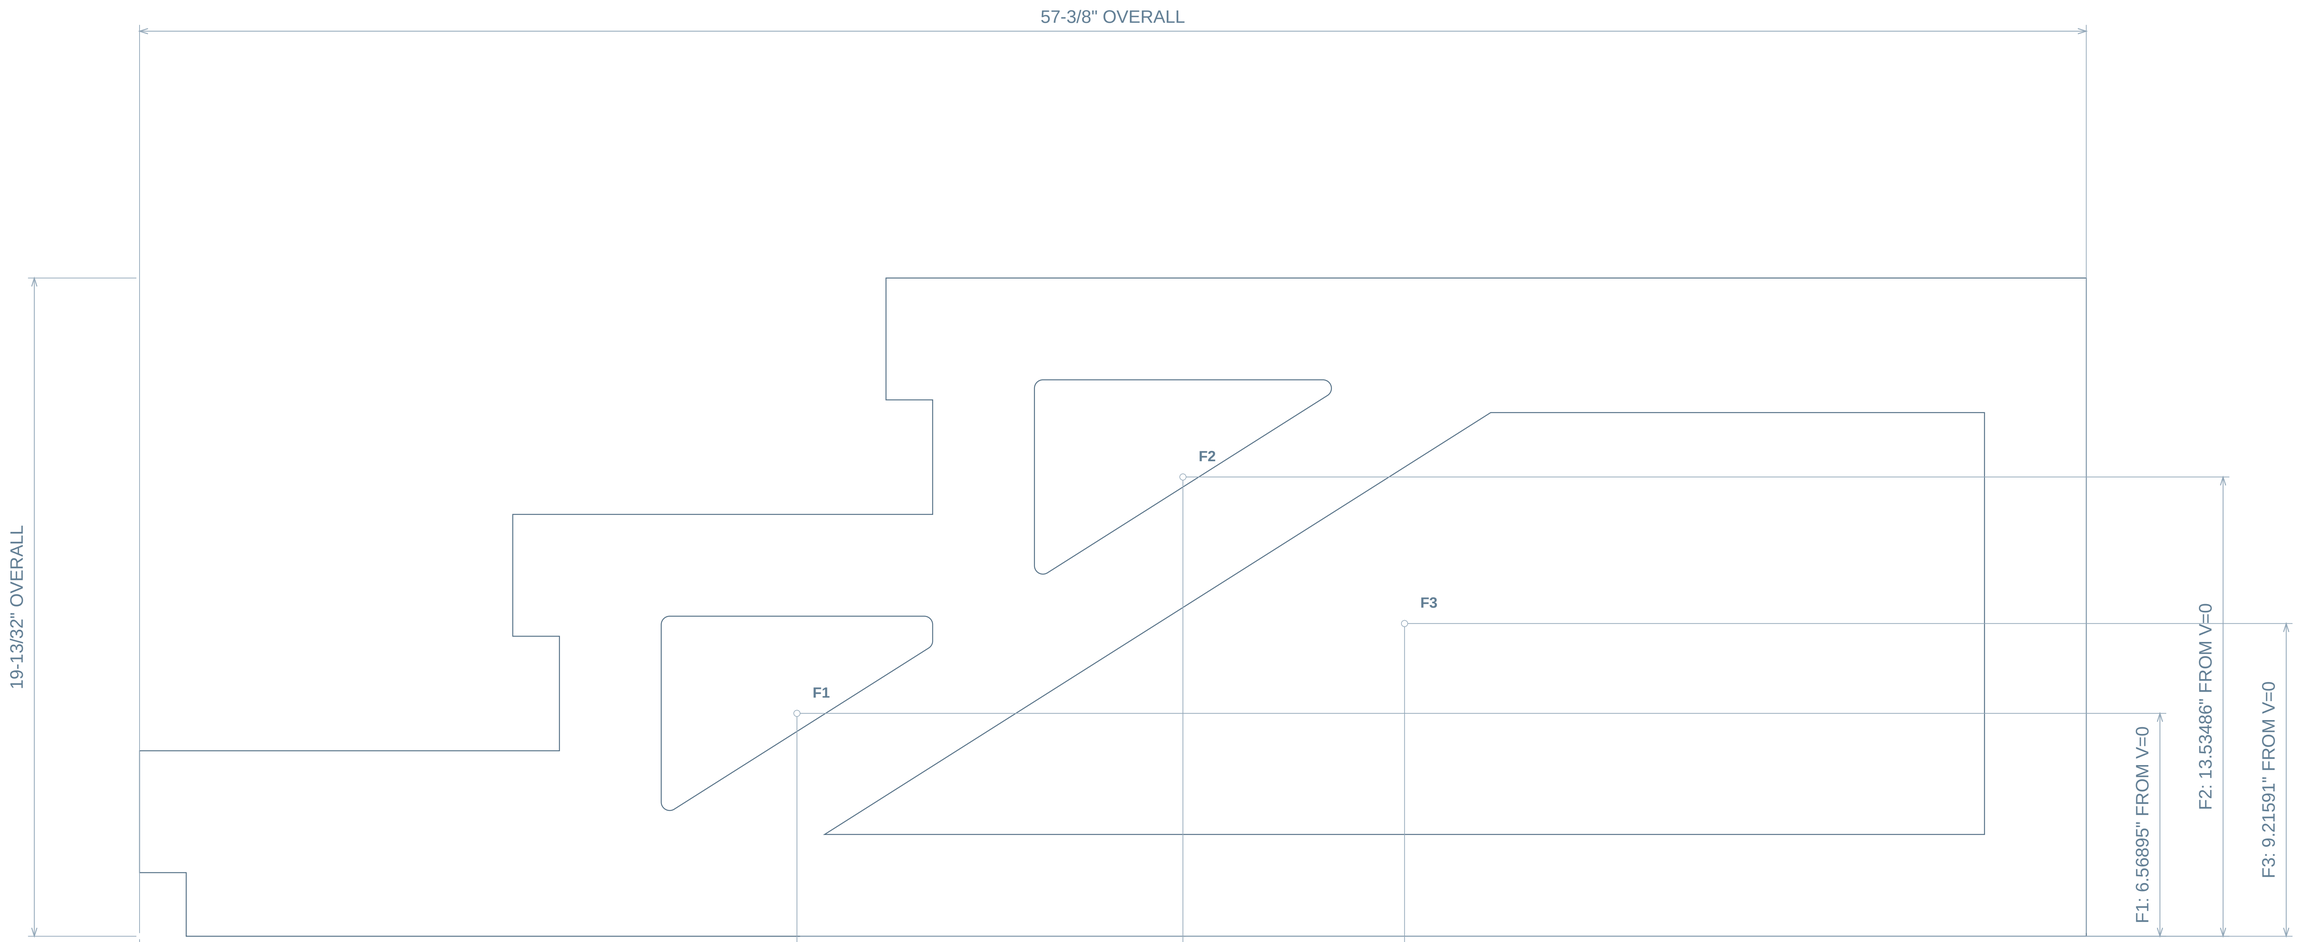

A: U=0 AT FIRST MATERIAL / V=0 AT LOWER MATERIAL EXTREME / SAME FRAME ON ALL DETAILS

F1: 19.37500" FROM A

F3: 37.28244" FROM A

F2: 30.75104" FROM A

F1: CENTER V=6.56895" / THROUGH


F2: CENTER V=13.53486" / THROUGH

F3: CENTER V=9.21591" / THROUGH

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F0 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

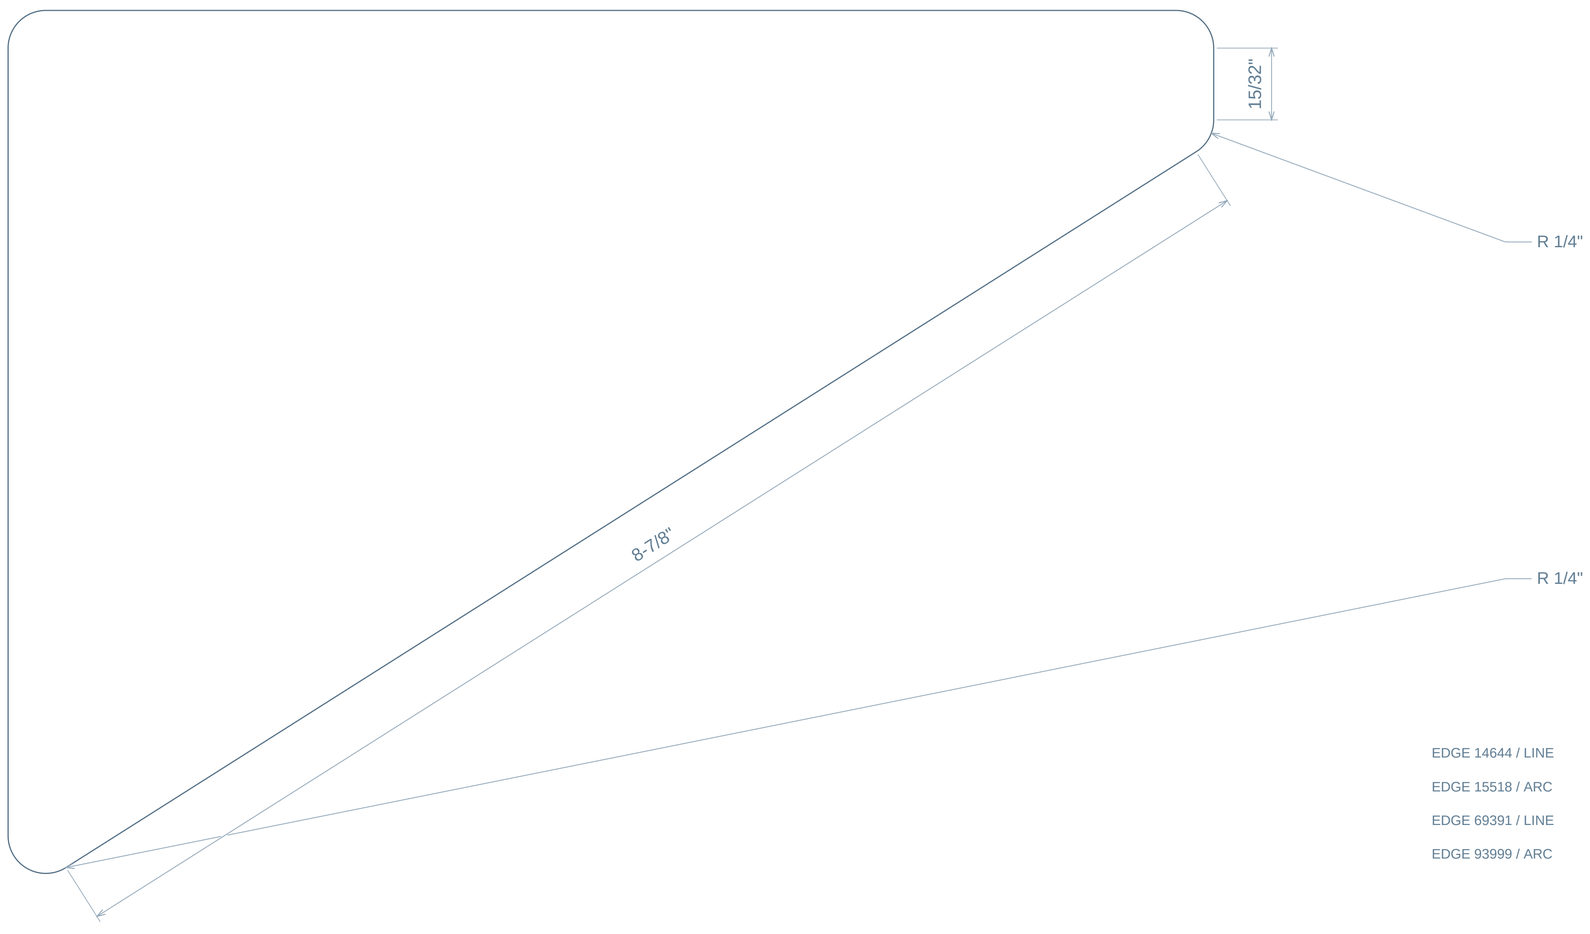

EDGE 14644 / LINE

EDGE 15518 / ARC

EDGE 69391 / LINE


EDGE 93999 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F0 / EDGES 5-8

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

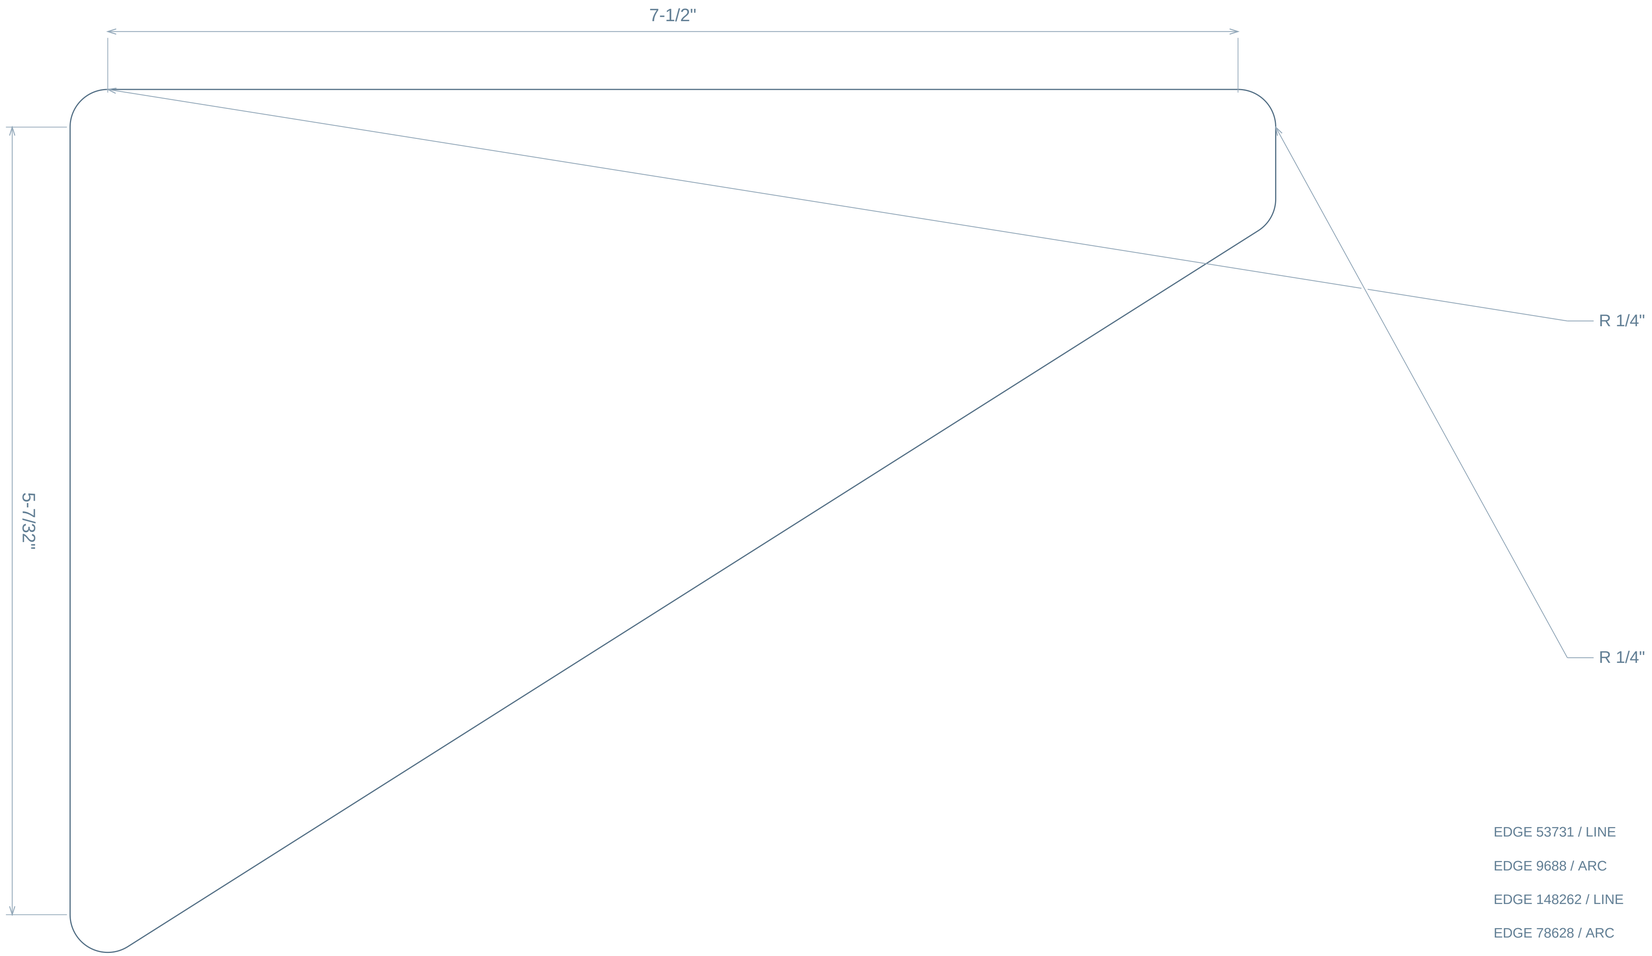

EDGE 53731 / LINE

EDGE 9688 / ARC

EDGE 148262 / LINE


EDGE 78628 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F1 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

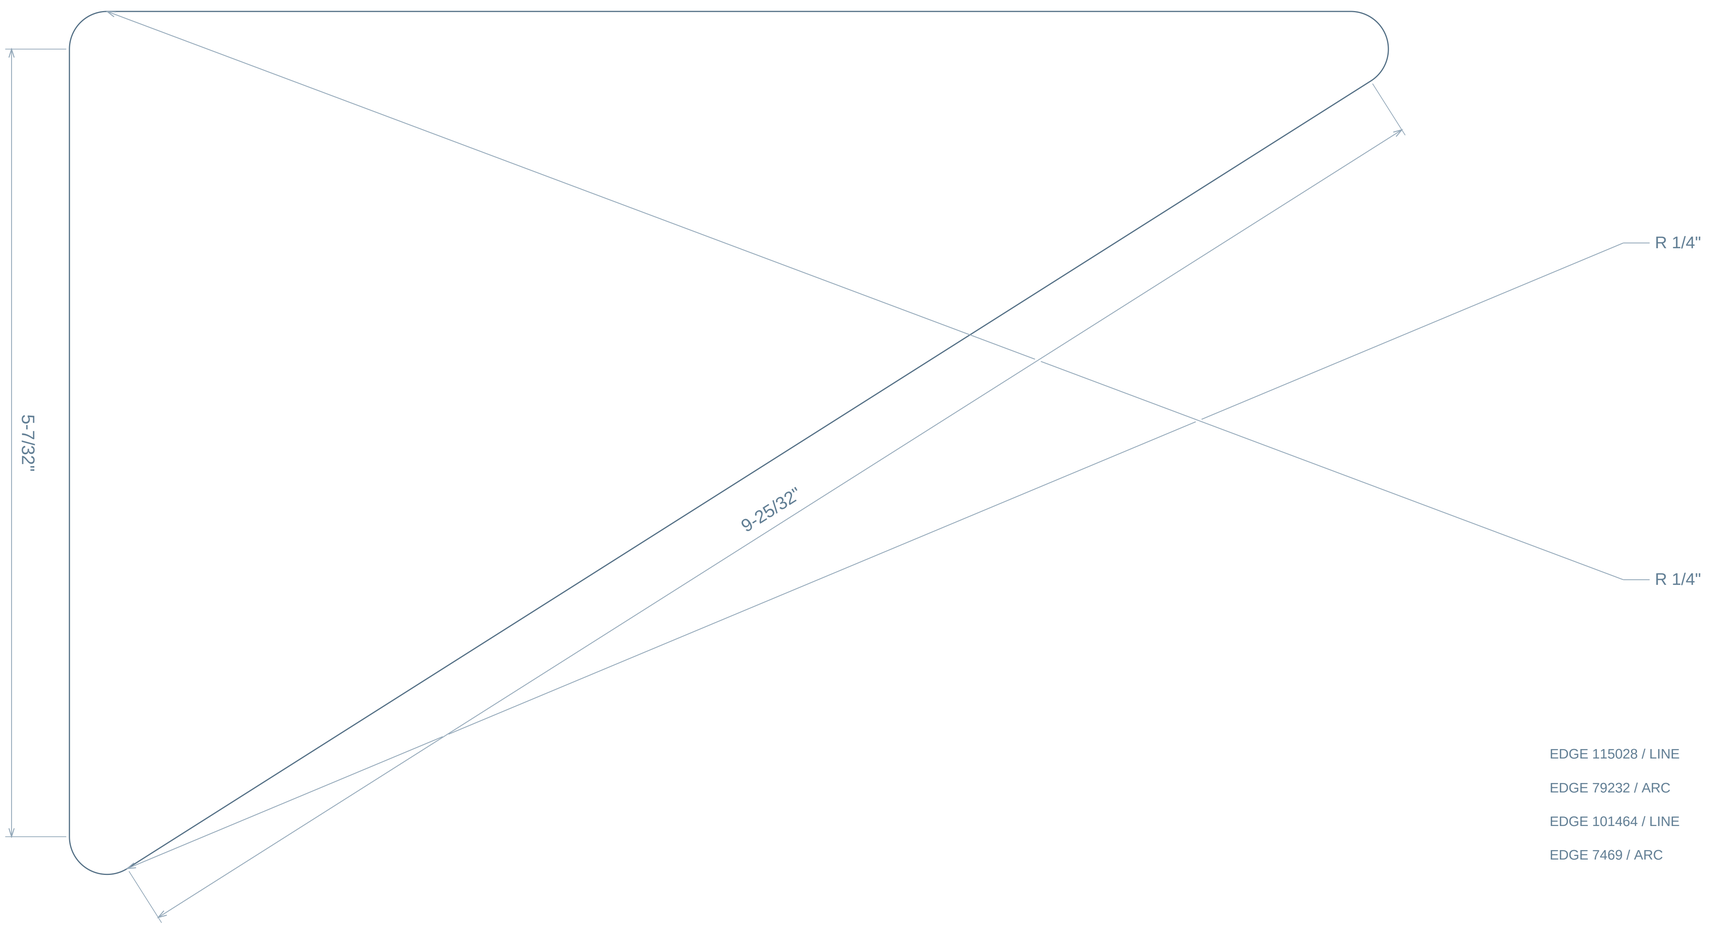

EDGE 115028 / LINE

EDGE 79232 / ARC

EDGE 101464 / LINE


EDGE 7469 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F1 / EDGES 5-7

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

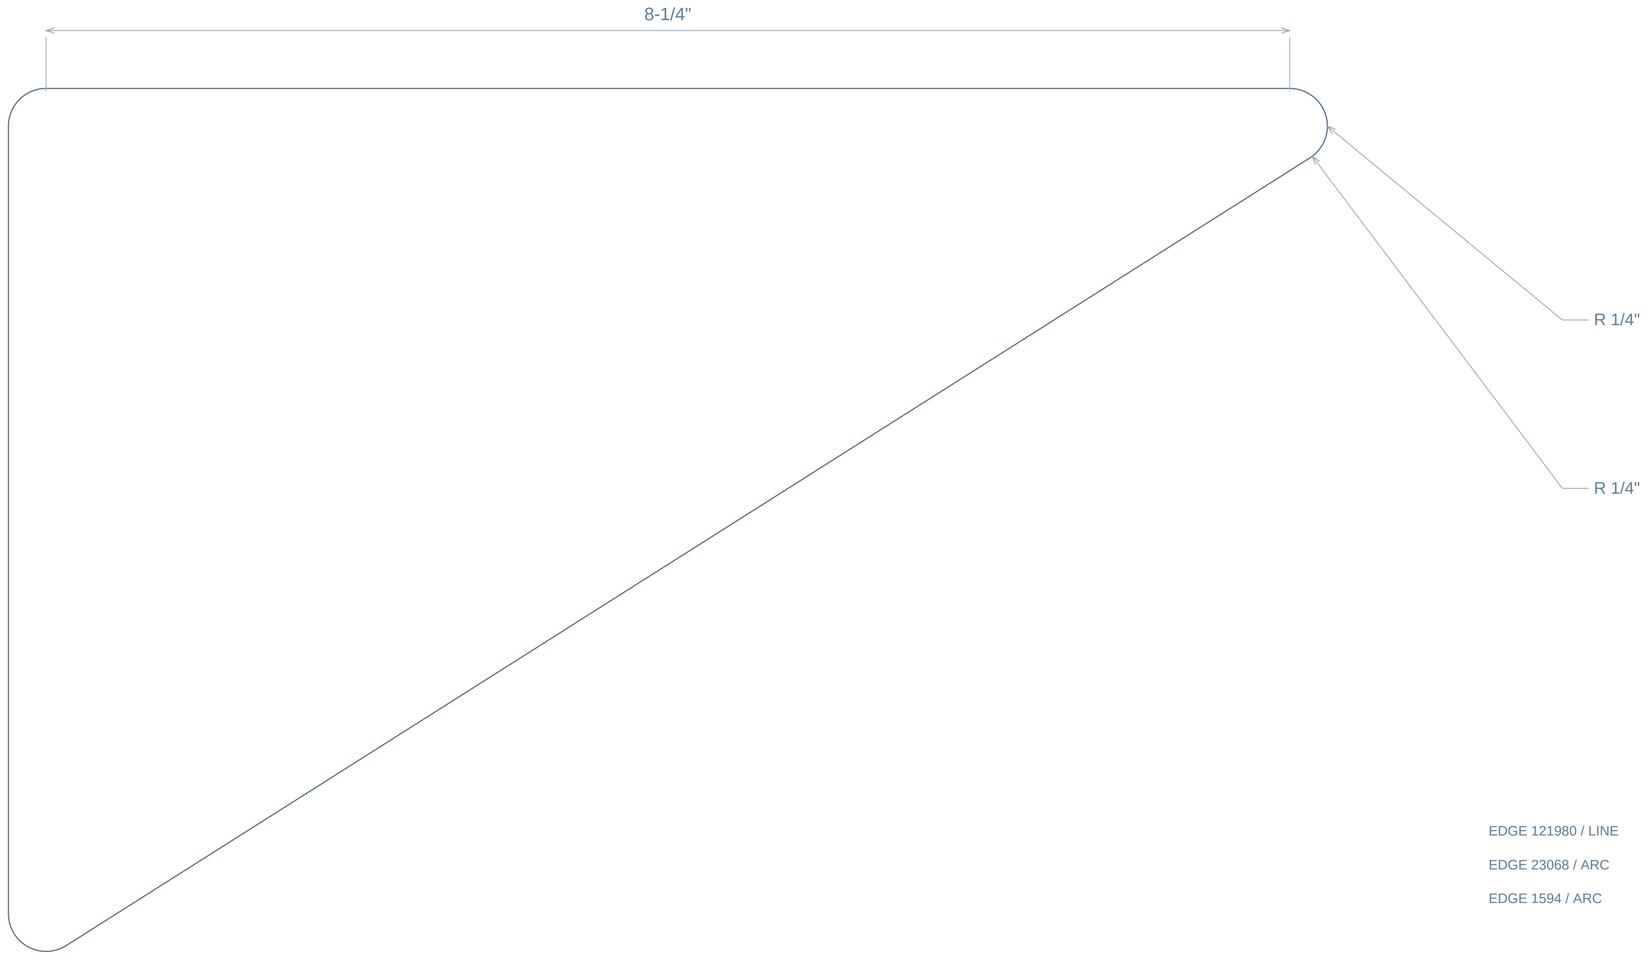

EDGE 121980 / LINE

EDGE 23068 / ARC


EDGE 1594 / ARC

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OPENING F2 / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

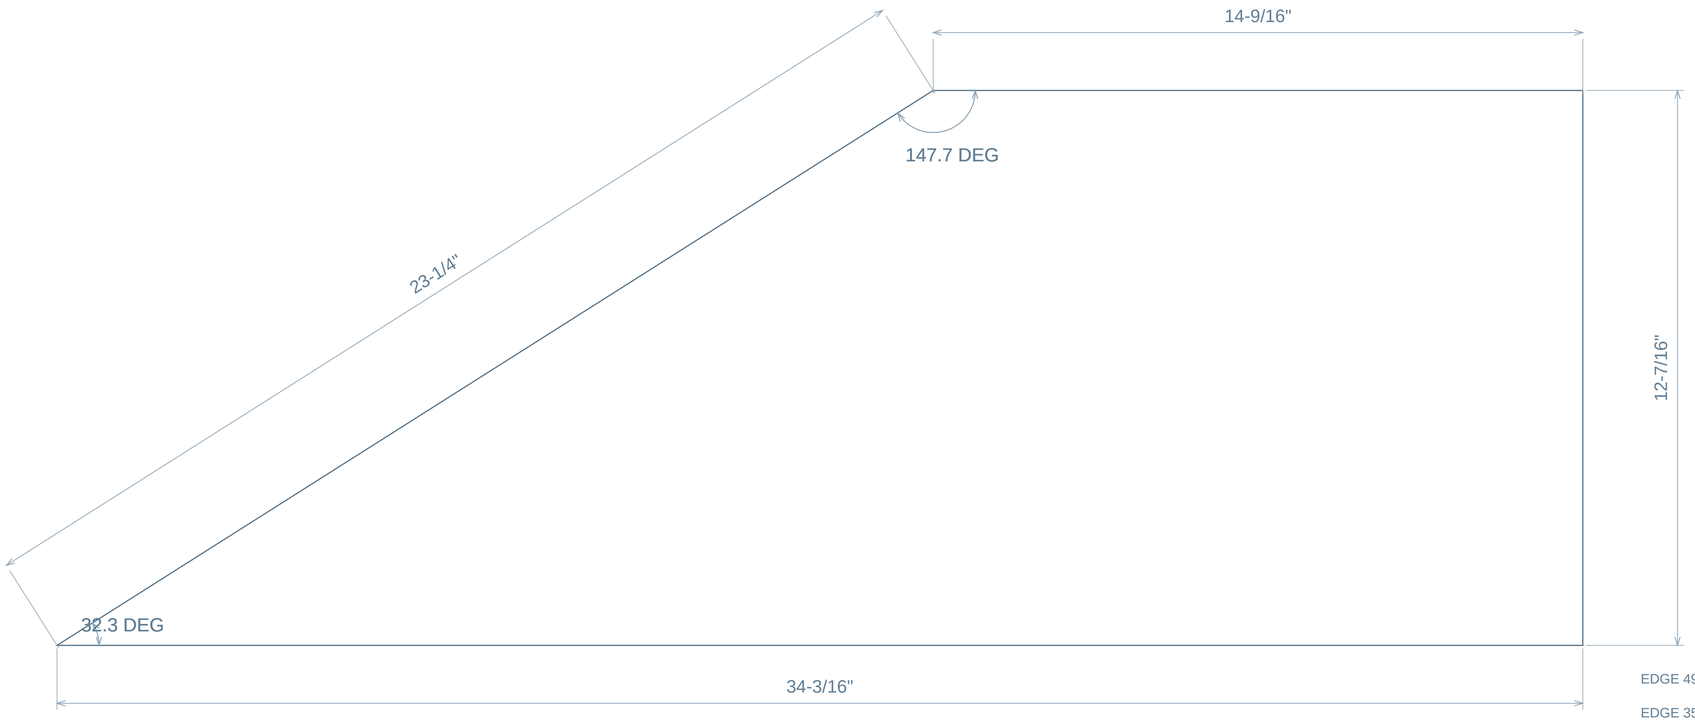

EDGE 49499 / LINE

EDGE 35235 / LINE


EDGE 111253 / LINE

EDGE 136987 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 1-4

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

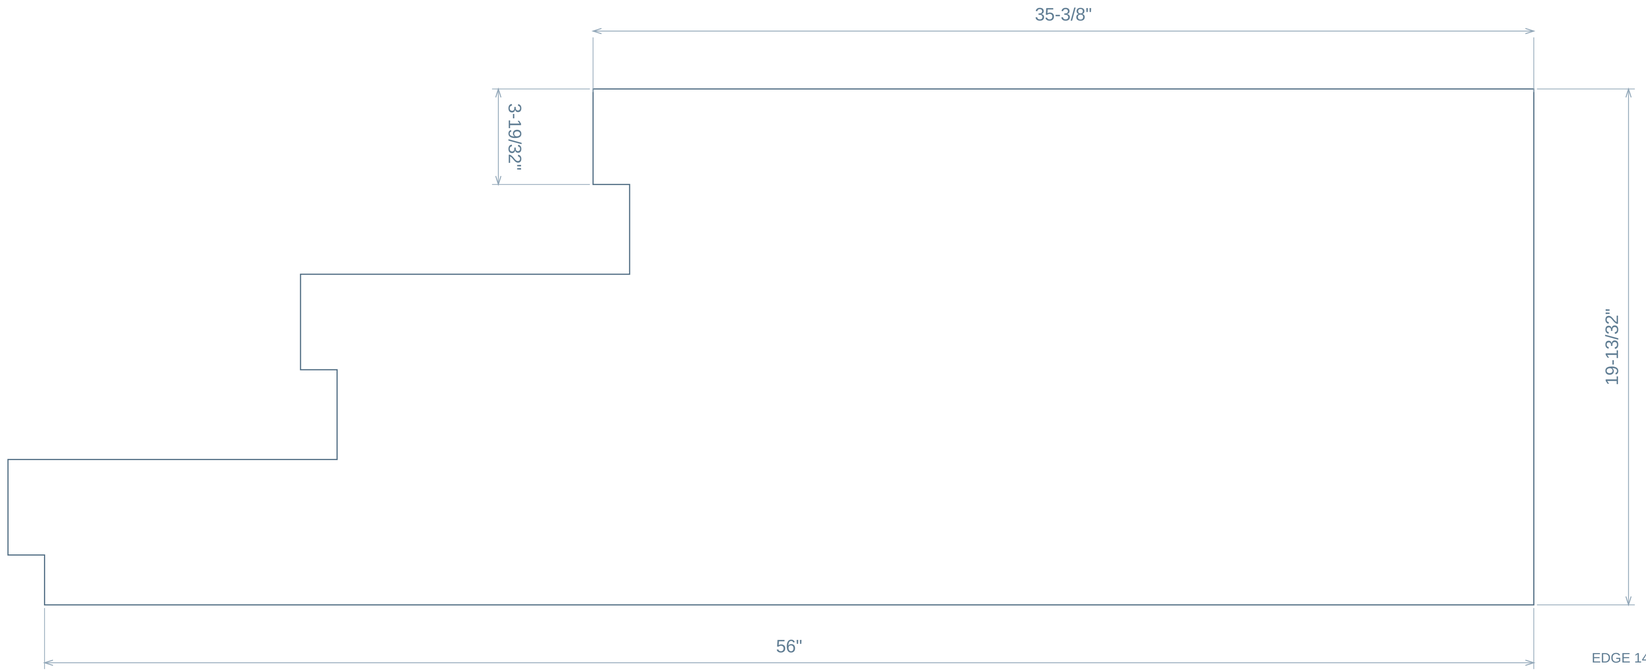

EDGE 142765 / LINE

EDGE 92454 / LINE


EDGE 115116 / LINE

EDGE 125334 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 5-8

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

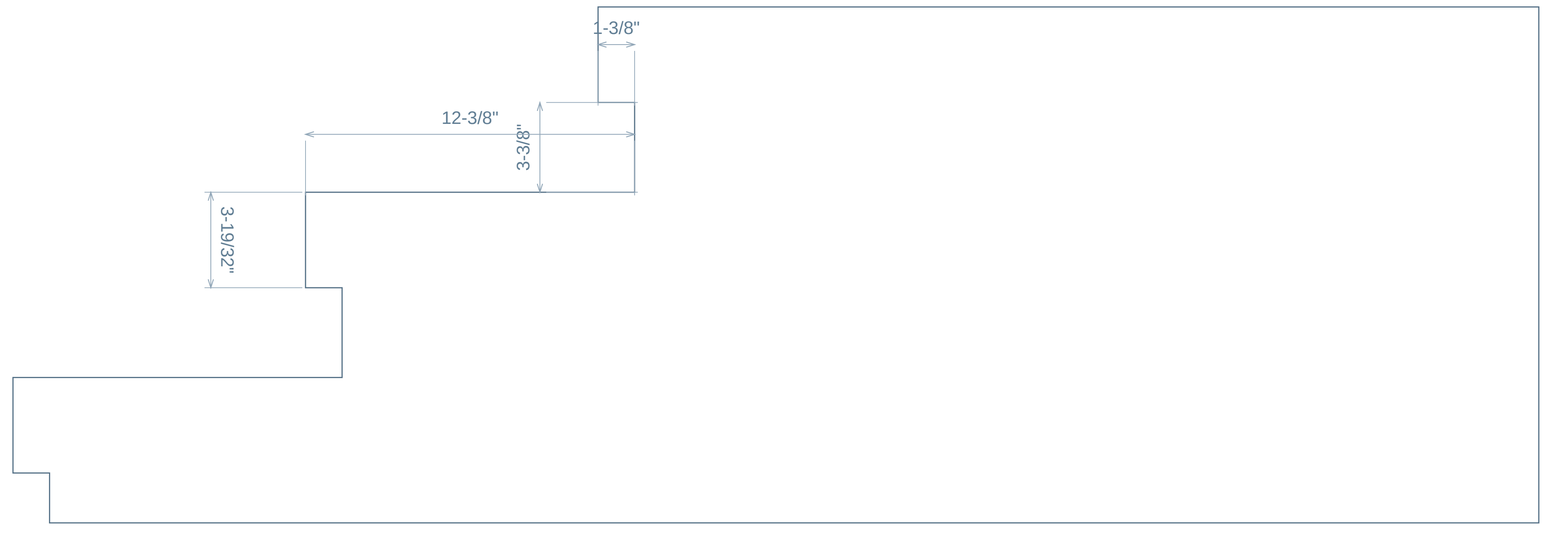

EDGE 115092 / LINE

EDGE 111645 / LINE

EDGE 55865 / LINE


EDGE 33200 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / ACTUAL SOURCE CONTOURS / DO NOT SCALE

plinth asm body 720 / OUTER PROFILE / EDGES 9-12

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES

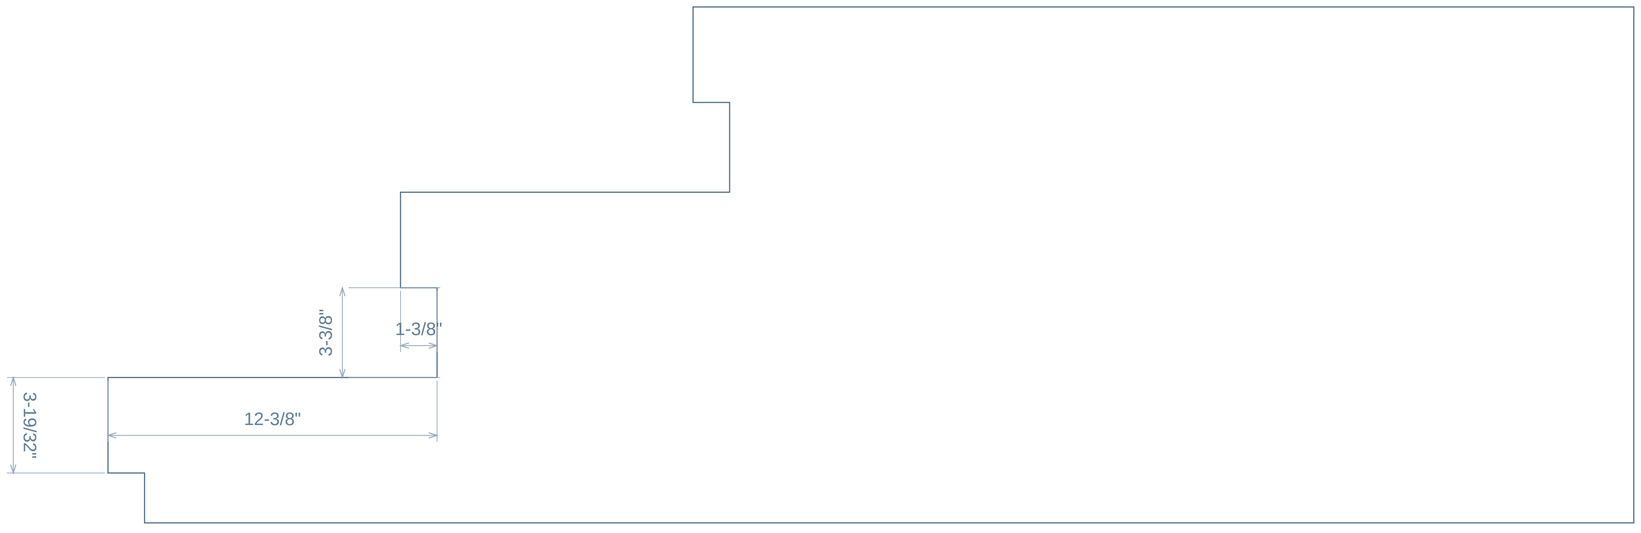

EDGE 40633 / LINE

EDGE 20089 / LINE

EDGE 48895 / LINE

EDGE 86550 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 720 / OUTER PROFILE / EDGES 13-14

body-0270 / QTY 1 / THICKNESS 1/4" / INCHES



EDGE 45011 / LINE


EDGE 1987 / LINE

UNMARKED ORTHOGONAL CORNERS 90.0 DEG / DIMENSIONS ATTACH TO ACTUAL CONNECTED BOUNDARY

plinth asm body 760

body-0893 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

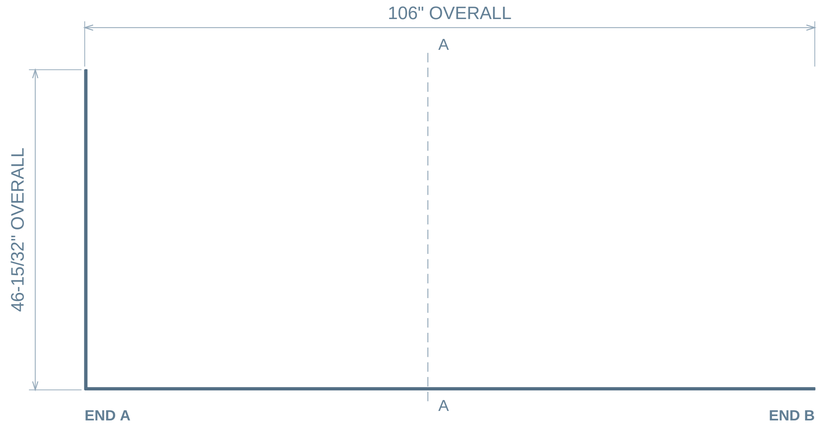

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

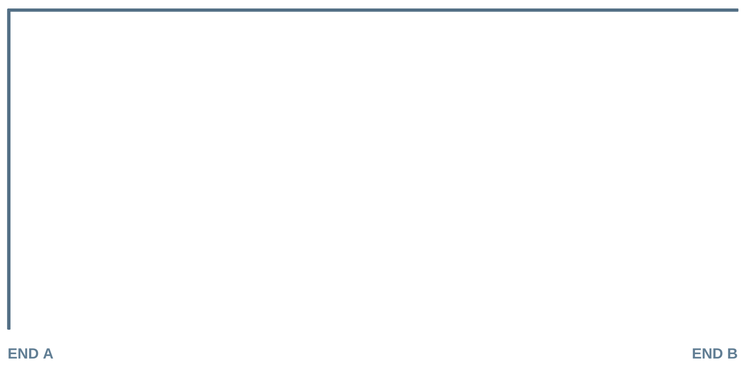

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 761

body-0894 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

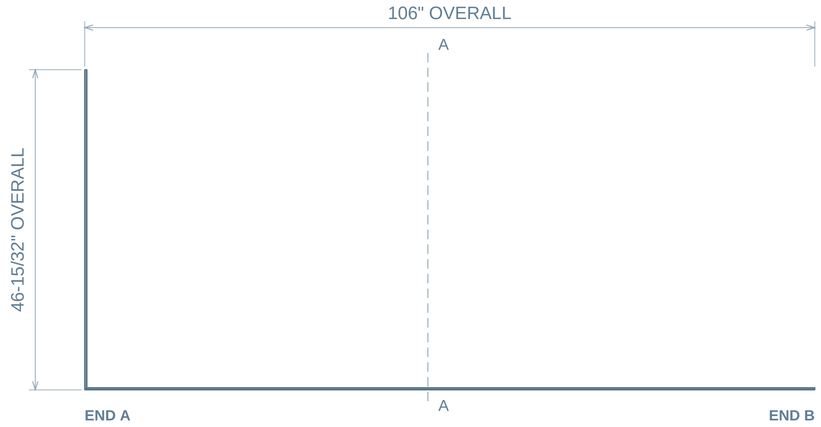

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

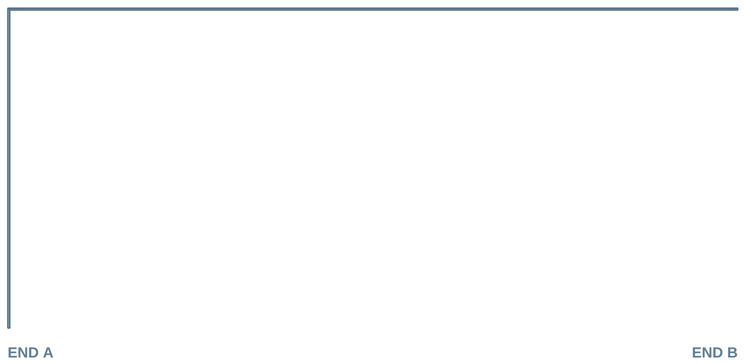


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-3/4"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 762

body-0895 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

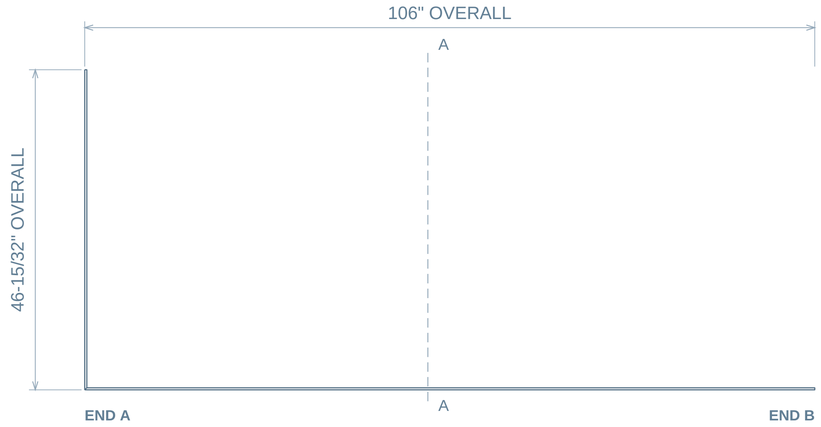

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

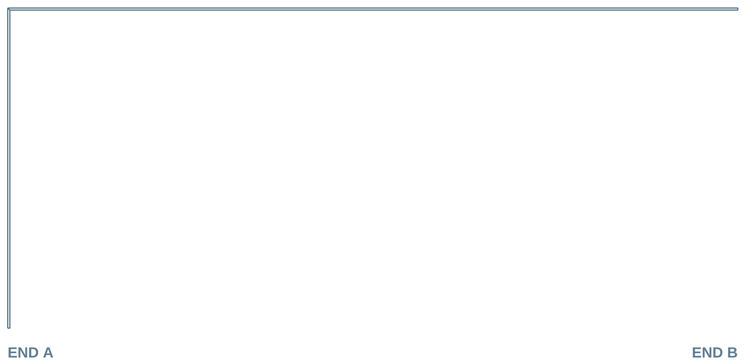


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 49-13/16" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 115-23/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 763

body-0896 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

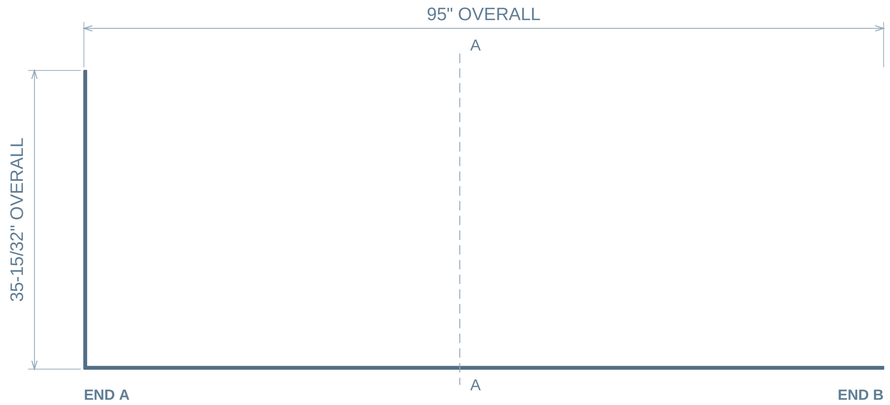

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

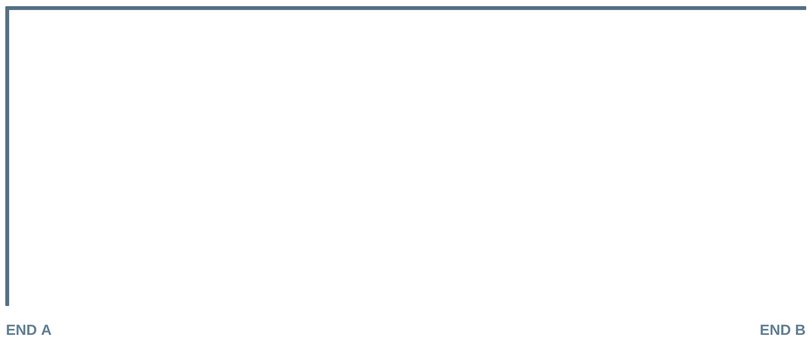

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

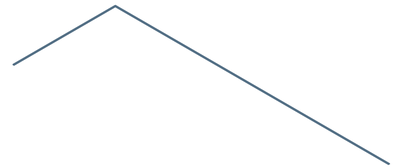

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 764

body-0897 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

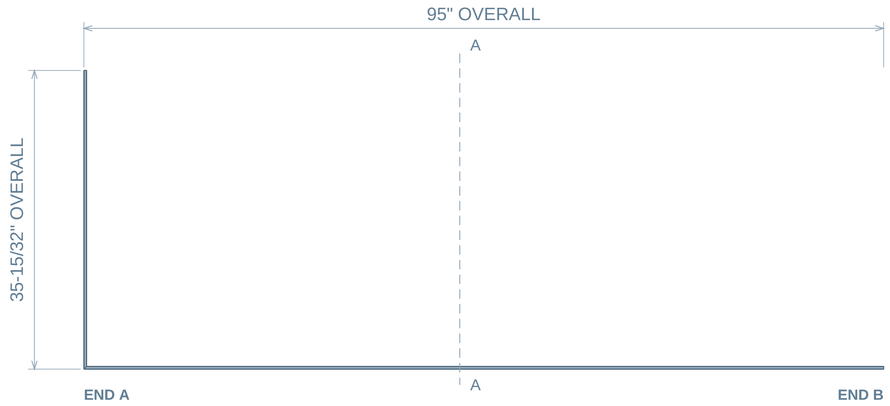

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

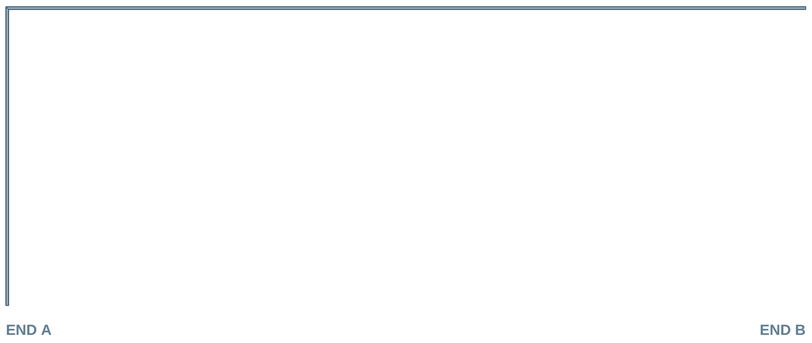


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

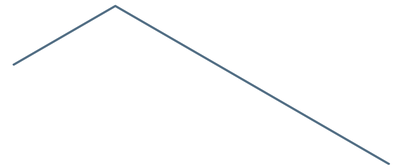

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

plinth asm body 765

body-0898 | QTY 1 IN PLINTH ASSEMBLY | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


01 / TOP - FACE A

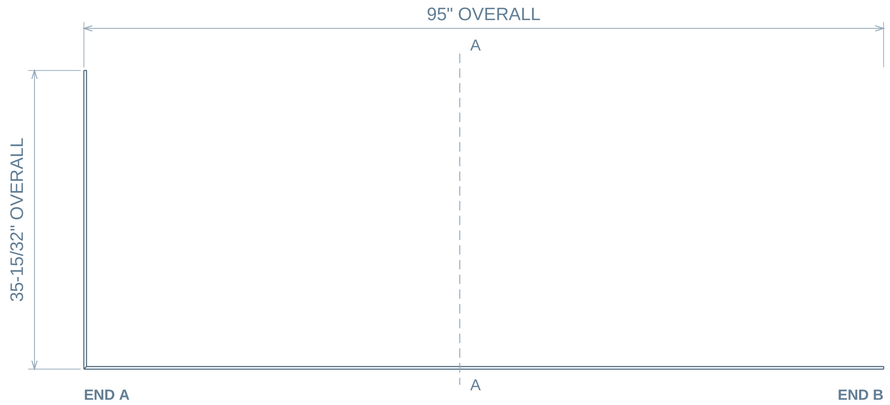

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 44-21/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

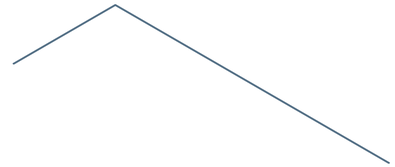

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 101-13/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

RH HANDRAIL COVE

17 bodies / 17 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

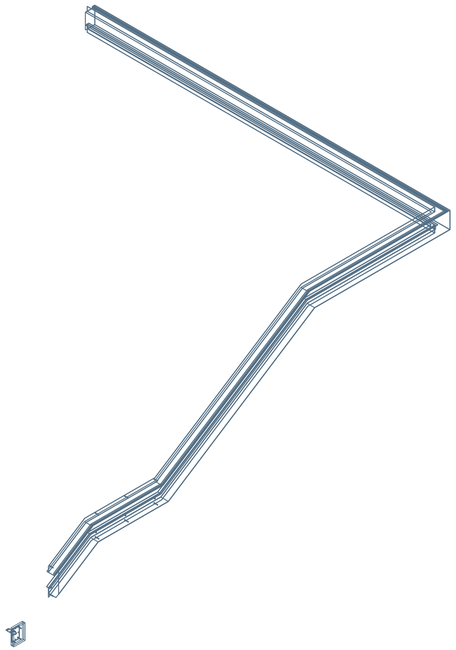

ASSEMBLY / TOP



PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B069-P01	cove handrail asm body 767	1	10-3/16"
02 / 2606-B069-P02	cove handrail asm body 768	1	287-7/16"
03 / 2606-B069-P03	cove handrail asm body 769	1	285-31/32"
04 / 2606-B069-P04	cove handrail asm body 770	1	285-1/16"
05 / 2606-B069-P05	cove handrail asm body 771	1	281-5/32"
06 / 2606-B069-P06	cove handrail asm body 772	1	284-31/32"
07 / 2606-B069-P07	cove handrail asm body 773	1	286-11/32"
08 / 2606-B069-P08	cove handrail asm body 774	1	281-29/32"
09 / 2606-B069-P09	cove handrail asm body 776	1	281-23/32"
10 / 2606-B069-P10	cove handrail asm body 777	1	282-1/32"
11 / 2606-B069-P14	cove handrail asm body 792	1	285-1/8"
12 / 2606-B069-P15	cove handrail asm body 793	1	285-3/16"
13 / 2606-B069-P16	cove handrail asm body 794	1	285-3/16"
14 / 2606-B069-P17	cove handrail asm body 795	1	7-1/32"
15 / 2606-B069-P18	cove handrail asm body 796	1	4-19/32"
16 / 2606-B069-P19	cove handrail asm body 797	1	10-1/32"
17 / 2606-B069-P20	cove handrail asm body 798	1	10-1/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

cove handrail asm body 767

body-0900 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:2


01 / TOP - FACE A

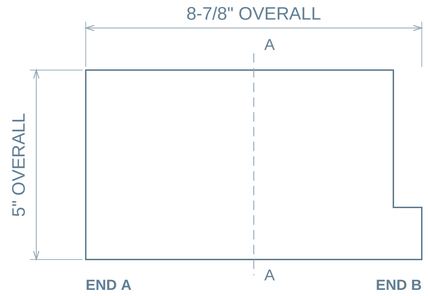

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 4-7/16" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

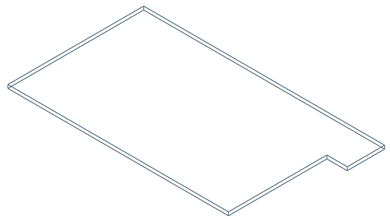

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 10-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


cove handrail asm body 768

body-0901 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:68

01 / TOP - FACE A



02 / FRONT - FORM PLAN

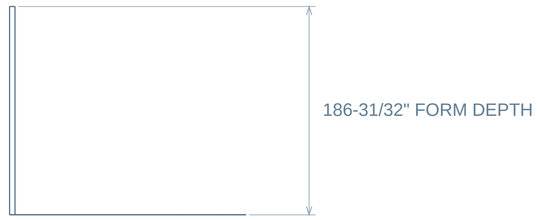

03 / BOTTOM - FACE B




GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 99-3/4" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 287-7/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 769

body-0902 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

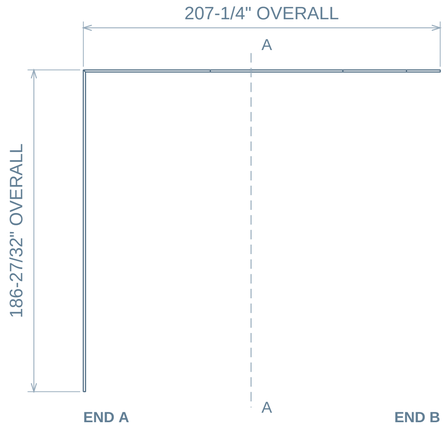

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

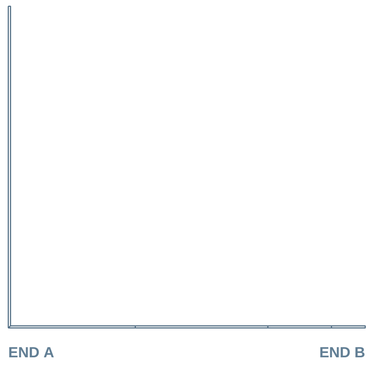

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 97-13/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 285-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


cove handrail asm body 770

body-0903 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:67

01 / TOP - FACE A



02 / FRONT - FORM PLAN

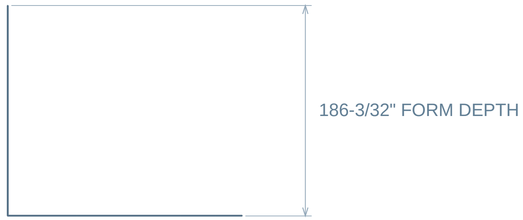

03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 97-5/8" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 285-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


cove handrail asm body 771

body-0904 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:66


01 / TOP - FACE A

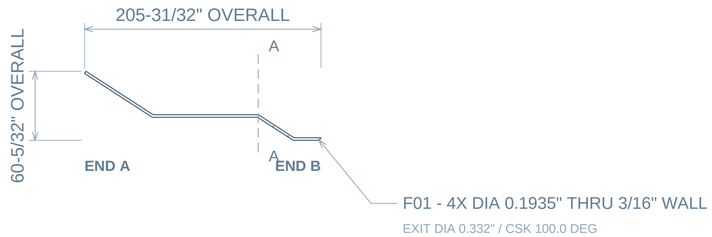

02 / FRONT - FORM PLAN

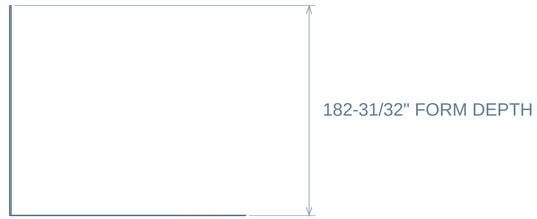


03 / BOTTOM - FACE B

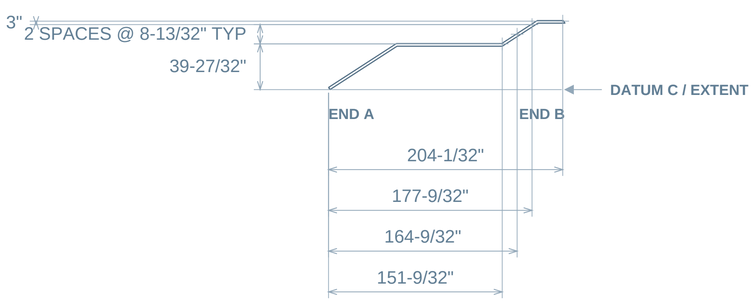

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT N = 86" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 772

body-0905 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

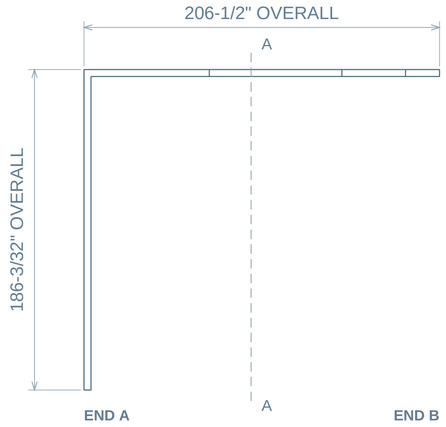

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

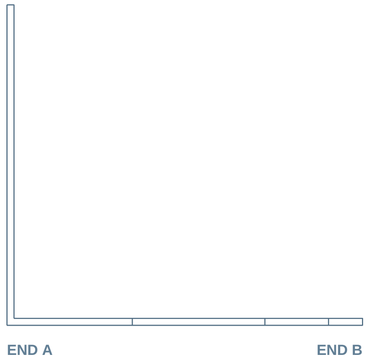

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 97-1/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 284-31/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 773

body-0906 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

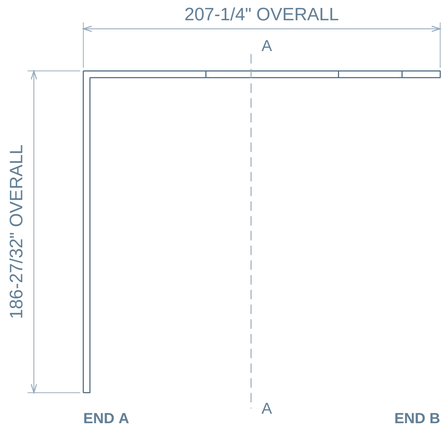

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

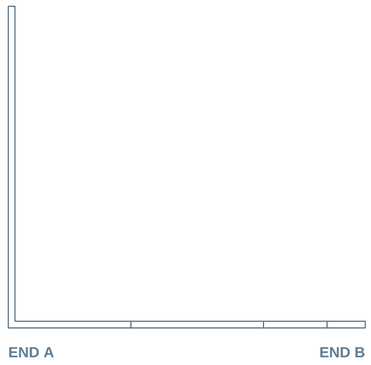


04 / SECTION A-A

CUT U = 97-13/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 286-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

cove handrail asm body 774

body-0907 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:66


01 / TOP - FACE A

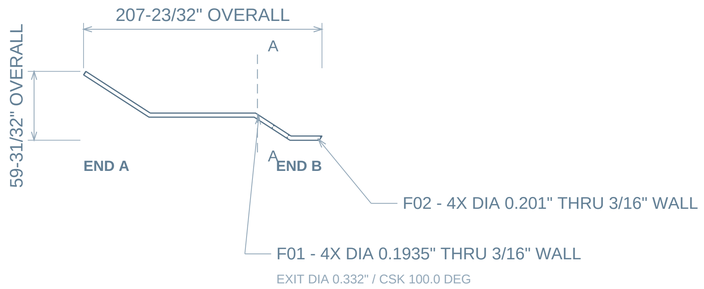

02 / FRONT - FORM PLAN




03 / BOTTOM - FACE B

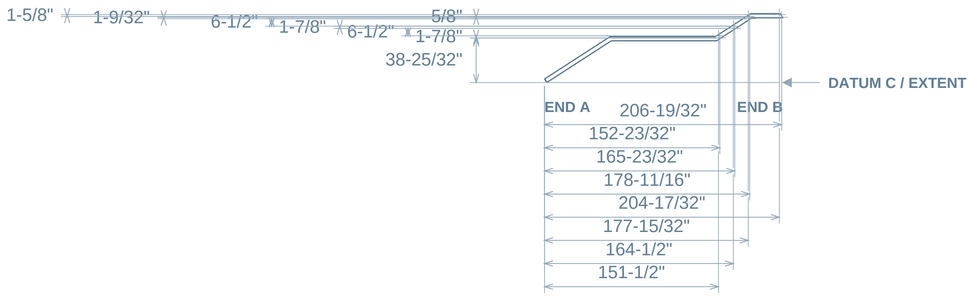

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 86" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


cove handrail asm body 776

body-0909 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:66


01 / TOP - FACE A

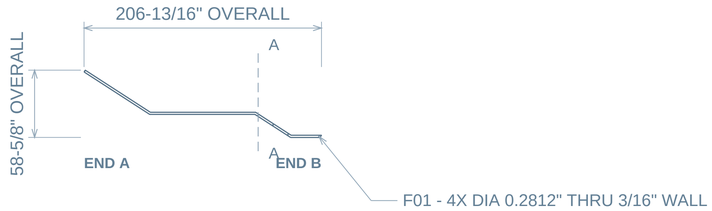

02 / FRONT - FORM PLAN

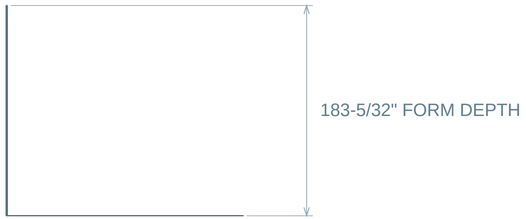


03 / BOTTOM - FACE B

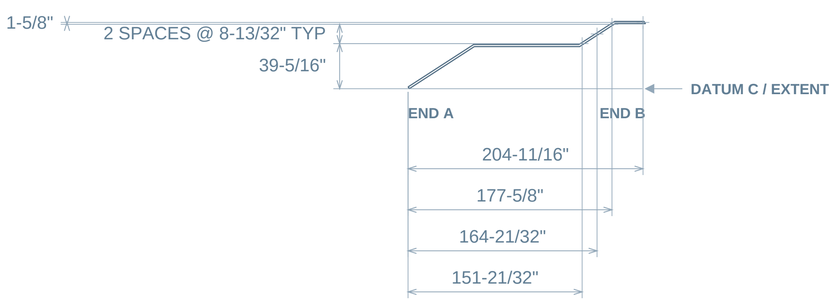

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 86-3/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


cove handrail asm body 777

body-0910 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:43


01 / TOP - FACE A

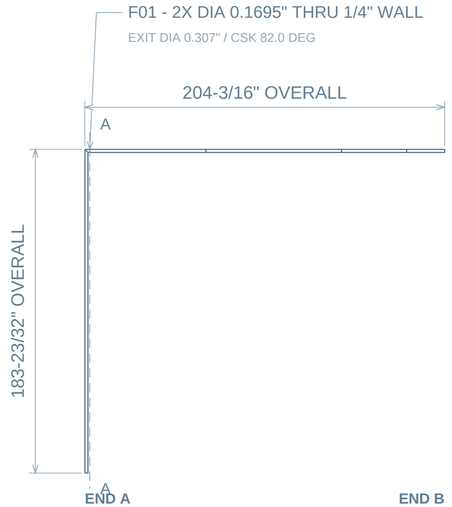

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

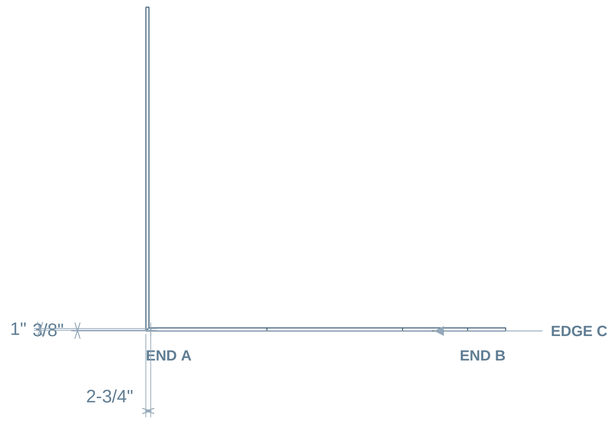

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 30-3/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 792

body-0925 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

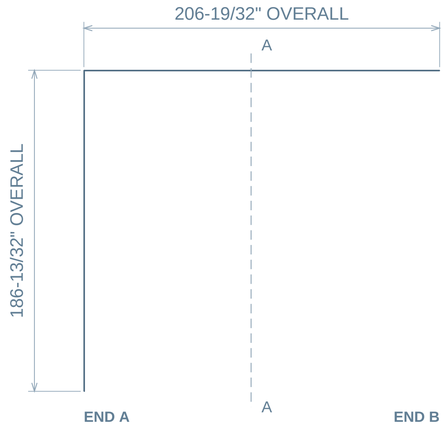

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

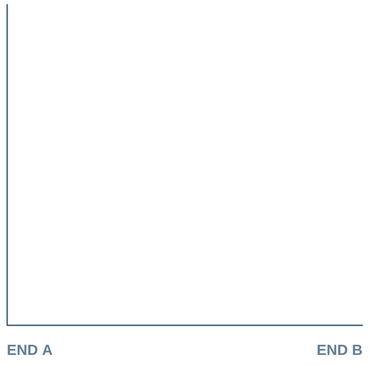


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 97-3/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 285-1/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 793

body-0926 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

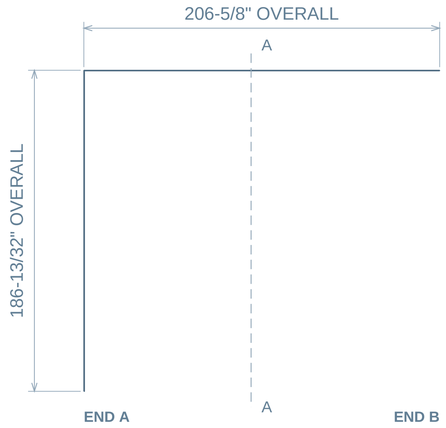

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

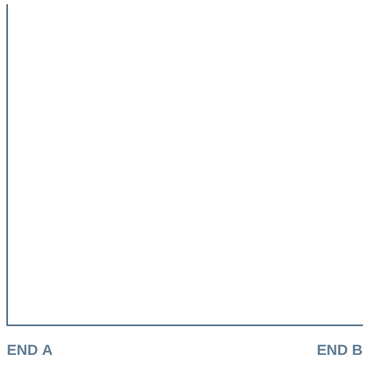

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 97-1/8" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 285-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 794

body-0927 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

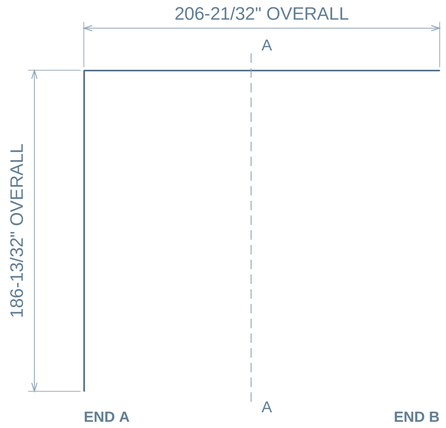

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

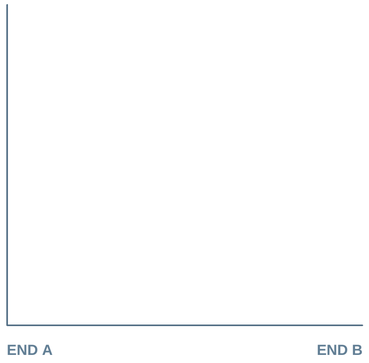


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

04 / SECTION A-A

CUT U = 97-1/8" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 285-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 795

body-0928 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

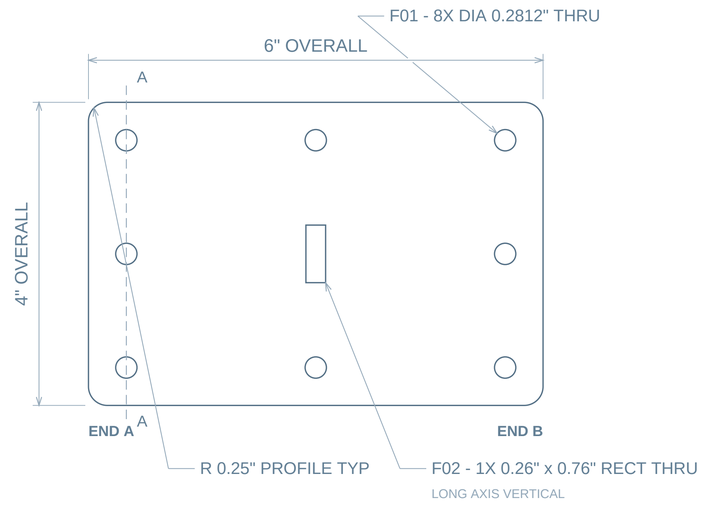

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

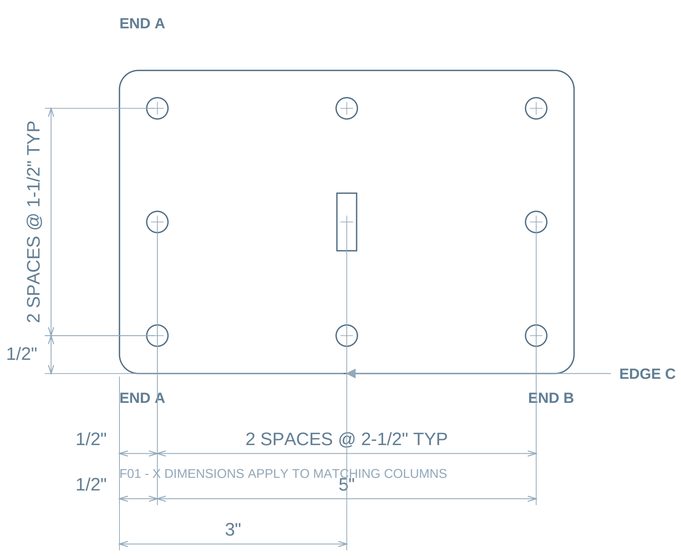


04 / SECTION A-A

X = 1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

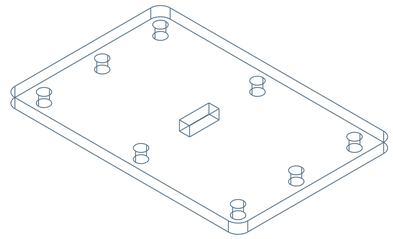

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

cove handrail asm body 796

body-0929 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

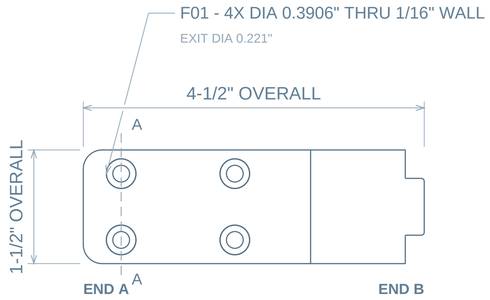

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B

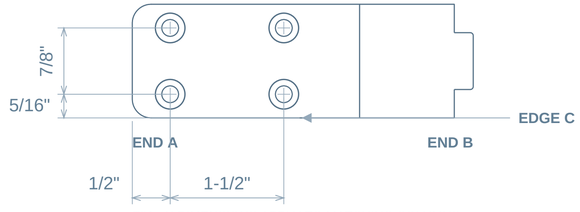


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 1/8" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

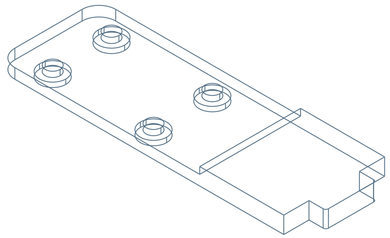

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

cove handrail asm body 797

body-0930 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

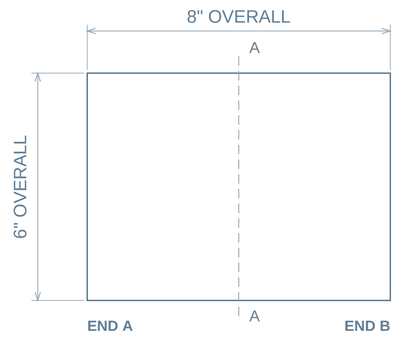

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 4" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

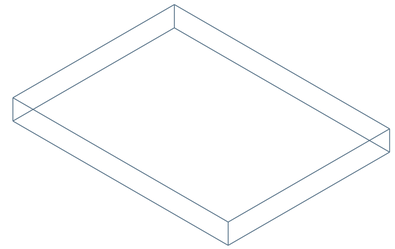

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 10-1/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

cove handrail asm body 798

body-0931 | QTY 1 IN RH HANDRAIL COVE | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

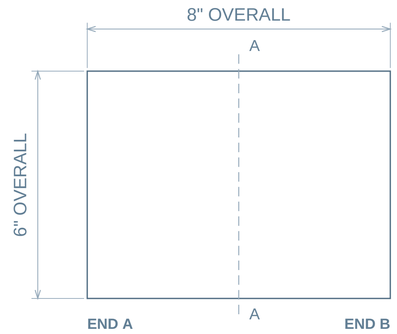

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 4" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 10-1/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


HANDRAIL BRACKETS

80 bodies / 6 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

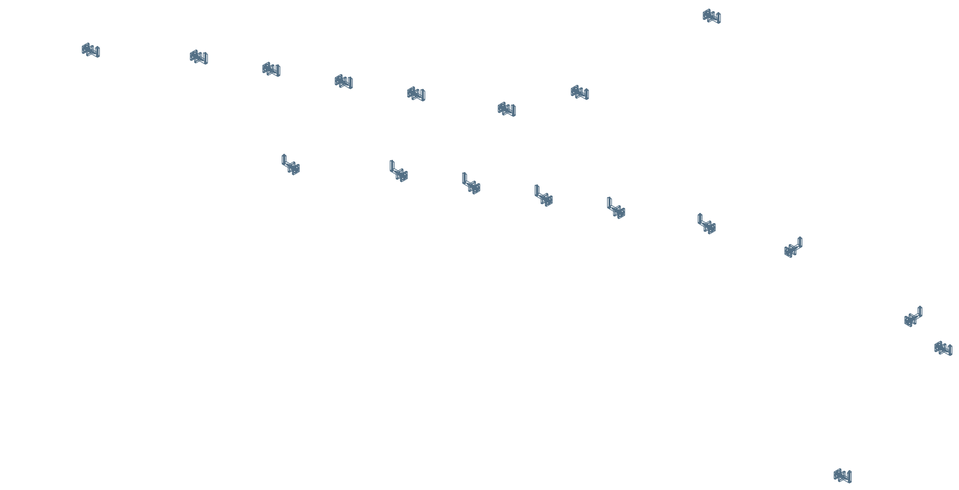

ASSEMBLY / TOP

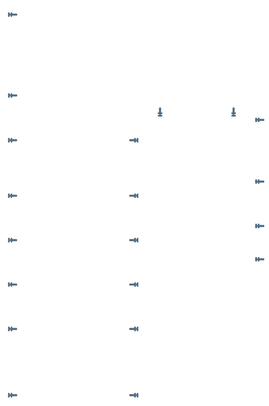

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B070-P01	handrail bracket inside puck	20	2-1/2"
02 / 2606-B070-P02	handrail bracket LH sloped stem [REF ONLY]	7	3-11/16"
03 / 2606-B070-P03	handrail bracket outside clamp disc	20	1-17/32"
04 / 2606-B070-P05	handrail bracket outside cover	20	2-1/2"
05 / 2606-B070-P08	handrail bracket flat stem	8	3-9/32"
06 / 2606-B070-P10	handrail bracket RH sloped stem [REF ONLY]	5	3-11/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Sloped bracket stems retain explicit curved intersection detailing limitations.


handrail bracket inside puck

body-0673 | QTY 20 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

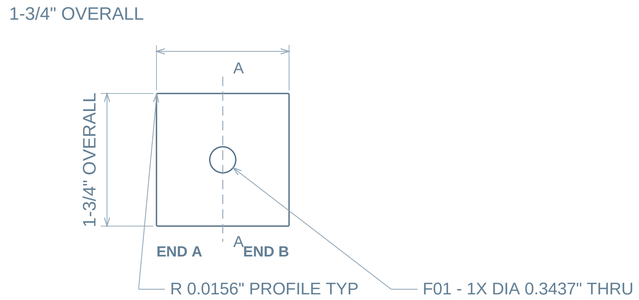

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 7/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


handrail bracket LH sloped stem

body-0674 / QTY 7 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

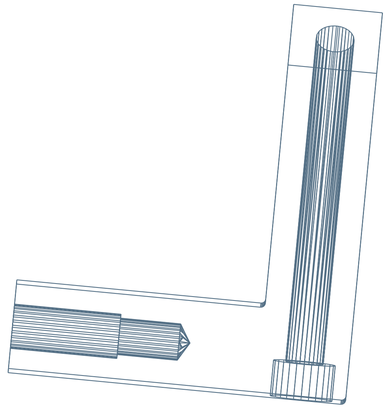


END REFERENCE



SIDE REFERENCE

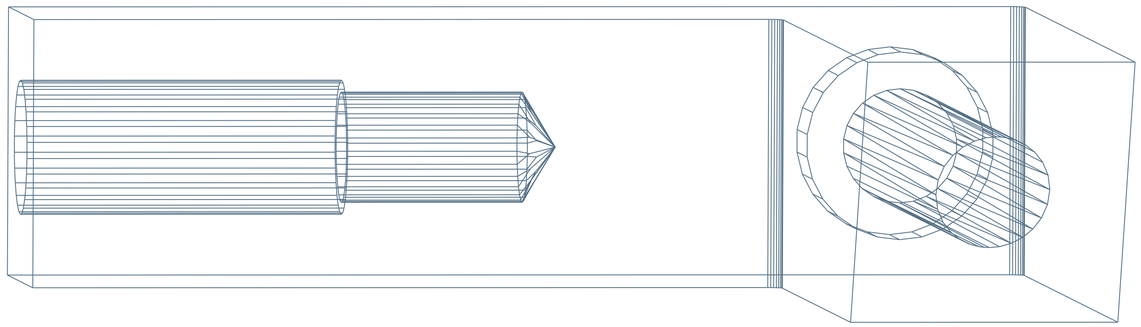

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


handrail bracket outside clamp disc

body-0675 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / CONCENTRIC BORES

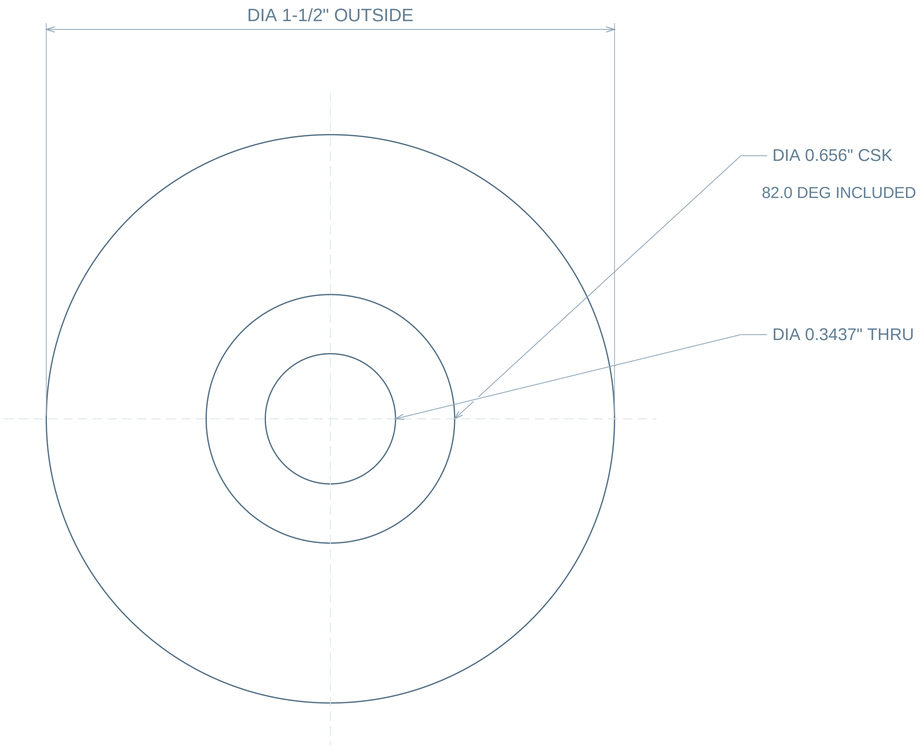

02 / DIAMETRAL SECTION A-A

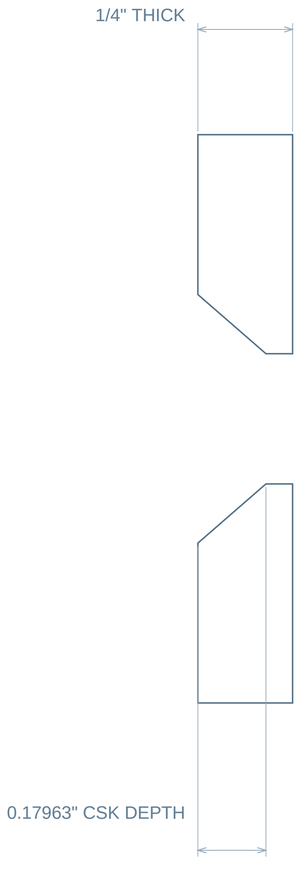


BORE AND COUNTERSINK ARE CONCENTRIC WITH OD

FRACTIONS NEAREST 1/32 / MEASURED DECIMAL BORES RETAINED / ANGLES 0.1 DEG / DO NOT SCALE


handrail bracket outside cover

body-0677 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / POCKET OPENING

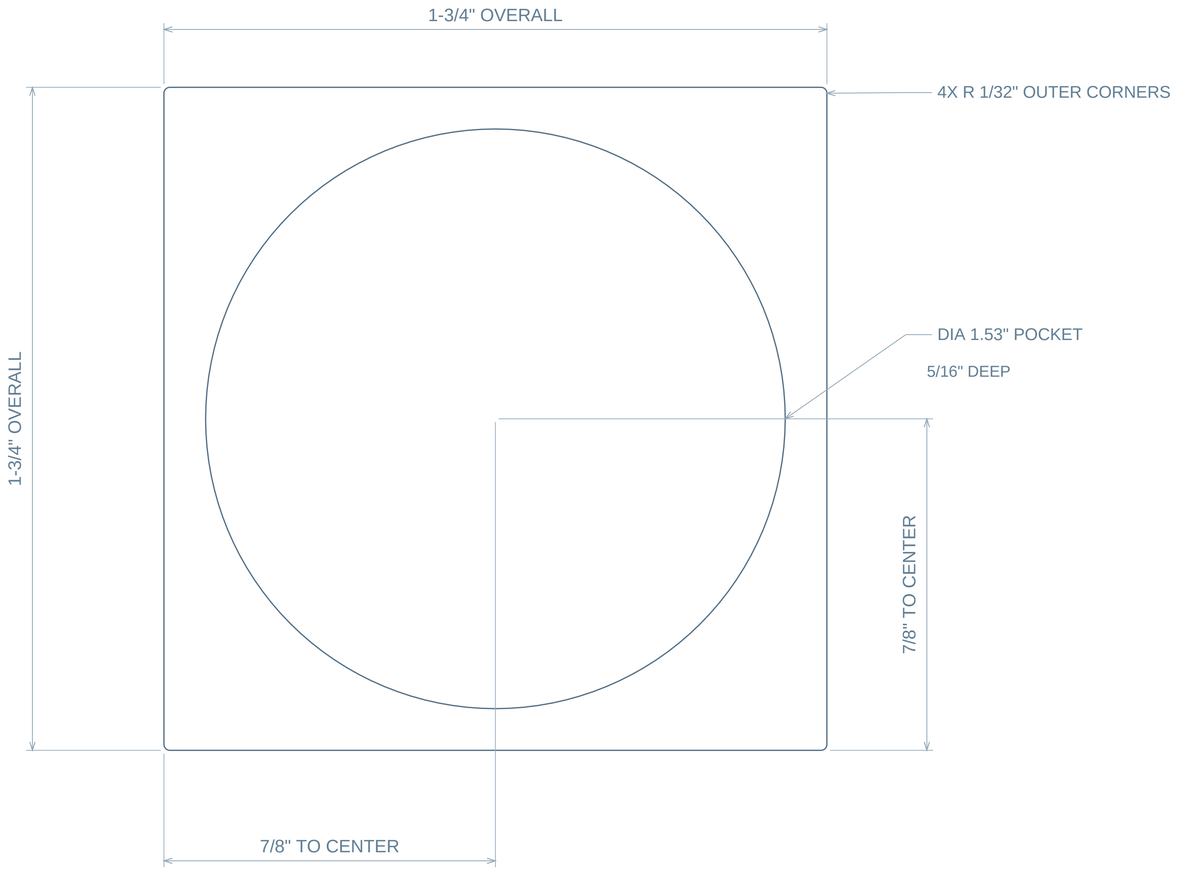


02 / CENTER SECTION A-A

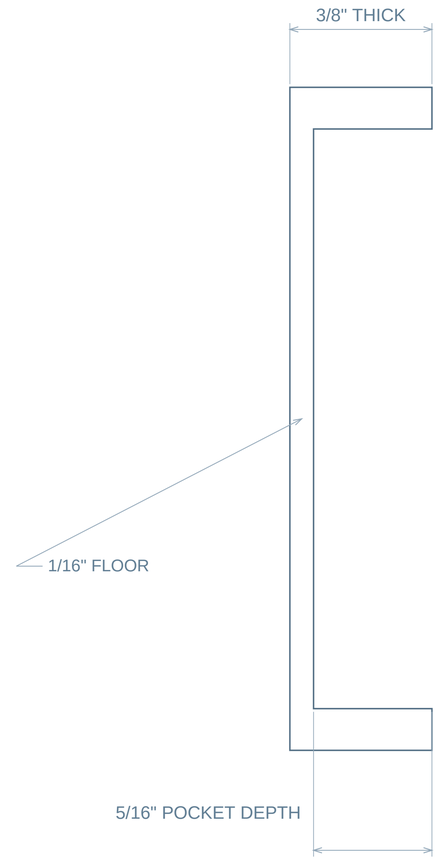


handrail bracket flat stem

body-0698 | QTY 8 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

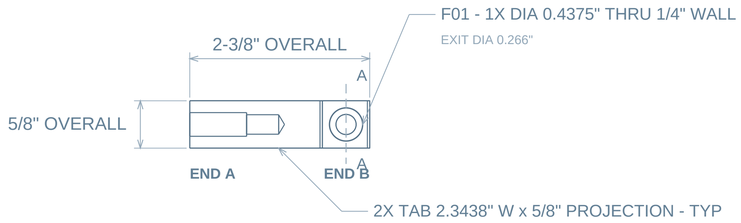

02 / FRONT - FORM PLAN

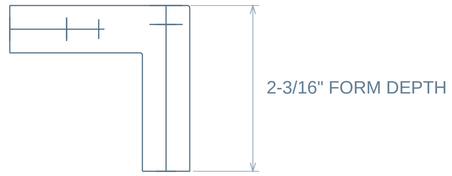

03 / BOTTOM - FACE B

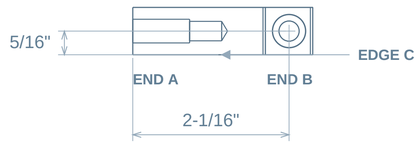

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 1-1/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 1-3/16"

1 SPACES @ 0" TYP

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


handrail bracket RH sloped stem

body-0778 / QTY 5 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

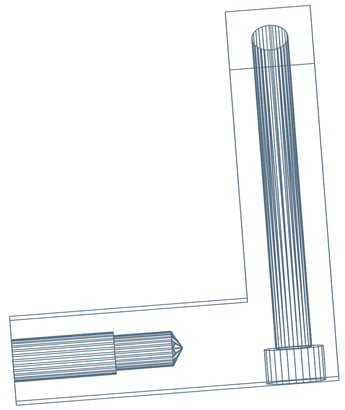


END REFERENCE



SIDE REFERENCE

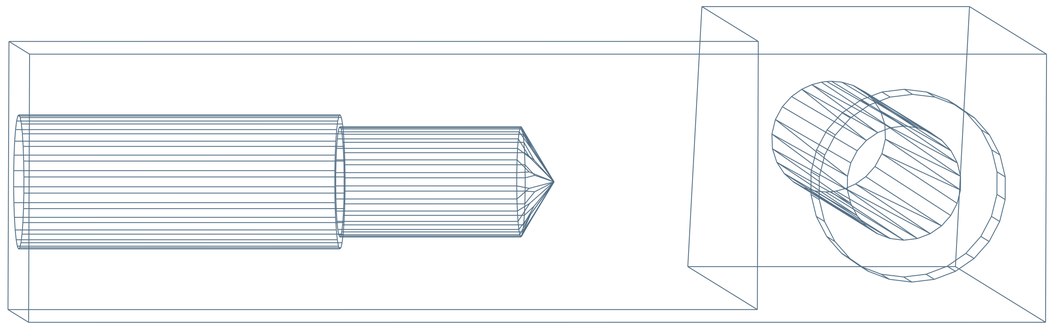

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


HANDRAIL BRACKET MACHINING

80 bodies / 6 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

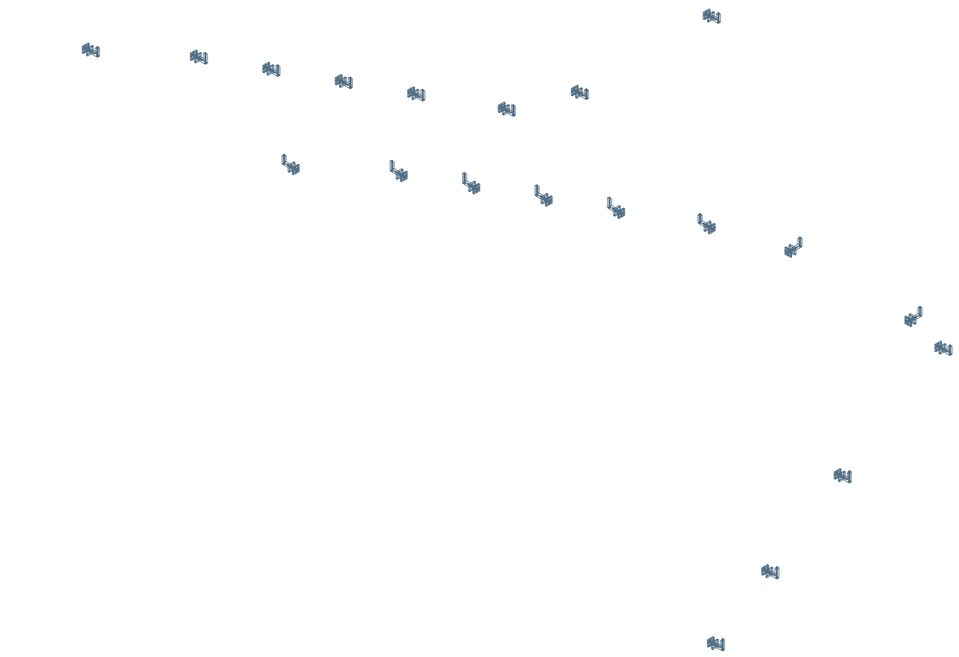

ASSEMBLY / TOP

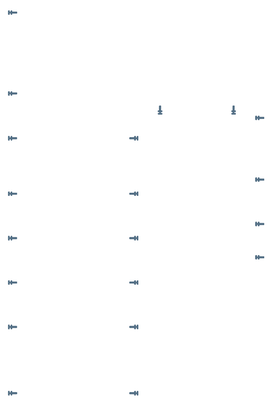

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B070-P01	handrail bracket inside puck	20	2-1/2"
02 / 2606-B070-P02	handrail bracket LH sloped stem [REF ONLY]	7	3-11/16"
03 / 2606-B070-P03	handrail bracket outside clamp disc	20	1-17/32"
04 / 2606-B070-P05	handrail bracket outside cover	20	2-1/2"
05 / 2606-B070-P08	handrail bracket flat stem	8	3-9/32"
06 / 2606-B070-P10	handrail bracket RH sloped stem [REF ONLY]	5	3-11/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

SHARED MACHINING STAGE / physical bracket part numbers and quantities are reused.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Sloped bracket stems retain explicit curved-intersection detailing limitations.

Each hole/slot includes size and two center-location dimensions.


Formed bodies retain inner source radii and actual sections.

Model-derived data. Existing dedicated drawings and prior annotations.


handrail bracket inside puck

body-0673 | QTY 20 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

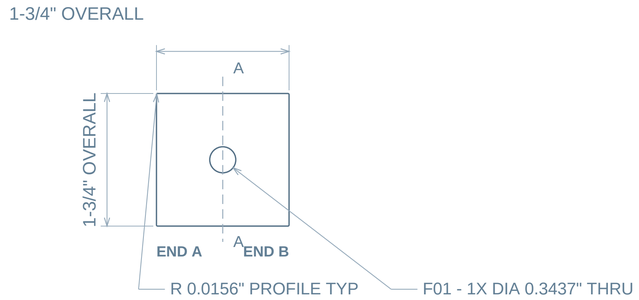

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 7/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


handrail bracket LH sloped stem

body-0674 / QTY 7 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

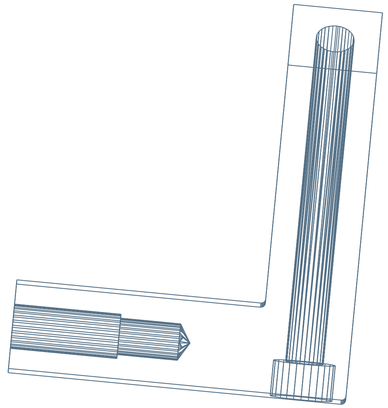


END REFERENCE



SIDE REFERENCE

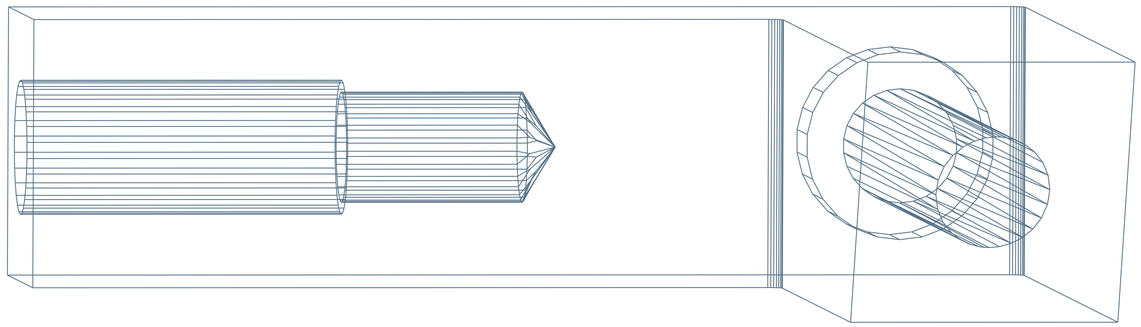

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


handrail bracket outside clamp disc

body-0675 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / CONCENTRIC BORES

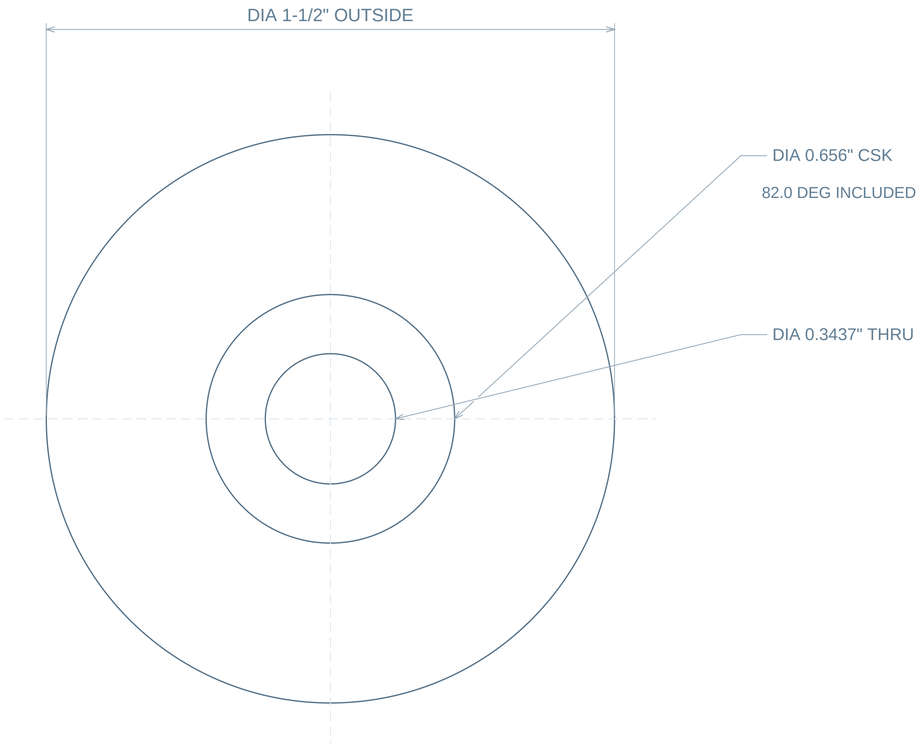

02 / DIAMETRAL SECTION A-A

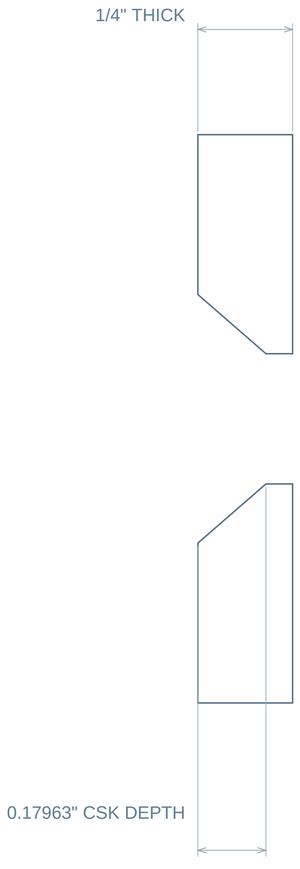


BORE AND COUNTERSINK ARE CONCENTRIC WITH OD

FRACTIONS NEAREST 1/32 / MEASURED DECIMAL BORES RETAINED / ANGLES 0.1 DEG / DO NOT SCALE


handrail bracket outside cover

body-0677 / QTY 20 / INCHES / VIEWS 5:1

01 / TRUE FACE / POCKET OPENING

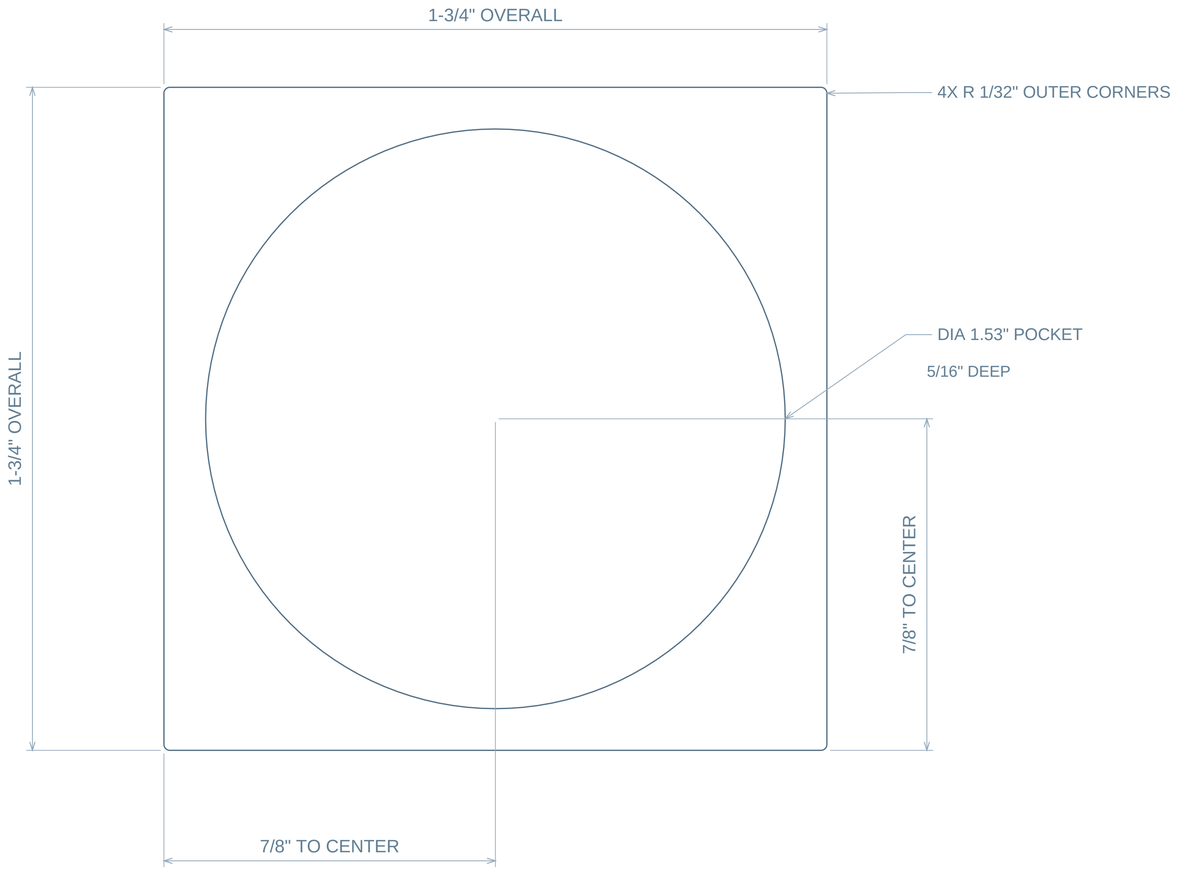


02 / CENTER SECTION A-A

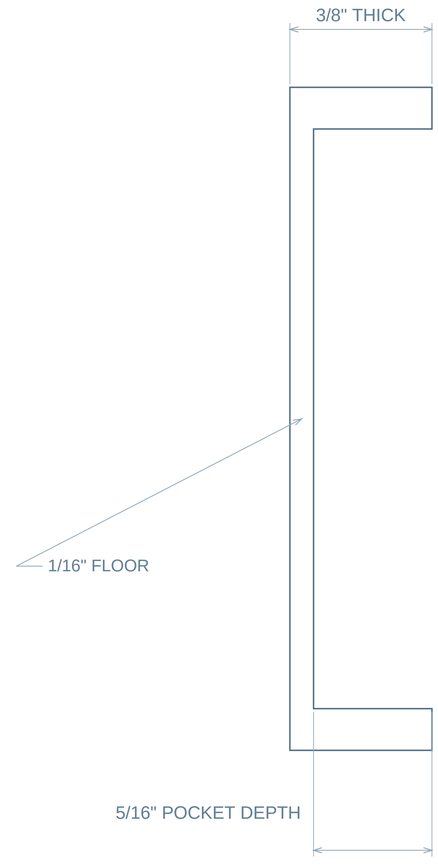


handrail bracket flat stem

body-0698 | QTY 8 IN HANDRAIL BRACKETS | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

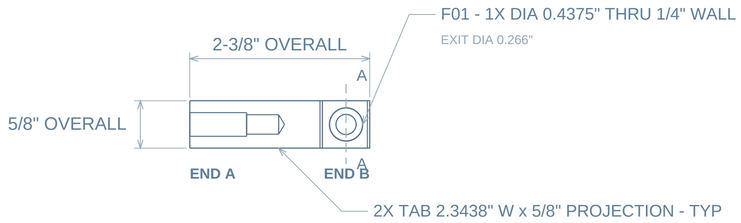

02 / FRONT - FORM PLAN

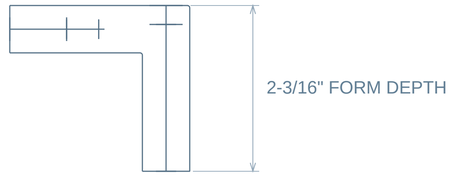

03 / BOTTOM - FACE B

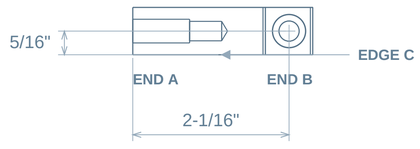

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 1-1/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 1-3/16"

1 SPACES @ 0" TYP

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.


handrail bracket RH sloped stem

body-0778 / QTY 5 / MODEL GEOMETRY REFERENCE / VIEWS NTS


DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Unsupported STEP curve ; add a verified reader before dimensioning this body


FACE REFERENCE

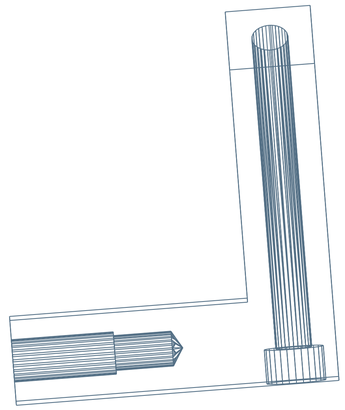


END REFERENCE



SIDE REFERENCE

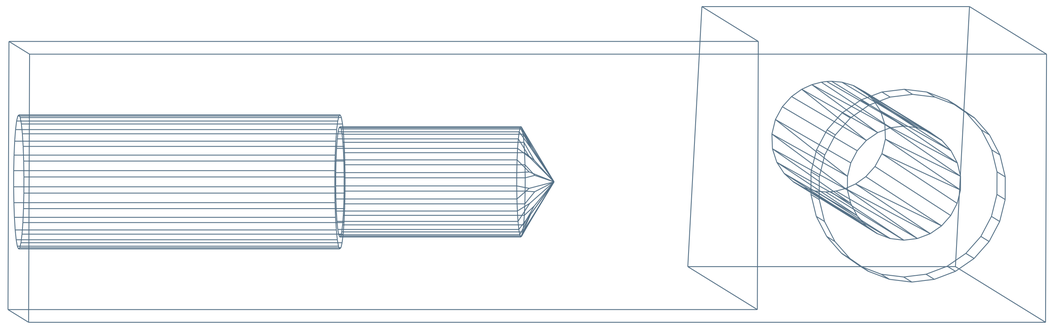

ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

LH HANDRAIL

4 bodies / 4 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

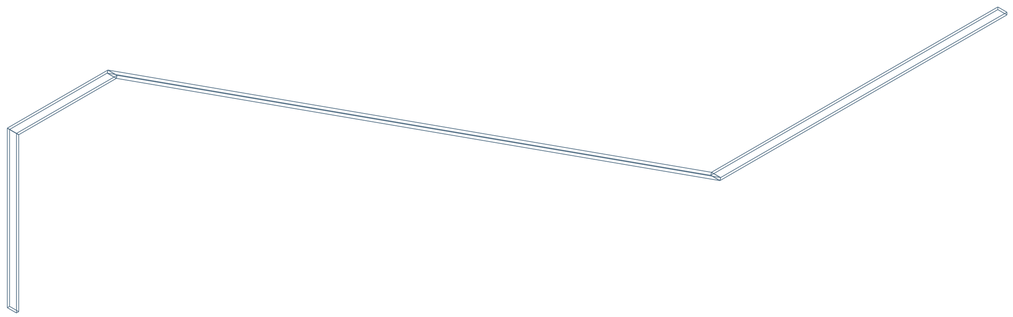

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B072-P01	stair asm body 451	1	157-11/32"
02 / 2606-B072-P02	stair asm body 452	1	22-3/32"
03 / 2606-B072-P03	stair asm body 453	1	34-1/16"
04 / 2606-B072-P04	stair asm body 454	1	62-13/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


LH HANDRAIL

2606-B072-P01-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 451 / COMPLETE PROFILE

body-0669 / QTY 1 / NORMAL DEPTH 2" / INCHES

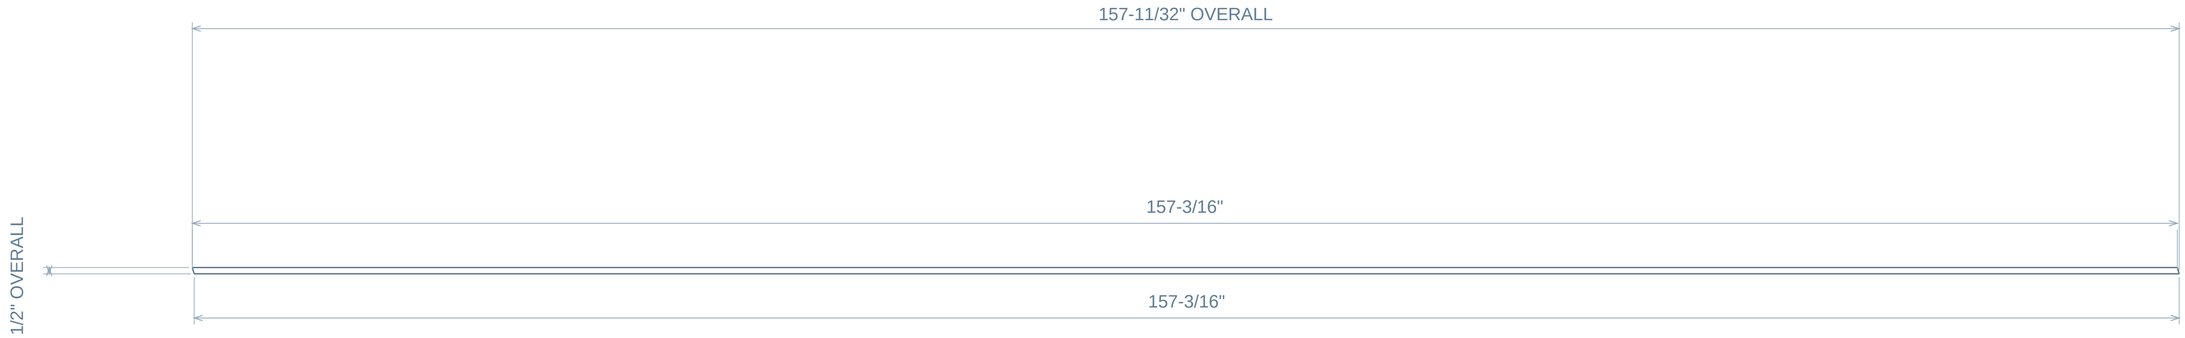


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1



DETAIL 2 / CONNECTED OUTLINE / 1:1




FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 452

body-0670 | QTY 1 IN LH HANDRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

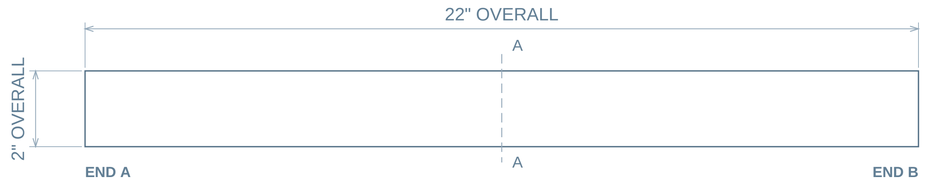

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 11" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

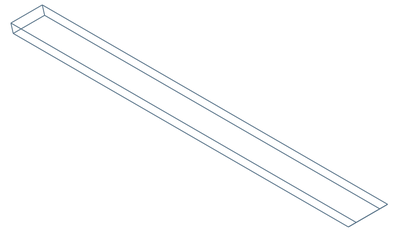

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 22-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 453

body-0671 | QTY 1 IN LH HANDRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

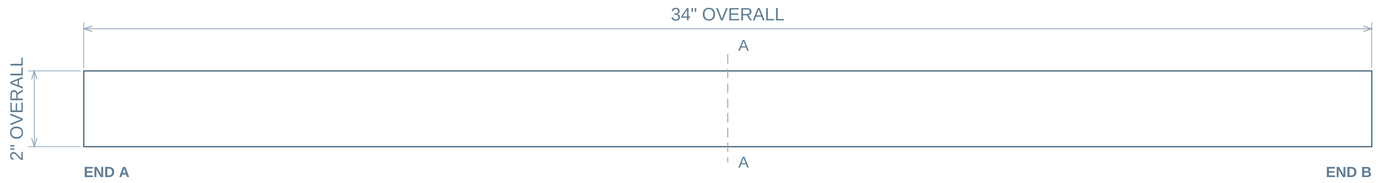

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 17" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

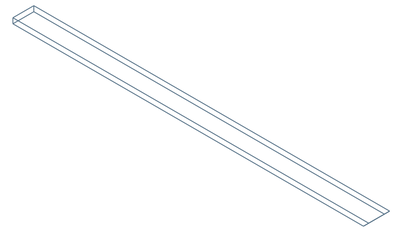

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 34-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 454

body-0672 | QTY 1 IN LH HANDRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

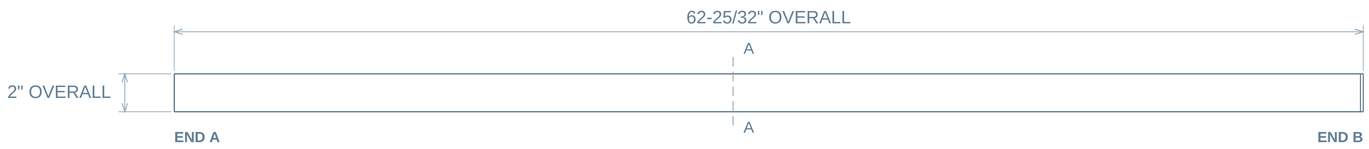

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 29-1/2" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

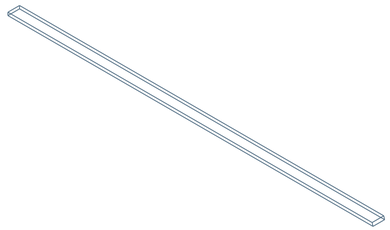

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 62-13/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


RH STAIR HANDRAIL + SUBRAIL

13 bodies / 13 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

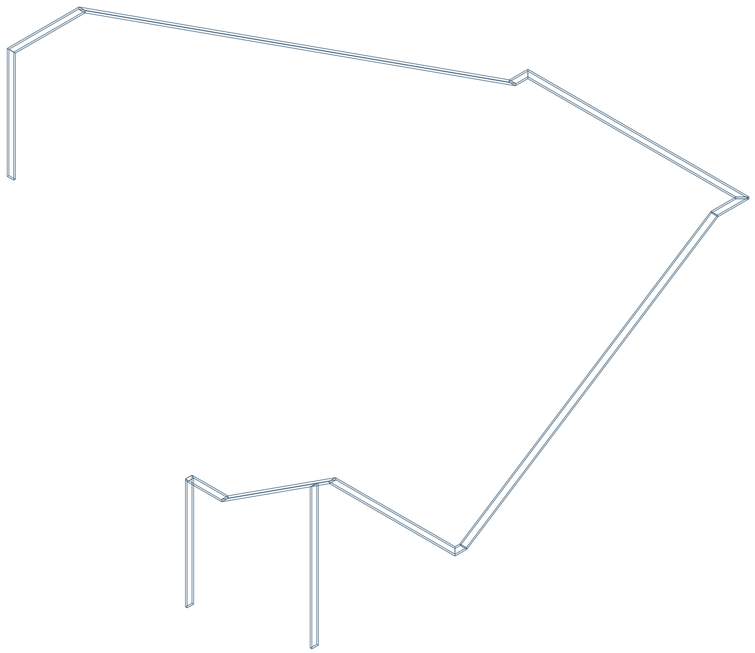

ASSEMBLY / TOP

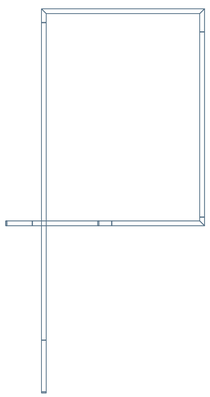

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B073-P01	stair asm body 438	1	34-1/16"
02 / 2606-B073-P02	stair asm body 439	1	11-11/32"
03 / 2606-B073-P03	stair asm body 440	1	38-23/32"
04 / 2606-B073-P04	stair asm body 441	1	4-3/16"
05 / 2606-B073-P05	stair asm body 442	1	91-7/8"
06 / 2606-B073-P06	stair asm body 443	1	9-7/8"
07 / 2606-B073-P07	stair asm body 444	1	67-13/16"
08 / 2606-B073-P08	stair asm body 445	1	6-5/32"
09 / 2606-B073-P09	stair asm body 446	1	157-11/32"
10 / 2606-B073-P10	stair asm body 447	1	22-3/32"
11 / 2606-B073-P11	stair asm body 448	1	34-1/16"
12 / 2606-B073-P12	stair asm body 449	1	39-1/2"
13 / 2606-B073-P13	stair asm body 450	1	43-3/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole slot includes size and XYZ center-location dimensions.

Formed bodies retain their source-stair arc actual solutions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.


Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Material, finish and manufacturing tolerances require job release data.

stair asm body 438

body-0656 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

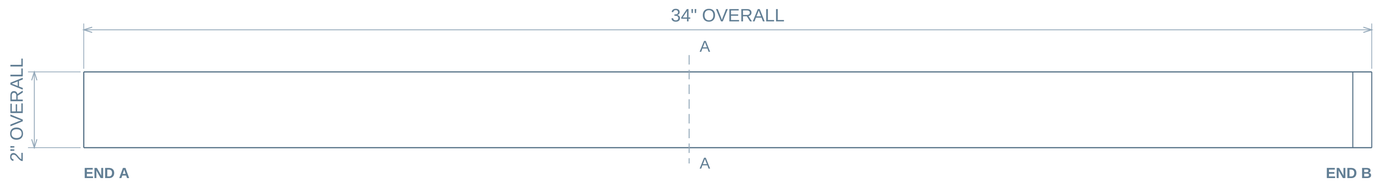

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 15-31/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

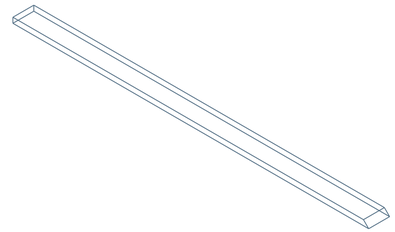

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 34-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 439

body-0657 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:1

01 / TOP - FACE A

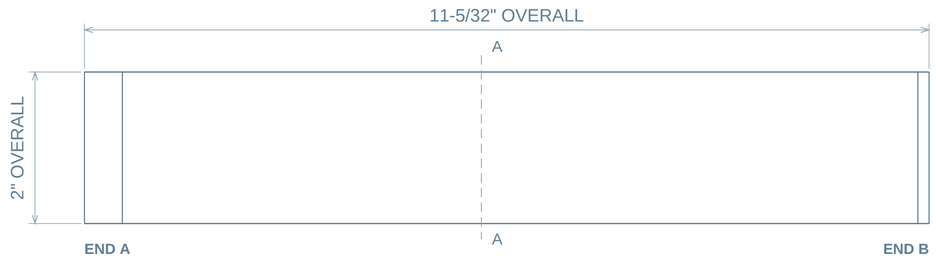

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 5-1/4" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 11-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

CALIPER / 2606


RH STAIR HANDRAIL + SUBRAIL

2606-B073-P03-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 440 / COMPLETE PROFILE

body-0658 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

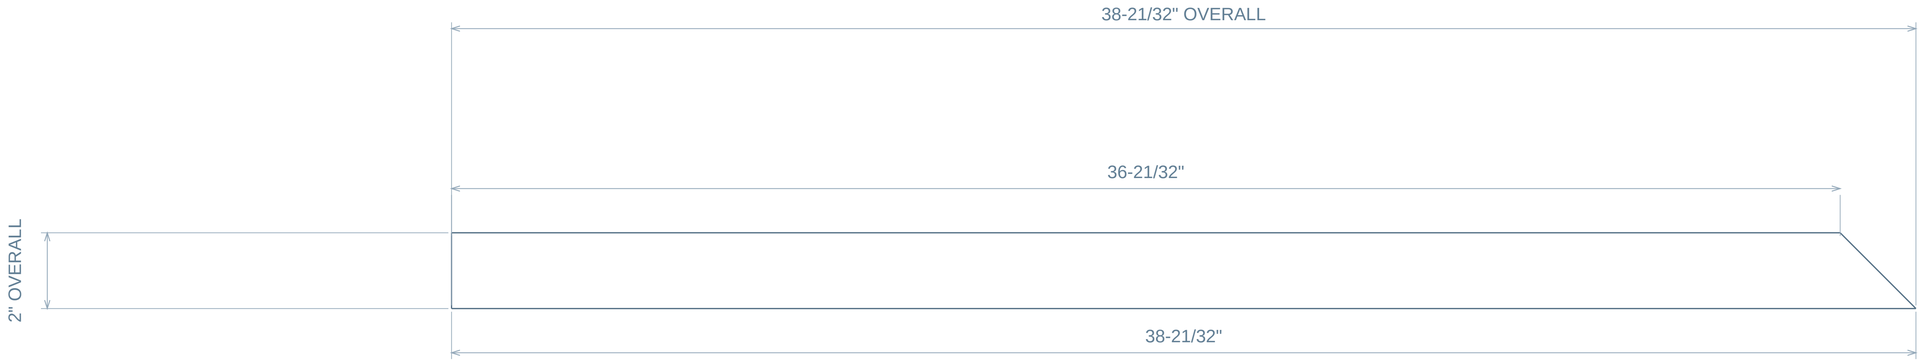


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1



DETAIL 2 / CONNECTED OUTLINE / 1:1



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


RH STAIR HANDRAIL + SUBRAIL

2606-B073-P04-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 441 / COMPLETE PROFILE


body-0659 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

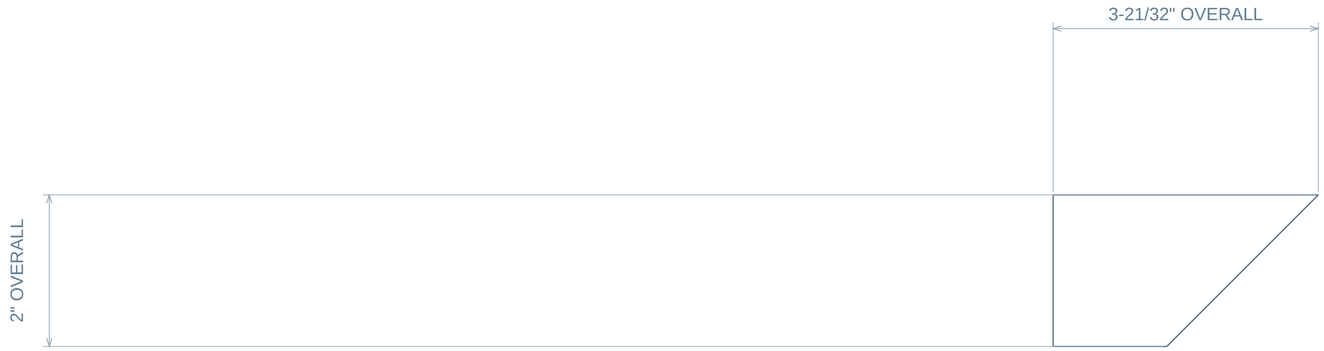

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

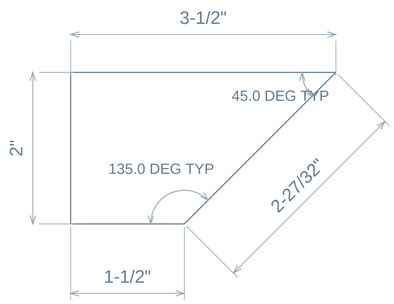


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 442

body-0660 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:5

01 / TOP - FACE A

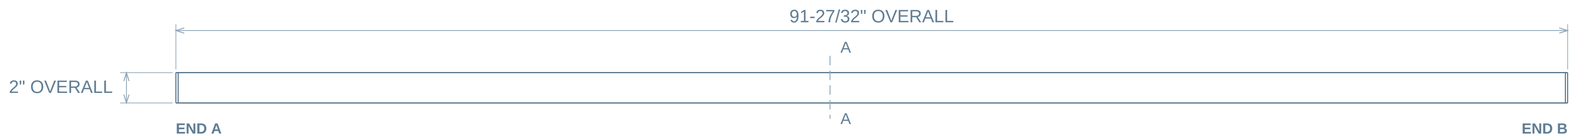

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 43-5/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 91-7/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

CALIPER / 2606


RH STAIR HANDRAIL + SUBRAIL

2606-B073-P06-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 443 / COMPLETE PROFILE


body-0661 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

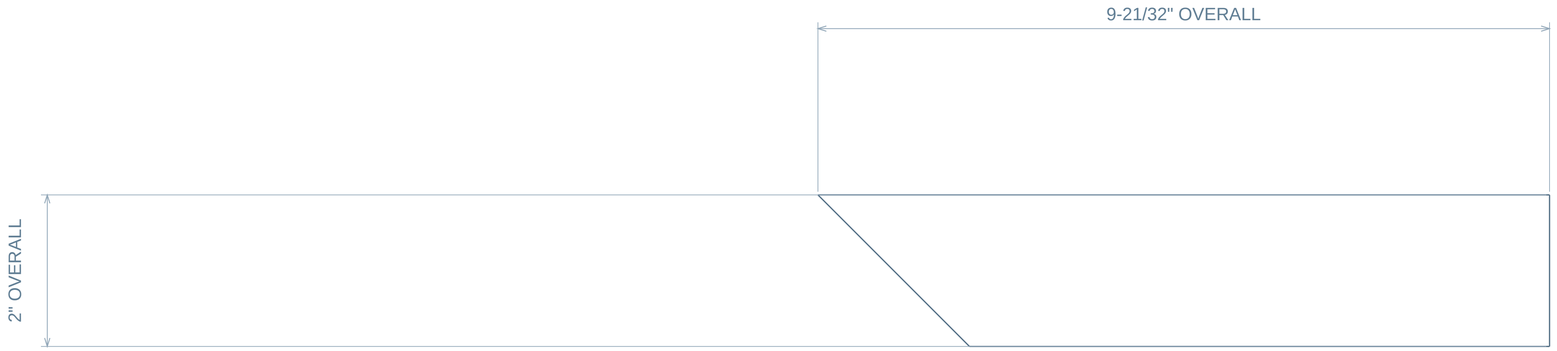

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:2

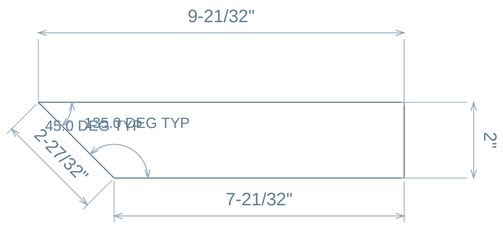

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


RH STAIR HANDRAIL + SUBRAIL

2606-B073-P07-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 444 / COMPLETE PROFILE


body-0662 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

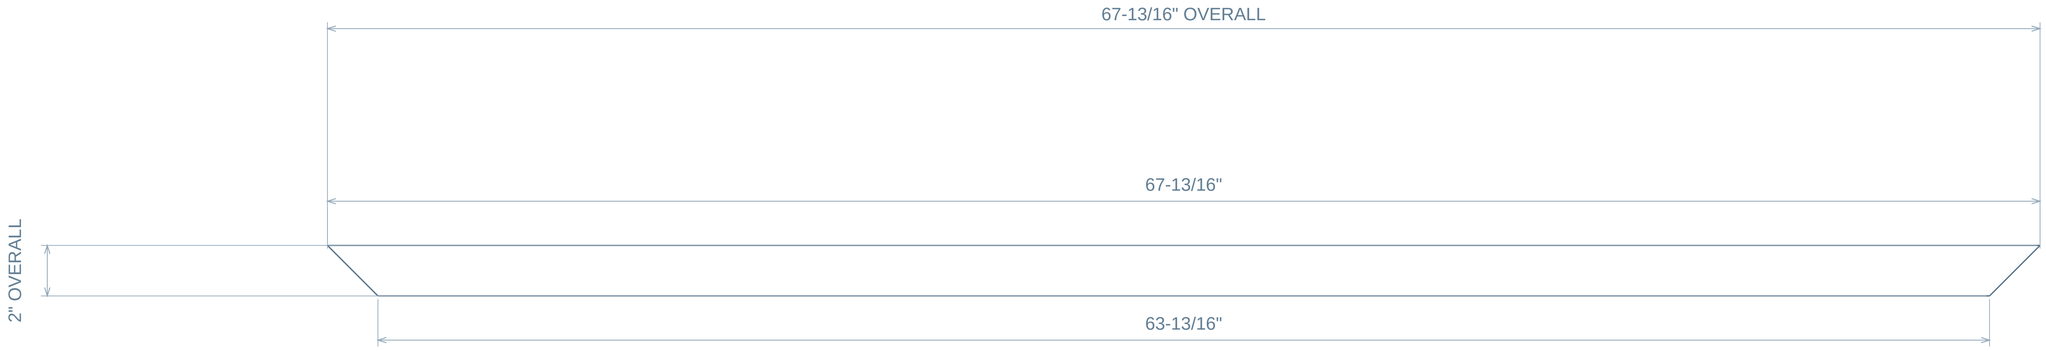


END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1



DETAIL 2 / CONNECTED OUTLINE / 1:1



FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


RH STAIR HANDRAIL + SUBRAIL

2606-B073-P08-R08 / 1

REVIEW 08 / 2026-10-26

stair asm body 445 / COMPLETE PROFILE


body-0663 / QTY 1 / NORMAL DEPTH 1/2" / INCHES

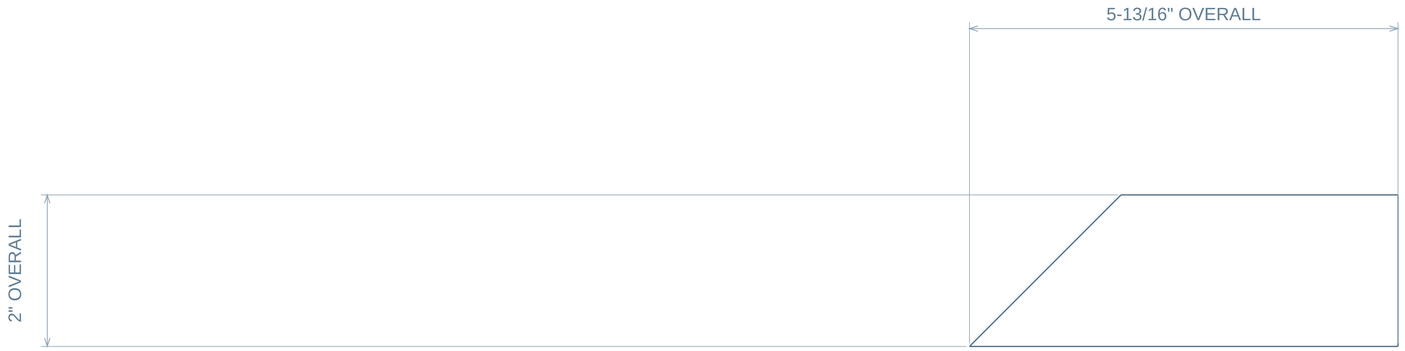

END A / U = 0 AT LEFTMOST MATERIAL

END B

DETAIL 1 / CONNECTED OUTLINE / 1:1

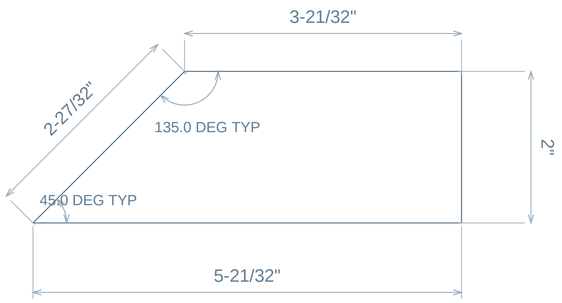


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

stair asm body 446

body-0664 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:8

01 / TOP - FACE A

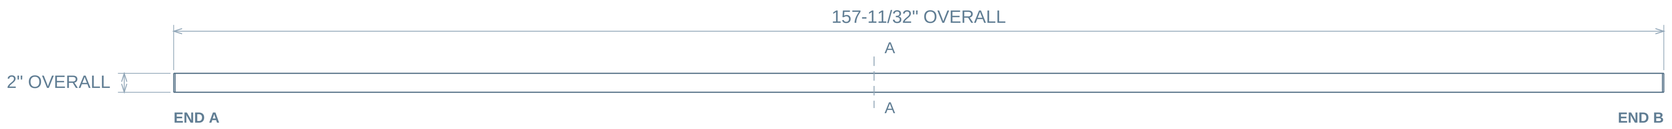

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B



GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT U = 73-15/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

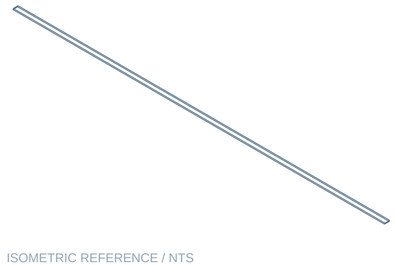

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 157-11/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

stair asm body 447

body-0665 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

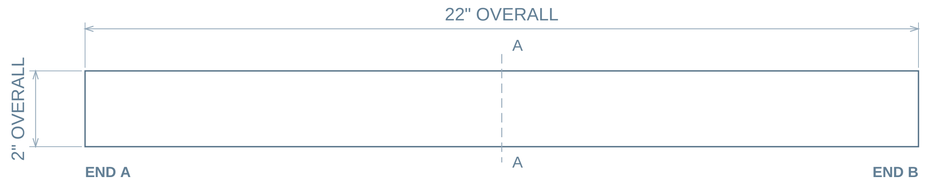

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 11" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

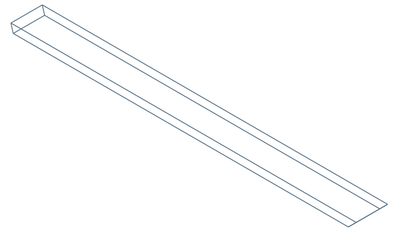

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 22-3/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 448

body-0666 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

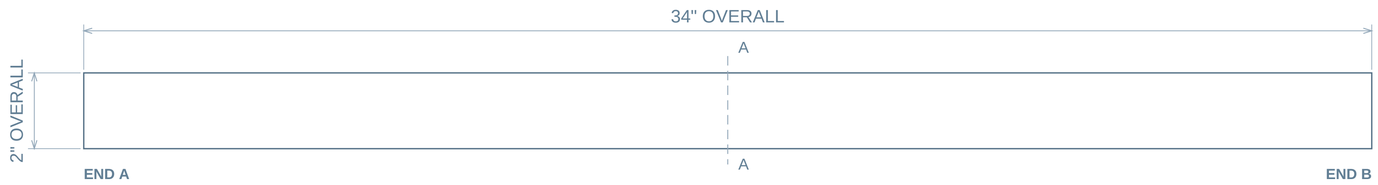

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B




04 / SECTION A-A

X = 17" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

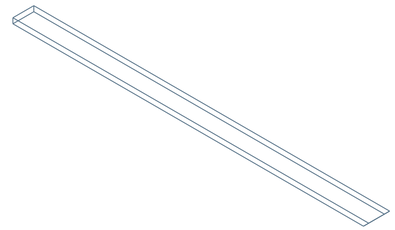

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 34-1/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 449

body-0667 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

01 / TOP - FACE A

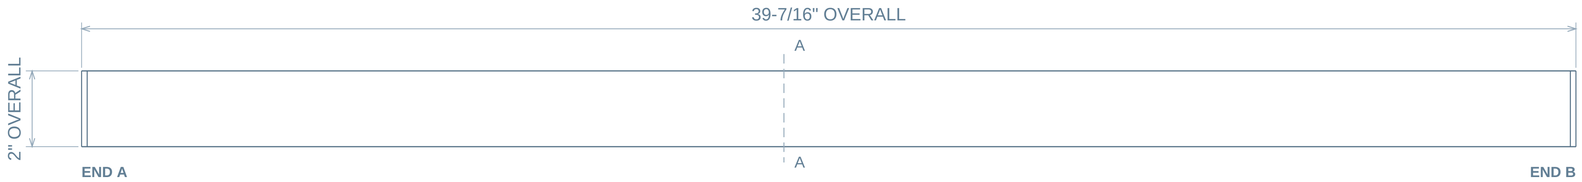

02 / FRONT - FORM PLAN



03 / BOTTOM - FACE B




04 / SECTION A-A

CUT U = 18-17/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC

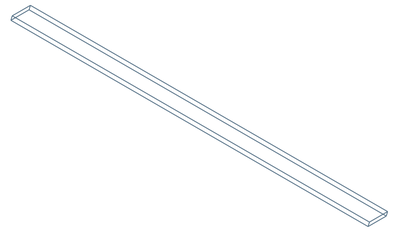

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 39-1/2"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 450

body-0668 | QTY 1 IN RH STAIR HANDRAIL + SUBRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

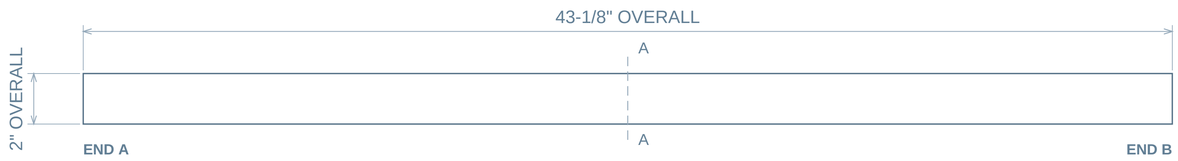


02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B


04 / SECTION A-A

X = 21-9/16" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

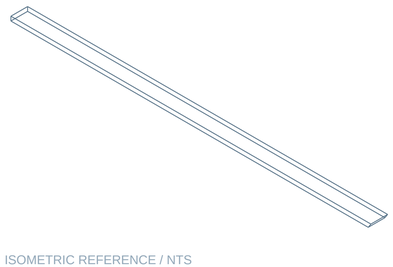

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 43-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


RH WALL HANDRAIL

1 bodies / 1 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

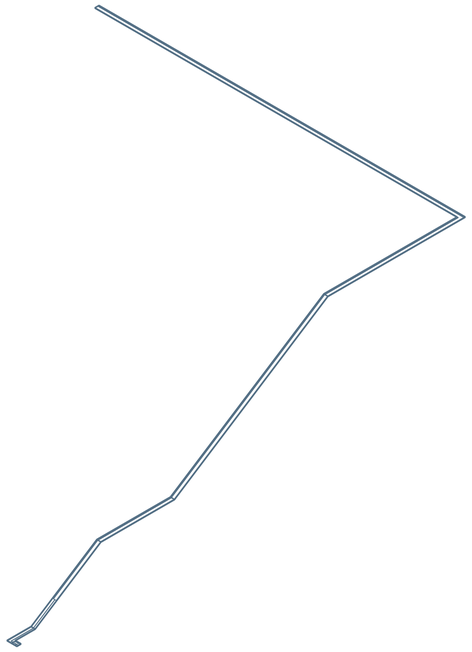

ASSEMBLY / TOP

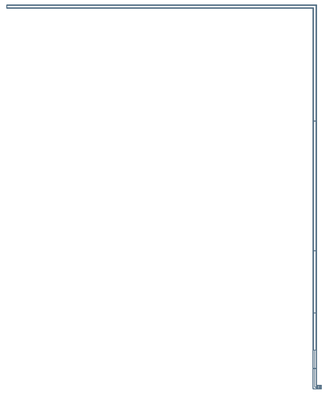

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B074-P01	wall cove handrail handrail	1	303-1/4"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.


Formed bodies: radii, inner bend reference and developed lengths.

Material, finish and manufacturing tolerances require job release data.


wall cove handrail handrail

body-0899 | QTY 1 IN RH WALL HANDRAIL | INCHES | TOP / FRONT / BOTTOM SCALE 1:44


01 / TOP - FACE A

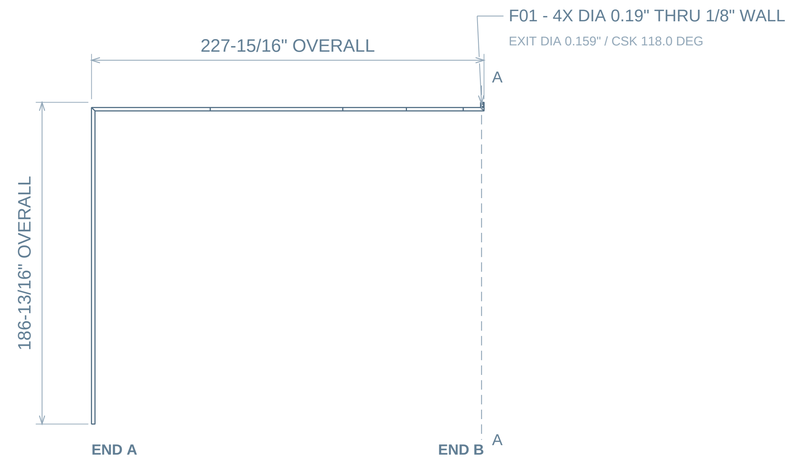

02 / FRONT - FORM PLAN

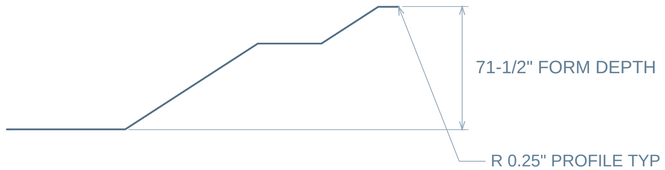

03 / BOTTOM - FACE B

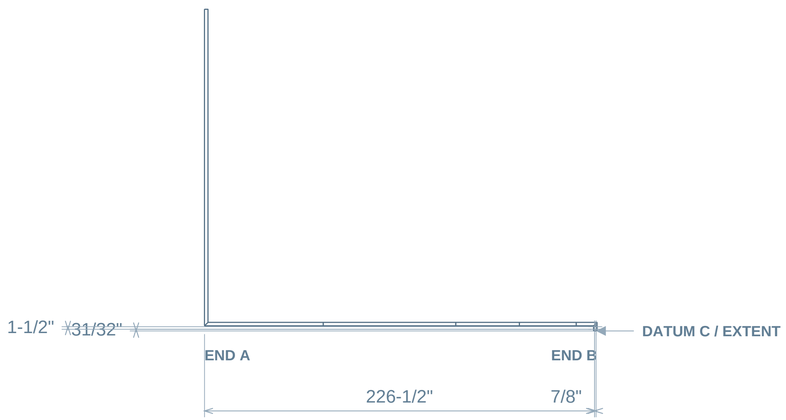

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

CUT N = 33-5/8" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

ML UNDERSIDE

NO PARTS MODELED / PLACEHOLDER

Midlanding underside covers will be detailed when source bodies are supplied.