

TOP RUN

31 bodies / 11 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

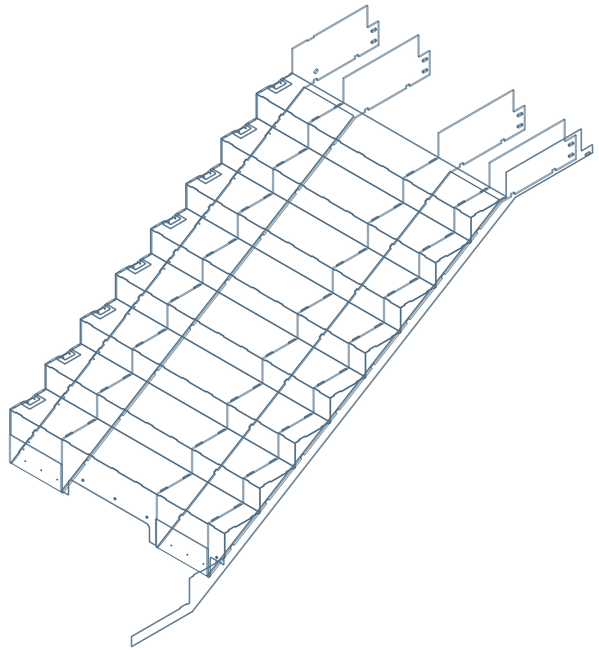

ASSEMBLY / TOP

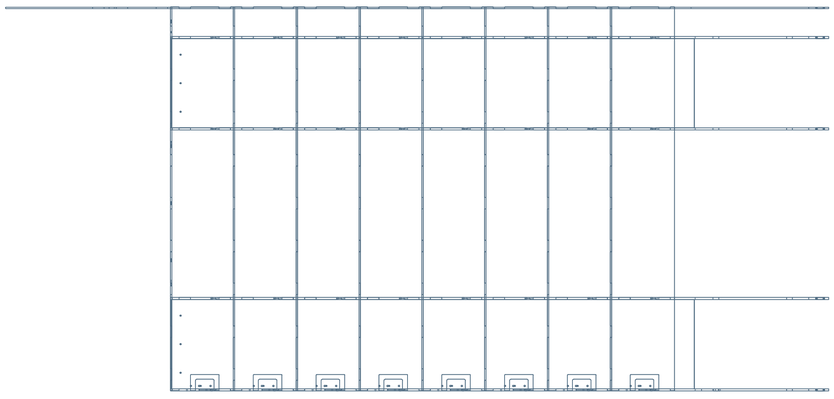

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2605-B01-P01	structure box asm TOP 5-6 body 187	1	130-25/32"
02 / 2605-B01-P02	structure box asm TOP 5-6 body 189	1	130-25/32"
03 / 2605-B01-P03	structure box asm TOP 5-6 body 191	1	108-9/16"
04 / 2605-B01-P04	steel substread 5-6 TYP Tread	8	68-1/8"
05 / 2605-B01-P05	steel substread 5-6 SPLICE Riser	1	67-17/32"
06 / 2605-B01-P06	base shoe top mount plate Tread-Side	8	5-17/32"
07 / 2605-B01-P07	steel substread 5-6 TYP Riser	7	67-1/2"
08 / 2605-B01-P08	structure box asm TOP 5-6 body 232	1	130-25/32"
09 / 2605-B01-P09	structure box asm TOP 5-6 body 234	1	130-25/32"
10 / 2605-B01-P10	structure box asm TOP 5-6 body 236	1	108-9/16"
11 / 2605-B01-P11	stringer plate TOP Run 5-6 Stringer VERT Wall E	1	157-21/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2605

TOP RUN | PART DRAWING PREVIEW


2605-B01-P01

REVIEW 08 / 2026-10-14

structure box asm TOP 5-6 body 187

body-0185 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


01 / TOP - FACE A

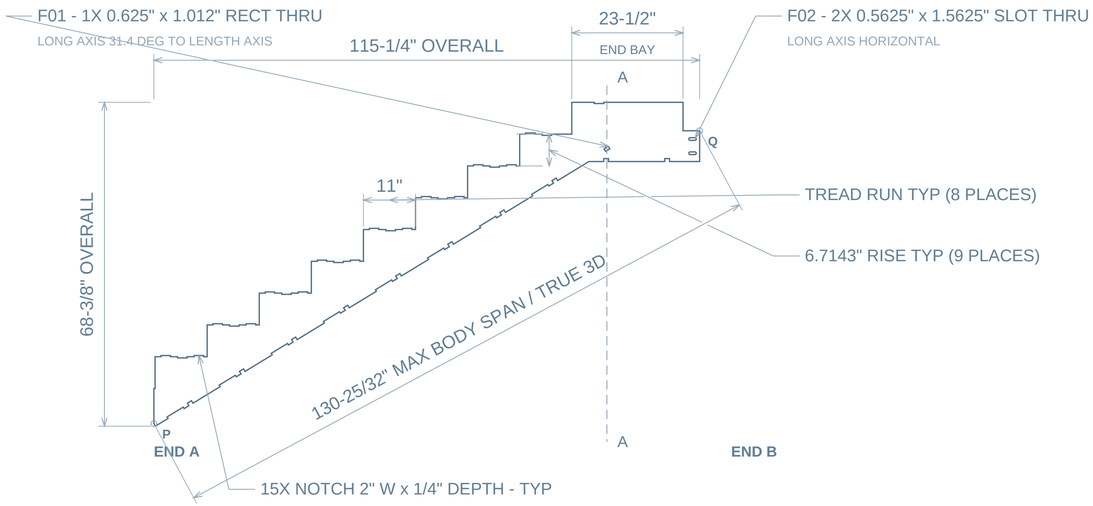

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

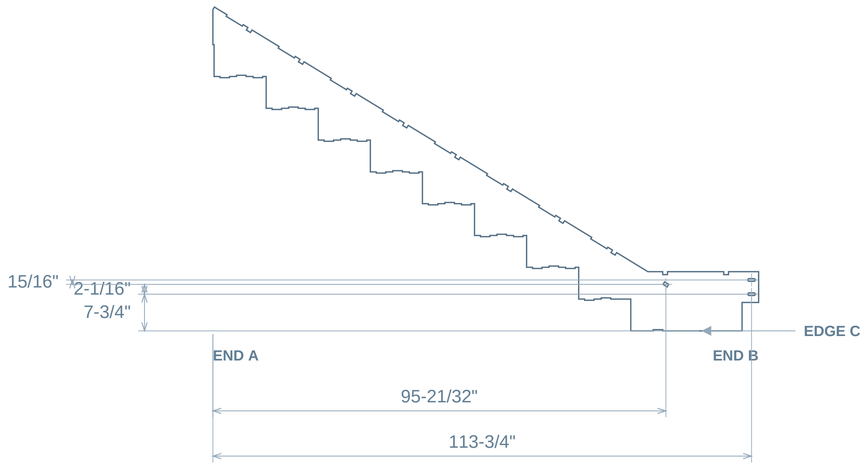

F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 95-21/32" FROM END A



SECTION SCALE 1:15

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

INCHES | ANGLES IN DEGREES | ANSI D 34 x 22 IN


MODEL-DERIVED REVIEW PREVIEW - verify dimensions, material and tolerances before fabrication.

SOURCE: 26-0527_UMG stair asmJR2.STEP

structure box asm TOP 5-6 body 189

body-0187 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


01 / TOP - FACE A

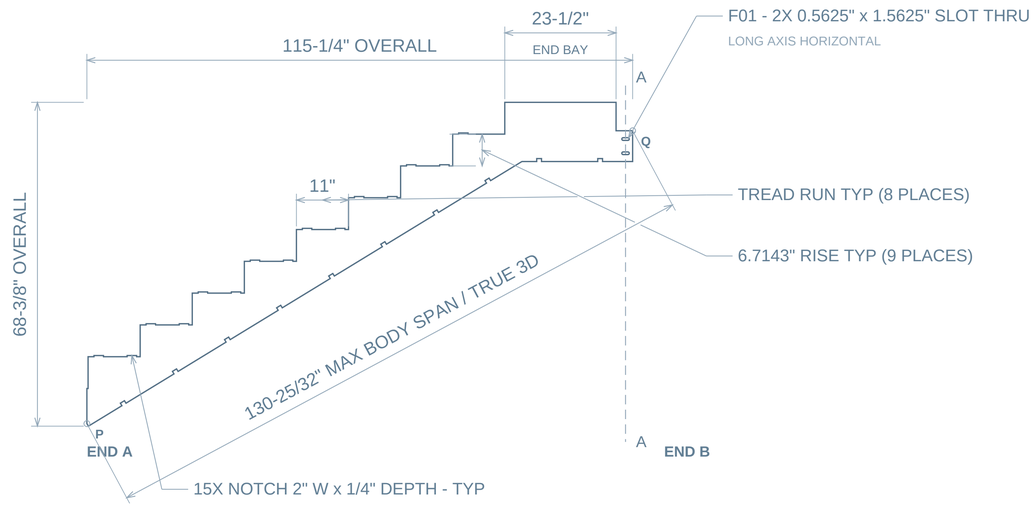

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

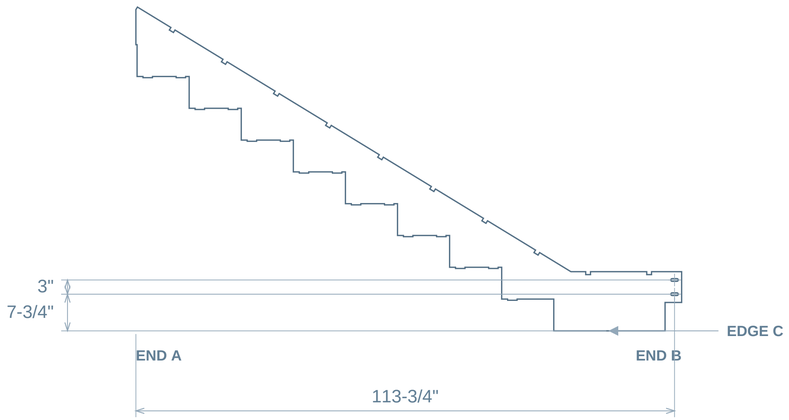

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 113-3/4" FROM END A



SECTION SCALE 1:15

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

structure box asm TOP 5-6 body 191

body-0189 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


01 / TOP - FACE A

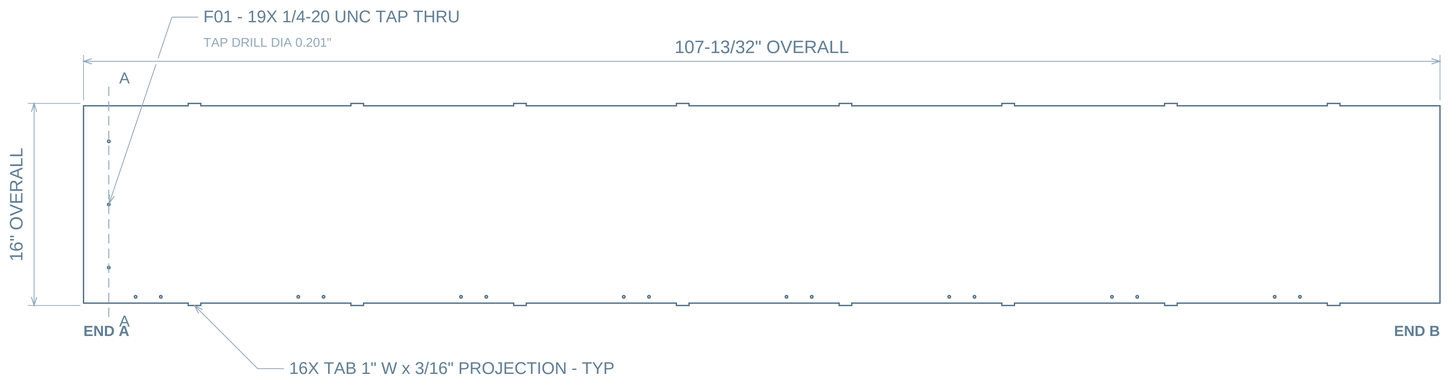

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

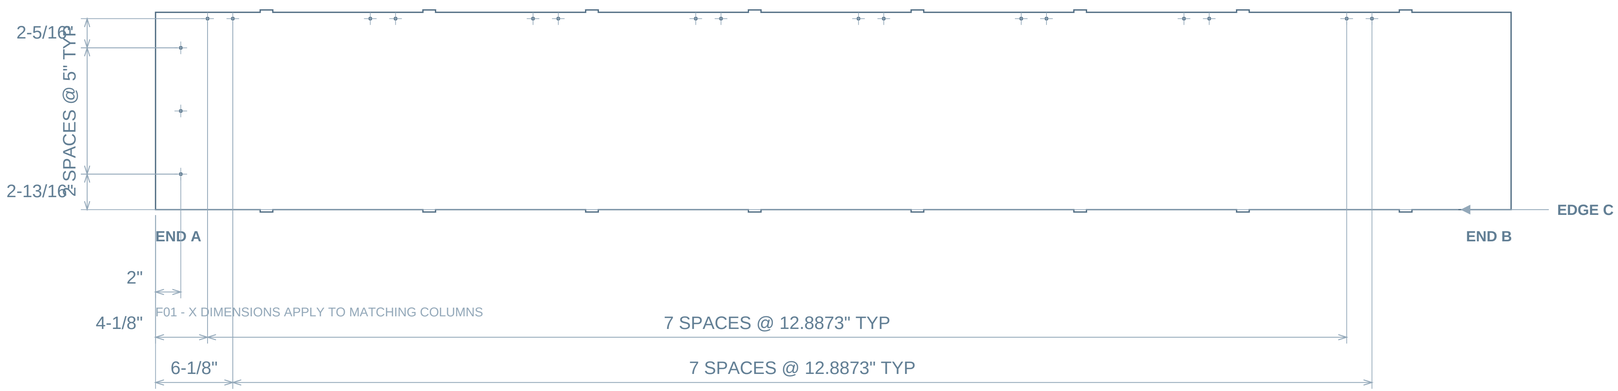


04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

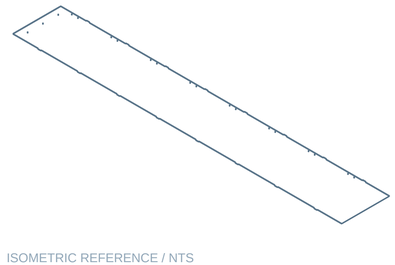

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 8-25/32"

Irregular spacing follows source profile.

SOLIDWORKS HOLE WIZARD SPECS

Exact part / active configuration matched to STEP.

Locations and quantities remain model-derived.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

steel substread 5-6 TYP Tread

body-0202 | QTY 8 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

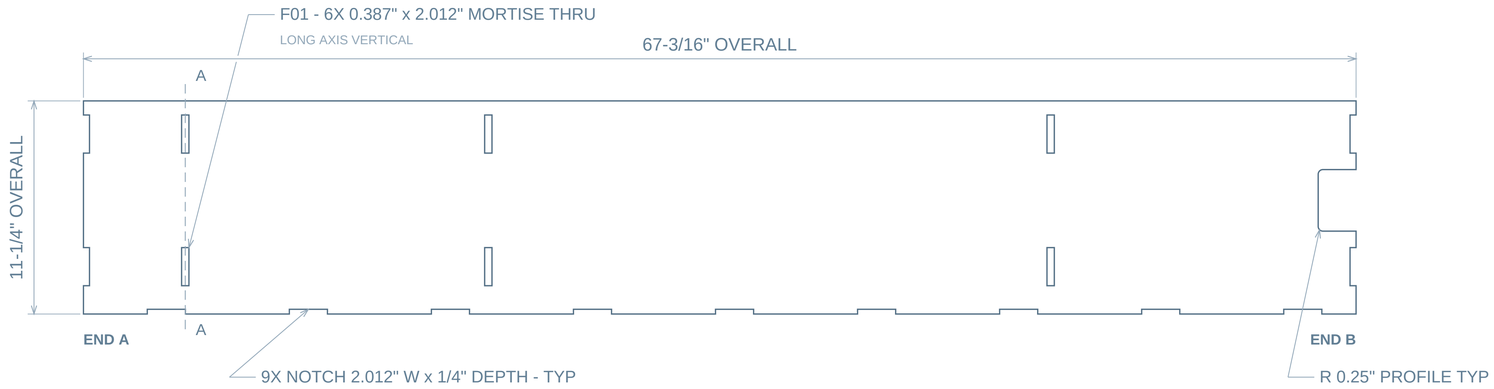

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

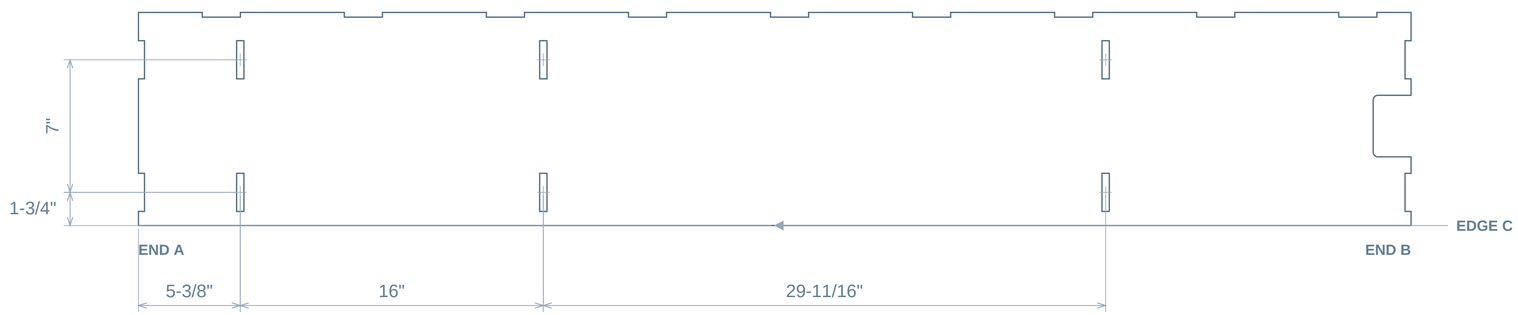

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 5-3/8" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

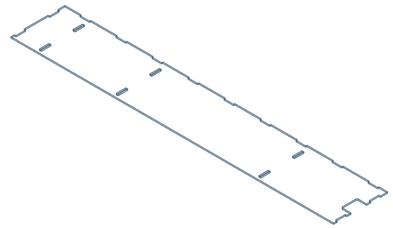

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

steel substread 5-6 SPLICE Riser

body-0203 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

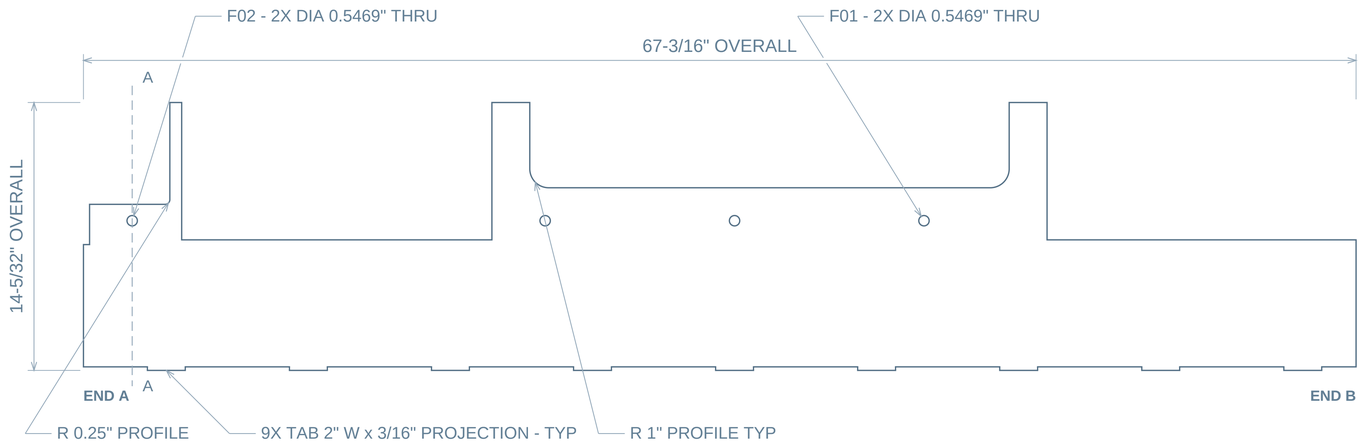

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

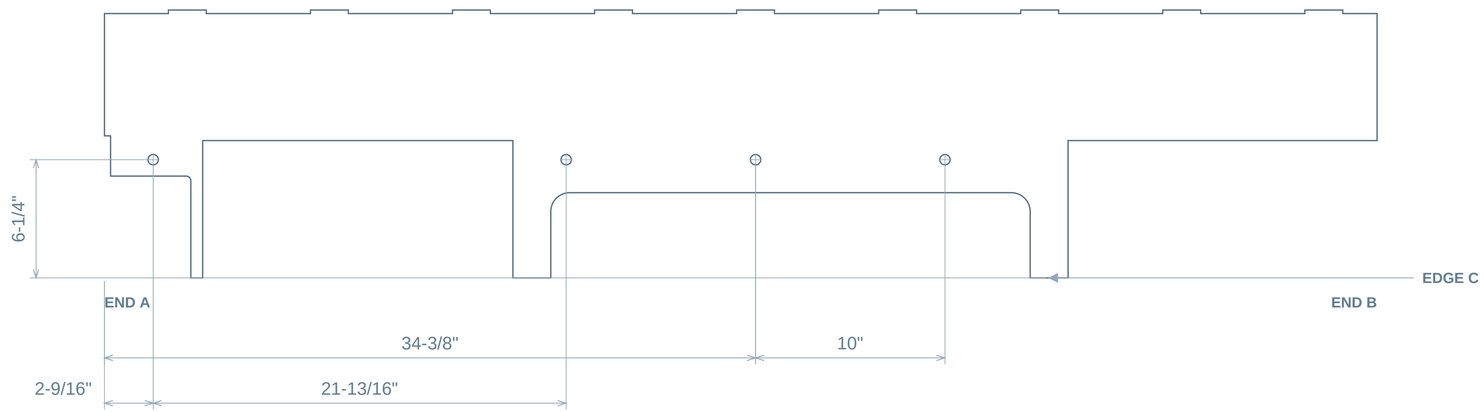


04 / SECTION A-A

X = 2-9/16" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

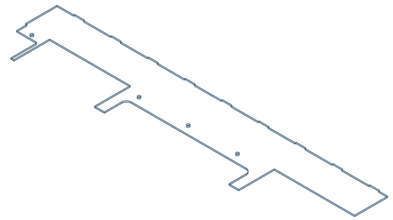

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

base shoe top mount plate Tread-Side

body-0204 | QTY 8 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

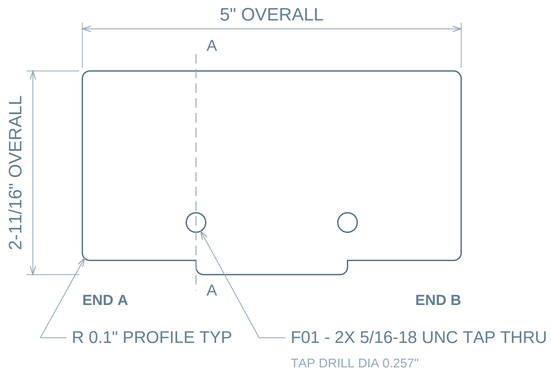

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

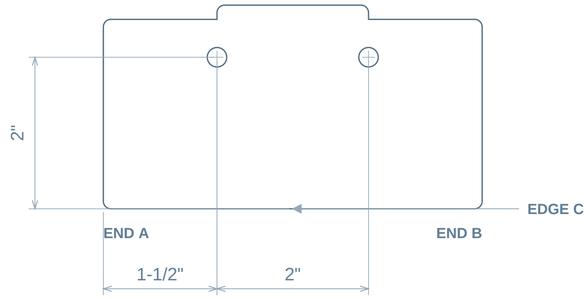


04 / SECTION A-A

X = 1-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

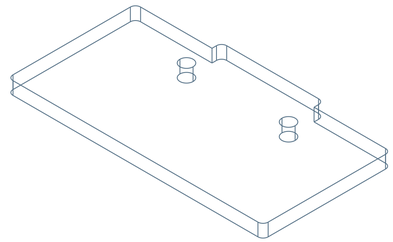

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

SOLIDWORKS HOLE WIZARD SPECS

Exact part / active configuration matched to STEP.

Locations and quantities remain model-derived.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

steel substread 5-6 TYP Riser

body-0210 | QTY 7 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

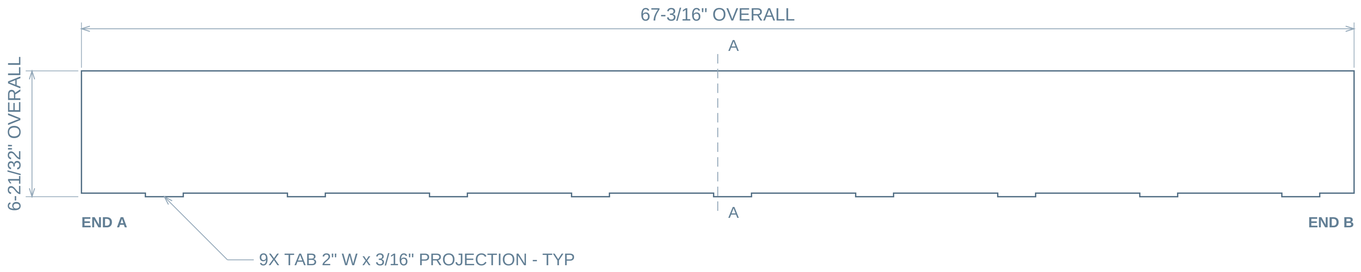

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 33-19/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

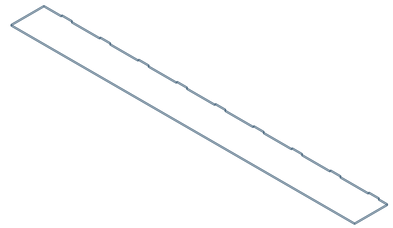

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 67-1/2"

No internal holes in the broad face.

TAB CENTRES / END A

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

structure box asm TOP 5-6 body 232

body-0230 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


01 / TOP - FACE A

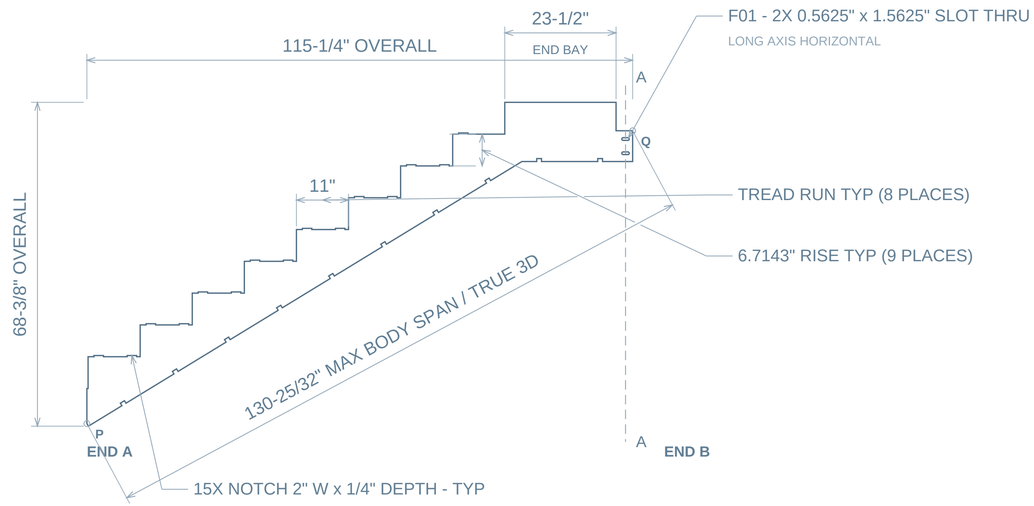

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

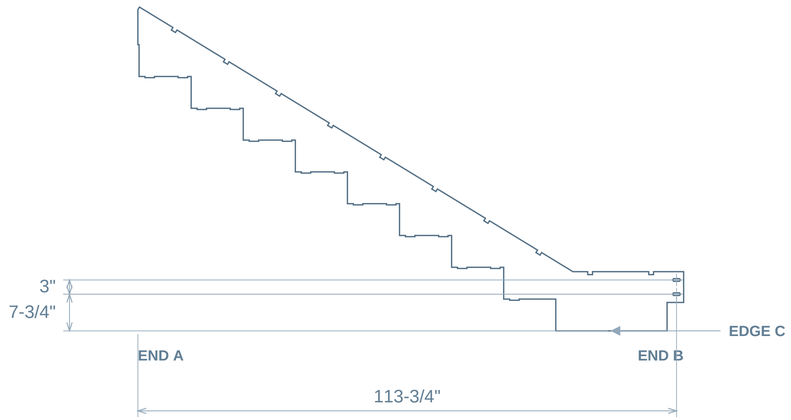

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 113-3/4" FROM END A



SECTION SCALE 1:15

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

structure box asm TOP 5-6 body 234

body-0232 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


01 / TOP - FACE A

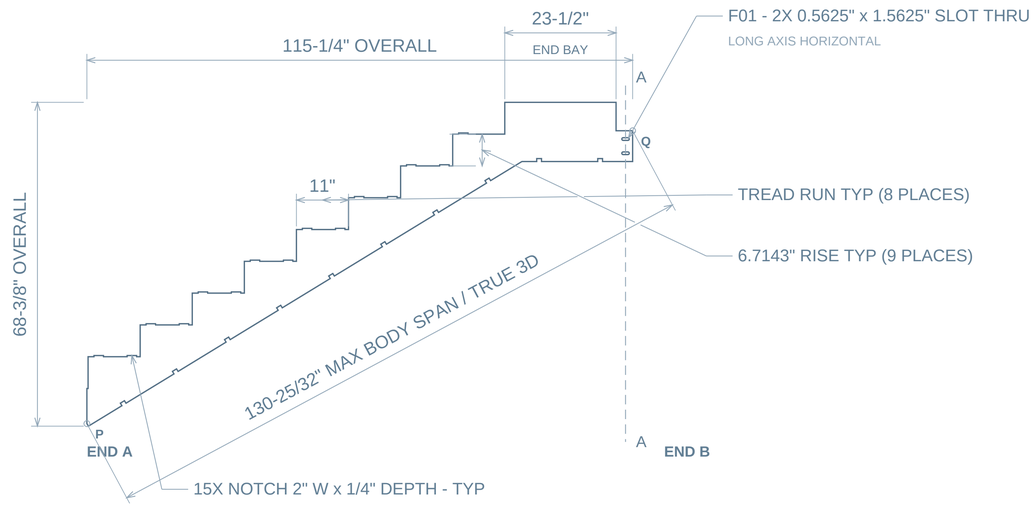

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

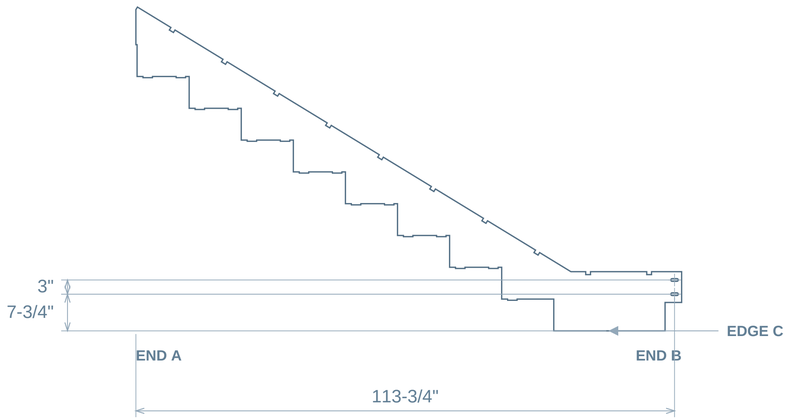

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 113-3/4" FROM END A



SECTION SCALE 1:15

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

structure box asm TOP 5-6 body 236

body-0234 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


01 / TOP - FACE A

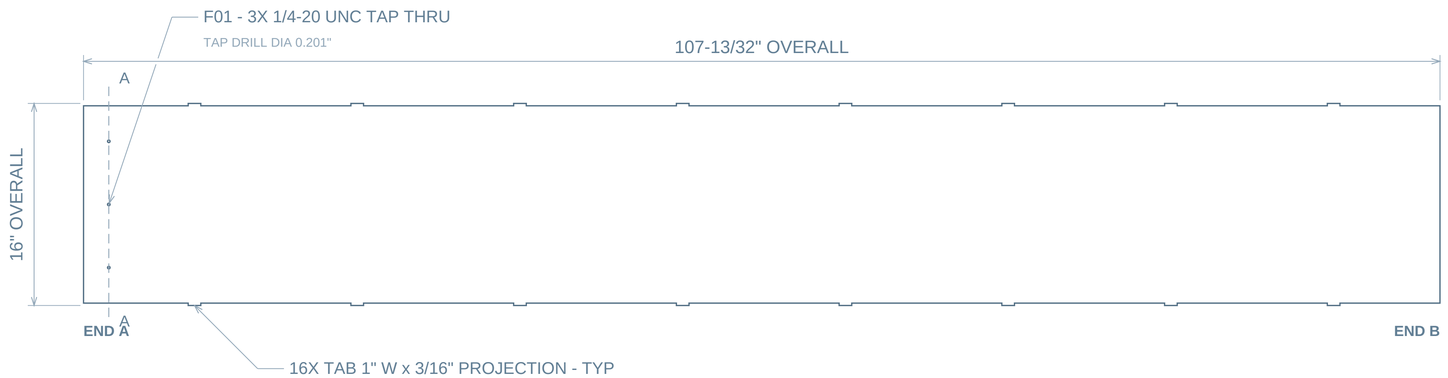

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

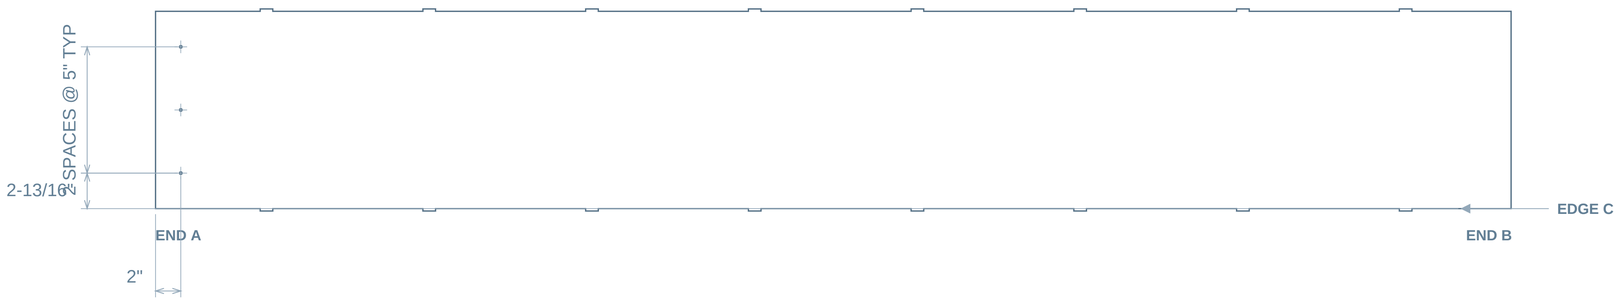

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

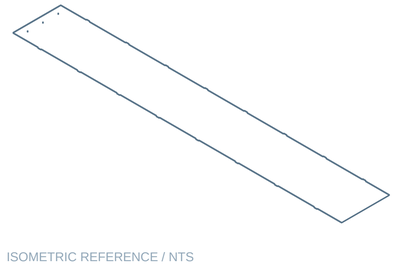

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 8-25/32"

Irregular spacing follows source profile.

SOLIDWORKS HOLE WIZARD SPECS

Exact part / active configuration matched to STEP.

Locations and quantities remain model-derived.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

stringer plate TOP Run 5-6 Stringer VERT Wall E

body-0247 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:17


01 / TOP - FACE A

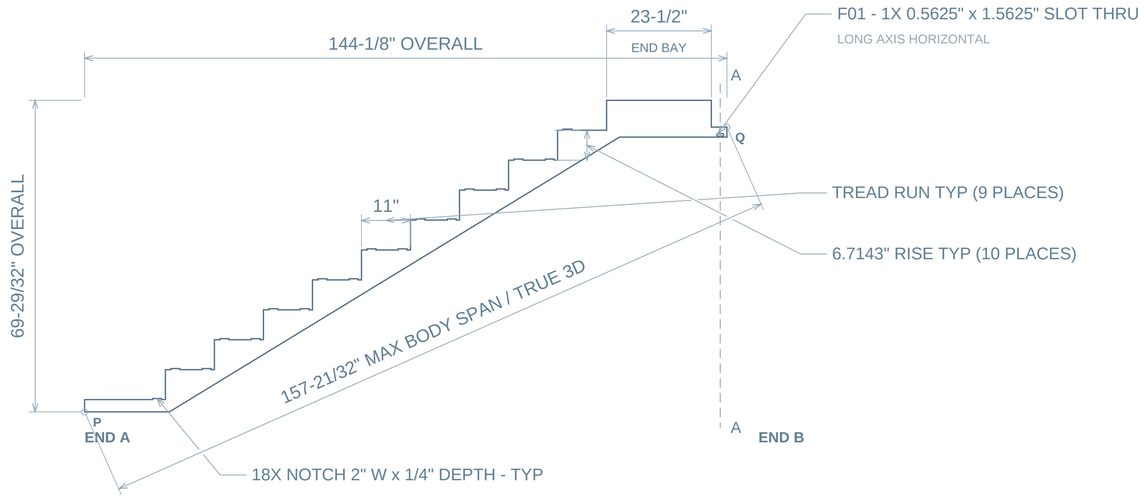

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

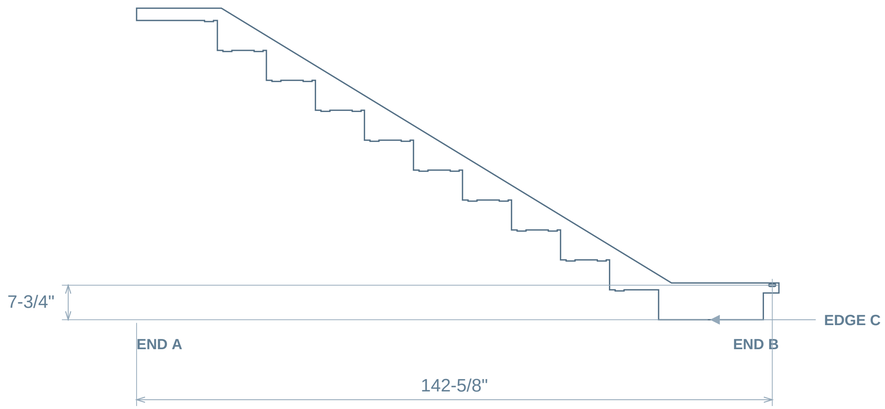


04 / SECTION A-A

X = 142-5/8" FROM END A



SECTION SCALE 1:15

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 157.6527"

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 16-1/4"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.