

# PLATFORM

44 bodies / 30 unique part types / installed source positions

## ASSEMBLY / ISOMETRIC

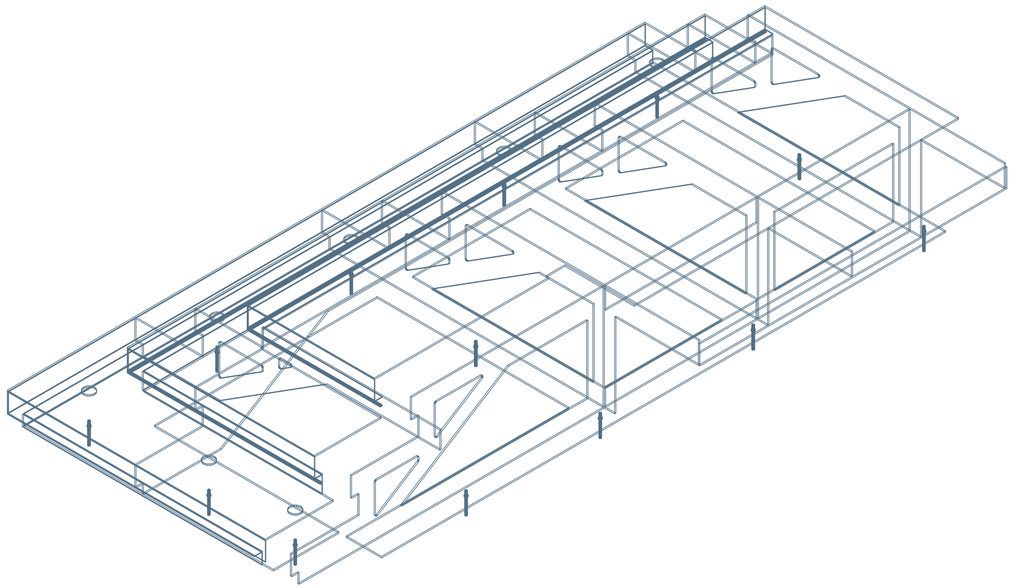

## ASSEMBLY / TOP

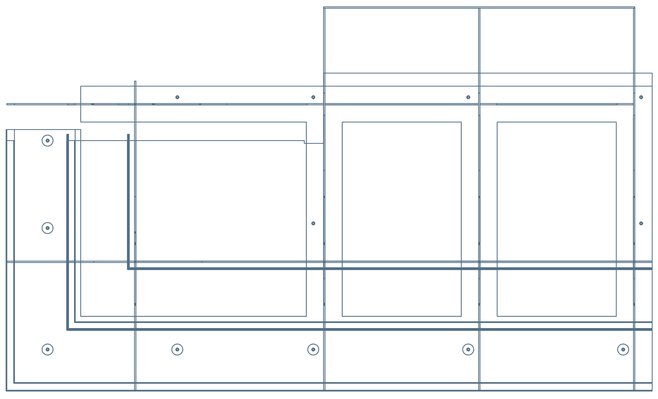

## PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

| ITEM / DRAWING | DESCRIPTION | QTY | MAX 3D SPAN |
|---|---|---|---|
| 01 / 2606-B046-P01 | plinth asm body 247 | 1 | 126-7/32" |
| 02 / 2606-B046-P02 | plinth asm body 248 | 1 | 47-11/32" |
| 03 / 2606-B046-P03 | plinth asm body 249 | 1 | 117-1/16" |
| 04 / 2606-B046-P04 | plinth asm body 250 | 1 | 127-3/8" |
| 05 / 2606-B046-P05 | plinth asm body 251 | 1 | 125-15/32" |
| 06 / 2606-B046-P06 | plinth asm body 252 | 1 | 123-23/32" |
| 07 / 2606-B046-P07 | plinth asm body 253 | 1 | 34-3/8" |
| 08 / 2606-B046-P08 | plinth asm body 254 | 1 | 106-1/16" |
| 09 / 2606-B046-P09 | plinth asm body 255 | 1 | 111-7/16" |
| 10 / 2606-B046-P10 | plinth asm body 256 | 1 | 111-7/16" |
| 11 / 2606-B046-P11 | plinth asm body 257 | 1 | 109-3/4" |
| 12 / 2606-B046-P12 | plinth asm body 258 | 1 | 23-15/32" |
| 13 / 2606-B046-P13 | plinth asm body 259 | 1 | 95-1/16" |
| 14 / 2606-B046-P14 | plinth asm body 260 | 1 | 97-13/16" |
| 15 / 2606-B046-P15 | plinth asm body 261 | 1 | 56-15/32" |
| 16 / 2606-B046-P16 | plinth asm body 262 | 1 | 101-7/16" |
| 17 / 2606-B046-P17 | platform stringer plates 2.0 [REF ONLY] | 3 | 71-3/8" |
| 18 / 2606-B046-P18 | platform stringer plates 02.1 [REF ONLY] | 1 | 57-21/32" |
| 19 / 2606-B046-P19 | platform stringer plates 03 | 1 | 117-21/32" |
| 20 / 2606-B046-P20 | plinth asm body 268 | 1 | 33-29/32" |
| 21 / 2606-B046-P21 | plinth asm body 269 | 1 | 28-3/32" |
| 22 / 2606-B046-P22 | plinth asm body 270 | 1 | 27-31/32" |
| 23 / 2606-B046-P23 | plinth asm body 271 [REF ONLY] | 1 | 60" |
| 24 / 2606-B046-P24 | 0.375-16 THRD Rod 0.375-16x4 THRD Rod [REF ONLY] | 13 | 4" |
| 25 / 2606-B046-P25 | plinth asm body 285 | 1 | 111-25/32" |
| 26 / 2606-B046-P26 | plinth asm body 286 | 1 | 111-25/32" |
| 27 / 2606-B046-P27 | plinth asm body 287 | 1 | 111-3/4" |
| 28 / 2606-B046-P28 | plinth asm body 288 | 1 | 98-3/32" |
| 29 / 2606-B046-P29 | plinth asm body 289 | 1 | 98-3/32" |
| 30 / 2606-B046-P30 | plinth asm body 290 | 1 | 98-3/32" |

## DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

REFERENCE ONLY entries have mesh spans; see each sheet limitation.

# plinth asm body 247

body-0246 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


## 01 / TOP - FACE A




## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

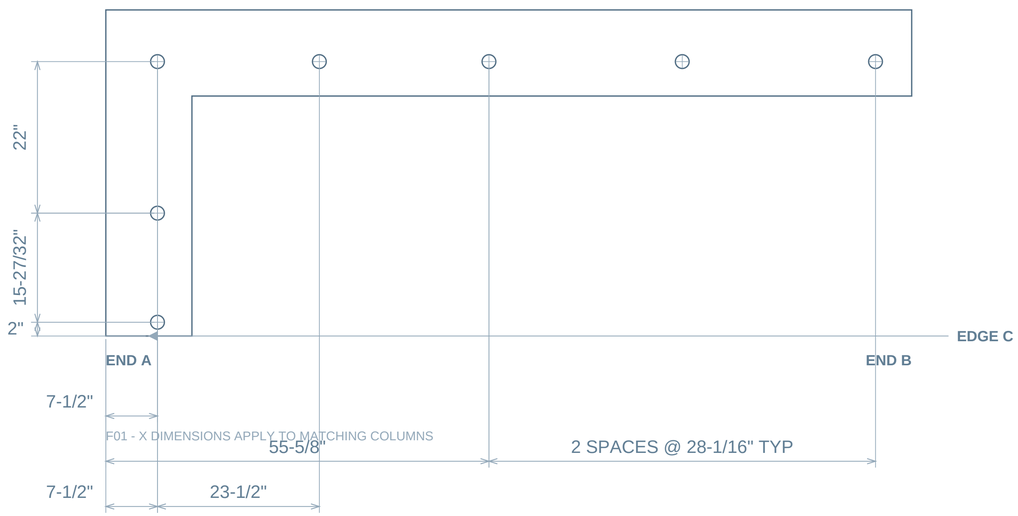



## 04 / SECTION A-A

X = 7-1/2" FROM END A




SECTION SCALE 1:10

## 05 / ISOMETRIC

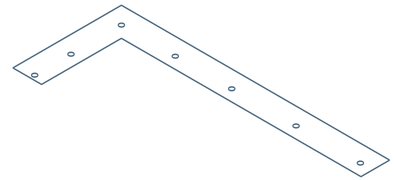

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

## DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 248

body-0247 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

## 01 / TOP - FACE A

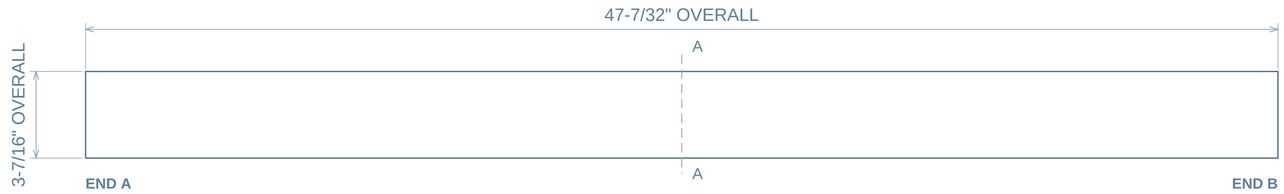


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 23-19/32" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

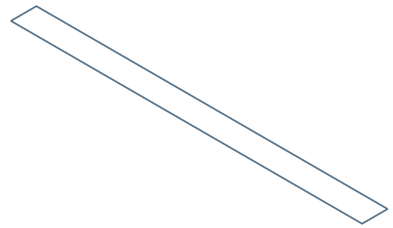

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 47-11/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 249

body-0248 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

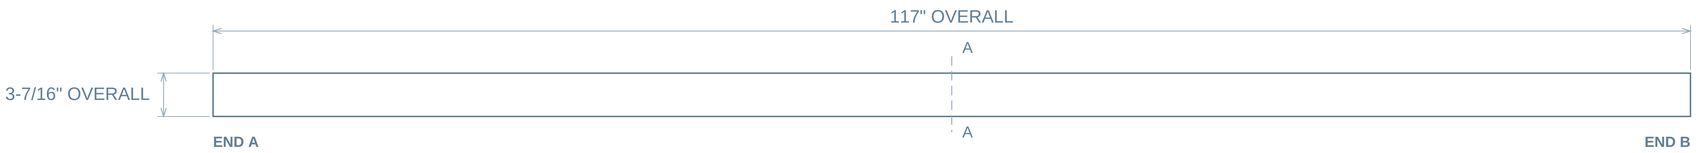


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 58-1/2" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

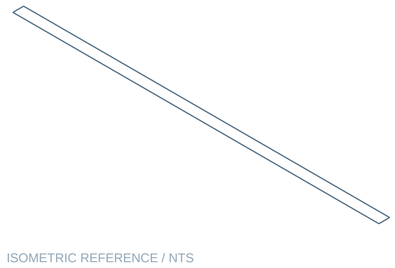

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 117-1/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 250

body-0249 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:18


## 01 / TOP - FACE A

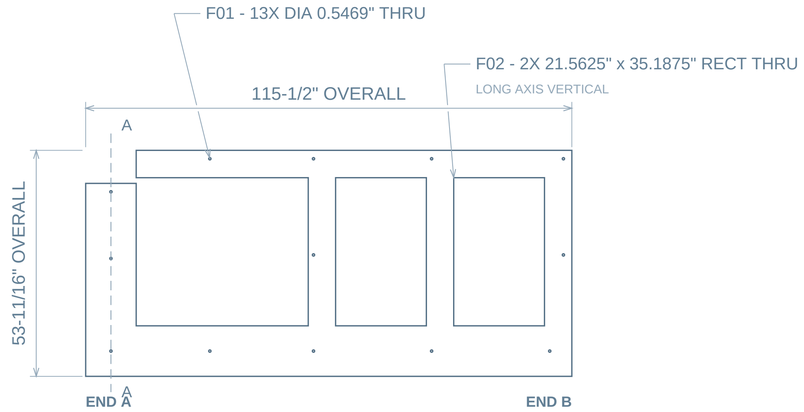


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

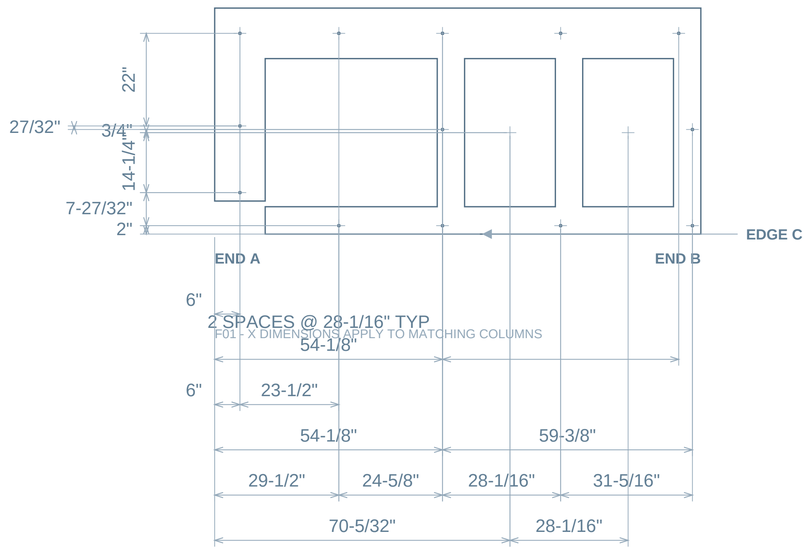


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


## 04 / SECTION A-A

X = 6" FROM END A




SECTION SCALE 1:12

## 05 / ISOMETRIC

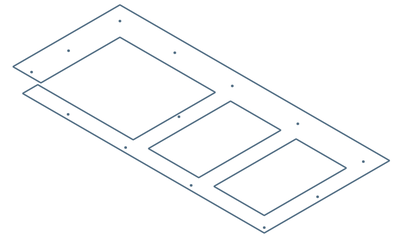

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

# plinth asm body 251

body-0250 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:11

## 01 / TOP - FACE A

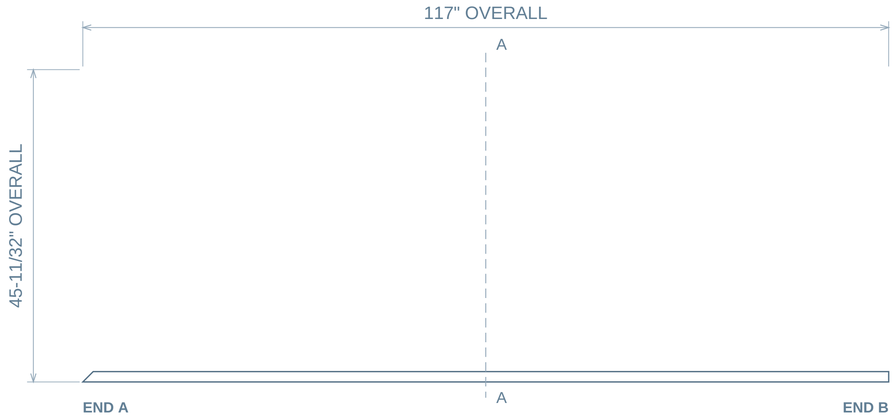


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 58-1/2" FROM END A




SECTION SCALE 1:10

## 05 / ISOMETRIC

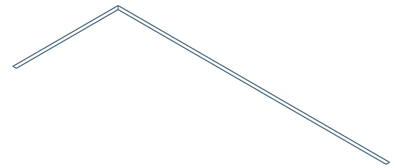

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 125-15/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 251

body-0250 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 63476 / TRUE FACE / SCALE 4.845:1




A: U 0" / V 0"

B: U 1.5" / V 1.5"

**45.0 DEG TO LOCAL U / EXACT LENGTH 2.121320"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.


# plinth asm body 252

body-0251 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:16

## 01 / TOP - FACE A




## 02 / FRONT - FORM PLAN

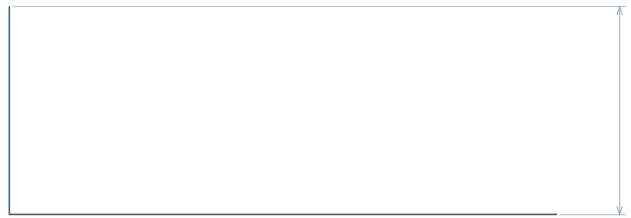


## 03 / BOTTOM - FACE B




GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


## 04 / SECTION A-A

CUT U = 54-11/32" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

## 05 / ISOMETRIC

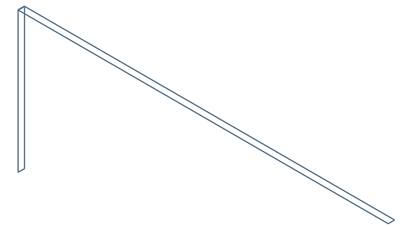

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**FORMED BODY / SOURCE ORTHOGRAPHICS**

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 123-23/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.


# plinth asm body 253

body-0252 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

## 01 / TOP - FACE A

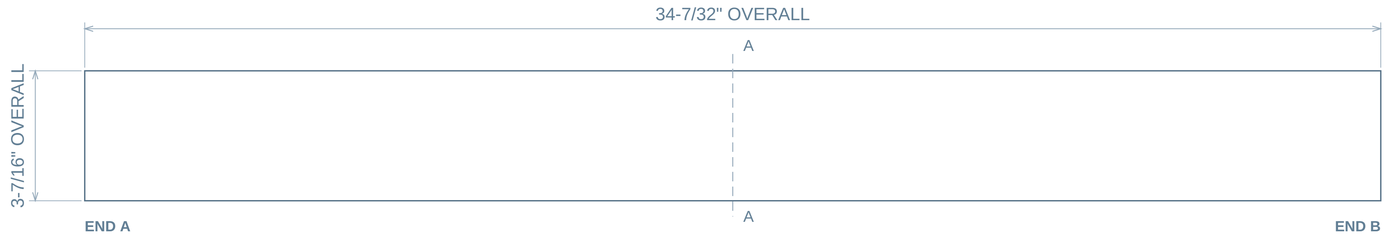


## 02 / FRONT - EDGE VIEW

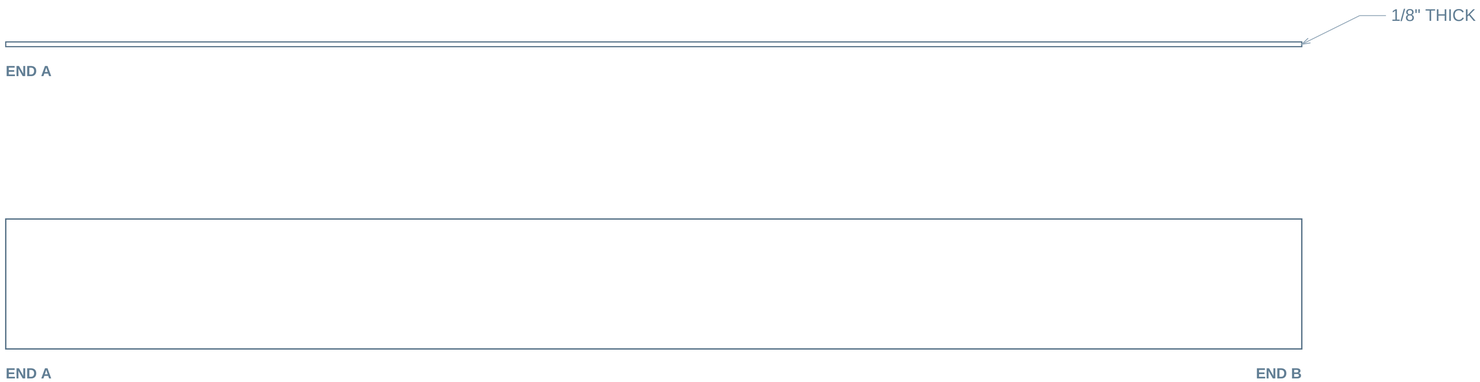


## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 17-3/32" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

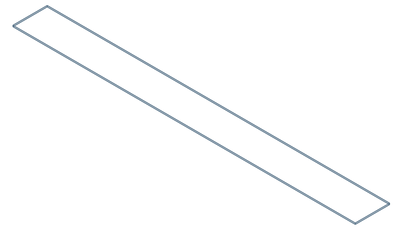

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 34-3/8"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 254

body-0253 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

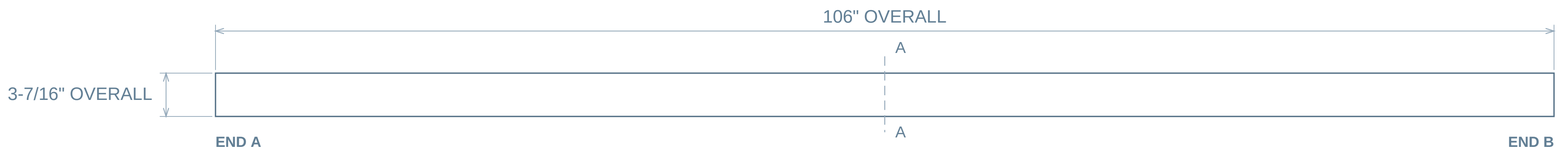


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B




GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

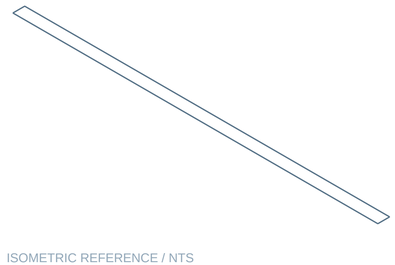

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 106-1/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

# plinth asm body 255

body-0254 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:8


## 01 / TOP - FACE A

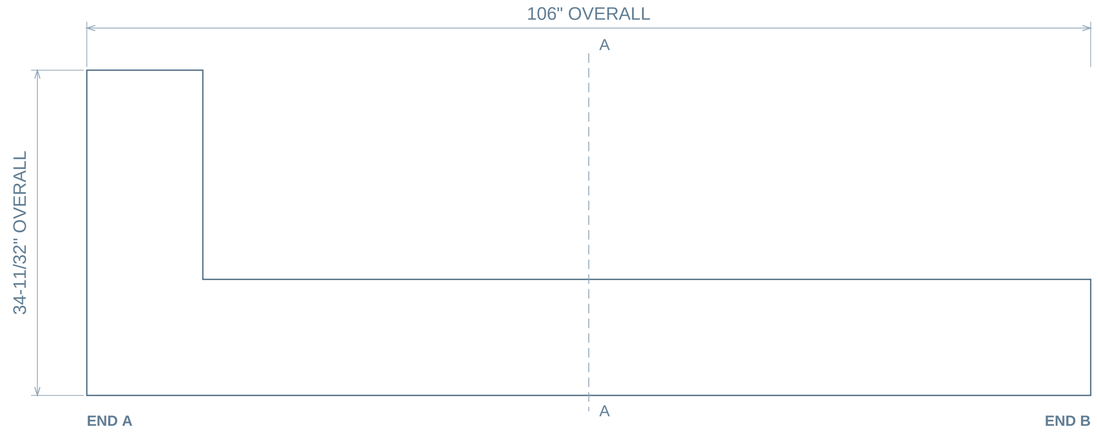


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

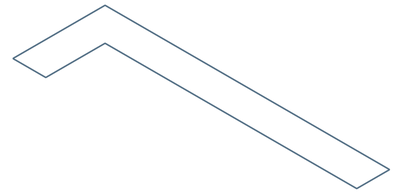

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 111-7/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 256

body-0255 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:8

## 01 / TOP - FACE A

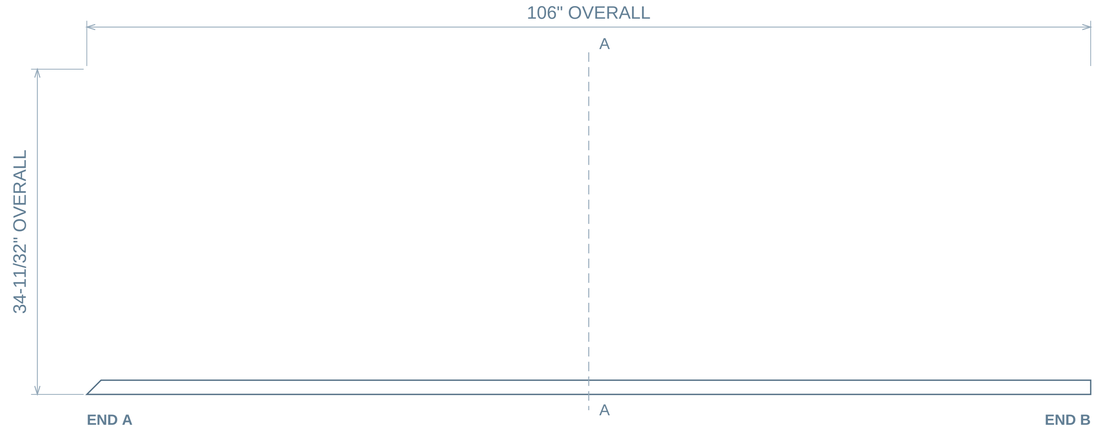


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

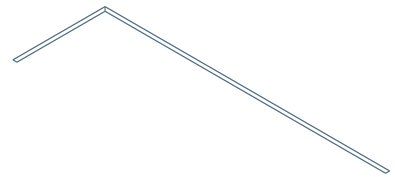

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 111-7/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 256

body-0255 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 62223 / TRUE FACE / SCALE 4.845:1




A: U 0" / V 0"

B: U 1.5" / V 1.5"

**45.0 DEG TO LOCAL U / EXACT LENGTH 2.121320"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

# plinth asm body 257

body-0256 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:12

## 01 / TOP - FACE A




## 02 / FRONT - FORM PLAN




## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

CUT U = 49-3/16" FROM LOCAL DATUM



ACTUAL FORMED SECTION / 1:1

## 05 / ISOMETRIC

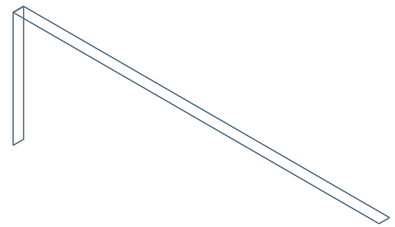

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**FORMED BODY / SOURCE ORTHOGRAPHICS**

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 109-3/4"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 258

body-0257 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

## 01 / TOP - FACE A

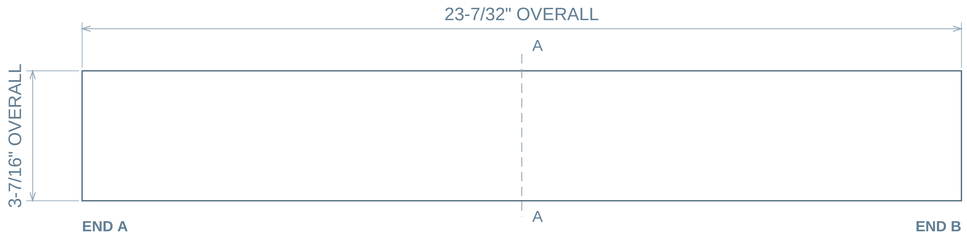


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 11-19/32" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

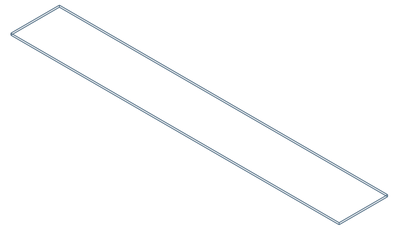

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 23-15/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 259

body-0258 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:5

## 01 / TOP - FACE A

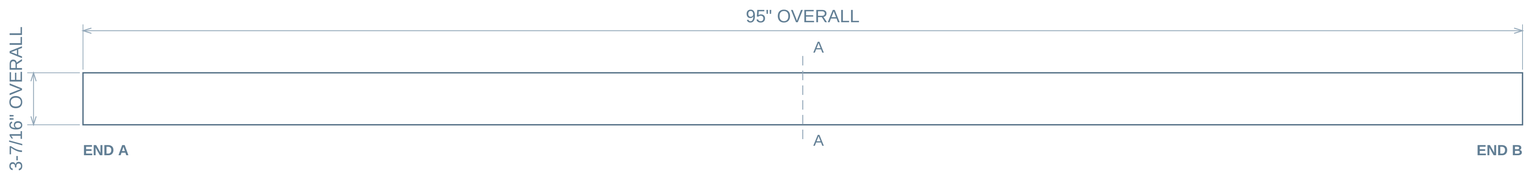


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

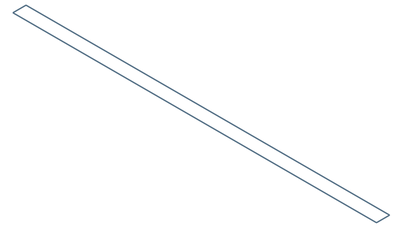

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 95-1/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


# plinth asm body 260

body-0259 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

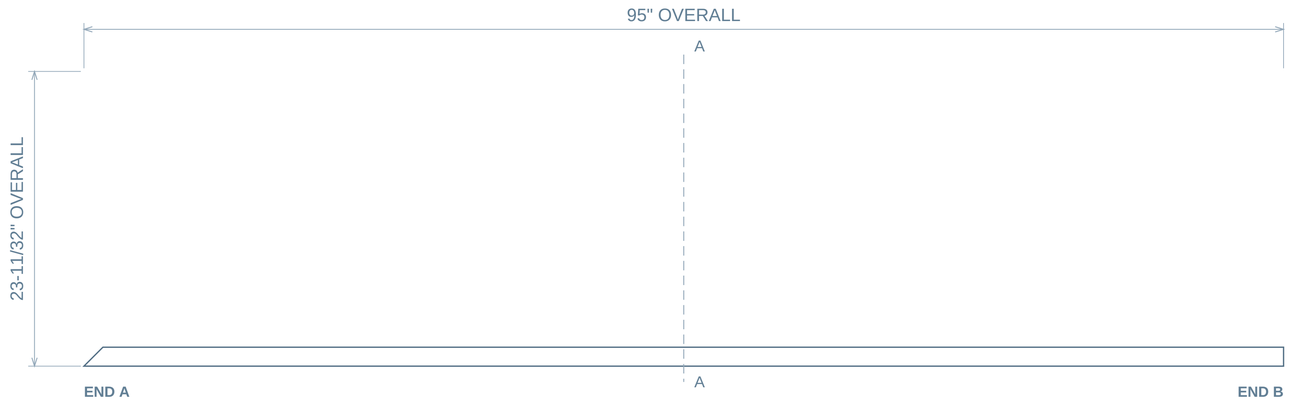


## 02 / FRONT - EDGE VIEW

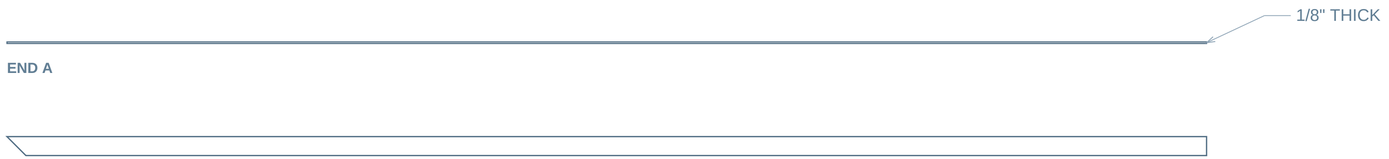


## 03 / BOTTOM - FACE B




## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:5

## 05 / ISOMETRIC

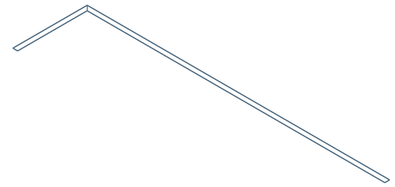

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 97-13/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 260

body-0259 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 104561 / TRUE FACE / SCALE 4.845:1




A: U 0" / V 0"

B: U 1.5" / V 1.5"

**45.0 DEG TO LOCAL U / EXACT LENGTH 2.121320"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

# plinth asm body 261

body-0260 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

## 01 / TOP - FACE A

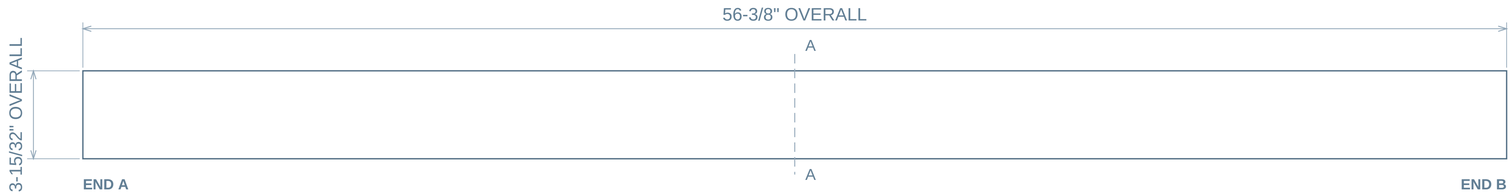


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 28-3/16" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

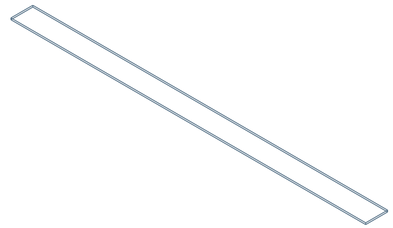

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 56-15/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 262

body-0261 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


## 01 / TOP - FACE A

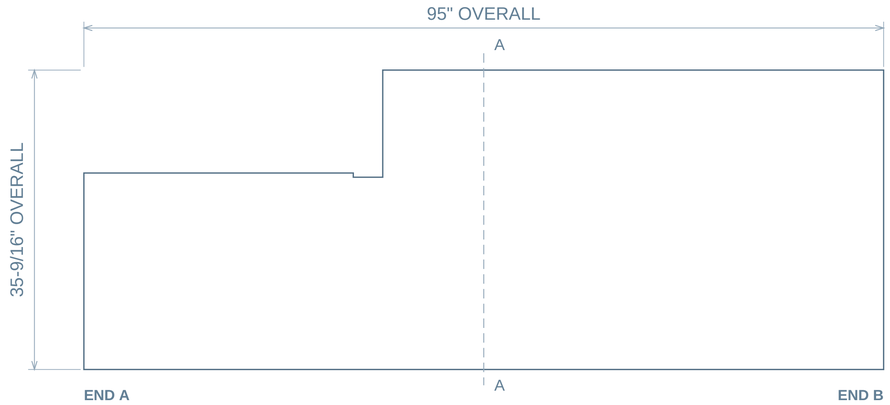


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

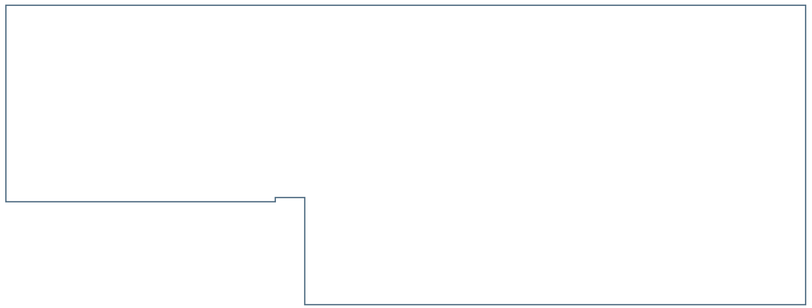


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

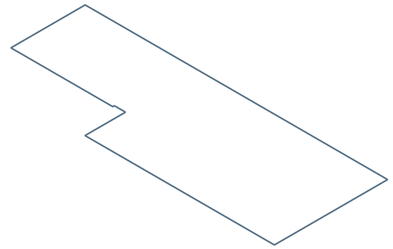

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 101-7/16"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

## CALIPER / 2606

2606-B046-P17

**PLATFORM / REFERENCE ONLY**

# platform stringer plates 2.0

body-0262 / QTY 3 / MODEL GEOMETRY REFERENCE / VIEWS NTS

**DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING**

Irregular quadrilateral needs profile dimensions

### FACE REFERENCE




### END REFERENCE



### SIDE REFERENCE



### ISOMETRIC

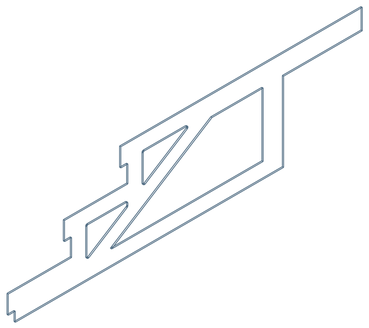

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

**INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19**

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

## CALIPER / 2606

2606-B046-P18

**PLATFORM / REFERENCE ONLY**

# platform stringer plates 02.1

body-0265 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

**DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING**

Non-standard internal profile/cavity requires a dedicated detailing view

### FACE REFERENCE




### END REFERENCE



### SIDE REFERENCE



### ISOMETRIC

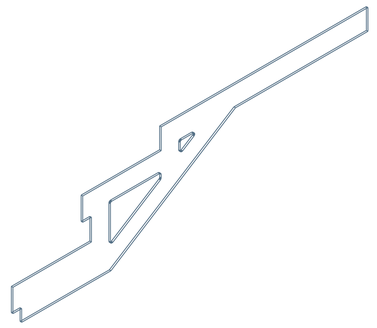

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


**INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19**

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

# platform stringer plates 03

body-0266 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


## 01 / TOP - FACE A

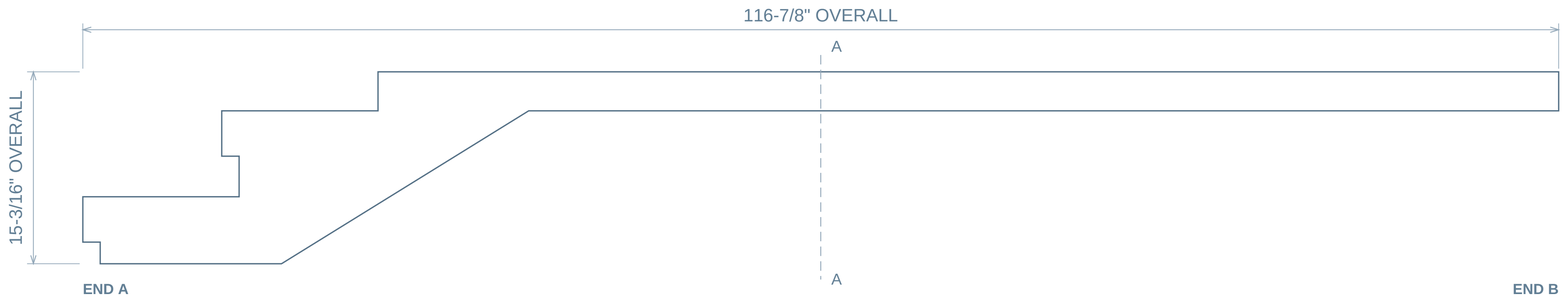


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

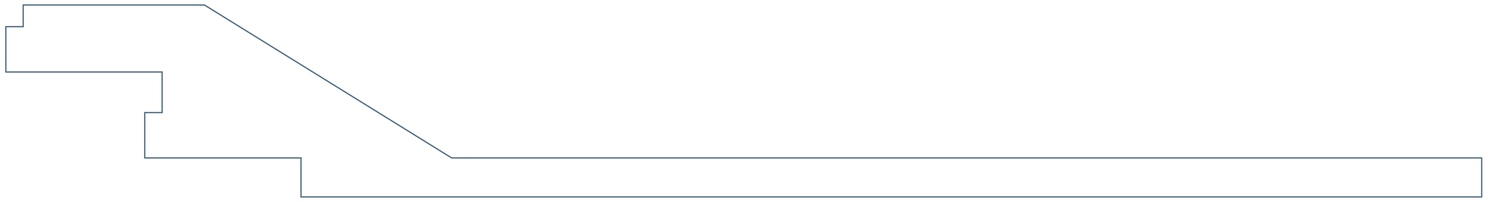


GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


## 04 / SECTION A-A

X = 58-7/16" FROM END A




SECTION SCALE 1:4

## 05 / ISOMETRIC

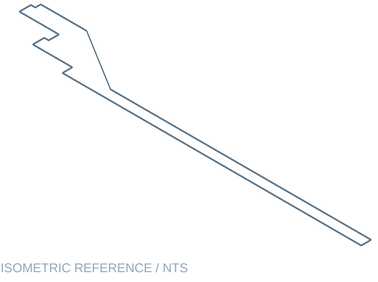

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 117-21/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

# platform stringer plates 03

body-0266 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 51264 / TRUE FACE / SCALE 0.447:1




A: U 15.7313" / V 0"

B: U 35.3063" / V 12.1087"

**31.7 DEG TO LOCAL U / EXACT LENGTH 23.017496"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

# plinth asm body 268

body-0267 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:5


## 01 / TOP - FACE A

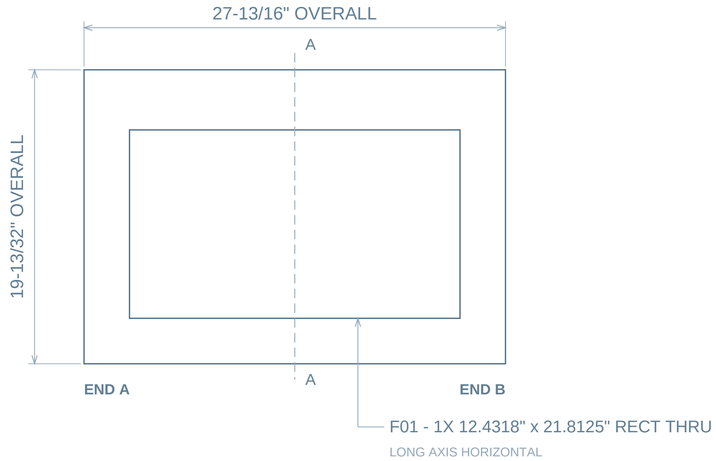


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

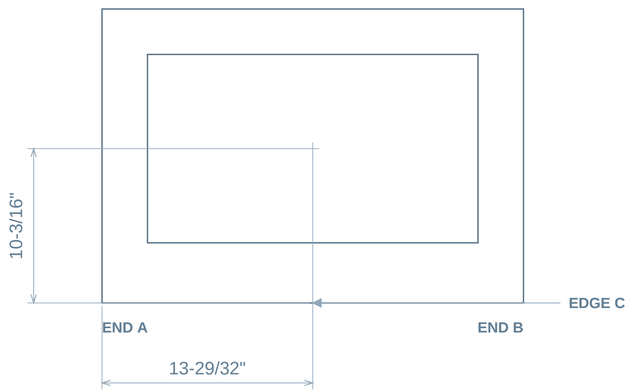



## 04 / SECTION A-A

X = 13-29/32" FROM END A




SECTION SCALE 1:4

## 05 / ISOMETRIC

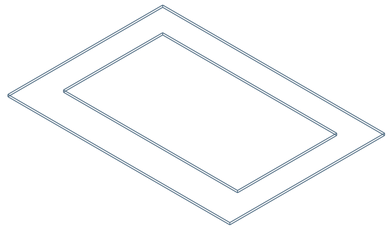

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

## DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 269

body-0268 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

## 01 / TOP - FACE A

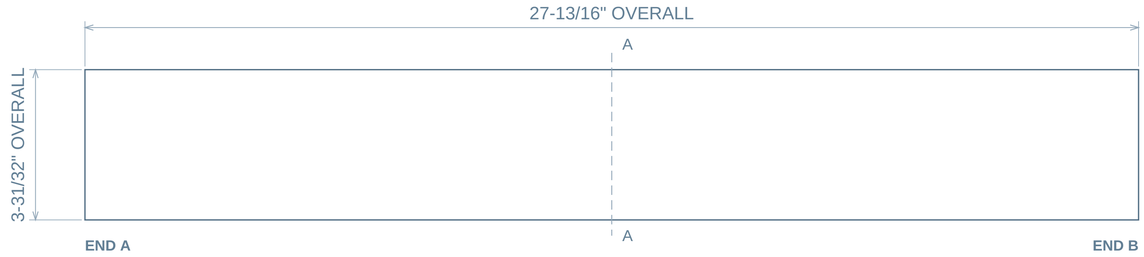


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 13-29/32" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

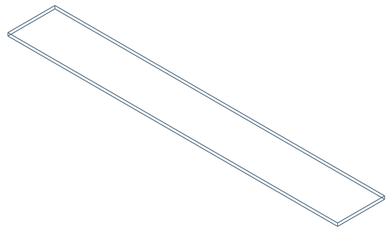

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 28-3/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 270

body-0269 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:2

## 01 / TOP - FACE A

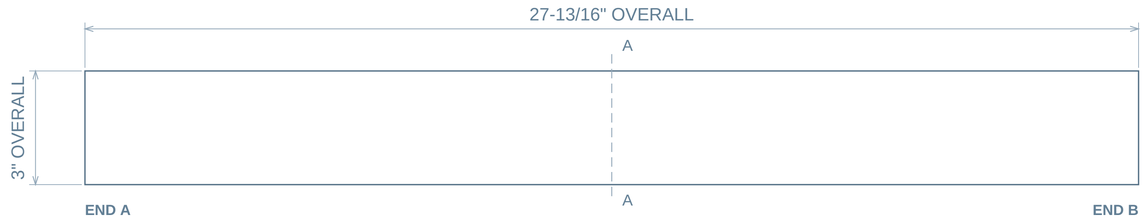


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 13-29/32" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

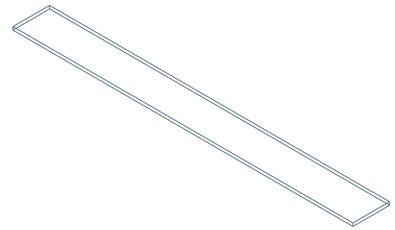

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 27-31/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

## CALIPER / 2606

**PLATFORM / REFERENCE ONLY**

2606-B046-P23


# plinth asm body 271

body-0270 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

**DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING**

Irregular quadrilateral needs profile dimensions

### FACE REFERENCE

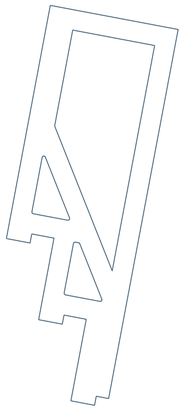


### END REFERENCE



### SIDE REFERENCE



### ISOMETRIC

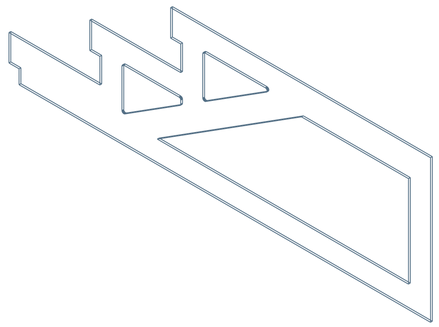

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

**INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19**

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

## CALIPER / 2606

2606-B046-P24

**PLATFORM / REFERENCE ONLY**


# 0.375-16 THRD Rod 0.375-16x4 THRD Rod

body-0271 / QTY 13 / MODEL GEOMETRY REFERENCE / VIEWS NTS

**DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING**

Purchased threaded rod. Thread form and manufacturing details require the native part/vendor specification.


### FACE REFERENCE




### END REFERENCE



### SIDE REFERENCE



### ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.


**INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19**

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

# plinth asm body 285

body-0284 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

## 01 / TOP - FACE A

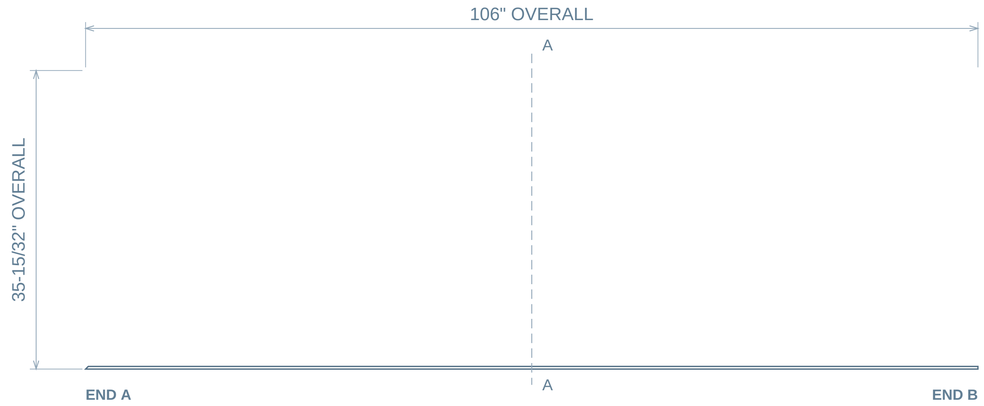


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

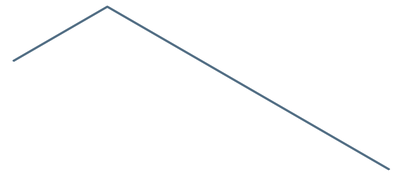

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 111-25/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 285

body-0284 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 83143 / TRUE FACE / SCALE 23.074:1




A: U 0" / V 0"

B: U 0.315" / V 0.315"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.445422"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

# plinth asm body 286

body-0285 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9


## 01 / TOP - FACE A

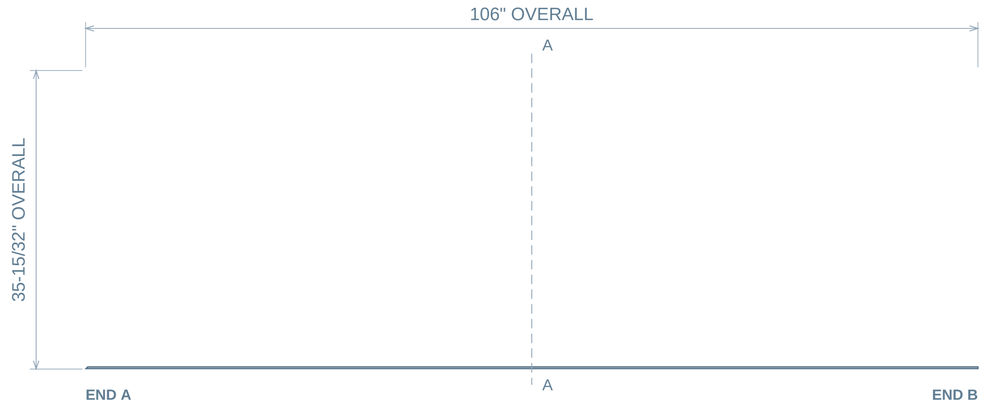


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

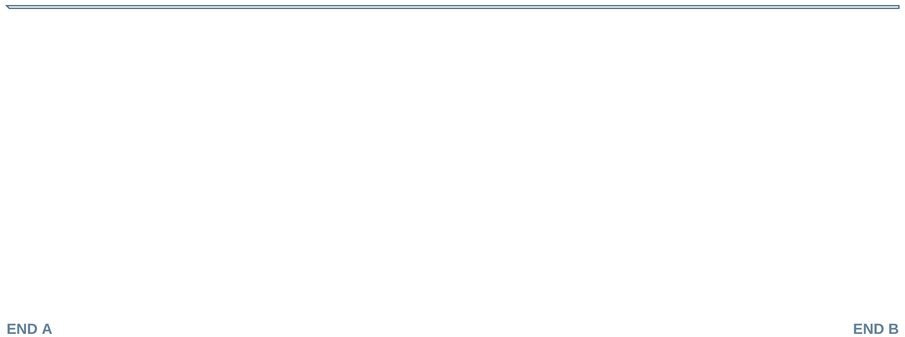



## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

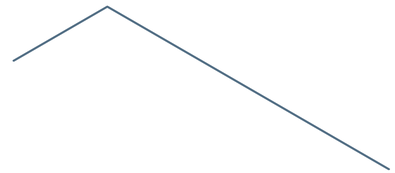

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 111-25/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 286

body-0285 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 40322 / TRUE FACE / SCALE 36.919:1




A: U 0.0591" / V 0.0591"

B: U 0.2559" / V 0.2559"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.278388"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.


# plinth asm body 287

body-0286 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

## 01 / TOP - FACE A

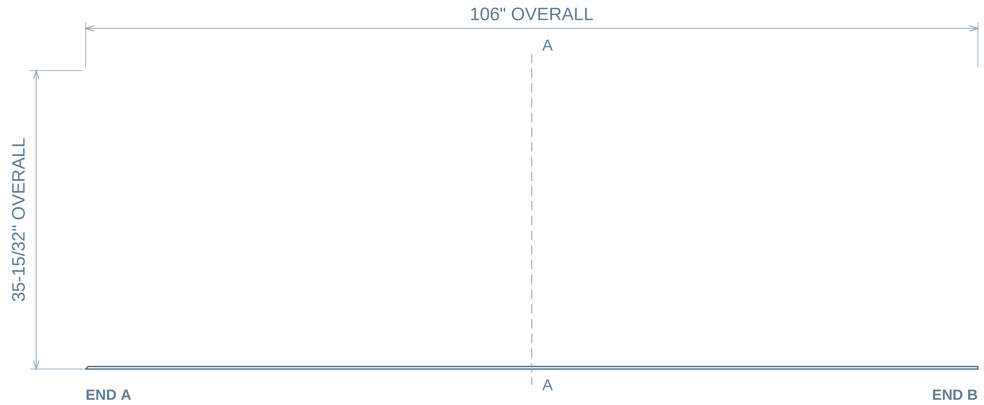


## 02 / FRONT - EDGE VIEW

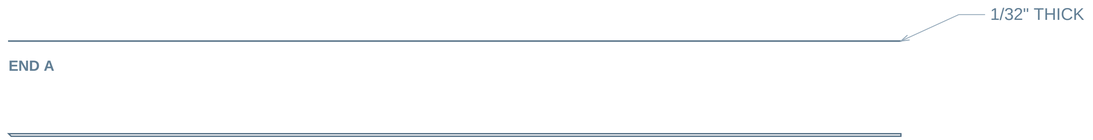


## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 53" FROM END A




SECTION SCALE 1:8

## 05 / ISOMETRIC

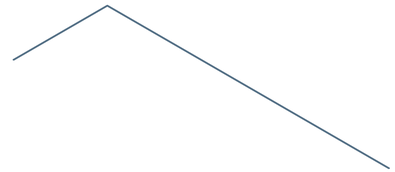

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 111-3/4"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 287

body-0286 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 24544 / TRUE FACE / SCALE 24.225:1




A: U 0" / V 0"

B: U 0.3" / V 0.3"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.424264"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.


# plinth asm body 288

body-0287 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

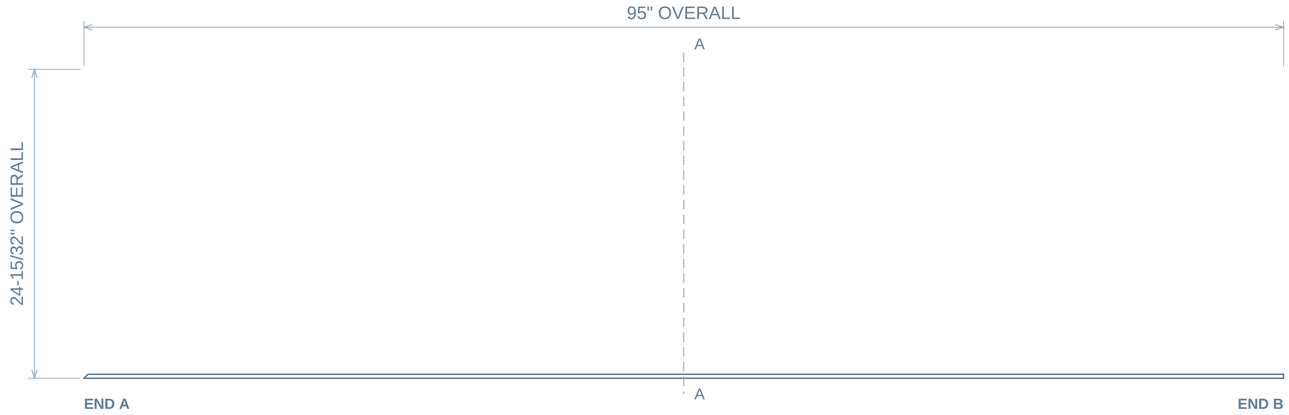


## 02 / FRONT - EDGE VIEW

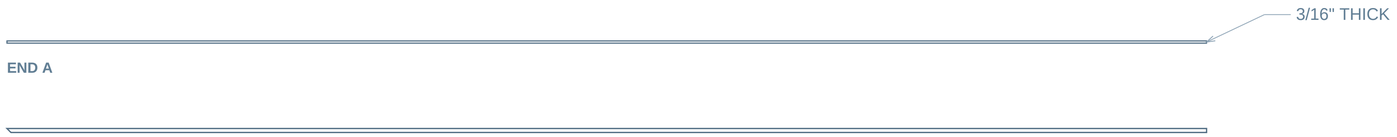


## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:6

## 05 / ISOMETRIC

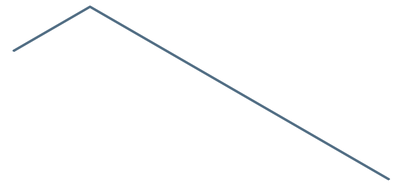

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 98-3/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 288

body-0287 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 59822 / TRUE FACE / SCALE 23.074:1




A: U 0" / V 0"

B: U 0.315" / V 0.315"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.445422"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.


# plinth asm body 289

body-0288 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

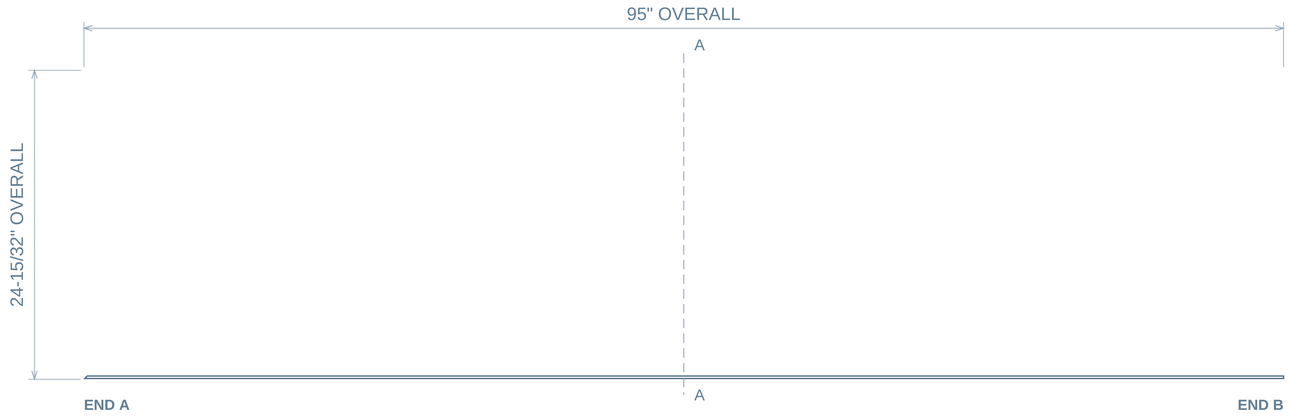


## 02 / FRONT - EDGE VIEW

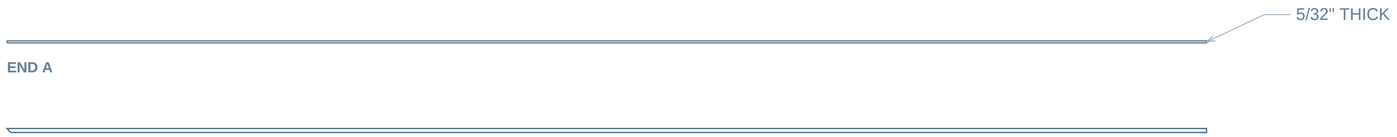


## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:6

## 05 / ISOMETRIC

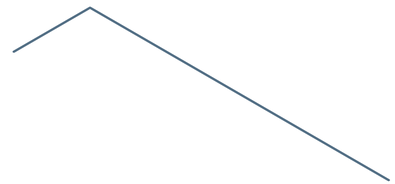

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 98-3/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 289

body-0288 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 90306 / TRUE FACE / SCALE 36.919:1




A: U 0.0591" / V 0.0591"

B: U 0.2559" / V 0.2559"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.278388"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE


Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

# plinth asm body 290

body-0289 | QTY 1 IN PLATFORM | INCHES | TOP / FRONT / BOTTOM SCALE 1:6

## 01 / TOP - FACE A

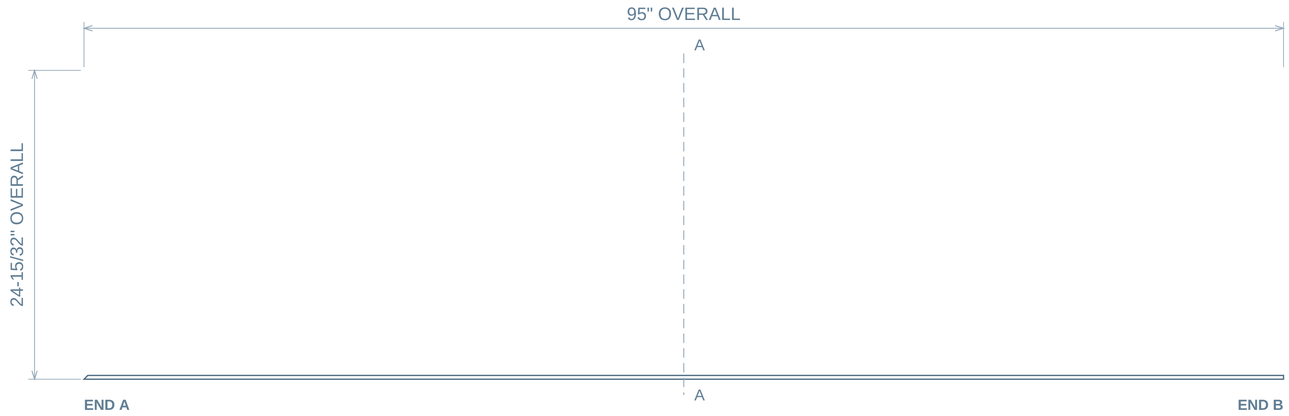


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B


## 04 / SECTION A-A

X = 47-1/2" FROM END A




SECTION SCALE 1:6

## 05 / ISOMETRIC

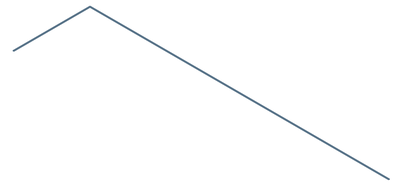

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 98-3/32"

No internal holes in the broad face.

## DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

# plinth asm body 290

body-0289 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 1

## SLOPE EDGE 543 / TRUE FACE / SCALE 24.225:1




A: U 0" / V 0"

B: U 0.3" / V 0.3"

**45.0 DEG TO LOCAL U / EXACT LENGTH 0.424264"**

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE

Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.