ML BACK BEAM · SPLICE REVIEW

4 bodies / 4 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

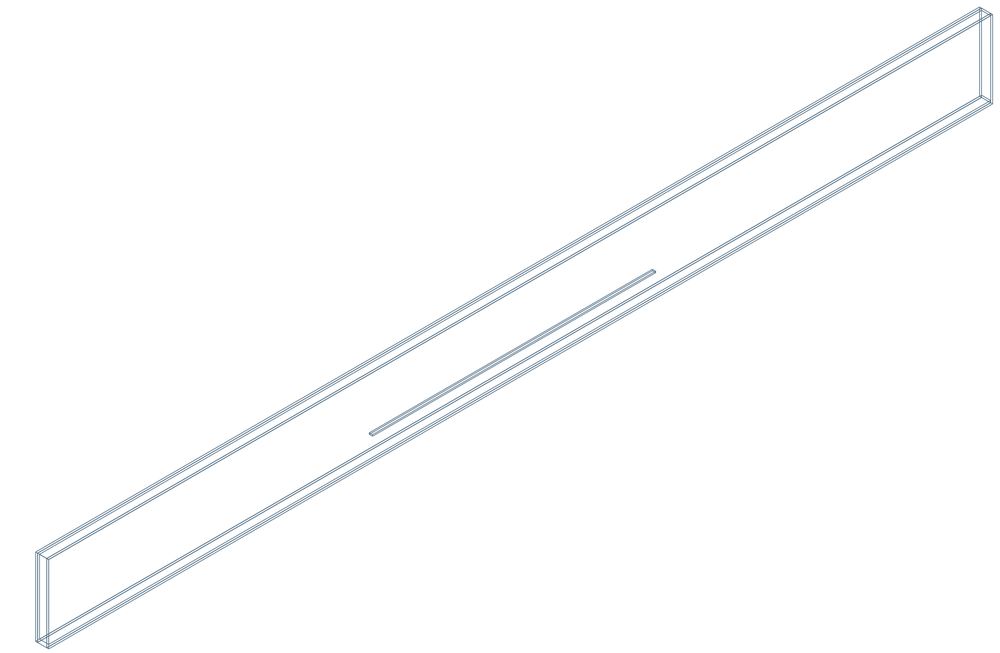

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B030-P01	stair asm body 186	1	180-19/32"
02 / 2606-B030-P02	stair asm body 187	1	180-19/32"
03 / 2606-B030-P03	stair asm body 188	1	180-5/8"
04 / 2606-B030-P04	stair asm body 189	1	54"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

REFERENCE ONLY entries have mesh spans; see each sheet limitation.

stair asm body 186

body-0185 | QTY 1 IN ML BACK BEAM · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A

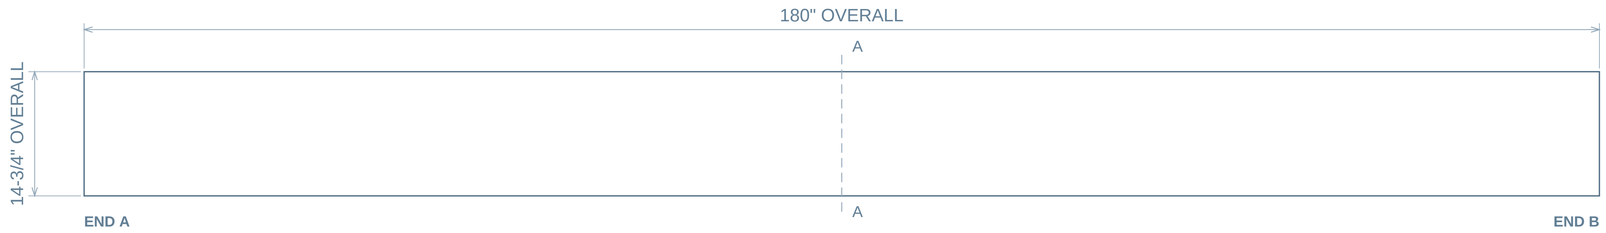

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

04 / SECTION A-A

X = 90" FROM END A

SECTION SCALE 1:4

05 / ISOMETRIC

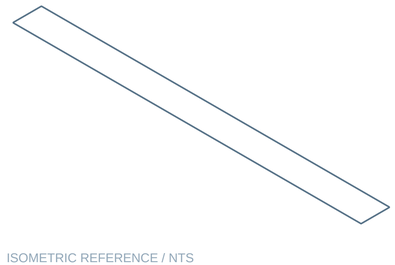

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 180-19/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 187

body-0186 | QTY 1 IN ML BACK BEAM · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A

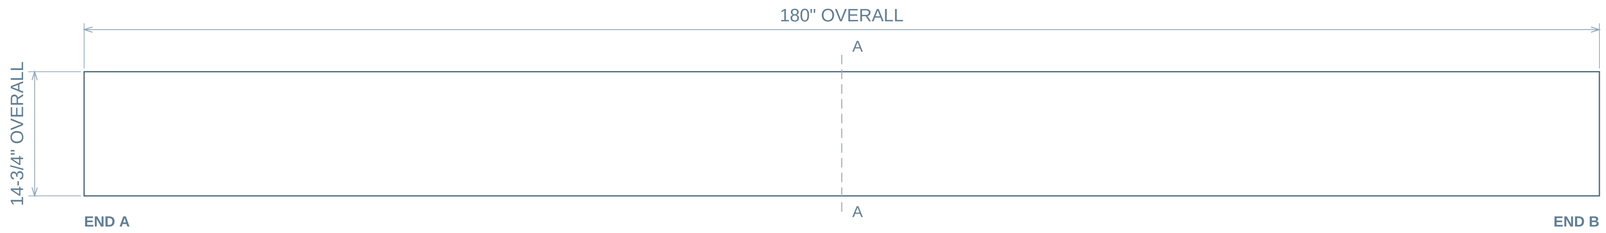

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

04 / SECTION A-A

X = 90" FROM END A

SECTION SCALE 1:4

05 / ISOMETRIC

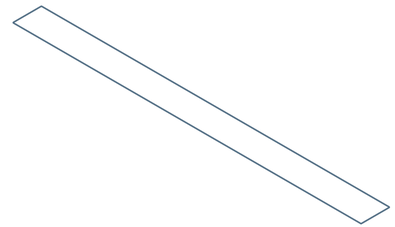

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 180-19/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 188

body-0187 | QTY 1 IN ML BACK BEAM · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:9

01 / TOP - FACE A

02 / FRONT - FORM PLAN

03 / BOTTOM - FACE B

04 / SECTION A-A

CUT U = 84-19/32" FROM LOCAL DATUM

ACTUAL FORMED SECTION / 1:7

05 / ISOMETRIC

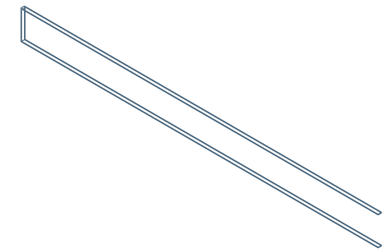

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

FORMED BODY / SOURCE ORTHOGRAPHICS

Feature offsets refer to the marked planar face.

Form depth is not material thickness.

Section follows actual source surfaces.

MAX BODY SPAN (TRUE 3D): 180-5/8"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 189

body-0188 | QTY 1 IN ML BACK BEAM · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:3

01 / TOP - FACE A

02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

04 / SECTION A-A

X = 27" FROM END A

SECTION SCALE 1:1

05 / ISOMETRIC

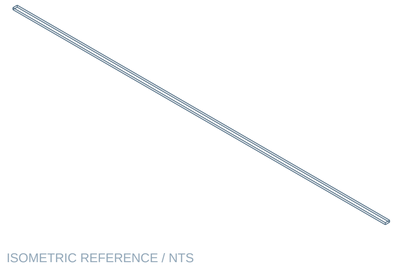

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 54"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.