
TOP LH STRINGER · SPLICE REVIEW

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

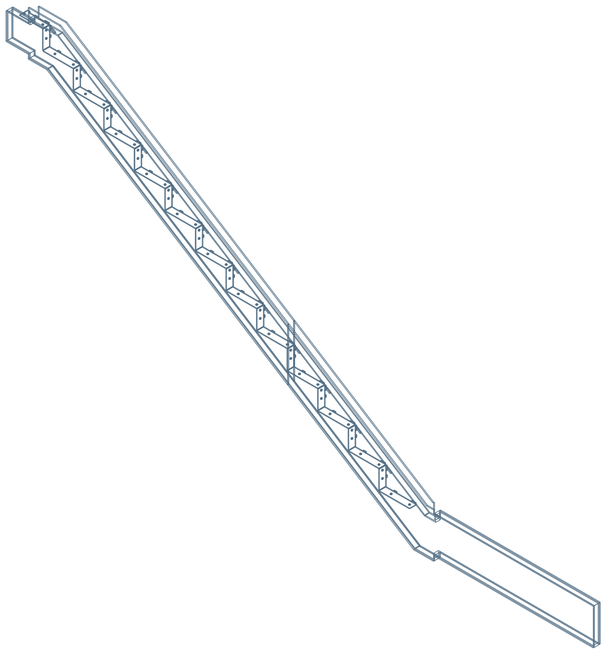

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B001-P01	stringer plates LHT horiz [REF ONLY]	1	230-7/8"
02 / 2606-B001-P02	stair asm body 10	1	120-29/32"
03 / 2606-B001-P03	stair asm body 11	1	119-3/16"
04 / 2606-B001-P04	stair asm body 12	1	120-29/32"
05 / 2606-B001-P05	stair asm body 13 [REF ONLY]	1	119-3/16"
06 / 2606-B001-P06	treadplate carriers horiz LH	12	11-11/32"
07 / 2606-B001-P07	treadplate carriers vert LH	12	7-3/32"
08 / 2606-B001-P08	treadplate carriers horiz top LH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

REFERENCE ONLY entries have mesh spans; see each sheet limitation.

stringer plates LHT horiz

body-0008 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Non-standard internal profile/cavity requires a dedicated detailing view

FACE REFERENCE

END REFERENCE



SIDE REFERENCE



ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

stair asm body 10

body-0009 / QTY 1 / 3/8" PLATE / NO HOLES IN THIS BODY / INCHES

01 / TOP - FACE A / COMPLETE BODY / SCALE 1:5

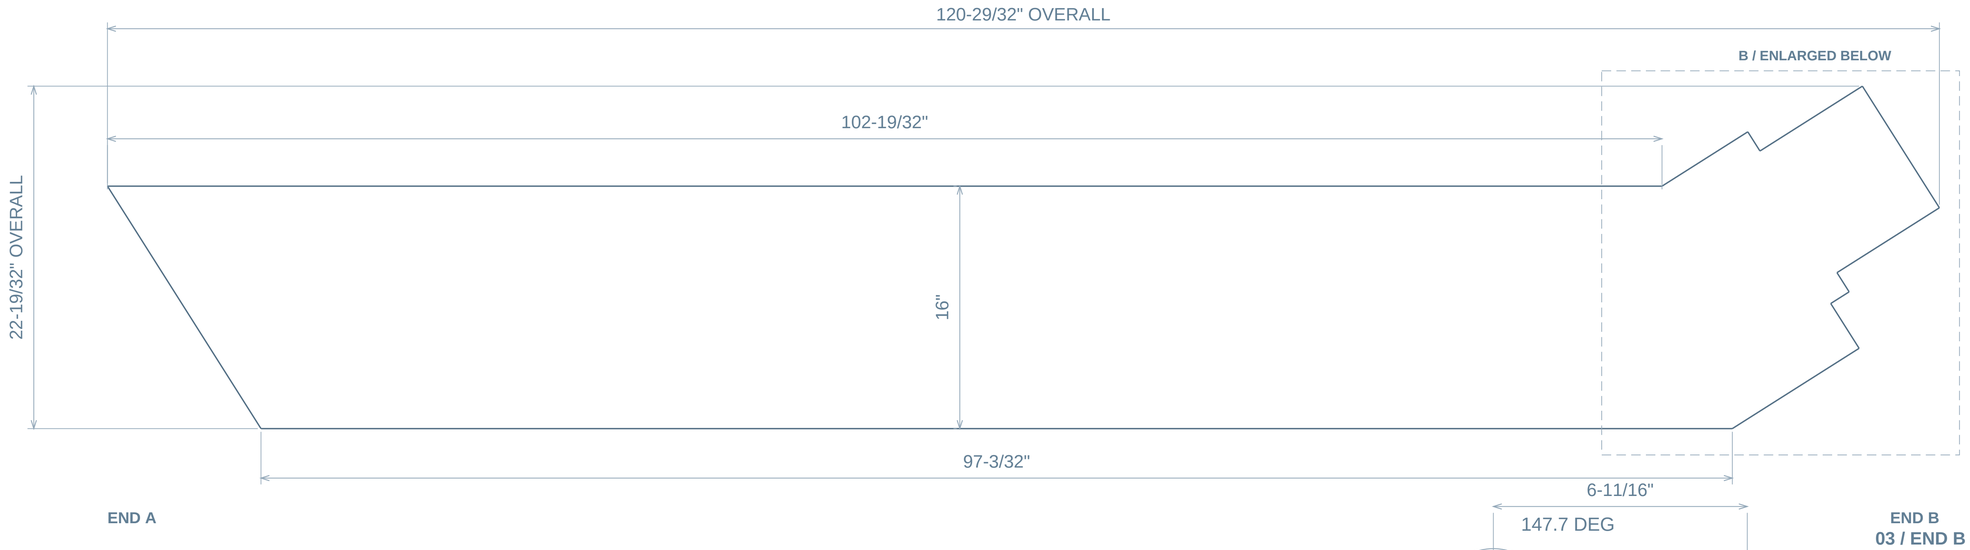


PLATE THICKNESS

3/8"


TRUE FACE VIEWS

Angles in the plate plane

End B rotated for clarity

Same source outline


02 / END A / CONNECTED FACE DETAIL / SCALE 1:3

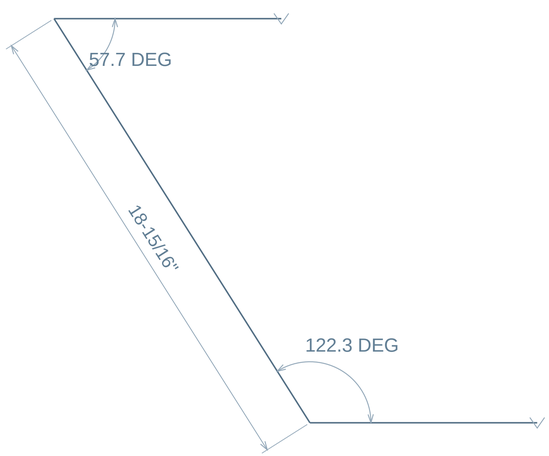

Actual adjacent edges
continue to the right.

Included cut angles shown
on the actual outline.

03 / END B / SCALE 1:2

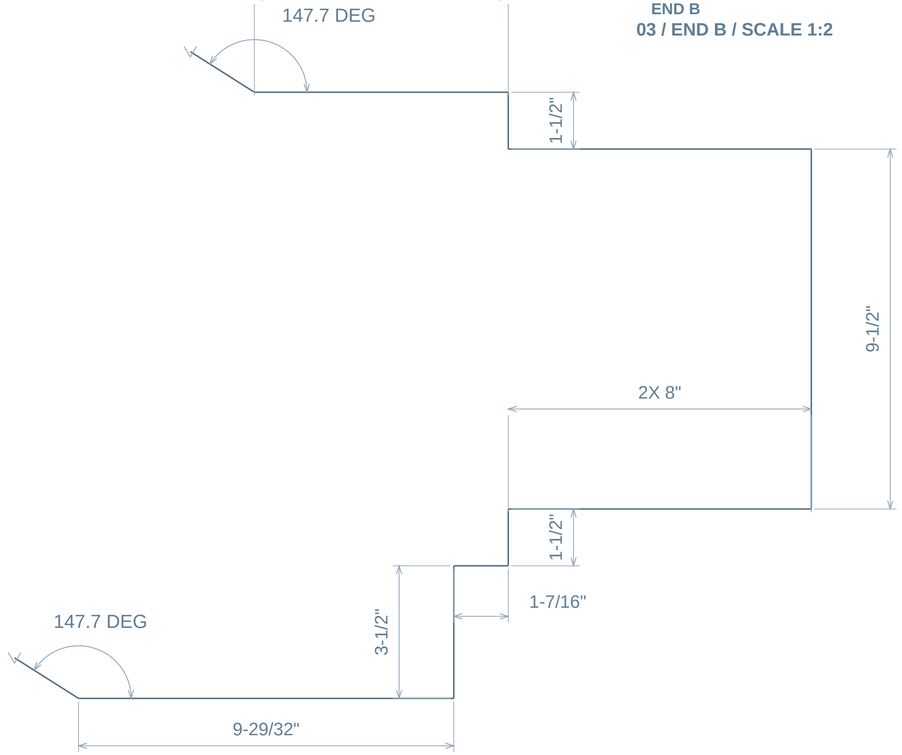

8 UNMARKED END-B CORNERS ARE 90.0 DEG / ALL PROFILE LENGTHS MEASURED IN THE TRUE FACE PLANE.


Break marks indicate view continuation only. They do not indicate a fabrication cut or splice.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / MODEL REVIEW / DO NOT SCALE

stair asm body 11

body-0010 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

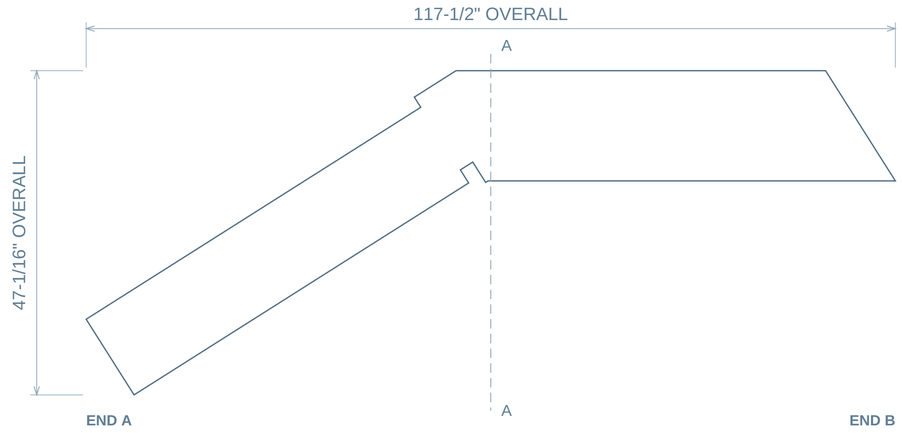

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

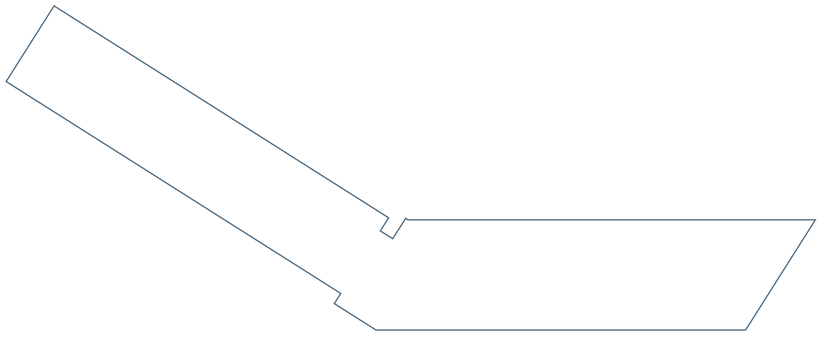


04 / SECTION A-A

X = 58-3/4" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 119-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 11

body-0010 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 1 OF 3

SLOPE EDGE 47089 / TRUE FACE / SCALE 2.937:1



A: U 56.1253" / V 33.8009"


B: U 57.9978" / V 30.844"

57.7 DEG TO LOCAL U / EXACT LENGTH 3.500000"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 30332 / TRUE FACE / SCALE 25.209:1

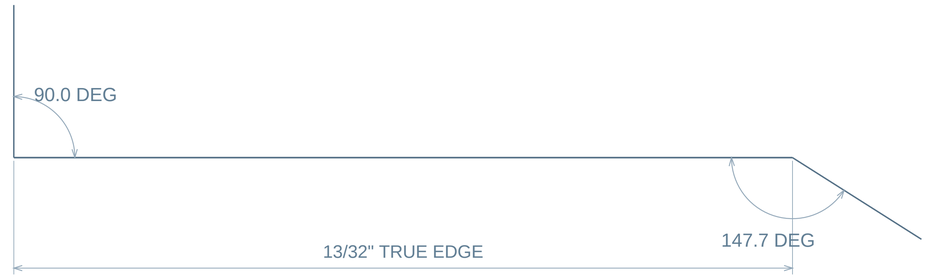

A: U 57.9978" / V 30.844"


B: U 58.3423" / V 31.0621"

32.3 DEG TO LOCAL U / EXACT LENGTH 0.407704"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 10190 / TRUE FACE / SCALE 0.543:1



A: U 107.3537" / V 47.0621"


B: U 117.486" / V 31.0621"

57.7 DEG TO LOCAL U / EXACT LENGTH 18.938377"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 4841 / TRUE FACE / SCALE 1.433:1

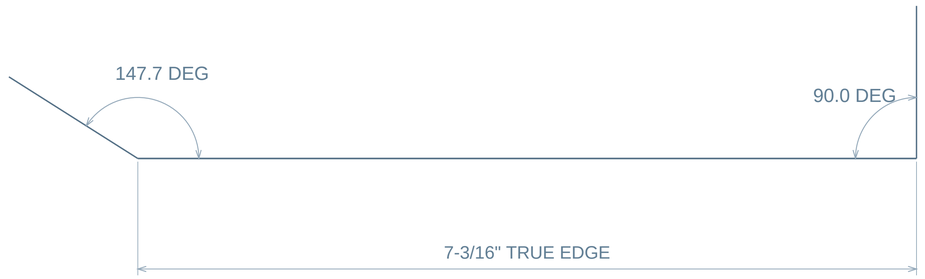

A: U 53.7022" / V 47.0621"

B: U 47.6423" / V 43.2246"

32.3 DEG TO LOCAL U / EXACT LENGTH 7.172750"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE

Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

stair asm body 11

body-0010 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 2 OF 3

SLOPE EDGE 46742 / TRUE FACE / SCALE 5.873:1



A: U 47.6423" / V 43.2246"


B: U 48.5786" / V 41.7461"

57.7 DEG TO LOCAL U / EXACT LENGTH 1.750000"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 80543 / TRUE FACE / SCALE 0.179:1

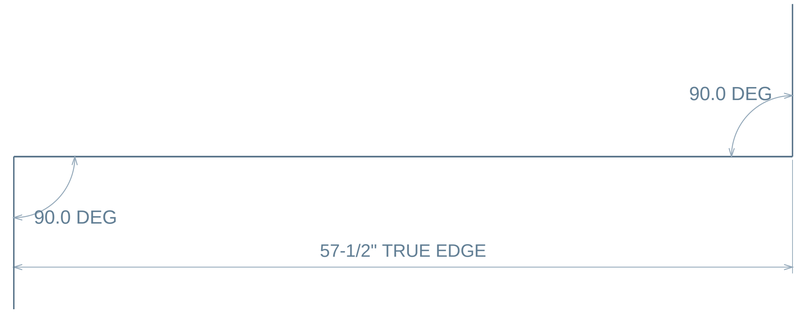

A: U 0" / V 10.983"

B: U 48.5786" / V 41.7461"

32.3 DEG TO LOCAL U / EXACT LENGTH 57.500000"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 22741 / TRUE FACE / SCALE 0.791:1



A: U 6.9551" / V 0"


B: U 0" / V 10.983"

57.7 DEG TO LOCAL U / EXACT LENGTH 13.000010"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 15364 / TRUE FACE / SCALE 0.179:1

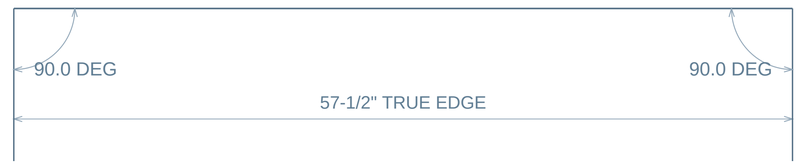

A: U 55.5338" / V 30.7631"

B: U 6.9551" / V 0"

32.3 DEG TO LOCAL U / EXACT LENGTH 57.500000"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE

Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

stair asm body 11

body-0010 / QTY 1 / TRUE FACE PLANE / PROFILE DETAIL 3 OF 3

SLOPE EDGE 75066 / TRUE FACE / SCALE 4.568:1



A: U 55.5338" / V 30.7631"


B: U 54.33" / V 32.664"

57.7 DEG TO LOCAL U / EXACT LENGTH 2.250010"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

SLOPE EDGE 19078 / TRUE FACE / SCALE 4.837:1



A: U 54.33" / V 32.664"

B: U 56.1253" / V 33.8009"

32.3 DEG TO LOCAL U / EXACT LENGTH 2.125000"

Adjacent edges truncated for clarity; smaller included angles measured in the true face plane.

A/B are this detail edge endpoints; U/V retain the original part frame origin.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / NOT A MANUFACTURING TOLERANCE

Smaller included angles are between the two actual adjacent edges. Slope to U is the acute angle to the local length axis.

Retain the accompanying R01 views for drilling, thickness, sections and release limitations. DO NOT SCALE.

stair asm body 12

body-0011 / QTY 1 / 3/8" PLATE / OUTER PROFILE / SLOT LAYOUT ON SHEET 2 / INCHES

01 / TOP - FACE A / COMPLETE BODY / SCALE 1:5

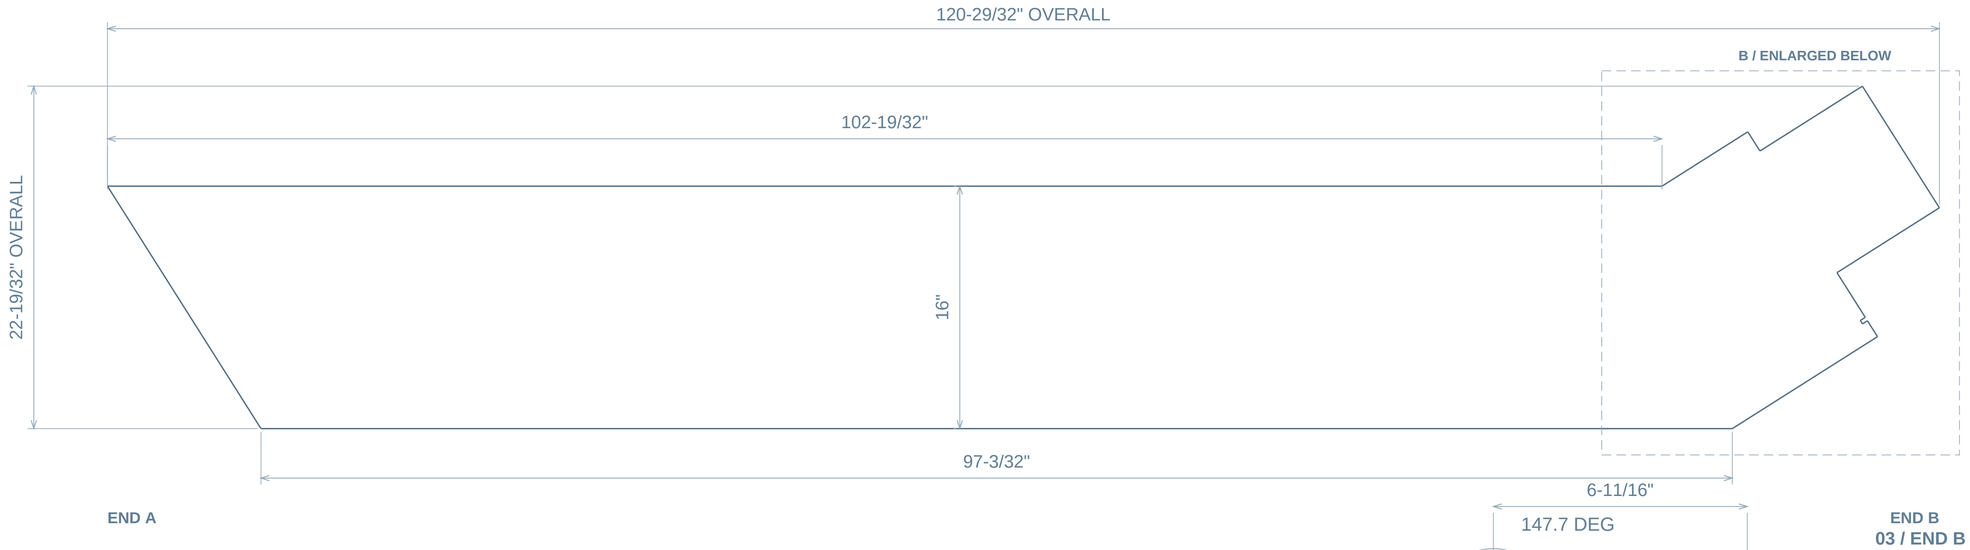


PLATE THICKNESS

3/8"


TRUE FACE VIEWS

Angles in the plate plane

End B rotated for clarity

Same source outline


02 / END A / CONNECTED FACE DETAIL / SCALE 1:3

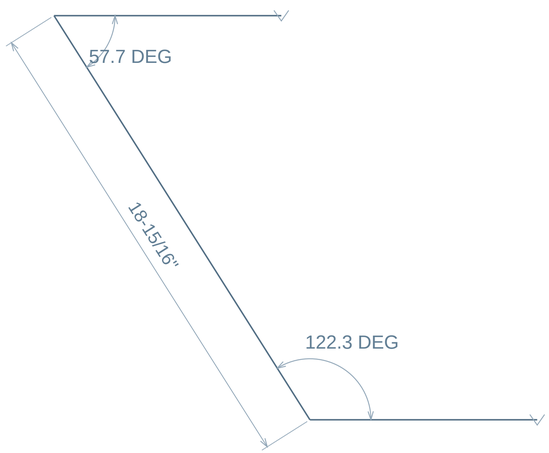

Actual adjacent edges
continue to the right.

Included cut angles shown
on the actual outline.

03 / END B / SCALE 1:2

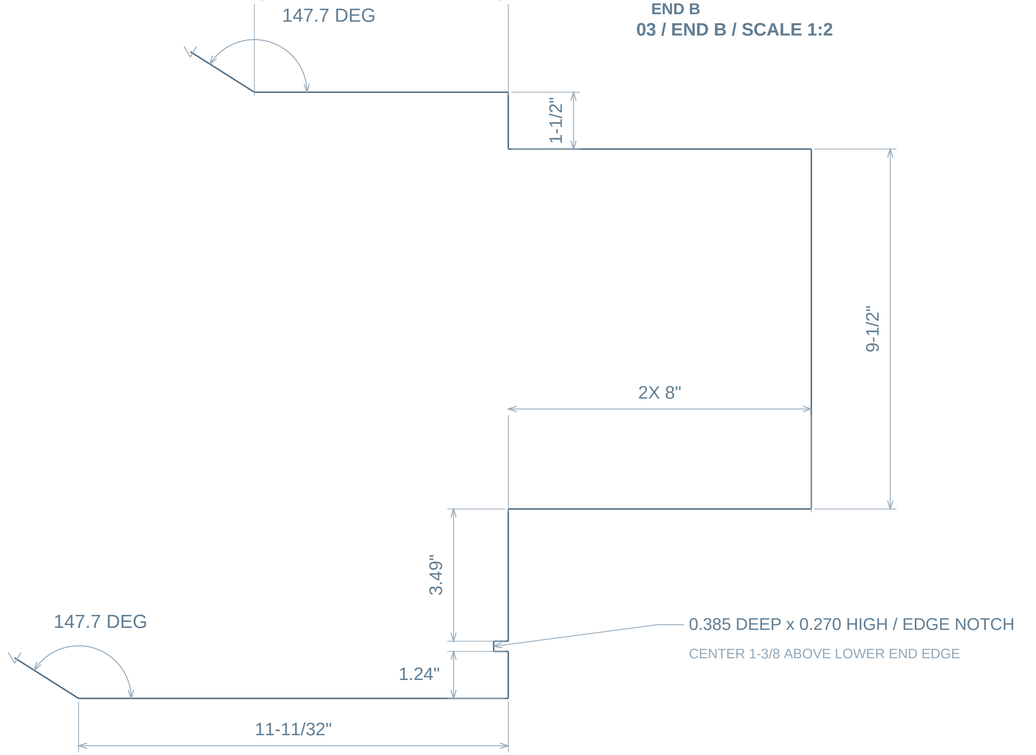

10 UNMARKED END-B CORNERS ARE 90.0 DEG / ALL PROFILE LENGTHS MEASURED IN THE TRUE FACE PLANE.

Break marks indicate view continuation only. They do not indicate a fabrication cut or splice.

INCHES / FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / MODEL REVIEW / DO NOT SCALE

stair asm body 12 / SLOT LAYOUT

40 RECTANGULAR SLOTS / 5 TYPES x 8 INSTANCES / ALL THRU 3/8 PLATE / SEE SHEET 1 FOR THE EDGE NOTCH

VERIFIED REPEAT

8 bays / 5 slots per bay

U runs parallel to the long straight edges.


Datum A: U = 0 at the leftmost material.

Edge C: actual lower long edge, V = 0.

First instances are dimensioned below.


Pitch is decimal to preserve all stations.


01 / ALL 40 SLOTS / TRUE FACE / SCALE 1:6

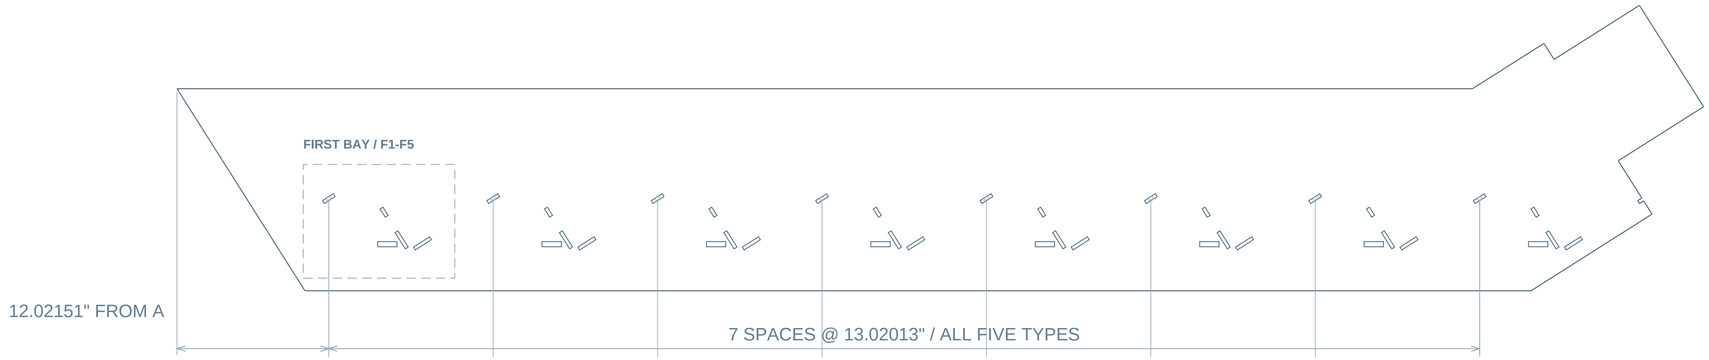

F1 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 12.02151" / V 7.29678" / LOCATION VIEW 1:8

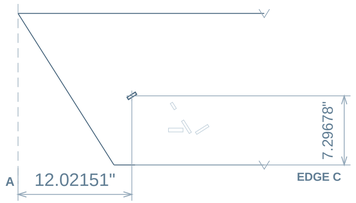





LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

F2 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.40043" / V 6.22294" / LOCATION VIEW 1:8

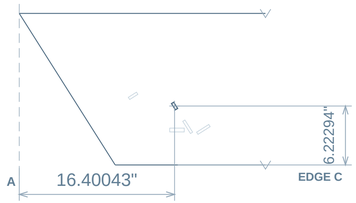




LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F3 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.65543" / V 3.68750" / LOCATION VIEW 1:8

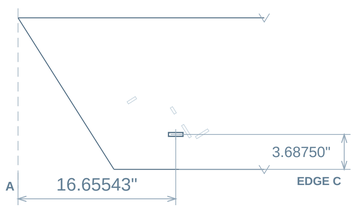





LONG AXIS 0.0 DEG CCW FROM +U / SIZE VIEW 1:1

F4 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 17.78660" / V 4.03402" / LOCATION VIEW 1:8

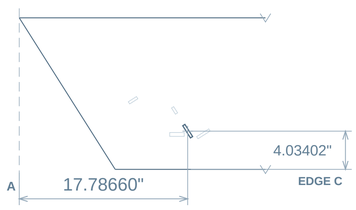


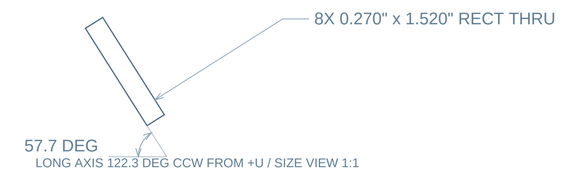


LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F5 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 19.44454" / V 3.75233" / LOCATION VIEW 1:8

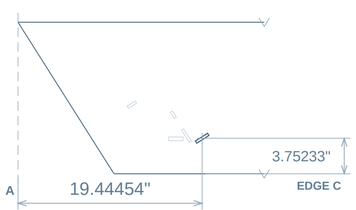



LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

PROFILE FRACTIONS NEAREST 1/32 / SLOT CENTERS AND REPEAT PITCH RETAINED AS DECIMALS / ANGLES 0.1 DEG

COMMON U/V DATUMS ON EVERY VIEW / ARCS SHOW ACUTE LINE INCLINATION / CCW LONG-AXIS ORIENTATION IS LABELED.

CALIPER / 2606

2606-B001-P05

TOP LH STRINGER · SPLICE REVIEW / REFERENCE ONLY


stair asm body 13

body-0012 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Dense feature callouts require a larger or split detail layout. Source geometry is retained; complete feature dimensions are withheld on this sheet.

FACE REFERENCE




END REFERENCE

SIDE REFERENCE



ISOMETRIC

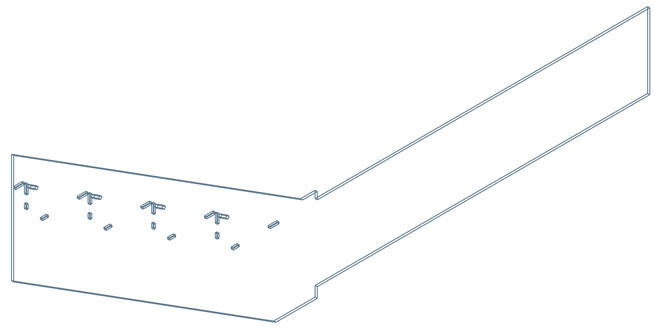

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

treadplate carriers horiz LH

body-0013 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

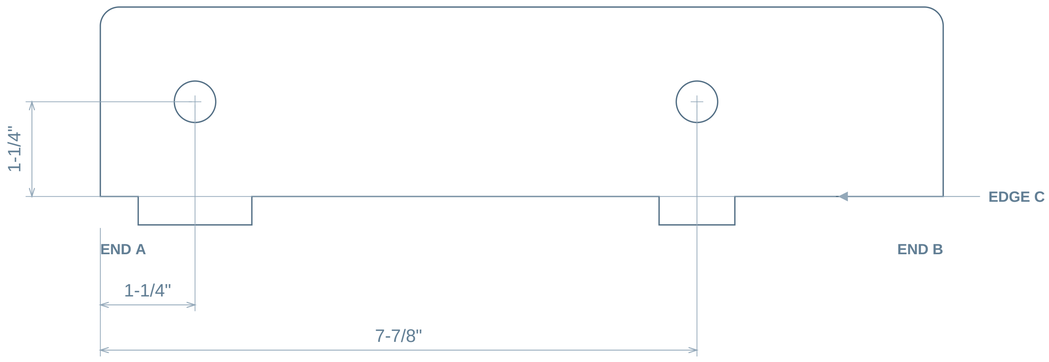

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

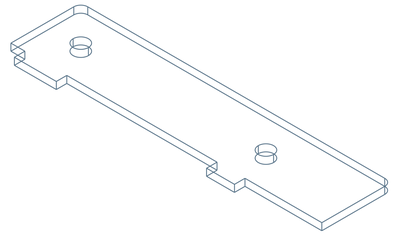

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

treadplate carriers vert LH

body-0014 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

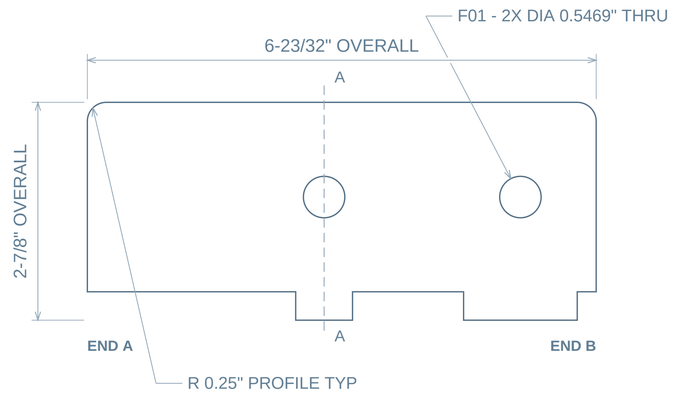

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

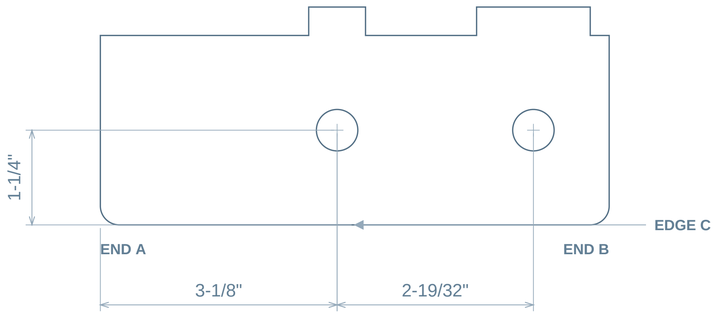


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

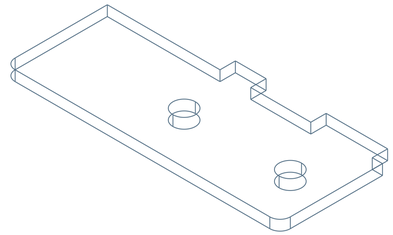

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top LH

body-0036 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

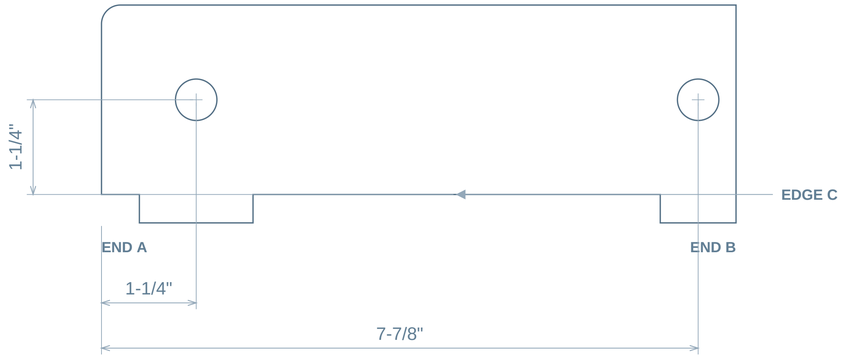

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

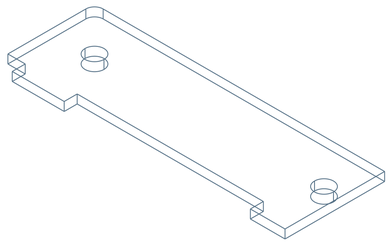

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.