

BTM RUN

34 bodies / 12 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

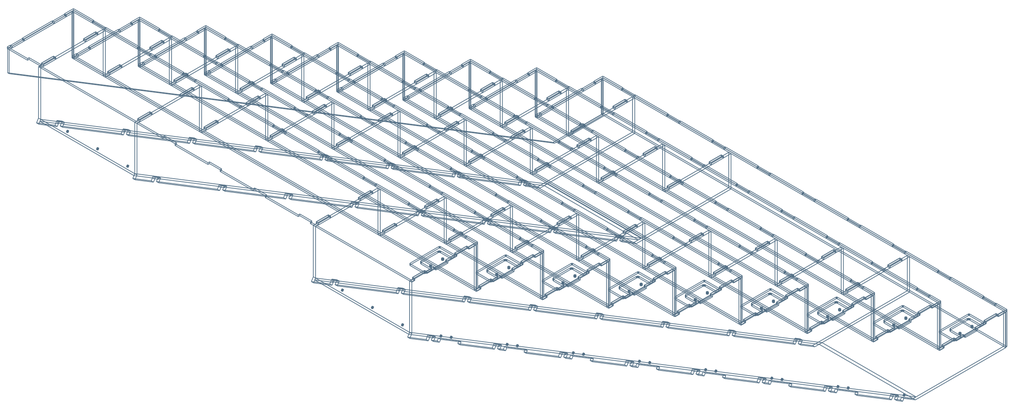

ASSEMBLY / TOP

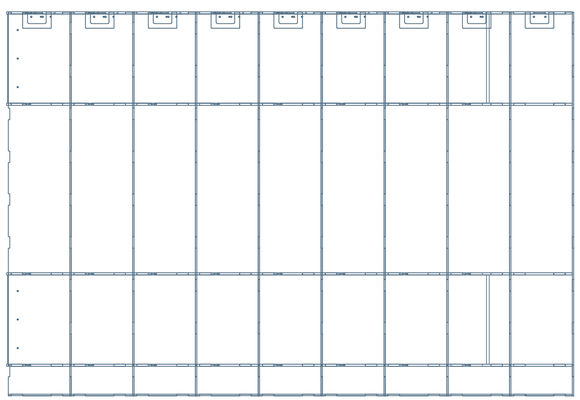

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2605-B02-P01	steel substread 5-6 TYP Tread	8	68-1/8"
02 / 2605-B02-P02	steel substread 5-6 BTM Riser	1	67-3/8"
03 / 2605-B02-P03	base shoe top mount plate Tread-Side	9	5-17/32"
04 / 2605-B02-P04	structure box asm BTM 5-6 body 5	1	114-15/16"
05 / 2605-B02-P05	structure box asm BTM 5-6 body 7	1	114-15/16"
06 / 2605-B02-P06	structure box asm BTM 5-6 body 9	1	99-7/8"
07 / 2605-B02-P07	steel substread 5-6 TYP Riser	8	67-1/2"
08 / 2605-B02-P08	steel substread 5-6 SPLICE Tread	1	68-5/64"
09 / 2605-B02-P09	structure box asm BTM 5-6 body 56	1	114-15/16"
10 / 2605-B02-P10	structure box asm BTM 5-6 body 58	1	114-15/16"
11 / 2605-B02-P11	structure box asm BTM 5-6 body 60	1	99-7/8"
12 / 2605-B02-P12	structure box asm BTM 5-6 body 70	1	114-15/16"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.


Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

steel substread 5-6 TYP Tread

body-0000 | QTY 8 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

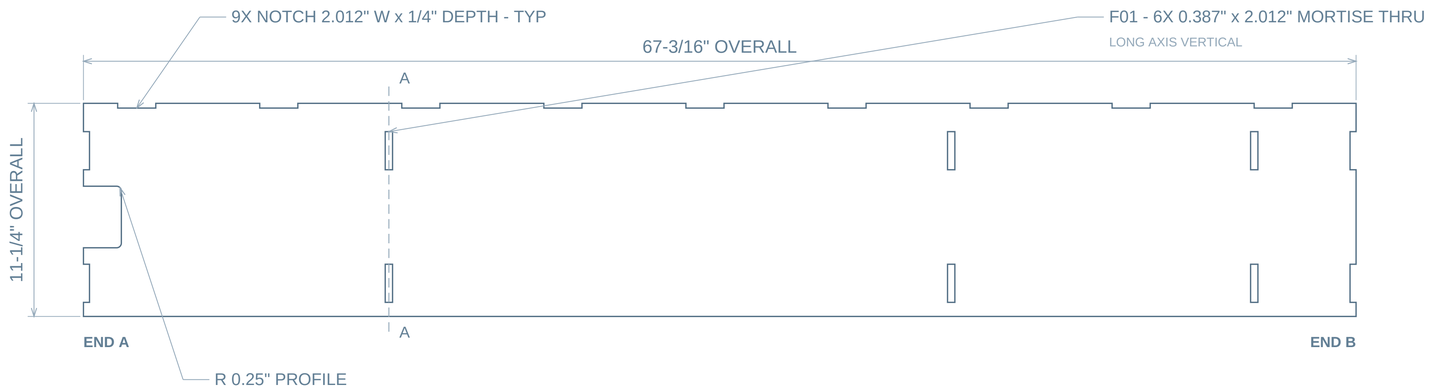

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

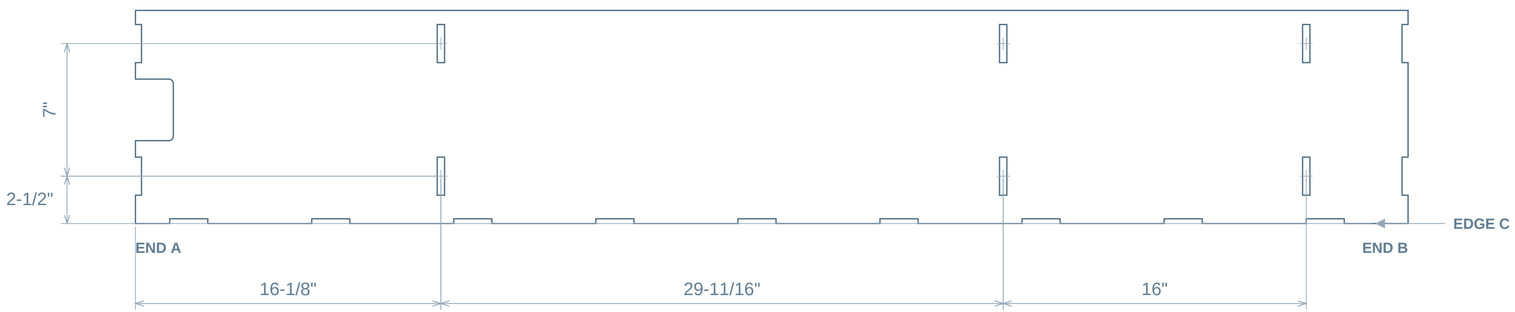

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 16-1/8" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

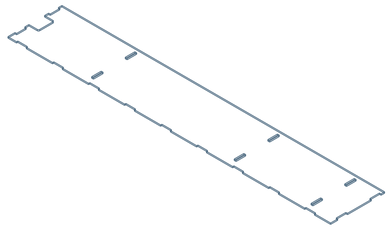

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-13/16"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

steel substread 5-6 BTM Riser


body-0001 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4

01 / TOP - FACE A

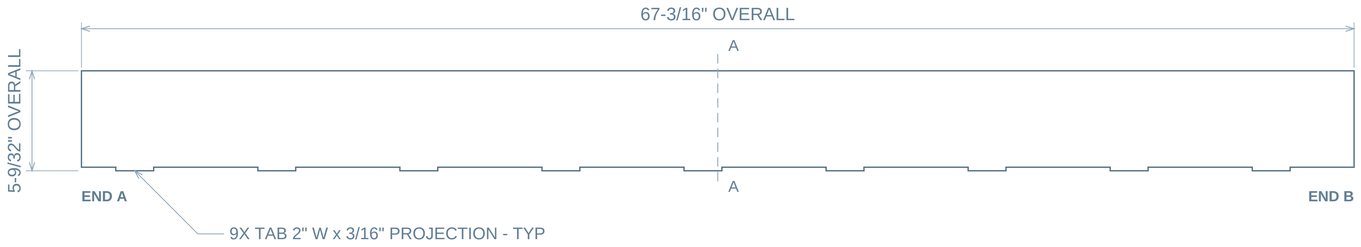


02 / FRONT - EDGE VIEW

03 / BOTTOM - FACE B

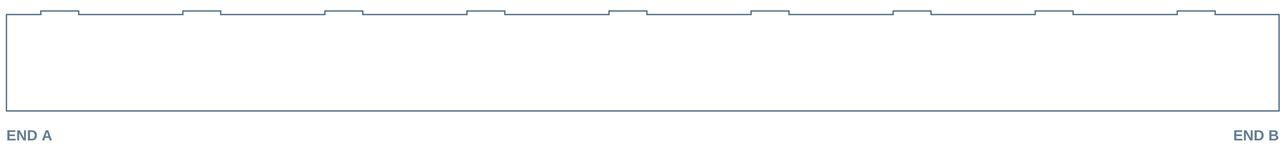


04 / SECTION A-A

X = 33-19/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

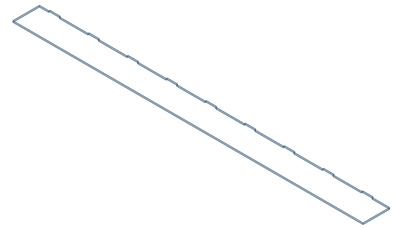

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 67-3/8"

No internal holes in the broad face.

TAB CENTRES / END A

FIRST: 2-13/16"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

base shoe top mount plate Tread-Side

body-0002 | QTY 9 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

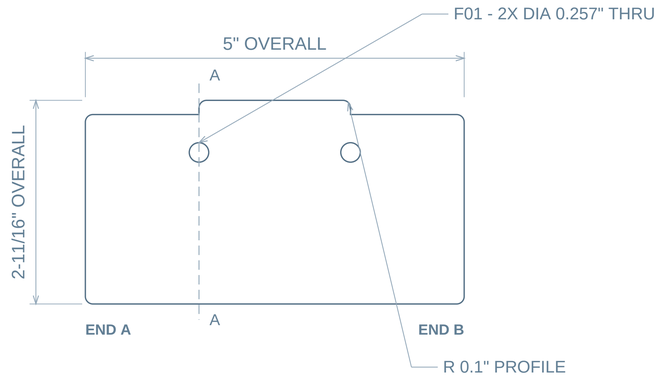

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

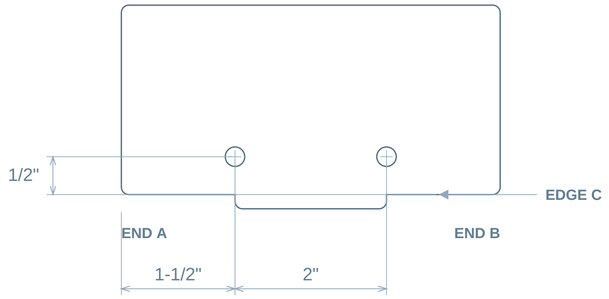


04 / SECTION A-A

X = 1-1/2" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

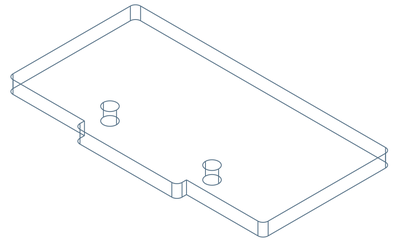

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

STEP FEATURE: 5/16-18 TAPPED HOLE

Threads are not represented by the bore surfaces.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.


structure box asm BTM 5-6 body 5

body-0004 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:14

01 / TOP - FACE A

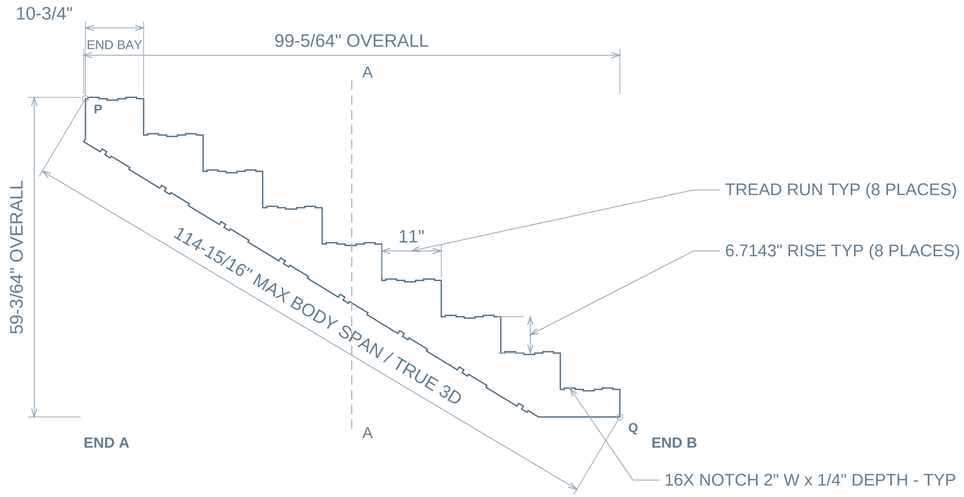

02 / FRONT - EDGE VIEW

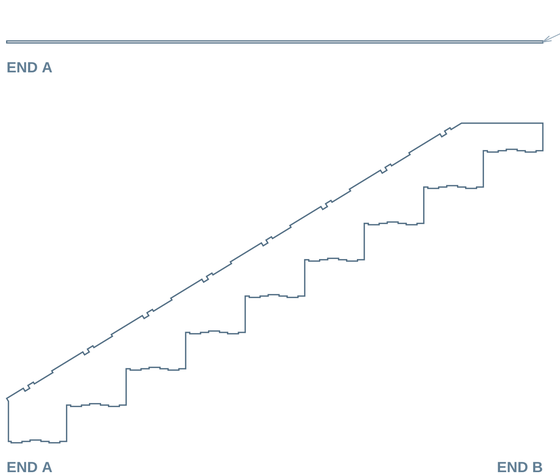

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 49-17/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 114.9329"

No internal holes in the broad face.

NOTCH CENTRES / END A

FIRST: 12-53/64"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.


structure box asm BTM 5-6 body 7

body-0006 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:14

01 / TOP - FACE A

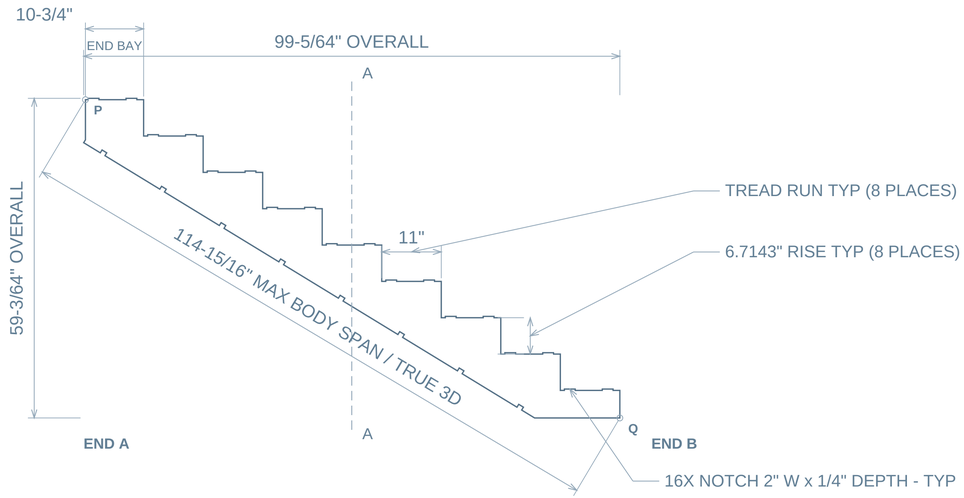

02 / FRONT - EDGE VIEW

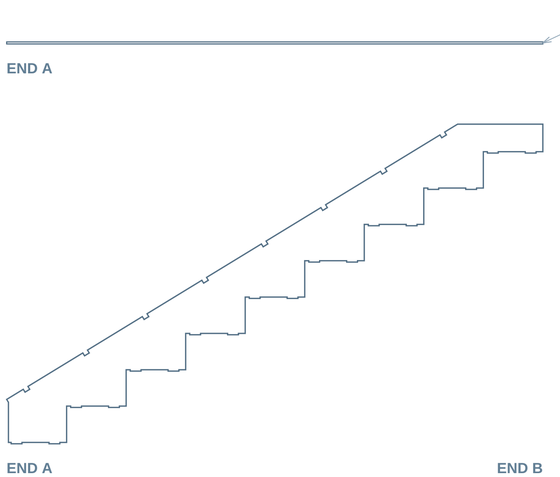

03 / BOTTOM - FACE B


04 / SECTION A-A

X = 49-17/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 114.9329"

No internal holes in the broad face.

NOTCH CENTRES / END A

FIRST: 12-53/64"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

structure box asm BTM 5-6 body 9

body-0008 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:5


01 / TOP - FACE A

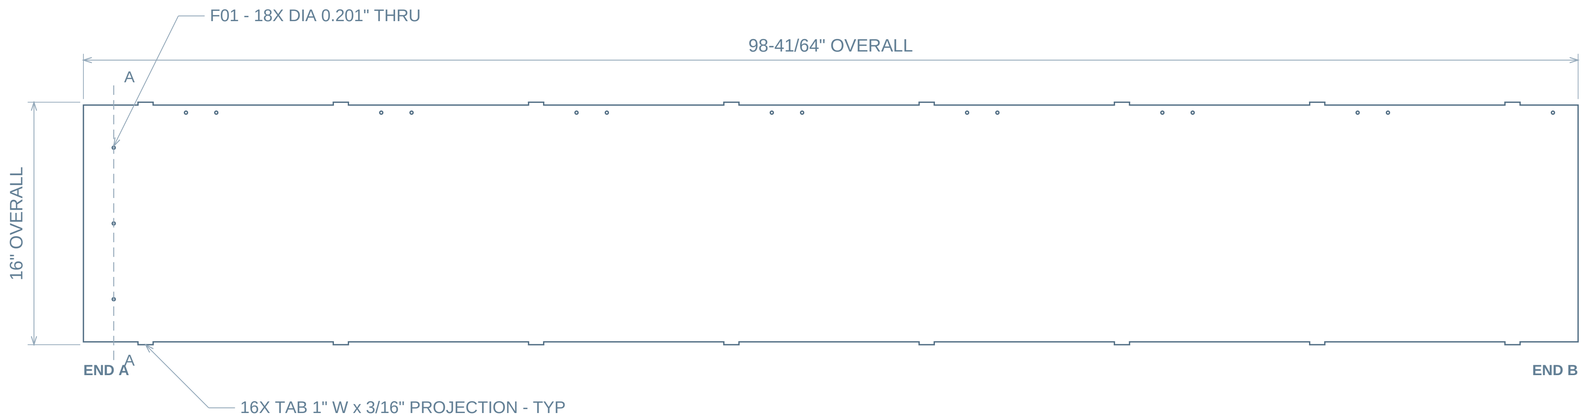

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

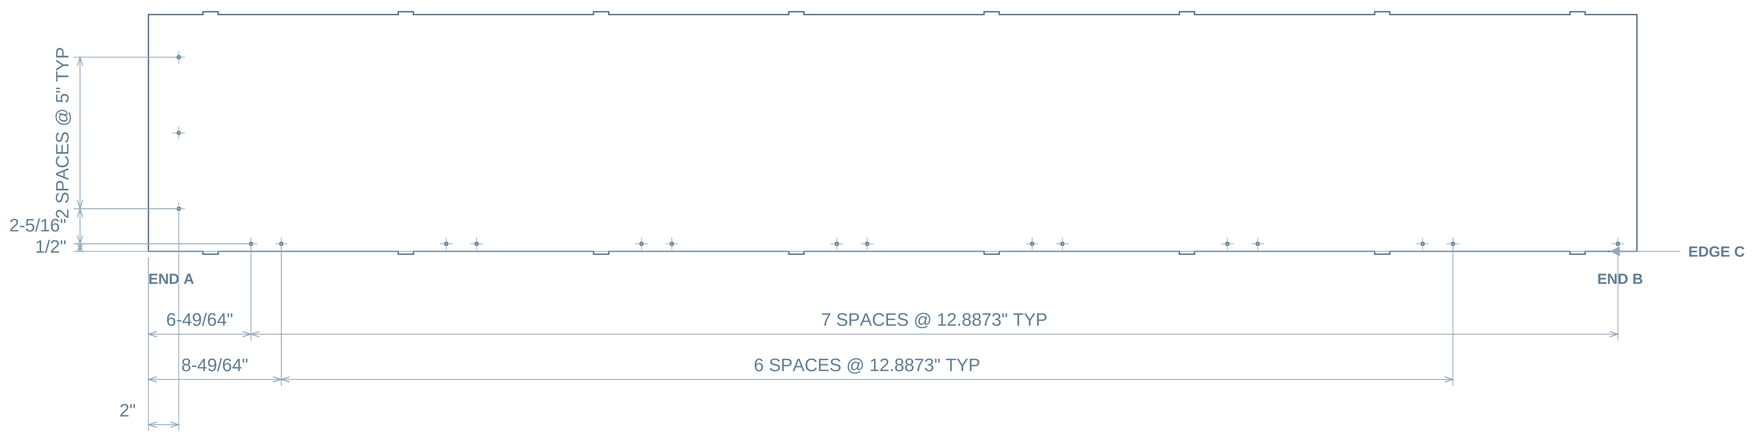

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

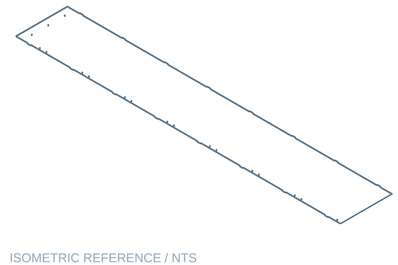

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 4-3/32"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

steel substread 5-6 TYP Riser

body-0018 | QTY 8 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

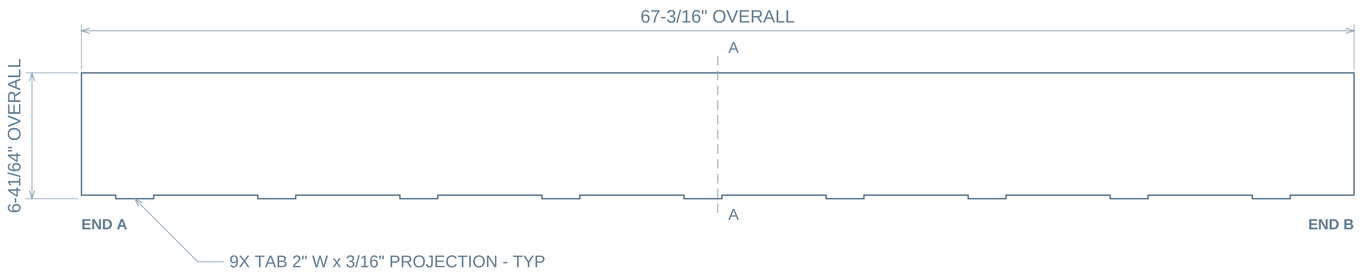

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B




04 / SECTION A-A

X = 33-19/32" FROM END A



SECTION SCALE 1:2

05 / ISOMETRIC

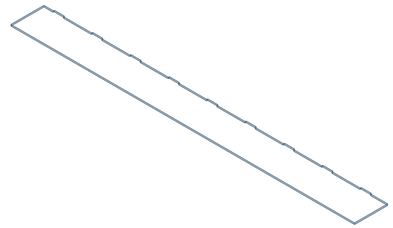

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 67-1/2"

No internal holes in the broad face.

TAB CENTRES / END A

FIRST: 2-13/16"

8 SPACES @ 7-1/2" TYP

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

steel substread 5-6 SPLICE Tread

body-0038 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


01 / TOP - FACE A

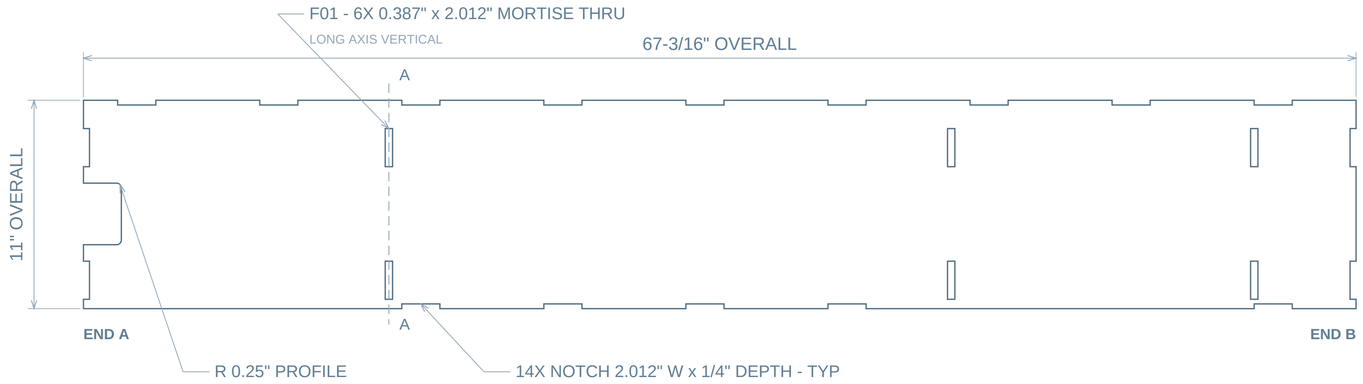

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

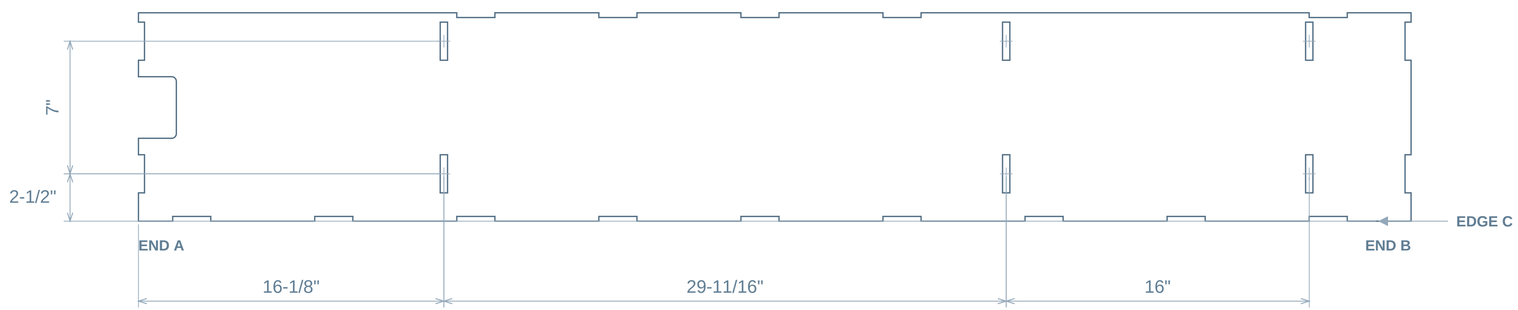

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 16-1/8" FROM END A



SECTION SCALE 1:3

05 / ISOMETRIC

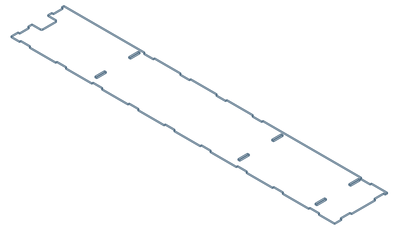

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

NOTCH CENTRES / END A

FIRST: 2-13/16"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

structure box asm BTM 5-6 body 56

body-0055 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

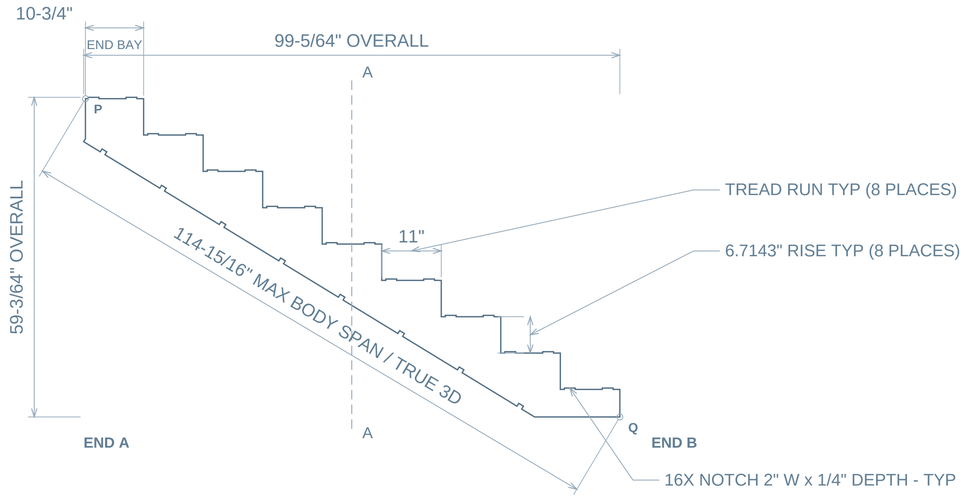

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

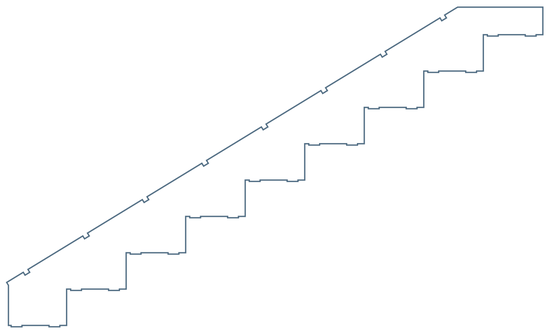


04 / SECTION A-A

X = 49-17/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 114.9329"

No internal holes in the broad face.

NOTCH CENTRES / END A

FIRST: 12-53/64"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

structure box asm BTM 5-6 body 58

body-0057 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

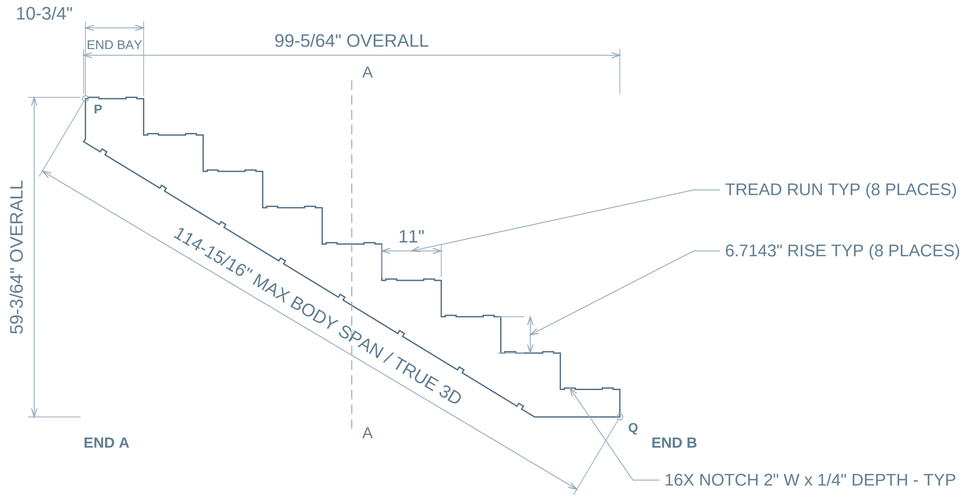

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

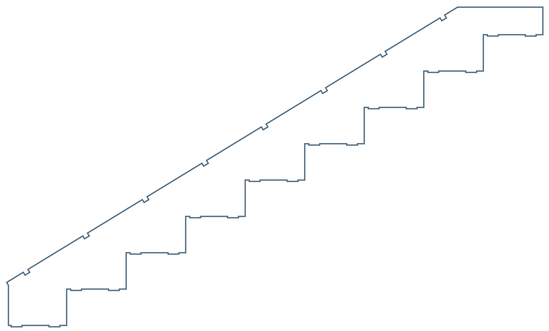


04 / SECTION A-A

X = 49-17/32" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 114.9329"

No internal holes in the broad face.

NOTCH CENTRES / END A

FIRST: 12-53/64"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

structure box asm BTM 5-6 body 60

body-0502 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:5


01 / TOP - FACE A

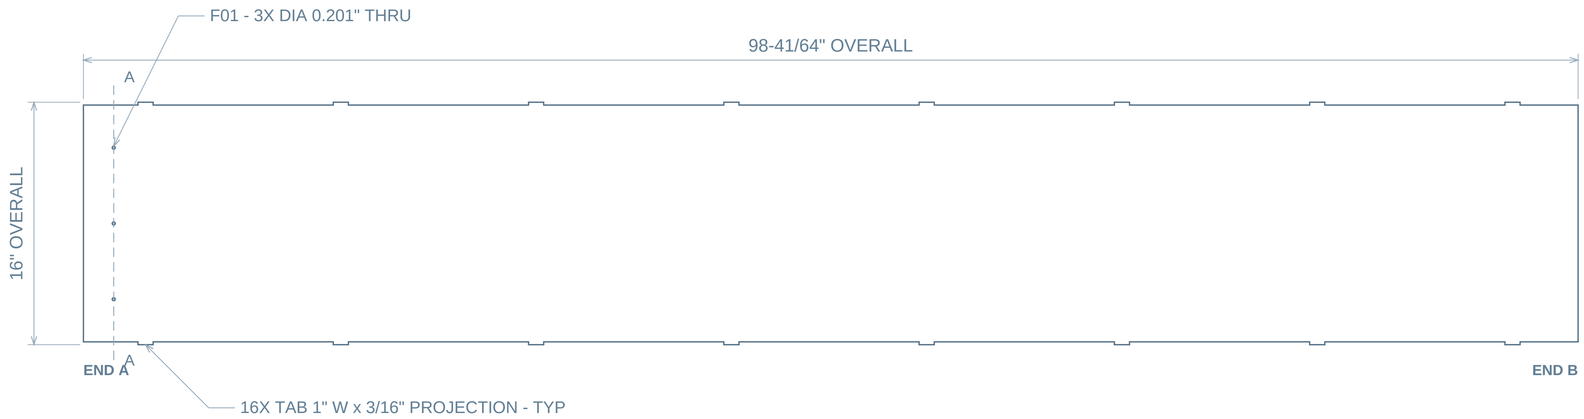

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

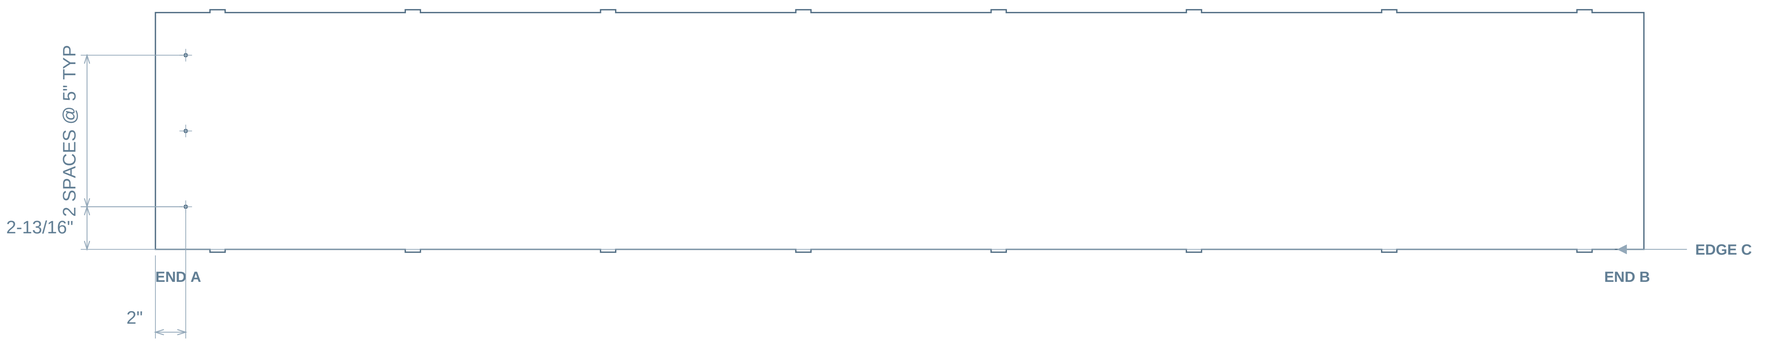

F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


04 / SECTION A-A

X = 2" FROM END A



SECTION SCALE 1:4

05 / ISOMETRIC

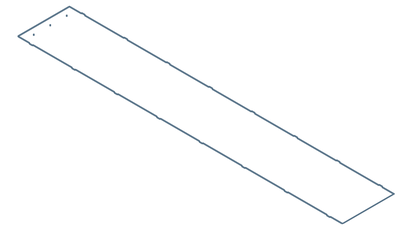

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

TAB CENTRES / END A

FIRST: 4-3/32"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

structure box asm BTM 5-6 body 70

body-0068 | QTY 1 IN BTM RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:14


01 / TOP - FACE A

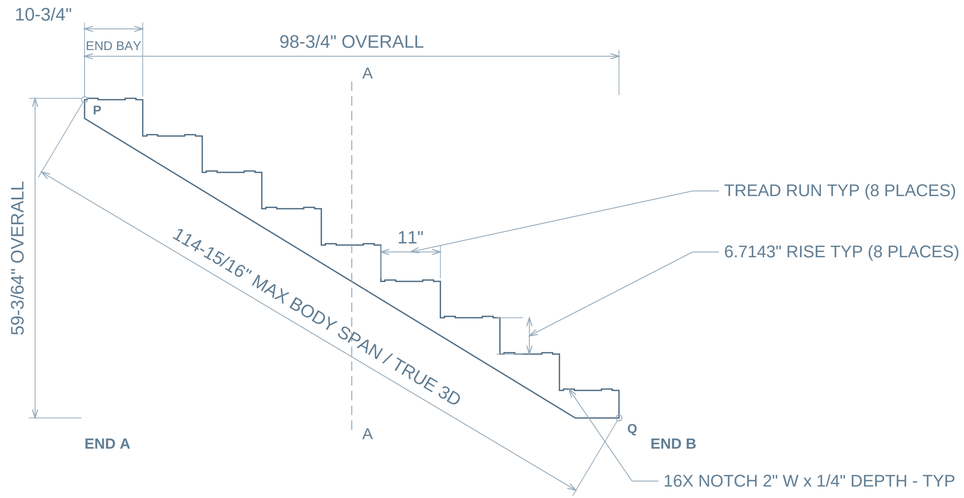

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

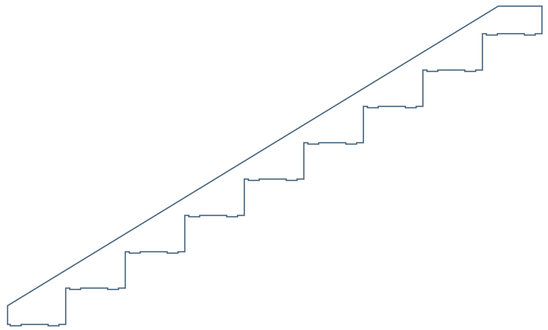


04 / SECTION A-A

X = 49-3/8" FROM END A



SECTION SCALE 1:13

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 114.9325"

No internal holes in the broad face.

NOTCH CENTRES / END A

FIRST: 12-1/2"

Irregular spacing follows source profile.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.