

# TOP RUN

31 bodies / 11 unique part types / installed source positions

## ASSEMBLY / ISOMETRIC

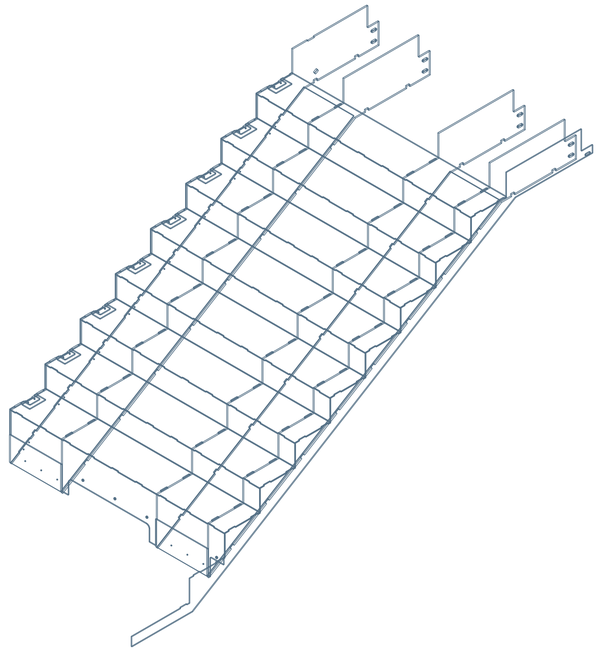

## ASSEMBLY / TOP

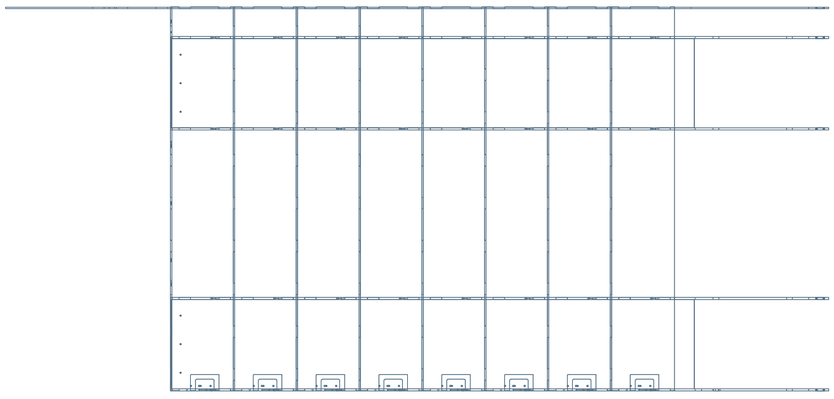

## PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

| ITEM / DRAWING | DESCRIPTION | QTY | MAX 3D SPAN |
|---|---|---|---|
| 01 / 2605-B01-P01 | structure box asm TOP 5-6 body 187 | 1 | 130-51/64" |
| 02 / 2605-B01-P02 | structure box asm TOP 5-6 body 189 | 1 | 130-51/64" |
| 03 / 2605-B01-P03 | structure box asm TOP 5-6 body 191 | 1 | 108-35/64" |
| 04 / 2605-B01-P04 | steel substread 5-6 TYP Tread | 8 | 68-1/8" |
| 05 / 2605-B01-P05 | steel substread 5-6 SPLICE Riser | 1 | 67-33/64" |
| 06 / 2605-B01-P06 | base shoe top mount plate Tread-Side | 8 | 5-17/32" |
| 07 / 2605-B01-P07 | steel substread 5-6 TYP Riser | 7 | 67-1/2" |
| 08 / 2605-B01-P08 | structure box asm TOP 5-6 body 232 | 1 | 130-51/64" |
| 09 / 2605-B01-P09 | structure box asm TOP 5-6 body 234 | 1 | 130-51/64" |
| 10 / 2605-B01-P10 | structure box asm TOP 5-6 body 236 | 1 | 108-35/64" |
| 11 / 2605-B01-P11 | stringer plate TOP Run 5-6 Stringer VERT Wall E | 1 | 157-21/32" |

## DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.


Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

# structure box asm TOP 5-6 body 187

body-0185 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


## 01 / TOP - FACE A

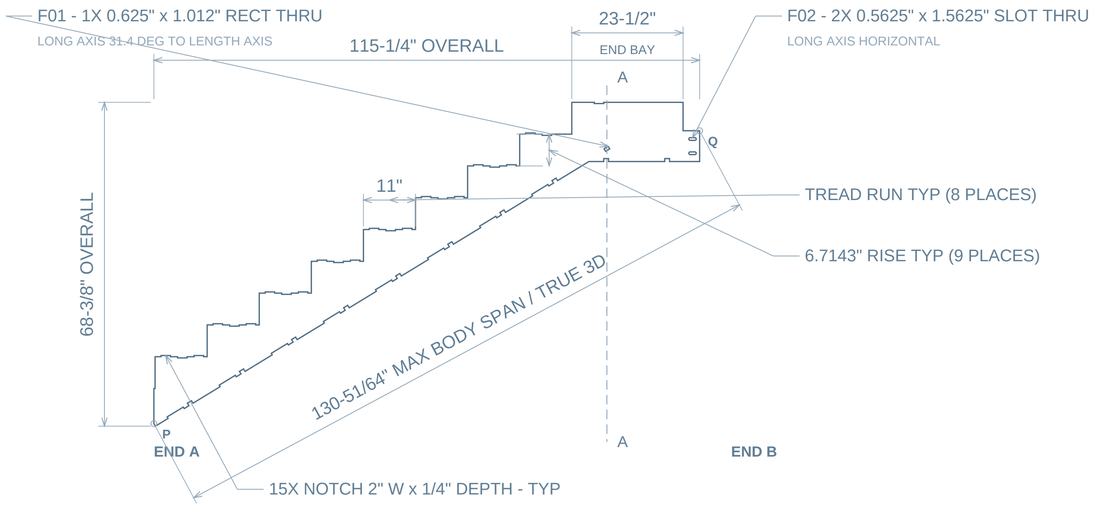


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

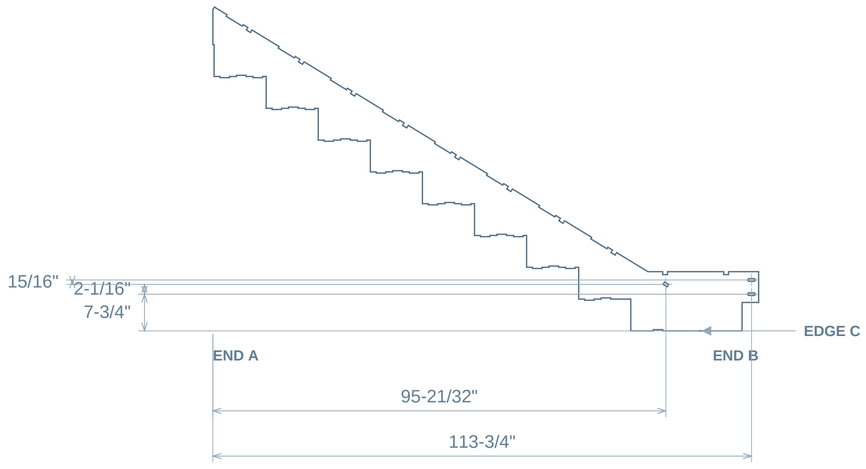


F02 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 95-21/32" FROM END A




SECTION SCALE 1:15

## 05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

### STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

### X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

### NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# structure box asm TOP 5-6 body 189

body-0187 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


## 01 / TOP - FACE A

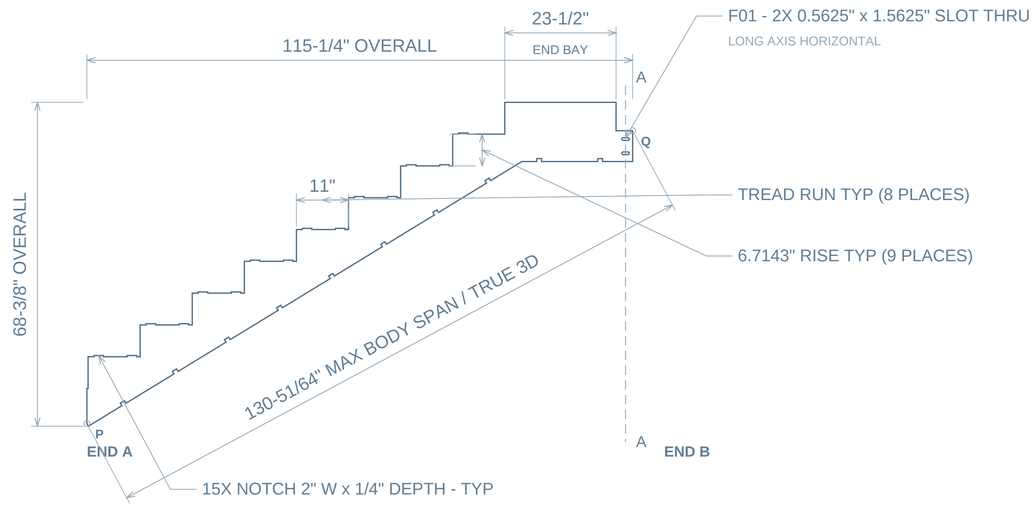


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

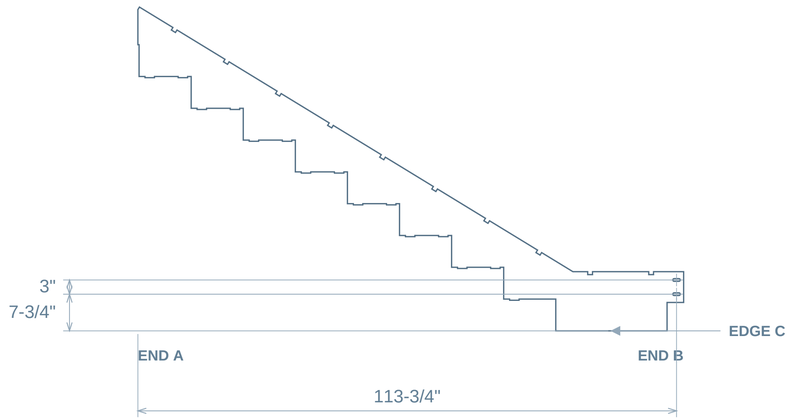


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 113-3/4" FROM END A




SECTION SCALE 1:15

## 05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

### STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

### X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

### NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# structure box asm TOP 5-6 body 191

body-0189 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


## 01 / TOP - FACE A

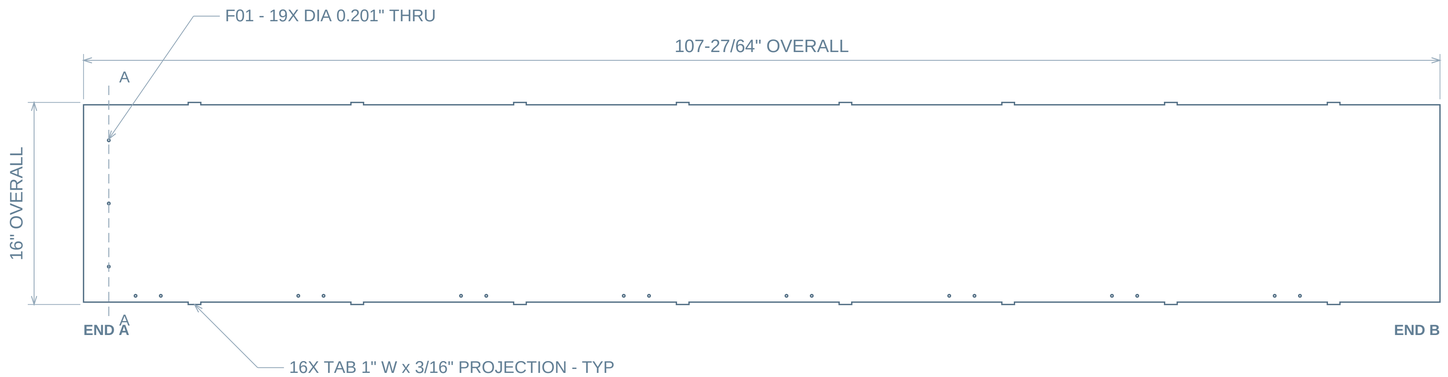


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

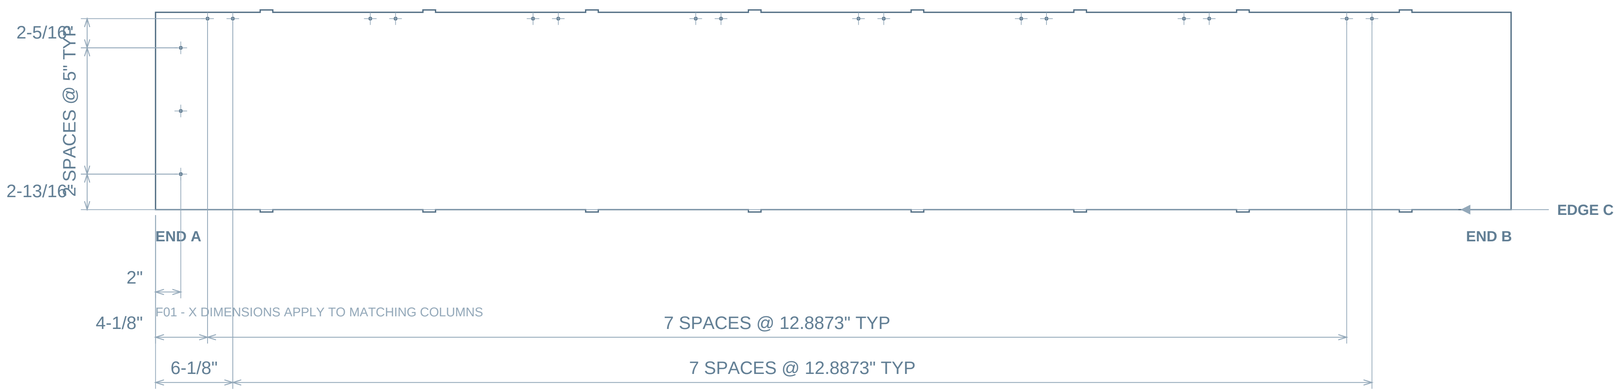



## 04 / SECTION A-A

X = 2" FROM END A




SECTION SCALE 1:4

## 05 / ISOMETRIC

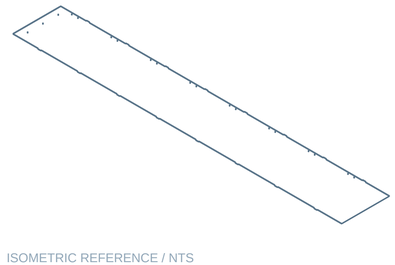

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

**TAB CENTRES / END A**

FIRST: 8-25/32"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# steel substread 5-6 TYP Tread

body-0202 | QTY 8 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


## 01 / TOP - FACE A

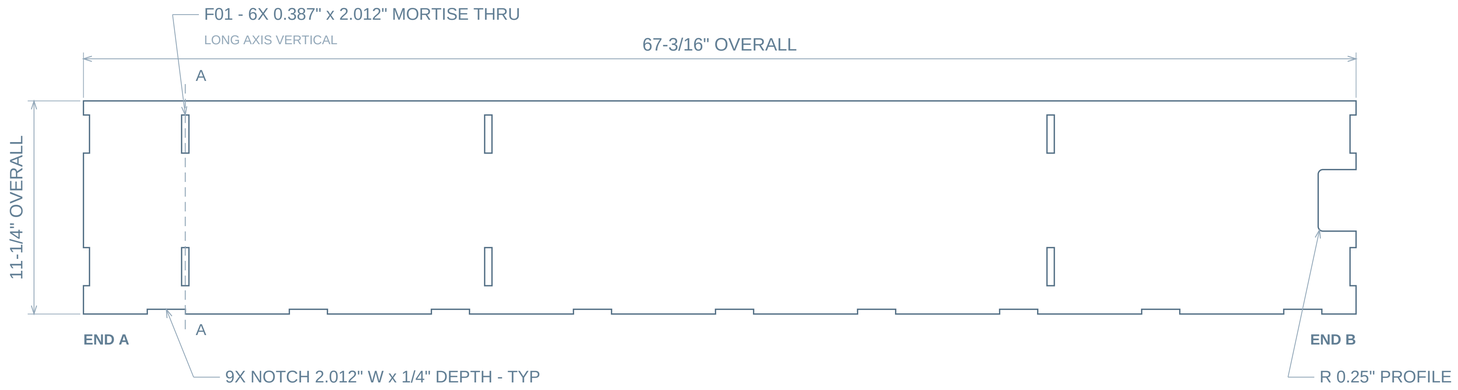


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

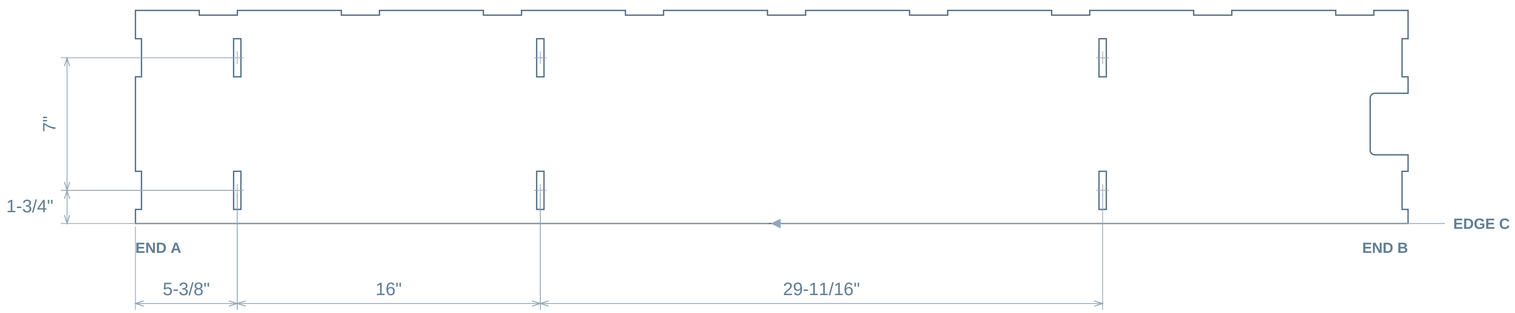


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 5-3/8" FROM END A




SECTION SCALE 1:3

## 05 / ISOMETRIC

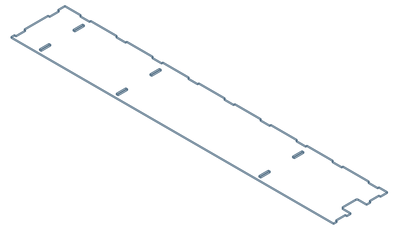

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

**NOTCH CENTRES / END A**

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# steel substread 5-6 SPLICE Riser

body-0203 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


## 01 / TOP - FACE A

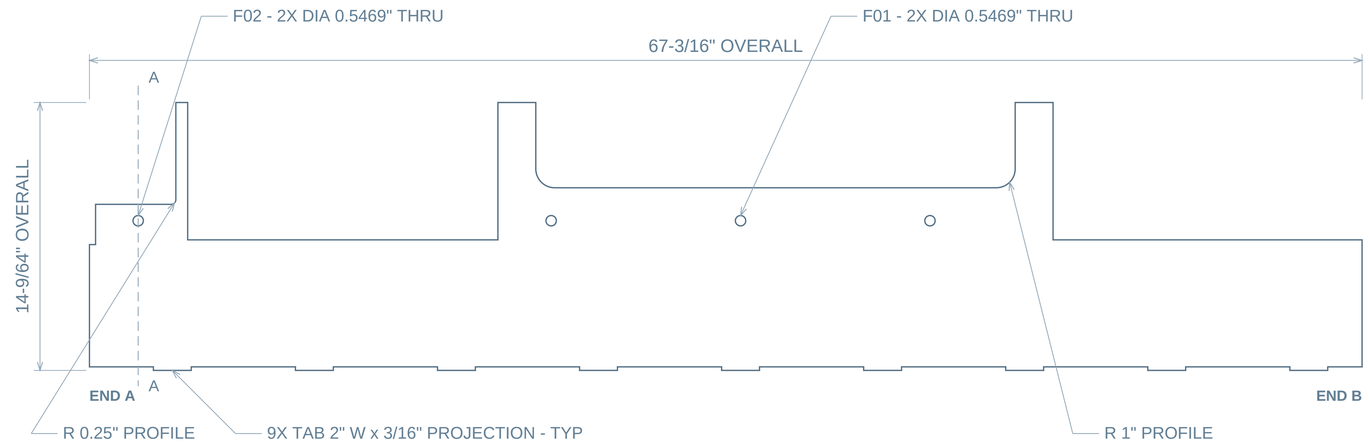


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B

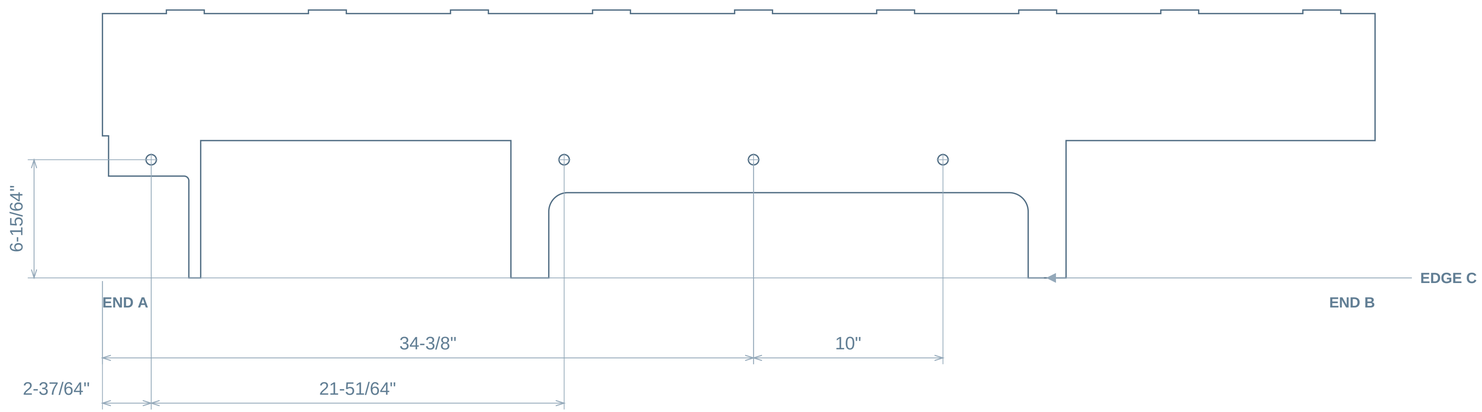



## 04 / SECTION A-A

X = 2-37/64" FROM END A




SECTION SCALE 1:3

## 05 / ISOMETRIC

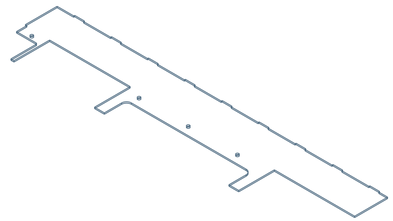

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

**TAB CENTRES / END A**

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# base shoe top mount plate Tread-Side

body-0204 | QTY 8 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


## 01 / TOP - FACE A

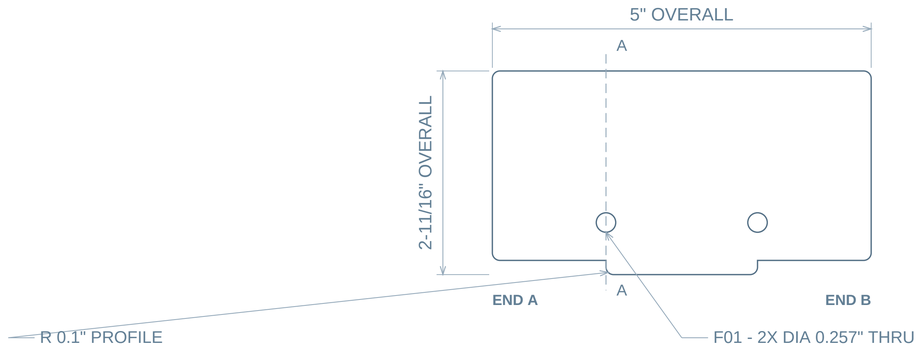


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B

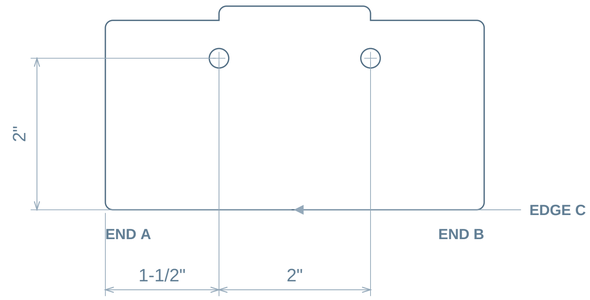



## 04 / SECTION A-A

X = 1-1/2" FROM END A




SECTION SCALE 1:1

## 05 / ISOMETRIC

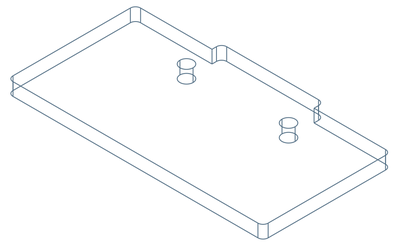

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

**STEP FEATURE: 5/16-18 TAPPED HOLE**

Threads are not represented by the bore surfaces.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# steel substread 5-6 TYP Riser

body-0210 | QTY 7 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:4


## 01 / TOP - FACE A

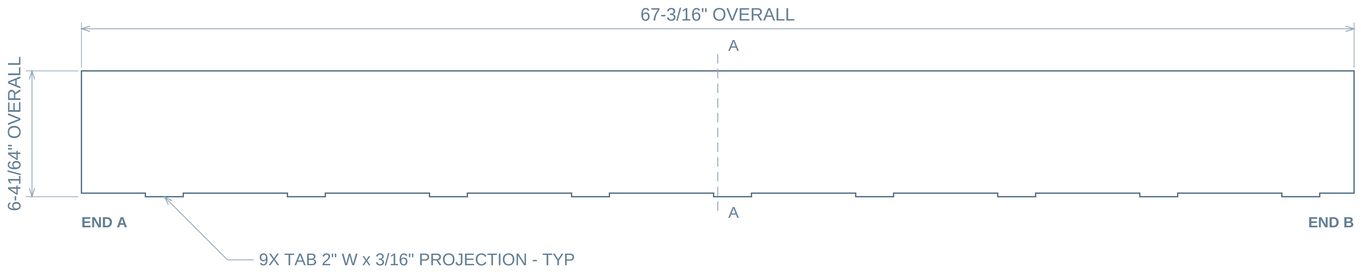


## 02 / FRONT - EDGE VIEW





## 03 / BOTTOM - FACE B





## 04 / SECTION A-A

X = 33-19/32" FROM END A




SECTION SCALE 1:2

## 05 / ISOMETRIC

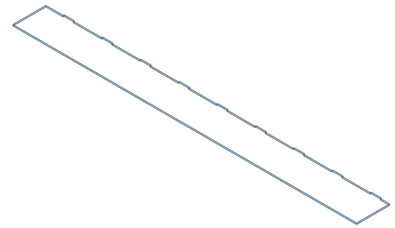

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 67-1/2"

No internal holes in the broad face.

**TAB CENTRES / END A**

FIRST: 4-3/8"

8 SPACES @ 7-1/2" TYP

## DATUM / REVIEW

END A is the left material extent in both face views.


Profile views retain the source geometry.

Fractions rounded to 1/64; feature sizes kept decimal.

# structure box asm TOP 5-6 body 232

body-0230 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


## 01 / TOP - FACE A

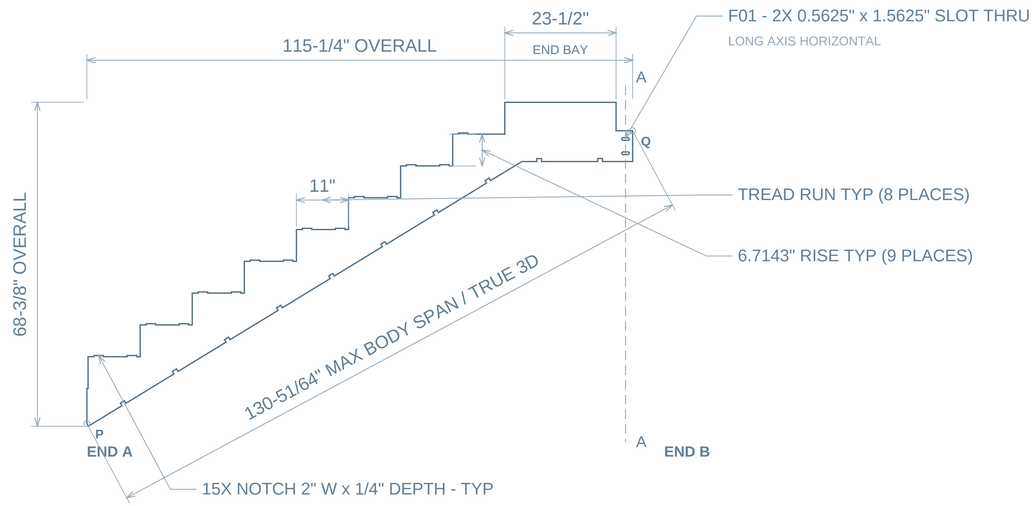


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

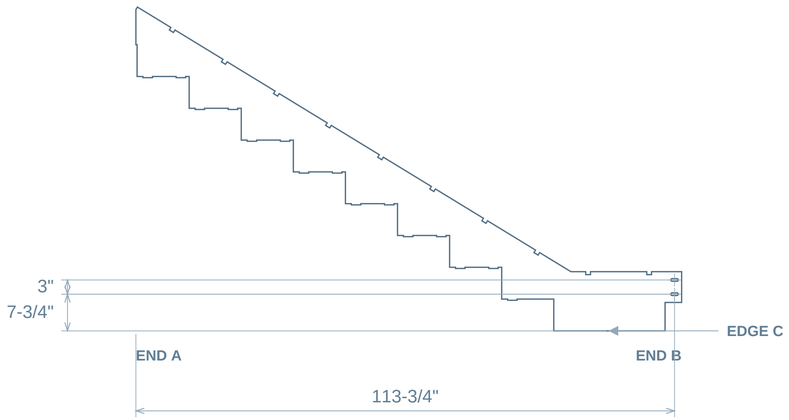


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 113-3/4" FROM END A




SECTION SCALE 1:15

## 05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

### STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

### X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

### NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# structure box asm TOP 5-6 body 234

body-0232 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:16


## 01 / TOP - FACE A

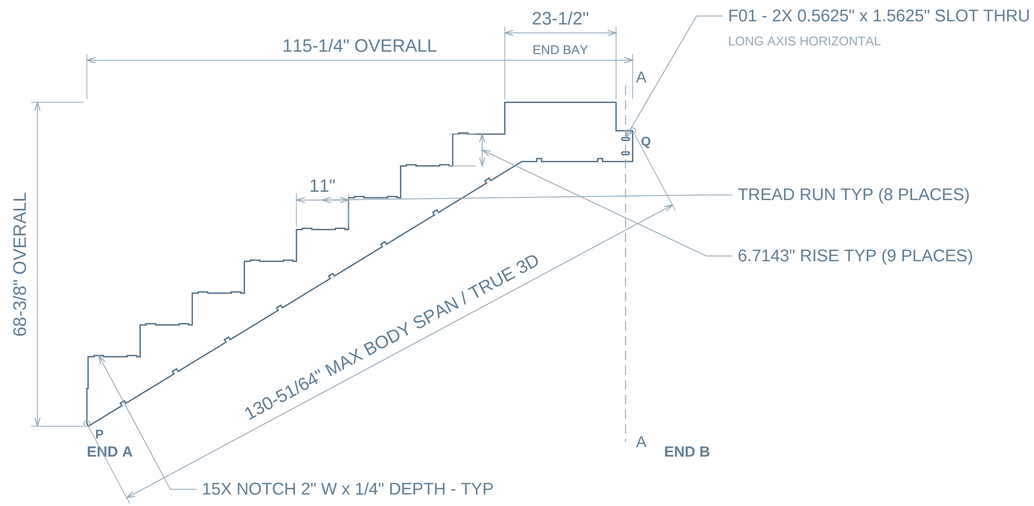


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

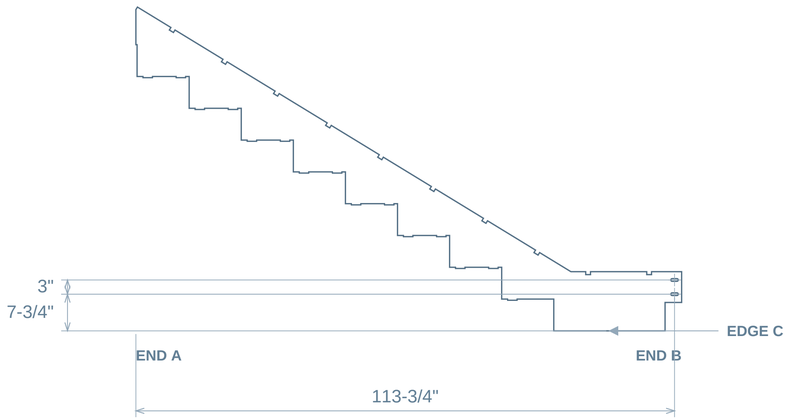


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 113-3/4" FROM END A




SECTION SCALE 1:15

## 05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

### STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 130.7937"

### X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

### NOTCH CENTRES / END A

FIRST: 2-1/2"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# structure box asm TOP 5-6 body 236

body-0234 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


## 01 / TOP - FACE A

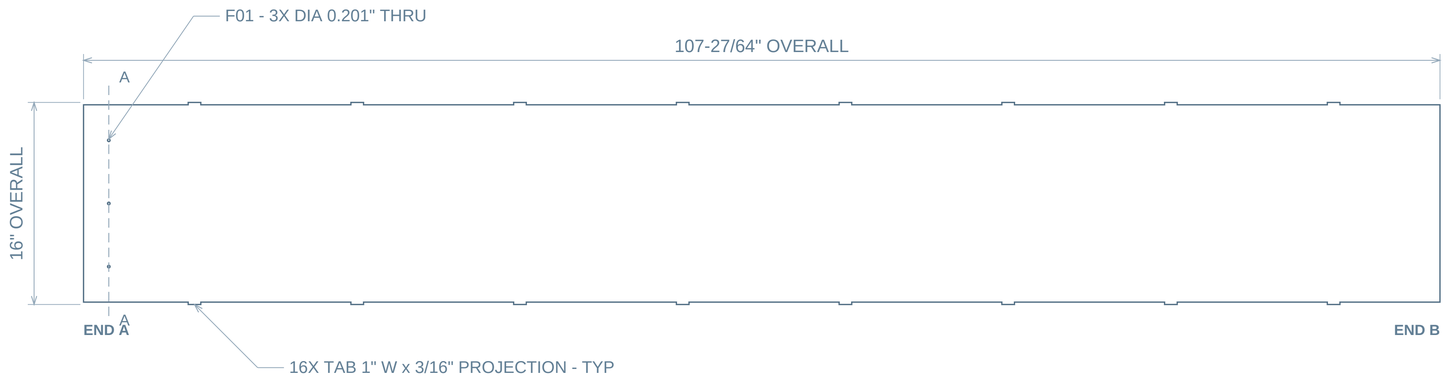


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

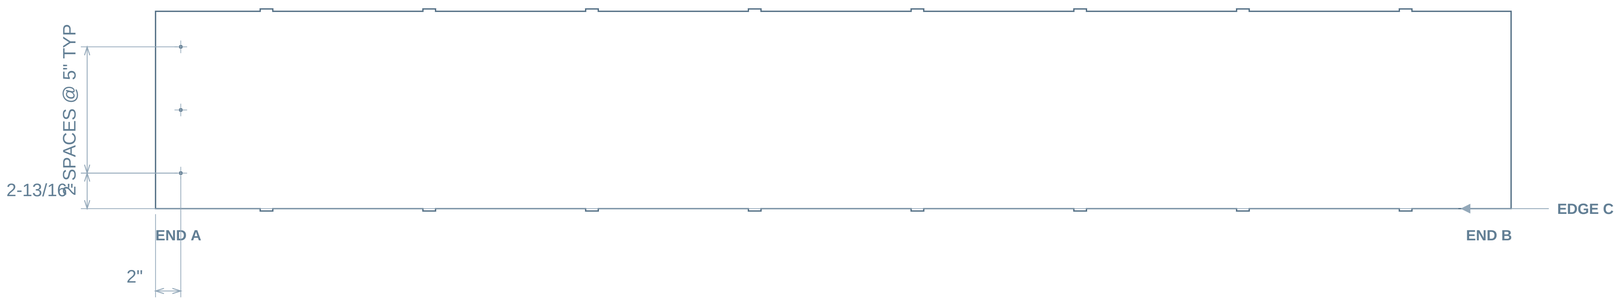


F01 - X DIMENSIONS APPLY TO MATCHING COLUMNS


## 04 / SECTION A-A

X = 2" FROM END A




SECTION SCALE 1:4

## 05 / ISOMETRIC

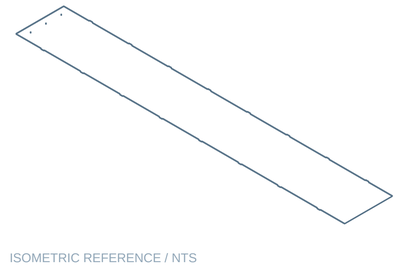

ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

**X: FROM END A / Y: FROM EDGE C**

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

**TAB CENTRES / END A**

FIRST: 8-25/32"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.

# stringer plate TOP Run 5-6 Stringer VERT Wall E

body-0247 | QTY 1 IN TOP RUN | INCHES | TOP / FRONT / BOTTOM SCALE 1:17


## 01 / TOP - FACE A

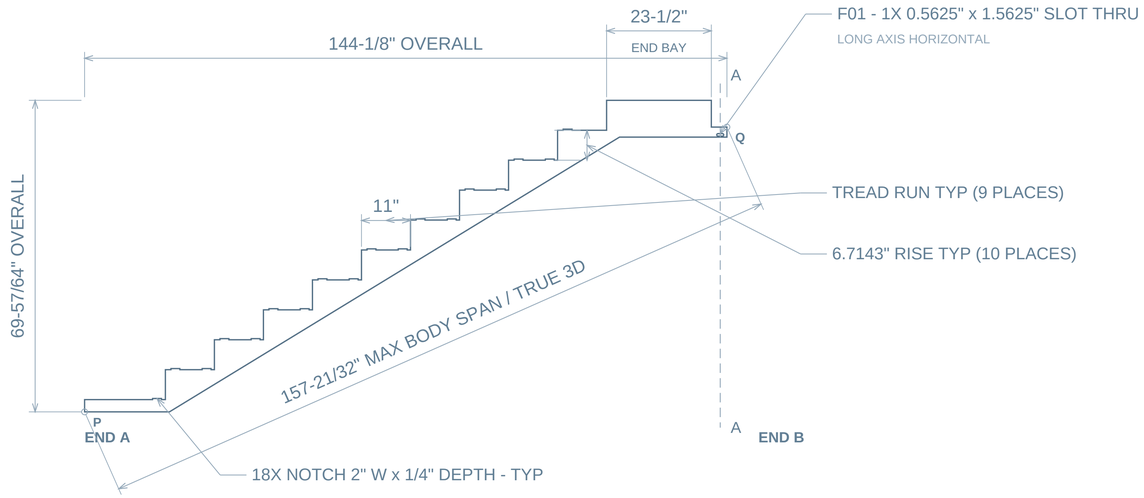


## 02 / FRONT - EDGE VIEW




## 03 / BOTTOM - FACE B

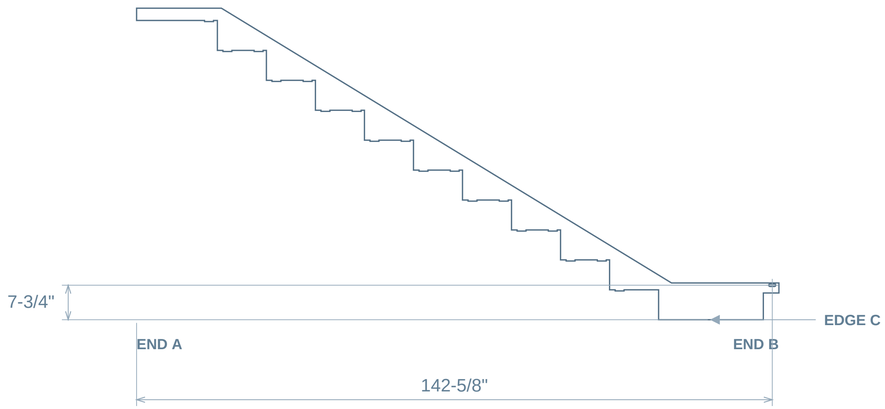



## 04 / SECTION A-A

X = 142-5/8" FROM END A




SECTION SCALE 1:15

## 05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

## FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

### STAIR REFERENCES

Run: between adjacent riser planes.

Notch widths are separate profile features.

P-Q: maximum span of the entire 3D body.

Face A shows the projected P/Q endpoints.

Exact span: 157.6527"

### X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

### NOTCH CENTRES / END A

FIRST: 16-1/4"

Irregular spacing follows source profile.

## DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions rounded to 1/64; feature sizes kept decimal.