
TOP LH STRINGER · SPLICE REVIEW

30 bodies / 8 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

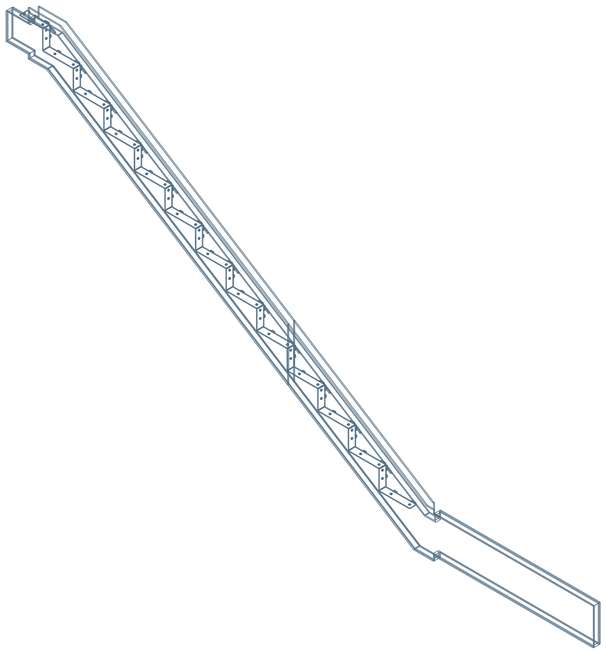

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B001-P01	stringer plates LHT horiz [REF ONLY]	1	230-7/8"
02 / 2606-B001-P02	stair asm body 10	1	120-29/32"
03 / 2606-B001-P03	stair asm body 11	1	119-3/16"
04 / 2606-B001-P04	stair asm body 12 [REF ONLY]	1	120-29/32"
05 / 2606-B001-P05	stair asm body 13 [REF ONLY]	1	119-3/16"
06 / 2606-B001-P06	treadplate carriers horiz LH	12	11-11/32"
07 / 2606-B001-P07	treadplate carriers vert LH	12	7-3/32"
08 / 2606-B001-P08	treadplate carriers horiz top LH	1	8-25/32"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Each hole/slot includes size and two center-location dimensions.

Formed bodies retain their source radii and actual sections.

Material, finish and manufacturing tolerances require job release data.

REFERENCE ONLY entries have mesh spans; see each sheet limitation.

stringer plates LHT horiz

body-0008 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Non-standard internal profile/cavity requires a dedicated detailing view

FACE REFERENCE

END REFERENCE



SIDE REFERENCE



ISOMETRIC



Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.


Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

stair asm body 10

body-0009 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:6


01 / TOP - FACE A

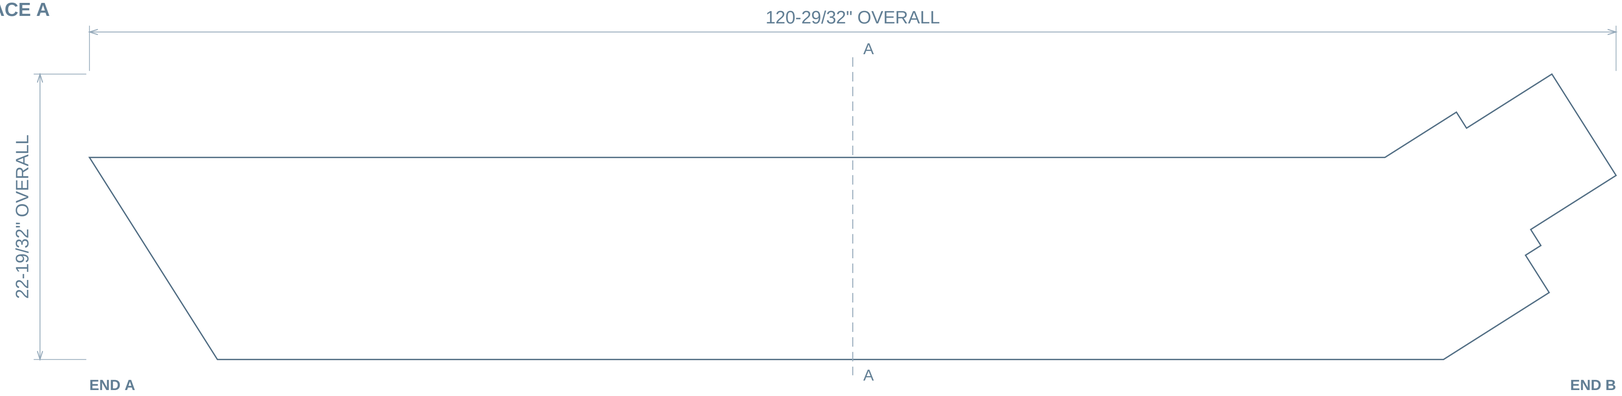

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

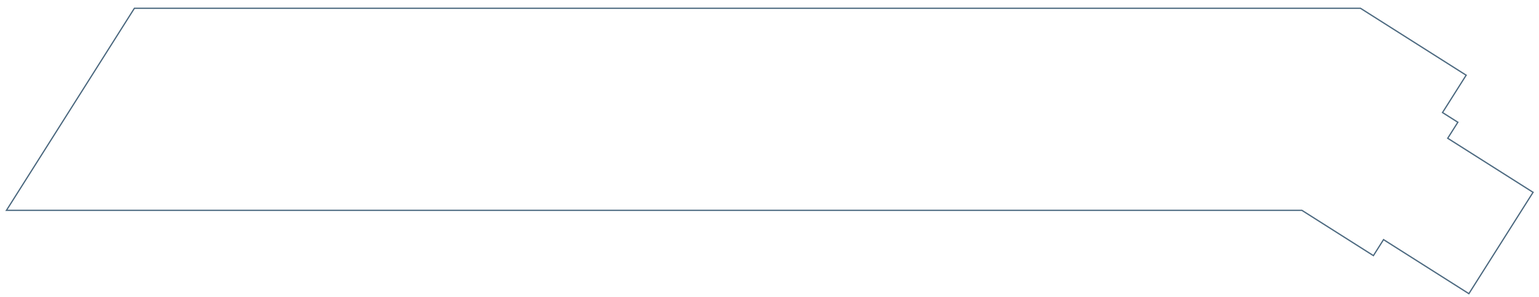


04 / SECTION A-A

X = 60-7/16" FROM END A



SECTION SCALE 1:5

05 / ISOMETRIC

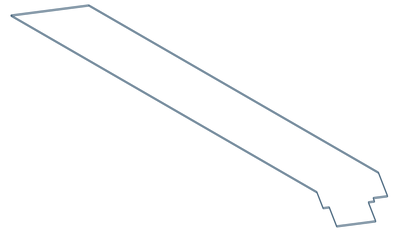

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 120-29/32"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

stair asm body 11

body-0010 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:11


01 / TOP - FACE A

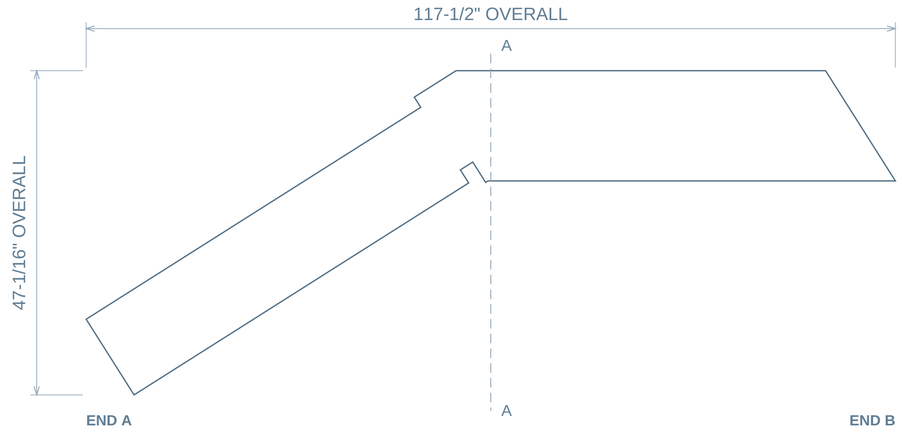

02 / FRONT - EDGE VIEW



03 / BOTTOM - FACE B

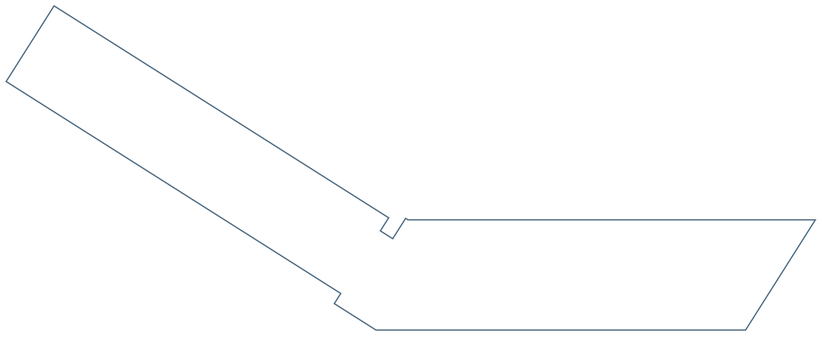


04 / SECTION A-A

X = 58-3/4" FROM END A



SECTION SCALE 1:10

05 / ISOMETRIC



ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

MAX BODY SPAN (TRUE 3D): 119-3/16"

No internal holes in the broad face.

DATUM / REVIEW

END A is the left material extent in both face views.

Profile views retain the source geometry.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

CALIPER / 2606

2606-B001-P04

TOP LH STRINGER · SPLICE REVIEW / REFERENCE ONLY

stair asm body 12

body-0011 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Dense feature callouts require a larger or split detail layout. Source geometry is retained; complete feature dimensions are withheld on this sheet.

FACE REFERENCE




END REFERENCE

SIDE REFERENCE



ISOMETRIC

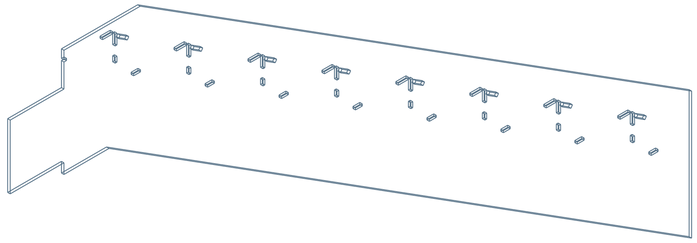

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

CALIPER / 2606

2606-B001-P05

TOP LH STRINGER · SPLICE REVIEW / REFERENCE ONLY


stair asm body 13

body-0012 / QTY 1 / MODEL GEOMETRY REFERENCE / VIEWS NTS

DETAILING REQUIRED — NOT A COMPLETE FABRICATION DRAWING

Dense feature callouts require a larger or split detail layout. Source geometry is retained; complete feature dimensions are withheld on this sheet.

FACE REFERENCE




END REFERENCE

SIDE REFERENCE



ISOMETRIC

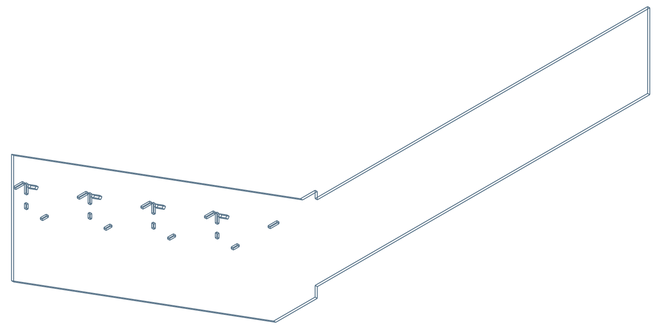

Reference views use STEP tessellation. No inferred hole depth, thread specification, cut angle or manufacturing profile.

Use the source model and native CAD detailing to resolve the limitation above before manufacture.

Dimensions and fabrication details intentionally withheld where the current verified reader/layout is insufficient.

INCHES / ANSI D 34 x 22 IN / REVIEW 01 / 2026-10-19

SOURCE: 26-0707_HPC stair installedJR.STEP / DO NOT SCALE

treadplate carriers horiz LH

body-0013 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

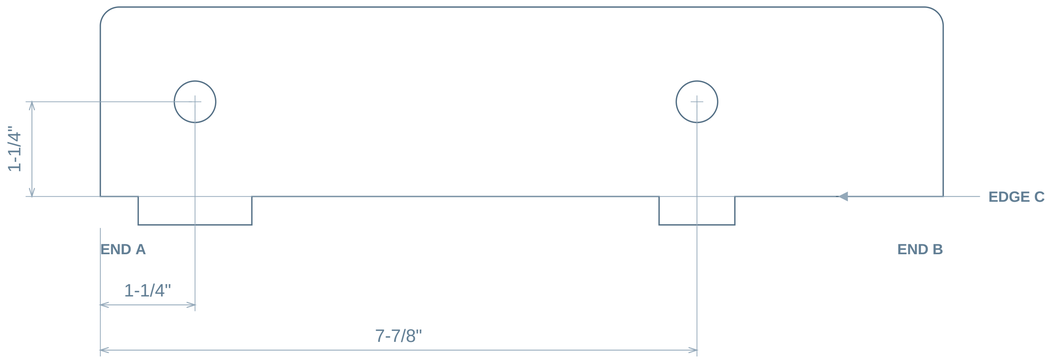

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

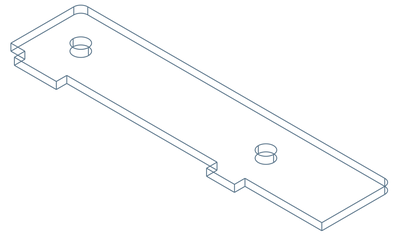

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.


EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

treadplate carriers vert LH

body-0014 | QTY 12 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

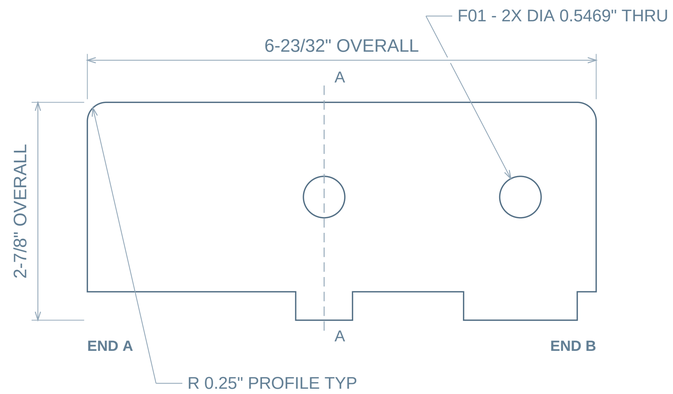

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

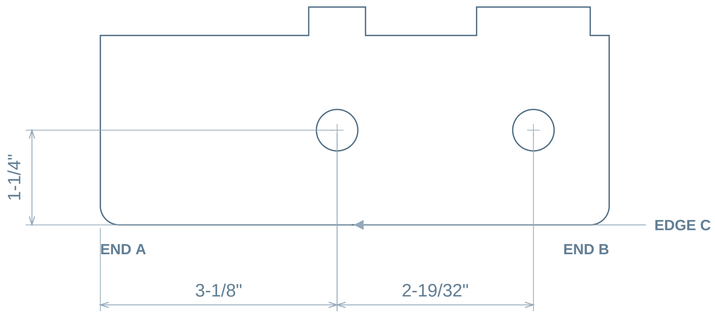


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

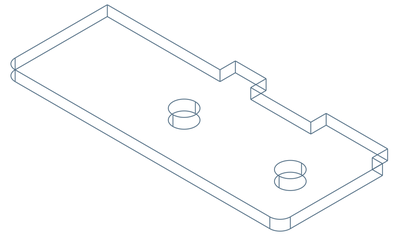

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers horiz top LH

body-0036 | QTY 1 IN TOP LH STRINGER · SPLICE REVIEW | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A



02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

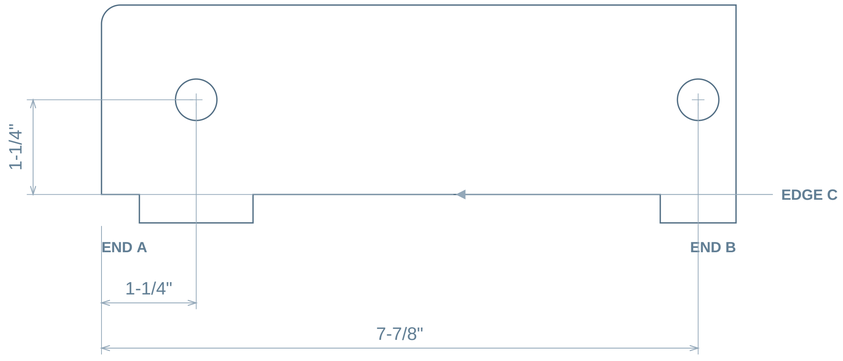

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.


04 / SECTION A-A

X = 1-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

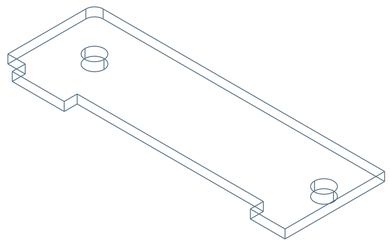

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.